


Switching Relay Input-Output Interface Relay IK 8701, IL 8701, IN 8701

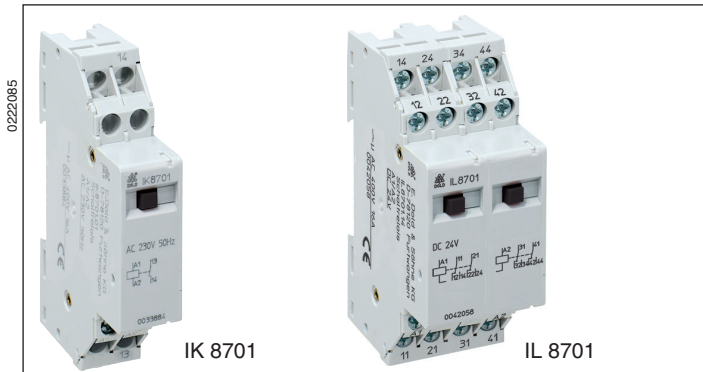


Your Advantages

- Optionally contacts with up to a maximum 4 changeover contacts
- Optionally without manual actuation and an operating position display
- Optionally for 2-wire initiator activation
- Optionally for switching low loads
- Optionally for switching lamps with parallel compensation (e.g. HQ lamps)
- Optionally for switching large inductive direct current loads
- Optionally with a recovery diode (only DC devices)
- Optionally with reliable release voltage of AC 120 V

Features

- According to EN 60947-5-1
- Pushbutton for manual actuation of the contact
- Operating position display
- High thermal current I_{th}
- Width: 17.5 or 35 or 52.5 mm

Schaltbilder

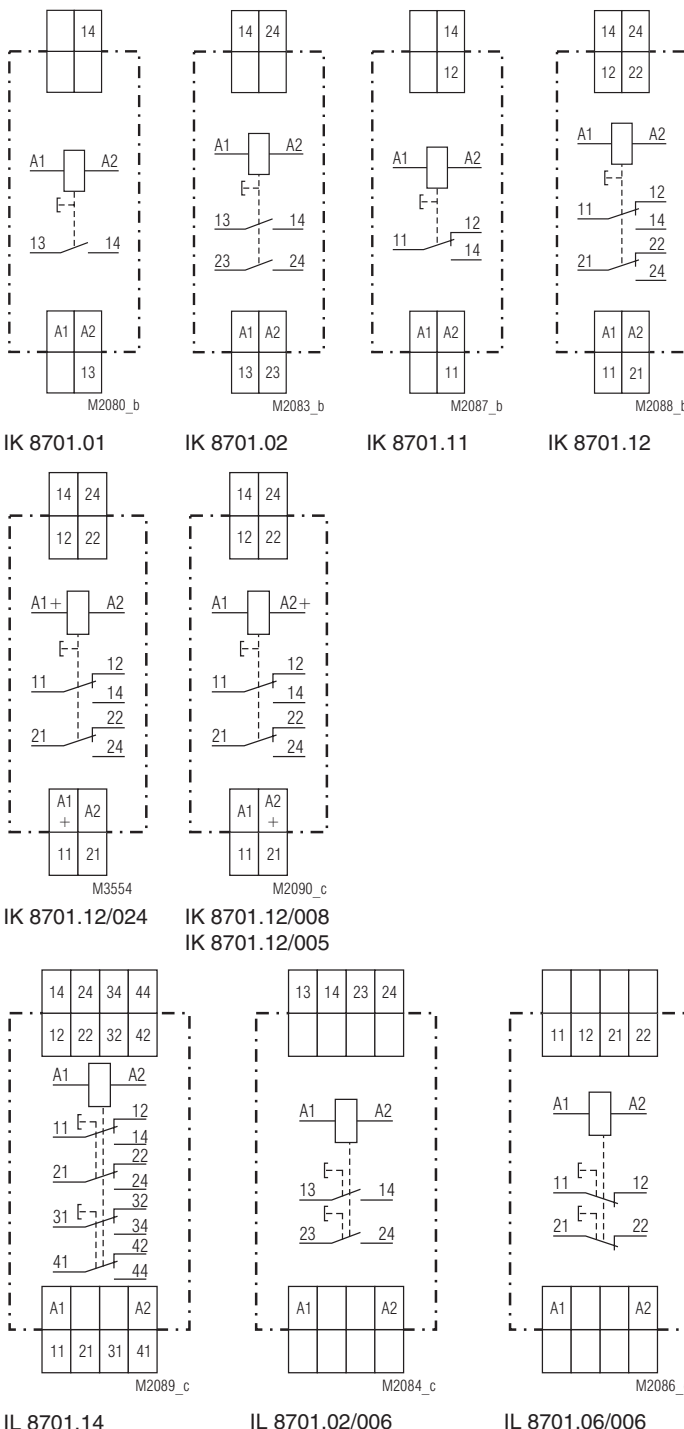

Approvals and Markings



Applications

- For switching lamp loads
- Input interface relay, e.g. for activation of PLC
- Output interface relay, e.g. for PLC-controlled loads

Function

The contacts are actuated with an armature via a plunger. After the exciting voltage has dropped, a spring returns the armature (which is connected to the plunger) to its home position. The contacts can be actuated manually via a pushbutton on the front as well. The pushbutton acts at the same time as an operating position display. The contacts are closed when the pushbutton is pressed. The red pushbutton is flush with the front edge when there is no current.

Note: IL devices have 2, IN devices have 3 pushbuttons on the front. These are **not** linked together. The pushbuttons only activate the contact shown on the front under the button.

Indicators

Pushbutton: pressed, when the relay is supplied with current

Connection Terminals

Terminal Designation	Signal description
A1 / A2	Control signal AC Control signal DC (polarity select.)
A1+ / A2; A1 / A2+	Control signal DC polarized
11,12,14; 21,22,24; 31,32,34; 41,42,44	Changeover contact LOAD
13,14; 23,24; 33,34; 43,44	NO contacts LOAD
11,12; 21,22; 31,32; 41,42	NC contacts LOAD

Technical Data

Input

Nominal voltage: AC 24, 42, 230 V
DC 12, 24 V
other voltages available on request
0.9 ... 1.1 U_N

Voltage range:

Nominal consumption

IK 8701: AC 1.8 W DC 1.2 W
IL 8701: AC 3.8 W DC 2.6 W
IN 8701: AC 5.8 W DC 4.0 W

Nominal frequency: 50 or 60 Hz

Output

Contacts

IK 8701.01: 1 NO contact
IK 8701.02: 2 NO contacts
IK 8701.05: 1 NC contact
IK 8701.06: 2 NC contacts
IK 8701.11: 1 changeover contact
IK 8701.12: 2 changeover contacts
IL 8701.13: 3 changeover contacts
IL 8701.14: 4 changeover contacts

Operate time:

< 30 ms

Release time:

< 30 ms

Nominal output voltage: AC 230 / 400 V IEC/EN 60947-5-1

Thermal current I_{th}: 16 A

Direct current load: See arc limit curve

Switching capacity

fluorescent lamp load: 20 lamps with 58 W / contact each

fluorescent lamp load with electronic series reactor: 58 lamps with 18 W / contact each

28 lamps with 40 W / contact each

20 lamps with 58 W / contact each

duo switching

(series compensated):

bulb load:

2 x 20 lamps with 58 W / contact each

5 x 10⁴ switching cycles

1200 W / contact

5 x 10⁴ switching cycles

500 switching cycles / h

with ohmic load AC 230 V: 6 A 150 x 10⁴ switching cycles

10 A 75 x 10⁴ switching cycles

16 A 12 x 10⁴ switching cycles

10 A 10 x 10⁴ switching cycles

see arc limit curve

Inductive load cos φ 0,6: 10 A 10 x 10⁴ switching cycles

DC-load: see arc limit curve

Permissible switching frequency: 1000 switching cycles / h

Short circuit strength

max. fuse rating: 16 A gG / gL IEC/EN 60947-5-1

Mechanical life: > 10 x 10⁶ switching cycles

General Data

Operating mode: Continuous operation

Temperature range

Operation: - 20 ... + 45 °C

Storage: - 25 ... + 55 °C

Altitude: < 2000 m

Clearance and creepage distances

rated impulse voltage / pollution degree: 4 kV / 2 IEC 60664-1

EMC

Interference resistance: Residential environments EN 61000-6-1

Interference resistance: Industrial environments EN 61000-6-2

Interference emission: Residential environments EN 61000-6-3

Interference emission: Industrial environments EN 61000-6-4

Degree of protection

Housing: IP 30 IEC/EN 60529

Terminals: IP 20 IEC/EN 60529

Housing: Thermoplastic with V0 behaviour according to UL subject 94

Vibration resistance: Amplitude 0.35 mm frequency 10 ... 55 Hz IEC/EN 60068-2-6

Climate resistance: Humid heat IEC/EN 60068-2-30

Terminal designation: EN 50005

Wire connection: 2 x 2.5 mm² solid or

2 x 1.5 mm² stranded ferruled or

2 x 1 mm² stranded ferruled

DIN 46228-1/-2/-3/-4

Wire fixing: Flat terminals with self-lifting clamping piece IEC/EN 60999-1

Fixing torque: 0.8 Nm

Mounting: DIN rail IEC/EN 60715

Technical Data

Weight:

IK 8701: 100 g

IL 8701: 200 g

IN 8701: 300 g

Dimensions

Width x height x depth:

IK 8701: 17,5 x 89 x 58 mm

IL 8701: 35 x 89 x 58 mm

IN 8701: 52.5 x 89 x 58 mm

Standard Type

IK 8701.12 AC 230 V 50 Hz

Article number: 0033896

• Pushbutton for manual actuation of the contacts and operating position display

• Output: 2 changeover contacts

• Nominal voltage U_N: AC 230 V

• Width: 17.5 mm

Variants

I_ 8701. __ /001: For switching low loads up to maximum of 6 VA/W at 0.3 ... 60 V / 1 ... 300 mA
The contacts also permit the maximum switching current.

However, since the gold plating is burnt off at this current level, the unit is no longer suitable for switching low loads again afterwards.

I_ 8701. __ /002: For U_N > 100 V DC or AC
Can be activated with 2-wire initiators, permissible residual current ≤ 3 mA. Max. 6 glow lamps (0.5 mA each) are possible parallel to the mains button.

I_ 8701. __ /033: NO contacts with manual interlocking.
This allows a mechanical locked actuation without electro magnetic continuous operation.

I_ 8701. __ /700: Without manual actuation and an operating position display

Only for devices with NC or NO contact:

I_ 8701. __ /003: 3 mm contact opening

I_ 8701. __ /006: 6 mm contact opening

For switching large inductive direct current voltage loads (DC 220 V, L/R = 30 ms)

IK 8701. __ /007: For switching lamps with parallel compensation, e.g. HQ lamps (only 1 or 2 NO contacts).
Maximum parallel compensation 100 µF

Only for DC devices:

I_ 8701. __ /005: Contacts with 5µm gold plating for switching small loads.
With protection diode to protect against wrong polarity and recovery diodes to reduce switching spikes, plus on **A2+**

I_ 8701. __ /008: With protection diode to protect against wrong polarity and recovery diodes to reduce switching spikes, plus on **A2+**

I_ 8701. __ /013: With recovery diodes to reduce switching spikes, plus on **A2+**; contact gab 6 mm

I_ 8701. __ /024: With protection diode to protect against wrong polarity and recovery diodes to reduce switching spikes, plus on **A1+**

I_ 8701. __ /027: With recovery diodes to reduce switching spikes, plus on **A1+**

I_ 8701. __ /032: With recovery diodes to reduce switching spikes, plus on **A1+**; 6 mm contact opening


Other variants or combinations on request

Ordering example for variants

I_ 8701 _ _ / _ _ AC 230 V 50 Hz

Nominal frequency
Nominal voltage
Variant, if required
Contacts
K: Width: 17.5 mm
L: Width: 35 mm
N: Width: 52.5 mm

Characteristics

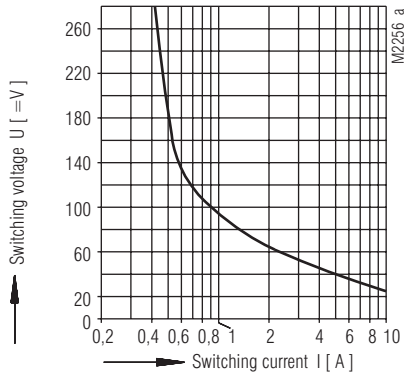

safe braking, no continuous arcing
max. 1000 switching cycles / h
contact spacing min. 0,6mm

Arc limit curve for direct current voltage-resistive load



Safety Notes



Dangerous voltage.
Electric shock will result in death or serious injury.



Disconnect all power supplies before servicing equipment.

- Faults must only be removed when the relay is disconnected
- The device may only be installed and put into operation by experts who are familiar with this technical documentation and the applicable health and safety and accident prevention regulations.
- The user has to make sure that the device and corresponding components are installed and wired according to the local rules and law (TUEV, VDE, Health and safety).
- Installation work must only be done when power is disconnected

