

1 Products affected

Product hierarchy no. *			Part no.	SBU	Type / Description	Customer part no.
SBU	PG	PGU	Type			
02	007	060	0000002300	0909.0001	Connectors	0909, 2 x IEC Appliance Outlets F
02	007	060	0000002300	0909.0011	Connectors	0909, 3 x IEC Appliance Outlets F
02	007	060	0000002300	0909.0021	Connectors	0909, 4 x IEC Appliance Outlets F
02	007	060	0000002300	0909.0031	Connectors	0909, 5 x IEC Appliance Outlets F
02	007	060	0000002300	0909.0041	Connectors	0909, 6 x IEC Appliance Outlets F
02	007	060	0000002300	0909.0051	Connectors	0909, 7 x IEC Appliance Outlets F


*SBU (2-digit) / PG (3-digit) / PGU (3-digit) / Type (10-digit)

2 Type of change

- L and E bars newly riveted to contacts, now are all 3 bars (L/N/E) riveted.
- Position of solder terminals of L&N are moved approx 5mm towards the border of the connector.


3 Detailed description of change

The old version had only the earth bar riveted to the outlet contacts - L/N bars and contacts were made of one piece. The new version has L/N/E riveted. (The holes are the riveting joints)

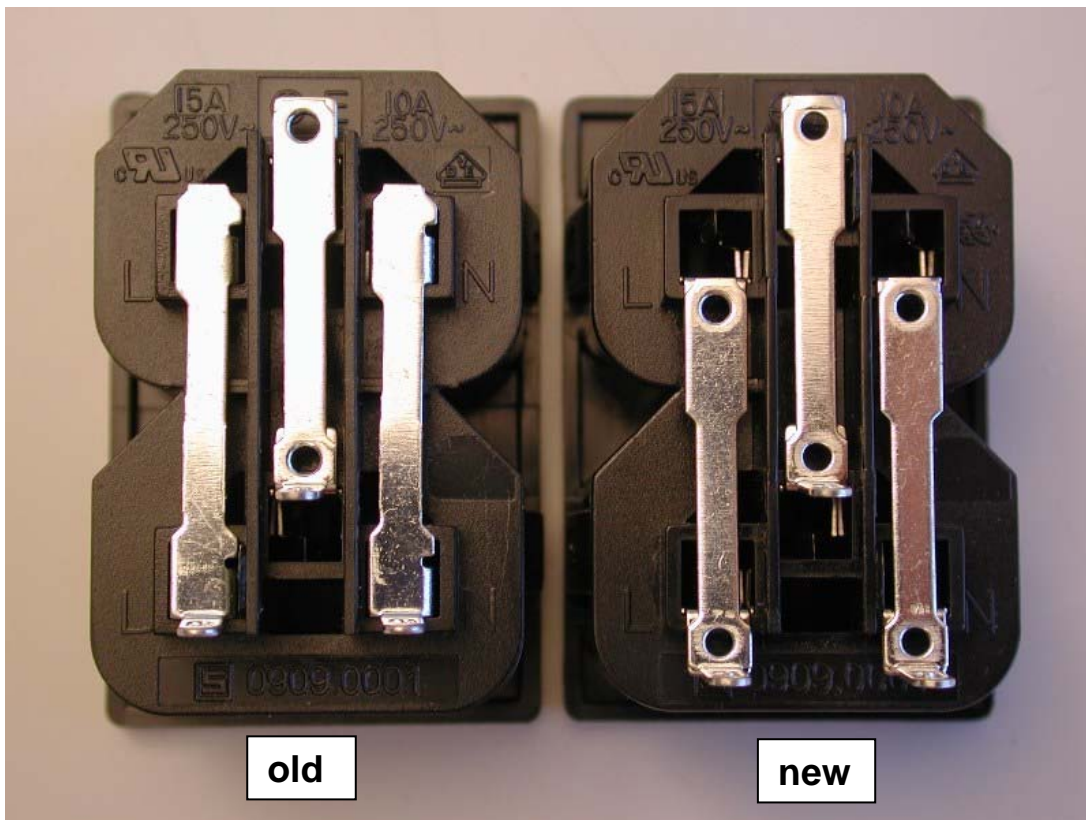

0909 Multiple IEC Appliance Outlets F					
Release date:	Released by:				
24.5.2011	SHO				1 von 2

Position of solder terminals of L&N are moved approx 5mm towards the border of the connector.

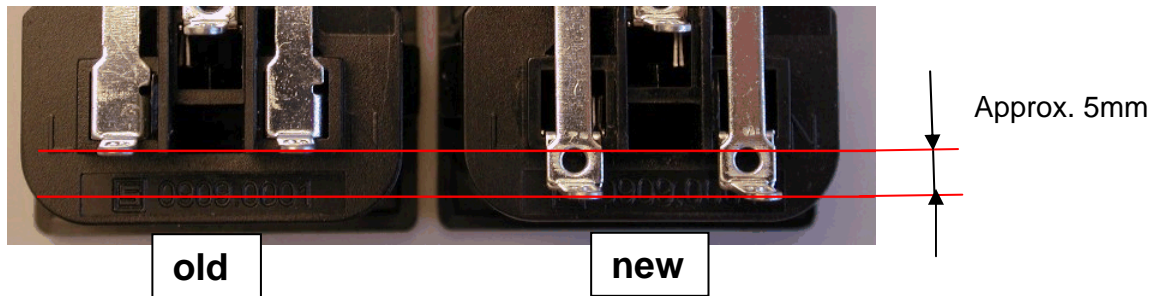

4 Reason of change

Production improvement.

5 Released date

Release date: February 2011

6 Impact of change and recommended action

Form: New internal joining technique, solder terminals of L&N are moved approx 5mm towards the border of the connector.
 Fit: No influence
 Function: No influence
 Production Site: No influence

7 Reference Documents / Attachments

Kind of document	Document number	Remarks