

## CURRENT SENSING SINGLE CHANNEL DRIVER

### Features

- Floating channel designed for bootstrap operation  
 Fully operational to +600V  
 Tolerant to negative transient voltage dV/dt immune
- Application- specific gate drive range:  
 Motor Drive: 12 to 20V (IR2127/IR2128)  
 Automotive: 9 to 20V (IR21271)
- Undervoltage lockout
- 3.3V, 5V and 15V input logic compatible
- FAULT lead indicates shutdown has occurred
- Output in phase with input (IR2127/IR21271)
- Output out of phase with input (IR2128)
- Available in Lead-Free


### Description

The IR2127/IR2128/IR21271(S) is a high voltage, high speed power MOSFET and IGBT driver. Proprietary HVIC and latch immune CMOS technologies enable ruggedized monolithic construction. The logic input is compatible with standard CMOS or LSTTL outputs, down to 3.3V. The protection circuitry detects over-current in the driven power transistor and terminates the gate drive voltage. An open drain FAULT signal is provided to indicate that an over-current shutdown has occurred. The output driver features a high pulse current buffer stage designed for minimum cross-conduction. The floating channel can be used to drive an N-channel power MOSFET or IGBT in the high side or low side configuration which operates up to 600 volts.


### Product Summary

|                                  |                                    |                             |
|----------------------------------|------------------------------------|-----------------------------|
| <b>V<sub>OFFSET</sub></b>        | <b>600V max.</b>                   |                             |
| <b>I<sub>O+/-</sub></b>          | <b>200 mA / 420 mA</b>             |                             |
| <b>V<sub>OUT</sub></b>           | <b>12 - 20V</b><br>(IR2127/IR2128) | <b>9 - 20V</b><br>(IR21271) |
| <b>V<sub>csth</sub></b>          | <b>250 mV or 1.8V</b>              |                             |
| <b>t<sub>on/off</sub> (typ.)</b> | <b>200 &amp; 150 ns</b>            |                             |

### Packages

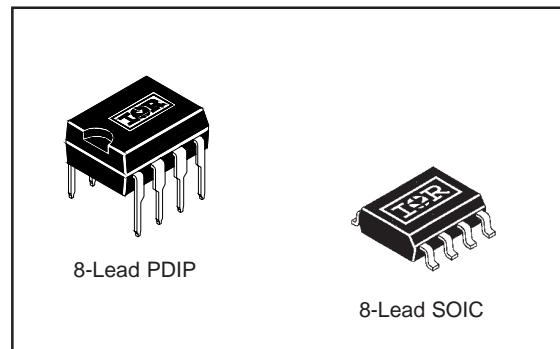

### Typical Connection

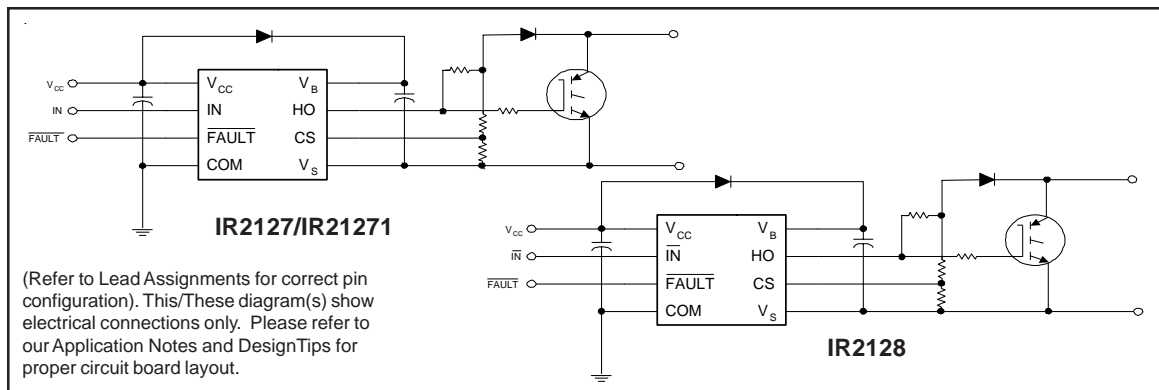

### Absolute Maximum Ratings

Absolute Maximum Ratings indicate sustained limits beyond which damage to the device may occur. All voltage parameters are absolute voltages referenced to COM. The Thermal Resistance and Power Dissipation ratings are measured under board mounted and still air conditions.

| Symbol              | Definition  | Min.                 | Max.                  | Units |
|---------------------|---|----------------------|-----------------------|-------|
| V <sub>B</sub>      | High Side Floating Supply Voltage                               | -0.3                 | 625                   | V     |
| V <sub>S</sub>      | High Side Floating Offset Voltage                               | V <sub>B</sub> - 25  | V <sub>B</sub> + 0.3  |       |
| V <sub>HO</sub>     | High Side Floating Output Voltage                               | V <sub>S</sub> - 0.3 | V <sub>B</sub> + 0.3  |       |
| V <sub>CC</sub>     | Logic Supply Voltage  | -0.3                 | 25                    |       |
| V <sub>IN</sub>     | Logic Input Voltage   | -0.3                 | V <sub>CC</sub> + 0.3 |       |
| V <sub>FLT</sub>    | $\overline{\text{FAULT}}$ Output Voltage                        | -0.3                 | V <sub>CC</sub> + 0.3 |       |
| V <sub>CS</sub>     | Current Sense Voltage   | V <sub>S</sub> - 0.3 | V <sub>B</sub> + 0.3  |       |
| dV <sub>S</sub> /dt | Allowable Offset Supply Voltage Transient                       | —                    | 50                    | V/ns  |
| P <sub>D</sub>      | Package Power Dissipation @ T <sub>A</sub> ≤ +25°C (8 Lead DIP) | —                    | 1.0                   | W     |
|                     | (8 Lead SOIC)   | —                    | 0.625                 |       |
| R <sub>thJA</sub>   | Thermal Resistance, Junction to Ambient (8 Lead DIP)            | —                    | 125                   | °C/W  |
|                     | (8 Lead SOIC)   | —                    | 200                   |       |
| T <sub>J</sub>      | Junction Temperature  | —                    | 150                   | °C    |
| T <sub>S</sub>      | Storage Temperature   | -55                  | 150                   |       |
| T <sub>L</sub>      | Lead Temperature (Soldering, 10 seconds)                        | —                    | 300                   |       |

### Recommended Operating Conditions

The Input/Output logic timing diagram is shown in Figure 1. For proper operation the device should be used within the recommended conditions. The V<sub>S</sub> offset rating is tested with all supplies biased at 15V differential.

| Symbol           | Definition  | Min.                | Max.                | Units |
|------------------|---|---------------------|---------------------|-------|
| V <sub>B</sub>   | High Side Floating Supply Voltage (IR2127/IR2128) | V <sub>S</sub> + 12 | V <sub>S</sub> + 20 | V     |
|                  | (IR21271)   | V <sub>S</sub> + 9  | V <sub>S</sub> + 20 |       |
| V <sub>S</sub>   | High Side Floating Offset Voltage                 | Note 1              | 600                 |       |
| V <sub>HO</sub>  | High Side Floating Output Voltage                 | V <sub>S</sub>      | V <sub>B</sub>      |       |
| V <sub>CC</sub>  | Logic Supply Voltage                              | 10                  | 20                  |       |
| V <sub>IN</sub>  | Logic Input Voltage                               | 0                   | V <sub>CC</sub>     |       |
| V <sub>FLT</sub> | $\overline{\text{FAULT}}$ Output Voltage          | 0                   | V <sub>CC</sub>     |       |
| V <sub>CS</sub>  | Current Sense Signal Voltage                      | V <sub>S</sub>      | V <sub>S</sub> + 5  |       |
| T <sub>A</sub>   | Ambient Temperature                               | -40                 | 125                 | °C    |

Note 1: Logic operational for V<sub>S</sub> of -5 to +600V. Logic state held for V<sub>S</sub> of -5V to -V<sub>BS</sub>. (Please refer to the Design Tip DT97-3 for more details).

### Dynamic Electrical Characteristics

$V_{BIAS}$  ( $V_{CC}$ ,  $V_{BS}$ ) = 15V,  $C_L$  = 1000 pF and  $T_A$  = 25°C unless otherwise specified. The dynamic electrical characteristics are measured using the test circuit shown in Figure 3.


| Symbol    | Definition                            | Min. | Typ. | Max. | Units | Test Conditions |
|-----------|---------------------------------------|------|------|------|-------|-----------------|
| $t_{on}$  | Turn-On Propagation Delay             | —    | 200  | 250  | ns    | $V_S = 0V$      |
| $t_{off}$ | Turn-Off Propagation Delay            | —    | 150  | 200  |       | $V_S = 600V$    |
| $t_r$     | Turn-On Rise Time                     | —    | 80   | 130  |       |                 |
| $t_f$     | Turn-Off Fall Time                    | —    | 40   | 65   |       |                 |
| $t_{bl}$  | Start-Up Blanking Time                | 500  | 700  | 900  |       |                 |
| $t_{cs}$  | CS Shutdown Propagation Delay         | —    | 240  | 360  |       |                 |
| $t_{fit}$ | CS to FAULT Pull-Up Propagation Delay | —    | 340  | 510  |       |                 |

### Static Electrical Characteristics


$V_{BIAS}$  ( $V_{CC}$ ,  $V_{BS}$ ) = 15V and  $T_A$  = 25°C unless otherwise specified. The  $V_{IN}$ ,  $V_{TH}$  and  $I_{IN}$  parameters are referenced to COM. The  $V_O$  and  $I_O$  parameters are referenced to  $V_S$ .

| Symbol      | Definition  | Min. | Typ. | Max. | Units    | Test Conditions                                   |
|-------------|---|------|------|------|----------|---|
| $V_{IH}$    | Logic "1" Input Voltage<br>(IR2127/IR21271)                                 | 3.0  | —    | —    | V        | $V_{CC} = 10V$ to 20V                             |
| $V_{IL}$    | Logic "0" Input Voltage<br>(IR2128)   | —    | —    | 0.8  |          |   |
| $V_{IL}$    | Logic "0" Input Voltage<br>(IR2127/IR21271)                                 | —    | —    | 0.8  |          |   |
| $V_{IL}$    | Logic "1" Input Voltage<br>(IR2128)   | —    | —    | 0.8  |          |   |
| $V_{CSTH+}$ | CS Input Positive<br>Going Threshold<br>(IR2127/IR2128)                     | 180  | 250  | 320  | mV       |   |
| $V_{CSTH+}$ | CS Input Positive<br>Going Threshold<br>(IR21271)                           | —    | 1.8  | —    | V        |   |
| $V_{OH}$    | High Level Output Voltage, $V_{BIAS} - V_O$                                 | —    | —    | 100  | mV       | $I_O = 0A$  |
| $V_{OL}$    | Low Level Output Voltage, $V_O$   | —    | —    | 100  |          | $I_O = 0A$  |
| $I_{LK}$    | Offset Supply Leakage Current   | —    | —    | 50   | $\mu A$  | $V_B = V_S = 600V$                                |
| $I_{QBS}$   | Quiescent $V_{BS}$ Supply Current   | —    | 200  | 400  |          | $V_{IN} = 0V$ or 5V                               |
| $I_{QCC}$   | Quiescent $V_{CC}$ Supply Current   | —    | 60   | 120  |          | $V_{IN} = 5V$                                     |
| $I_{IN+}$   | Logic "1" Input Bias Current  | —    | 7.0  | 15   |          | $V_{IN} = 0V$                                     |
| $I_{IN-}$   | Logic "0" Input Bias Current  | —    | —    | 1.0  |          | $V_{CS} = 3V$                                     |
| $I_{CS+}$   | "High" CS Bias Current  | —    | —    | 1.0  |          | $V_{CS} = 0V$                                     |
| $I_{CS-}$   | "High" CS Bias Current  | —    | —    | 1.0  |          |   |
| $V_{BSUV+}$ | $V_{BS}$ Supply Undervoltage<br>Positive Going Threshold<br>(IR2127/IR2128) | 8.8  | 10.3 | 11.8 |          | V   |
| $V_{BSUV+}$ | $V_{BS}$ Supply Undervoltage<br>Positive Going Threshold<br>(IR21271)       | 6.3  | 7.2  | 8.2  |          |   |
| $V_{BSUV-}$ | $V_{BS}$ Supply Undervoltage<br>Negative Going Threshold<br>(IR2127/IR2128) | 7.5  | 9.0  | 10.6 | V        |   |
| $V_{BSUV-}$ | $V_{BS}$ Supply Undervoltage<br>Negative Going Threshold<br>(IR21271)       | 6.0  | 6.8  | 7.7  |          |   |
| $I_{O+}$    | Output High Short Circuit Pulsed Current                                    | 200  | 250  | —    | mA       | $V_O = 0V$ , $V_{IN} = 5V$<br>$PW \leq 10 \mu s$  |
| $I_{O-}$    | Output Low Short Circuit Pulsed Current                                     | 420  | 500  | —    |          | $V_O = 15V$ , $V_{IN} = 0V$<br>$PW \leq 10 \mu s$ |
| Ron, FLT    | FAULT - Low on Resistance   | —    | 125  | —    | $\Omega$ |   |

**Functional Block Diagram IR2127/IR21271**

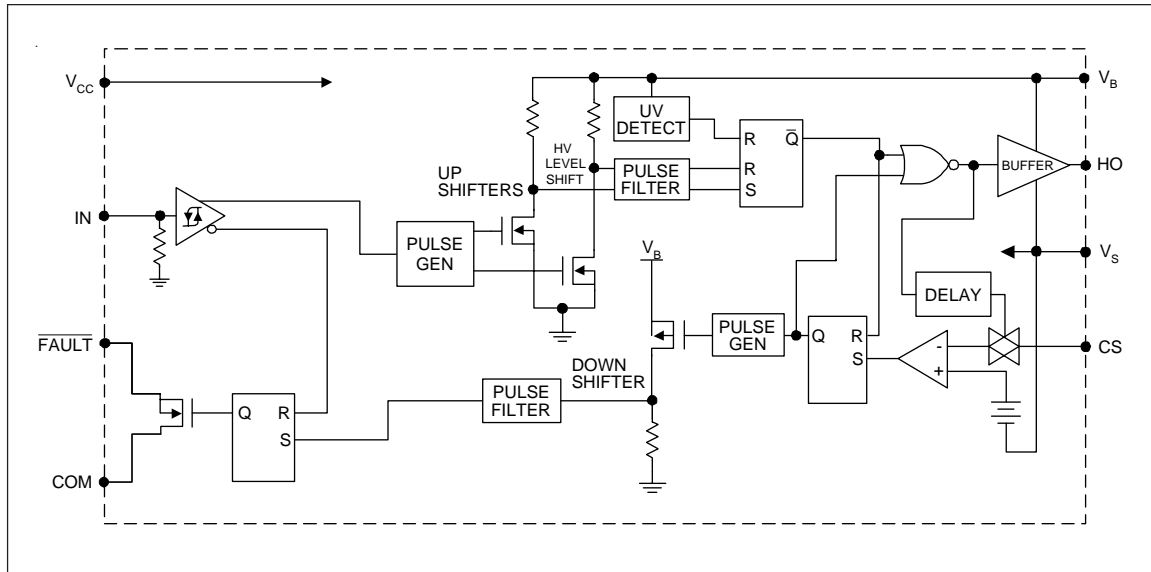

**Functional Block Diagram IR2128**

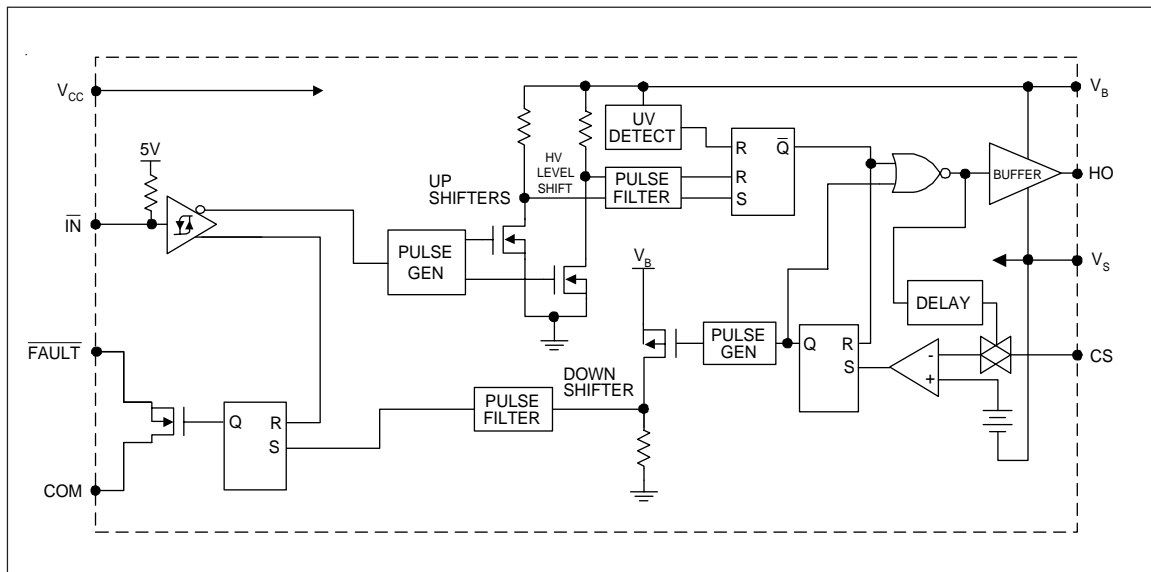

**Lead Definitions**

| Symbol                    | Description   |
|---------------------------|---|
| V <sub>CC</sub>           | Logic and gate drive supply   |
| IN                        | Logic input for gate driver output (HO), in phase with HO (IR2127/IR21271)<br>out of phase with HO (IR2128) |
| $\overline{\text{FAULT}}$ | Indicates over-current shutdown has occurred, negative logic  |
| COM                       | Logic ground  |
| V <sub>B</sub>            | High side floating supply   |
| HO                        | High side gate drive output   |
| V <sub>S</sub>            | High side floating supply return  |
| CS                        | Current sense input to current sense comparator   |

**Lead Assignments**

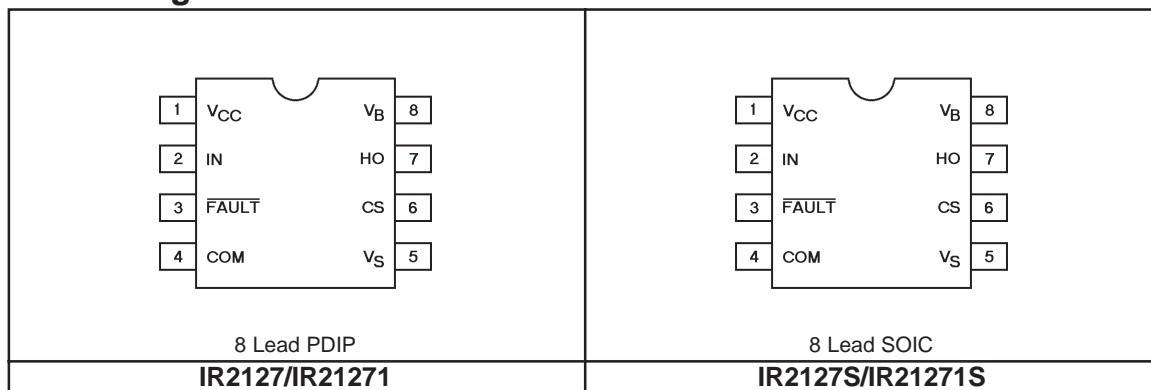




Figure 1. Input/Output Timing Diagram



Figure 2. Switching Time Waveform Definition



Figure 3. Start-up Blanking Time Waveform Definitions

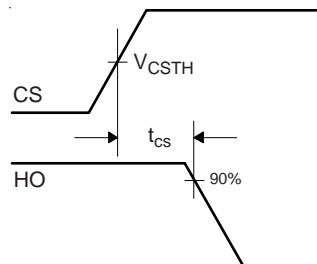


Figure 4. CS Shutdown Waveform Definitions

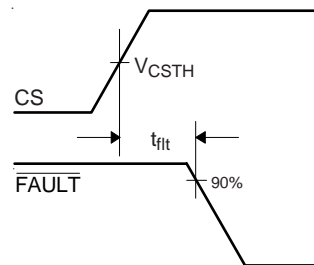


Figure 5. CS to FAULT Waveform Definitions



Figure 10A Turn-On Time vs. Temperature



Figure 10B Turn-On Time vs. Supply Voltage



Figure 10C Turn-On Time vs. Input Voltage



Figure 11A Turn-Off Time vs. Temperature



Figure 11B Turn-Off Time vs. Supply Voltage

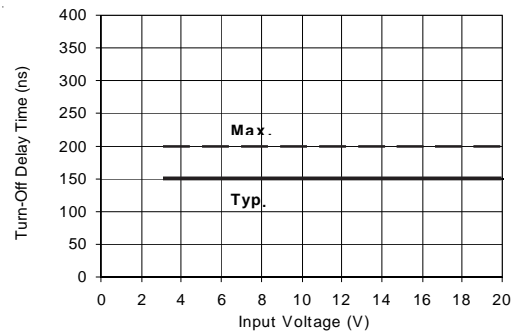


Figure 11C Turn-Off Time vs. Input Voltage



Figure 12A Turn-On Rise Time vs. Temperature



Figure 12B Turn-On Rise Time vs. Supply Voltage

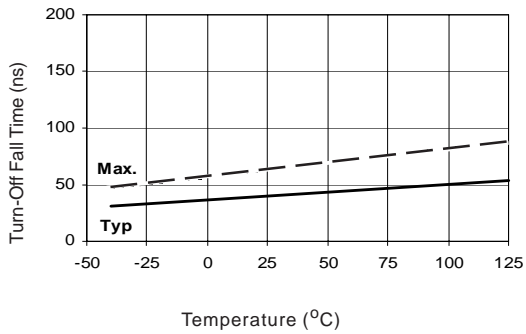


Figure 13A Turn-Off Fall Time vs. Temperature

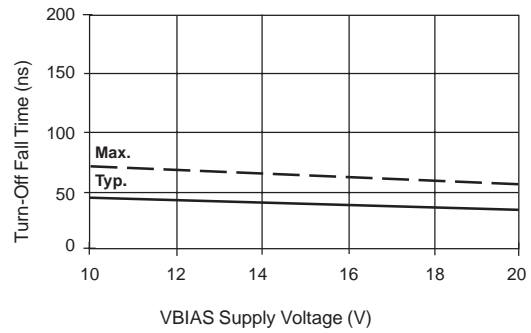


Figure 13B Turn-Off Fall Time vs. Voltage

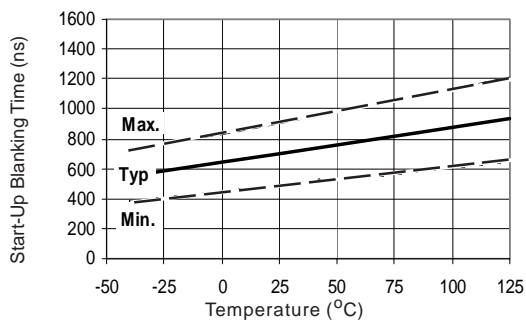


Figure 14A Start-Up Blanking Time vs. Temperature

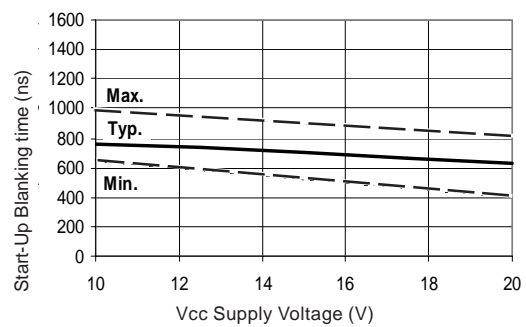


Figure 14B Start-Up Blanking Time vs Voltage





Figure 15A CS Shutdown Propagation Delay vs. Temperature



Figure 15B CS Shutdown Propagation Delay vs. Voltage



Figure 16A CS to FAULT Pull-Up Propagation Delay vs. Temperature



Figure 16B CS to FAULT Pull-Up Propagation Delay vs. Voltage



Figure 17A Logic "1" Input Voltage (IR2127)  
Logic "0" Input Voltage (IR2128)  
vs Temperature



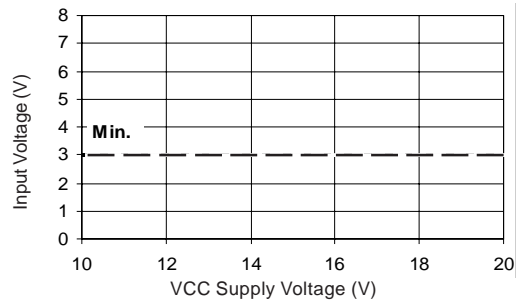



Figure 17B Logic "1" Input Voltage (IR2127)  
Logic "0" Input Voltage (IR2128)  
vs Voltage

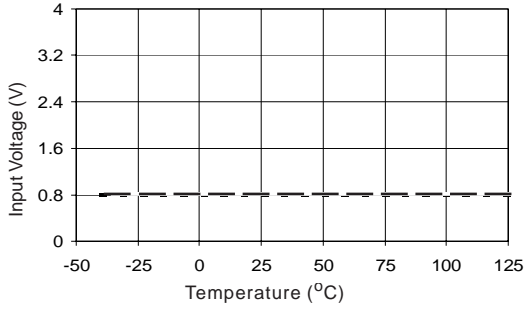


**Figure 18A Logic "0" Input Voltage (IR2127)  
 Logic "1" Input Voltage (IR2128)  
 vs Temperature**

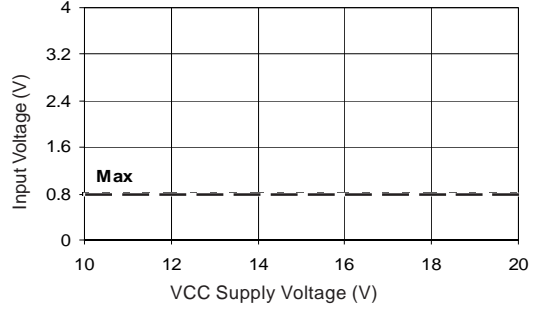


**Figure 18B Logic "0" Input Voltage (IR2127)  
 Logic "1" Input Voltage (IR2128)  
 vs Voltage**

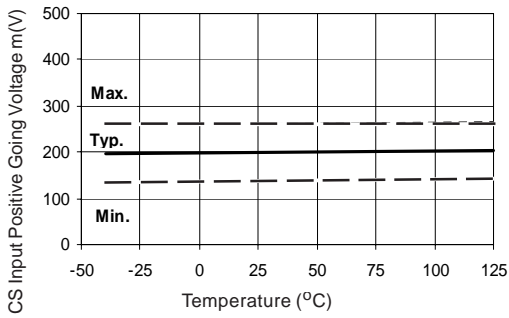


**Figure 19A CS Input Positive Going Voltage  
 vs Temperature (IR2127/IR2128)**

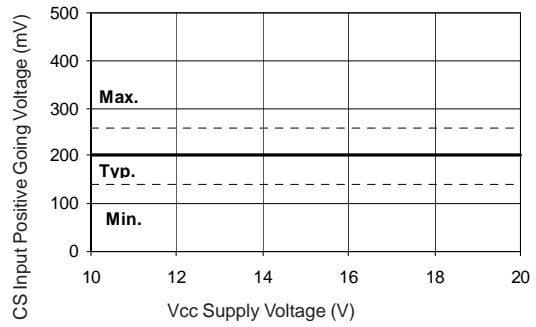

**Figure 19B CS Input Positive Going Voltage  
 vs Voltage (IR2127/IR2128)**

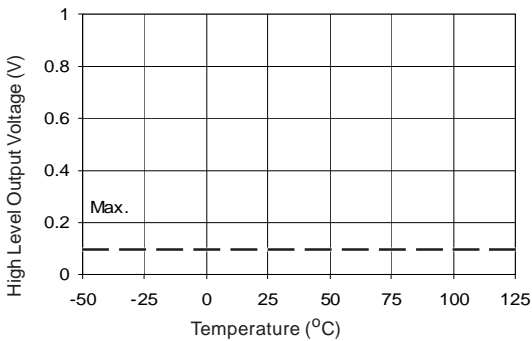

**Figure 20A High Level Output vs Temperature**

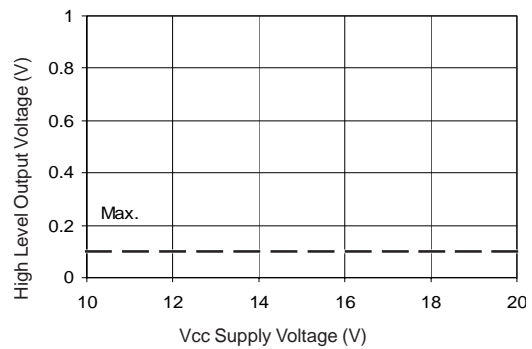

**Figure 20B High Level Output vs Voltage**



**Figure 21A Low Level Output vs Temperature**




**Figure 21B Low Level Output vs Voltage**




**Figure 22A Offset Supply Current vs Temperature**



**Figure 22B Offset Supply Current vs Voltage**

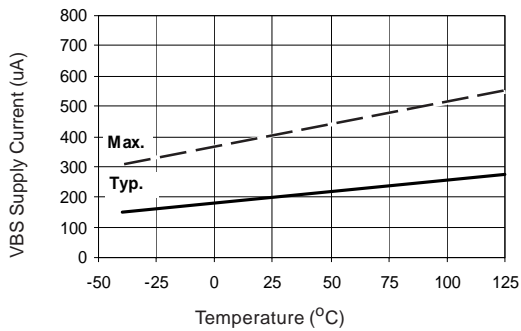


**Figure 23A VBS Supply Current vs Temperature**

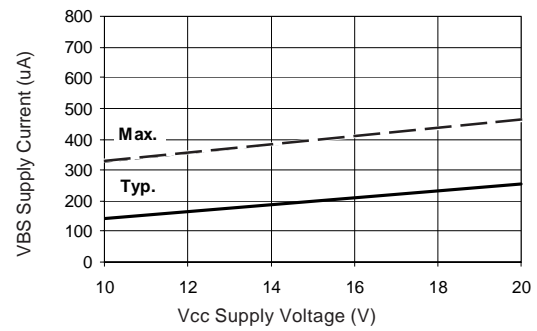


**Figure 23B VBS Supply Current vs Voltage**




**Figure 24A Vcc Supply Current vs Temperature**

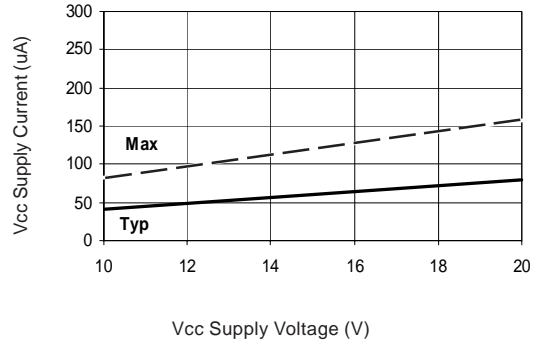


**Figure 24B Vcc Supply Current vs Voltage**

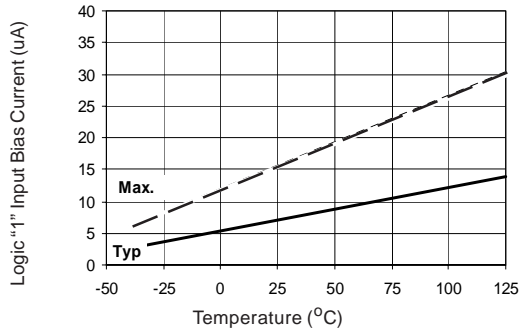


**Figure 25A Logic "1" Input Current vs Temperature**

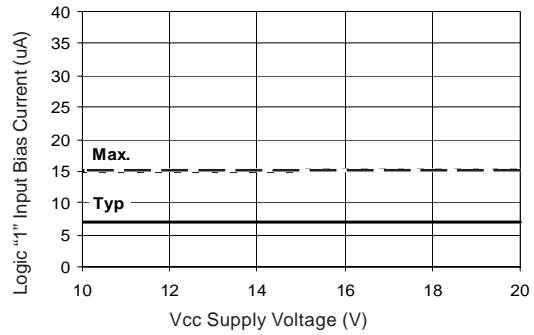


**Figure 25B Logic "1" Input Current vs Voltage**

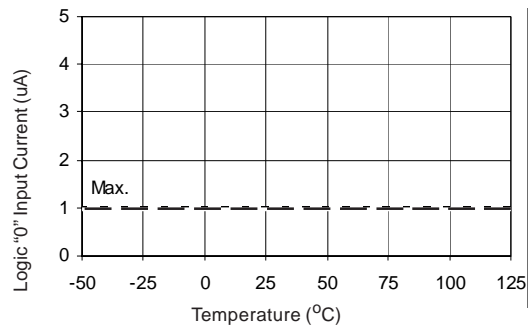

**Figure 26A Logic "0" Input Current vs Temperature**

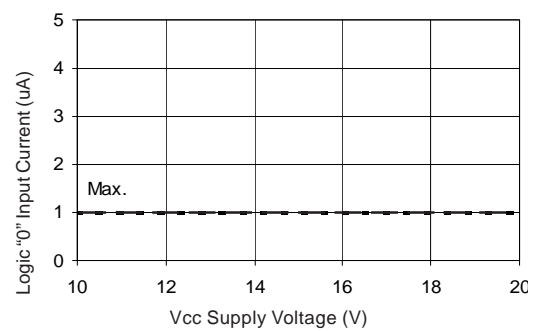


**Figure 26B Logic "0" Input Current vs Voltage**

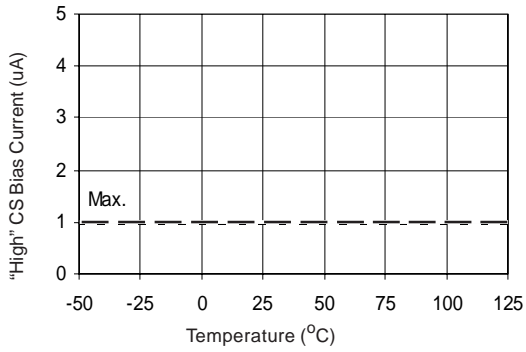


**Figure 27A "High" CS Bias Current vs Temperature**




**Figure 27B "High" CS Bias Current vs Voltage**

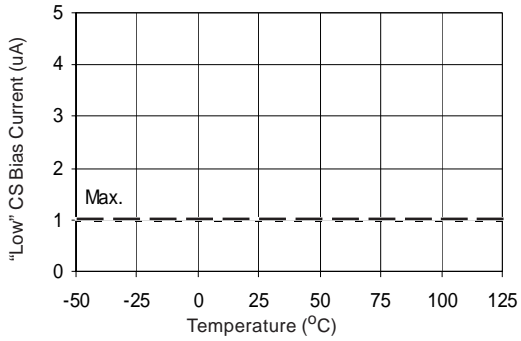


**Figure 28A "Low" CS Bias Current vs Temperature**

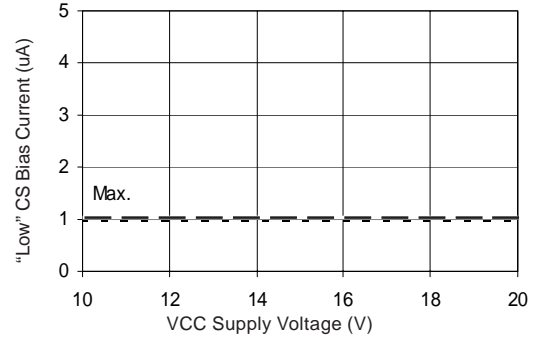

**Figure 28B "Low" CS Bias Current vs Voltage**

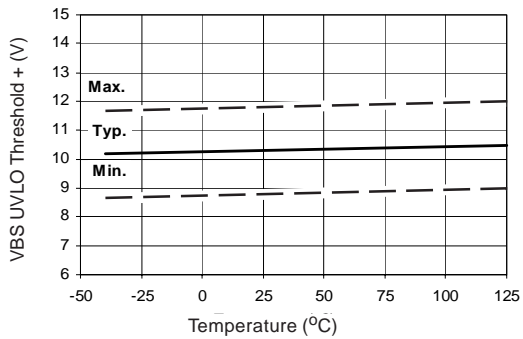

**Figure 29A VBS Undervoltage Threshold (+) vs Temperature (IR2127/IR2128)**

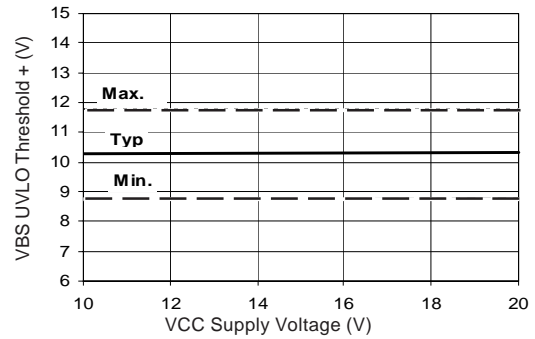

**Figure 29B VBS Undervoltage Threshold (+) vs Voltage (IR2127/IR2128)**

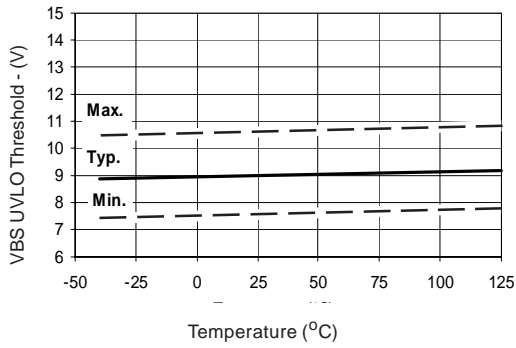


Figure 30A VBS Undervoltage Threshold (-) vs Temperature (IR2127/IR2128)

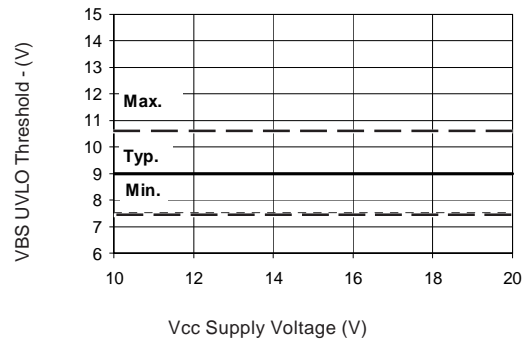


Figure 30B VBS Undervoltage Threshold (-) vs Voltage (IR2127/IR2128)



Figure 31A Output Source Current vs Temperature



Figure 31B Output Source Current vs Voltage

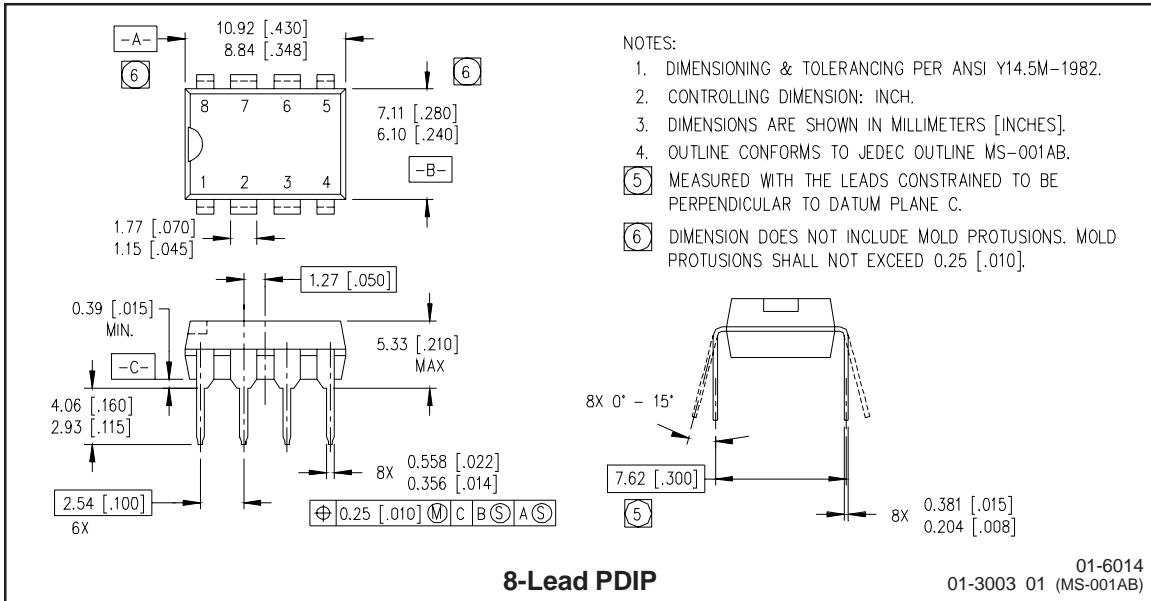


Figure 32A Output Sink Current vs Temperature

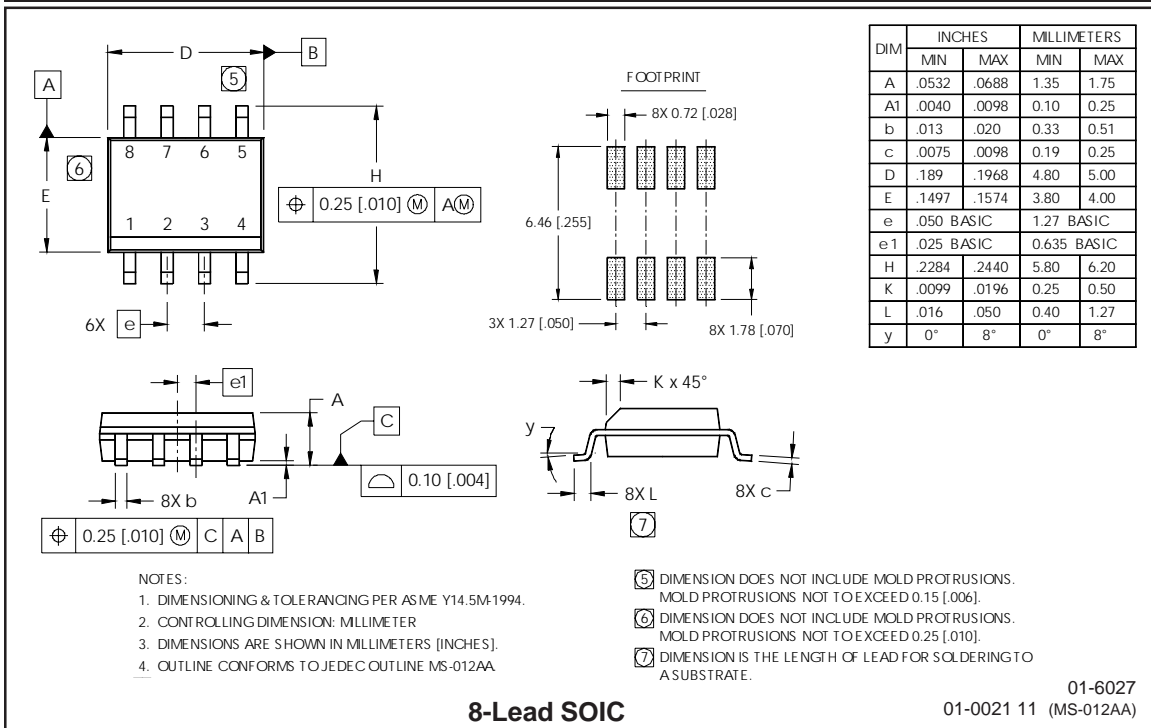


Figure 32B Output Sink Current vs Voltage

**Case outlines**



**8-Lead PDIP**




**8-Lead SOIC**

# IR2127(S) / IR21271(S) / IR2128(S) & (PbF)



## LEADFREE PART MARKING INFORMATION

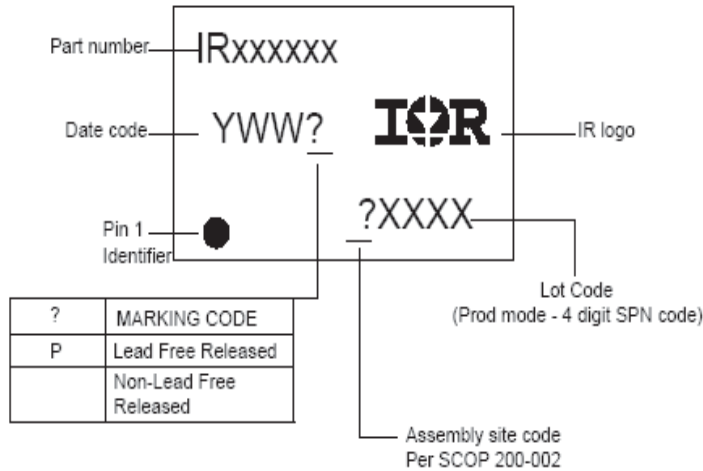

## ORDER INFORMATION

### Basic Part (Non-Lead Free)

|             |          |       |          |
|-------------|----------|-------|----------|
| 8-Lead PDIP | IR2127   | order | IR2127   |
| 8-Lead SOIC | IR2127S  | order | IR2127S  |
| 8-Lead PDIP | IR21271  | order | IR21271  |
| 8-Lead SOIC | IR21271S | order | IR21271S |
| 8-Lead PDIP | IR2128   | order | IR2128   |
| 8-Lead SOIC | IR2128S  | order | IR2128S  |

### Lead-Free Part

|             |          |       |             |
|-------------|----------|-------|-------------|
| 8-Lead PDIP | IR2127   | order | IR2127PbF   |
| 8-Lead SOIC | IR2127S  | order | IR2127SPbF  |
| 8-Lead PDIP | IR21271  | order | IR21271PbF  |
| 8-Lead SOIC | IR21271S | order | IR21271SPbF |
| 8-Lead PDIP | IR2128   | order | IR2128PbF   |
| 8-Lead SOIC | IR2128S  | order | IR2128SPbF  |



This product has been designed and qualified for the Industrial market. Qualification Standards can be found on IR's Web site. Data and specifications subject to change without notice.

**IR WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105 TAC Fax: (310) 252-7903

Visit us at [www.irf.com](http://www.irf.com) for sales contact information. 09/08/04



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Infineon:](#)

[IR2127PBF](#) [IR21271PBF](#) [IR21271SPBF](#) [IR21271STRPBF](#) [IR2127SPBF](#) [IR2127STRPBF](#) [IR2128PBF](#)  
[IR2128SPBF](#) [IR2128STRPBF](#)