


## Three-phase full shunt electricity meter evaluation board based on STPMS2, STISO621W and STM32F413RH

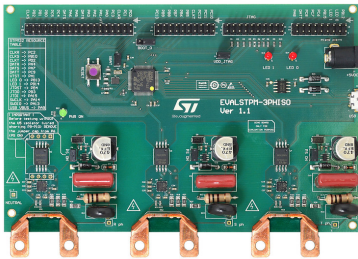

### Features

- Compliant to EN 50470-x, IEC 62053-2x, ANSI12.2x standard requirements for AC watt meters
- Active wideband, active fundamental, reactive and apparent power/energy calculation for each phase and cumulative
- Accuracy Class 0.5 according to IEC 62053-22 on 3-ph active/apparent power measurement
- Accuracy Class 1 according to IEC 62053-21 on 3-ph reactive power measurement
- 6 channels voltage and current decimated samples available @200 us
- 2.5 kHz measurement bandwidth
- RMS and THD (optional) calculation of each voltage and current signal
- Selectable high pass filter for DC measurement
- Line period and phase shift measurement for each phase
- Phase voltage delays
- Full calibration (amplitude, power offset and samples offset for DC measurement)
- Two configurable LED for pulsed outputs
- Communication through USB in virtual com port mode with shell commands
- 6 kV galvanic isolation between the phases with 8 mm creepage and clearance

Product status link

[EVALSTPM-3PHISO](#)

### Description

The **EVALSTPM-3PHISO** evaluation board implements a complete three-phase energy meter with low-cost shunt current sensors.

The solution is based on the STPMS2 device, a double channel, 24-bits second order sigma-delta modulator, measuring voltage and current for each phase through a voltage divider and a shunt current sensor. Sensing circuitry and PCB layout are optimized to maximize signal-to-noise ratio for optimal accuracy.

The STPMS2 oversamples the signal using a 4 MHz clock distributed in a synchronized way by the microcontroller and outputs voltage and current sigma-delta bitstreams, multiplexed on the same pin.

The two-wire communication between STPMS2 modulator and MCU is isolated by STISO621W, 6 kV galvanic isolated interface, allowing up to 100 Mbps rate and low pulse distortion (<3ns) for safe and fast data transfer between isolated domains.

The FW embedded in the solution exploits the DFSDM filters of the STM32F413RH to convert the six bitstreams into 24-bits voltage and current data, at 200 us rate. All the metrology parameters are computed real time on a 200 us basis.

Two LEDs are available for active and reactive pulses generation.

The FW also implements a virtual com port communication to easily access the internal parameters to read metrology data, to modify the internal configuration for a high flexibility of the application, and to calibrate the board.

## Revision history

**Table 1. Document revision history**

Date	Version	Changes
04-Nov-2020	1	Initial release.
22-Mar-2021	2	Updated features list



## Contents

Revision history .....	2
Contents .....	3

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to [www.st.com/trademarks](http://www.st.com/trademarks). All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2021 STMicroelectronics – All rights reserved

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[STMicroelectronics:](#)

[EVALSTPM-3PHISO](#)