

MAX33040E Shield Evaluation Kit

Evaluates: MAX33040E

General Description

The MAX33040E shield evaluation kit (EV kit) is a fully assembled and tested printed circuit board (PCB) that demonstrates the functionality of the MAX33040E controller area network (CAN) transceiver with $\pm 40V$ fault protection extended $\pm 25V$ common-mode input range and $\pm 40kV$ ESD human body model (HBM). The EV kit features a digital isolator, which is used as a level translator between the CAN transceiver and the controller interface.

Features

- Easy Evaluation of the MAX33040E
- I/O Interface Compatibility from 1.71V to 5.5V
- Proven PCB Layout
- Mbed™/Arduino® Platform +
- Fully Assembled and Tested


Quick Start

Required Equipment

- MAX33040E shield EV kit
- 3.3V, 500mA DC power supply
- Signal/function generator that can generate 2.5MHz square wave signal
- Oscilloscope

Ordering Information appears at end of data sheet.

EV Kit Photo with Jumper and Test Point Positions

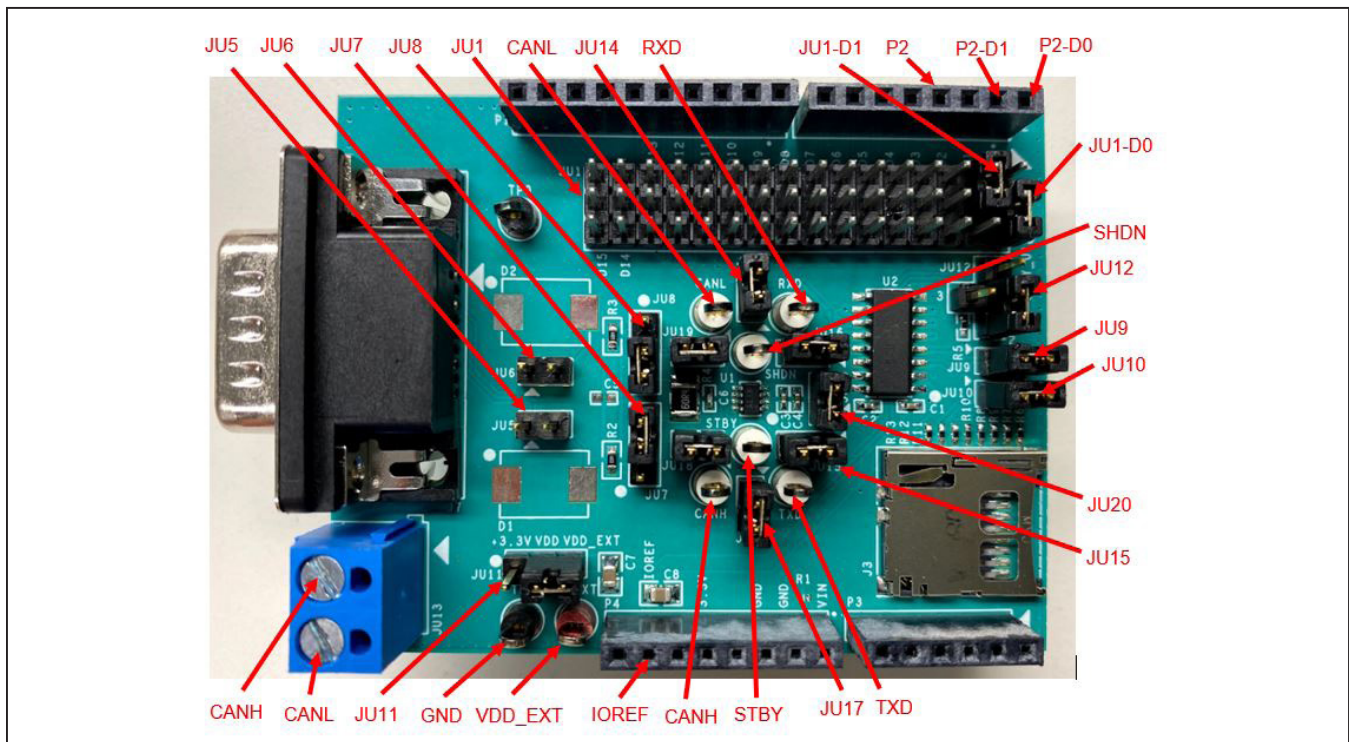

Arduino is a registered trademark of Arduino, LLC.

Mbed is a trademark of Arm Limited (or its subsidiaries) in the US and/or elsewhere.

Procedure

The following procedure can be used to test the MAX33040E shield EV kit as a standalone evaluation board.

- 1) Place the MAX33040E shield EV kit on a nonconductive surface to ensure that nothing on the PCB gets shorted to the workspace.
- 2) Set all the jumpers to their default positions as shown in [Table 1](#).
- 3) With +3.3V power supply disabled, connect the positive terminal to the VDD_EXT test point and IOREF (pin 7 of P4). Connect the negative terminal to the GND test point.
- 4) Connect the positive terminal of the function generator to the D1 (pin 2 of P2) and negative terminal to any GND test point on the shield. D1 is connected to MAX33040E's TXD pin through the digital isolator (U2).
- 5) Set function generator to the output a 2.5MHz square wave between 0V and 3.3V, and then enable function generator output.
- 6) Turn on the +3.3V DC power supply.
- 7) Connect an oscilloscope probe on D0 (pin 1 of P2) and verify the D0 output signal (RXD) matches the D1 input signal (TXD).

Detailed Description of Hardware

The MAX33040E shield EV kit is a fully assembled and tested circuit board for evaluating the MAX33040E fault-protected high-speed CAN transceiver (U1) with $\pm 40V$ of fault protection. The EV kit is designed to evaluate the MAX33040E alone or in a CAN system. The MAX33040E shield EV kit enables Mbed or Arduino platform to communicate on a CAN bus, or it can be used as a standalone evaluation board. The MAX14931 digital isolator is used as a level translator with a 1.71V to 5.5V supply range. Disconnect jumper JU15 to apply the transmitter input signal directly on the TXD test point. Likewise, disconnect jumper JU16 to measure the receiver output signal directly on the RXD test point. If external protection is desired beyond the device's built-in protection, the EV kit also features footprints for TVS diodes (D1 and D2) that can be connected to the CANH and CANL lines using JU5 and JU6, respectively.

Powering the Board

The MAX33040E shield EV kit requires two power supplies: one 3V–3.6V supply for the MAX33040E (U1) transceiver applied at the VDD_EXT test point, and one 1.71V–5.5V supply for the microcontroller domain applied at the IOREF test point. When the EV kit board is used with an Arduino/Mbed board, the power supply for U1

can also come from the Arduino/Mbed board's 3.3V rail. Place the shunt on 2-3 position of JU11 to connect VDD to the VDD_EXT pin. Place the shunt of JU11 on 1-2 position to connect VDD of U1 to the Arduino/Mbed 3.3V supply rail. In this scenario, IOREF is directly taken from the Arduino/Mbed header.

On-Board Termination

A properly terminated CAN bus is terminated at each end with the characteristic impedance of the cable. For CAT5 or CAT6 cables, this is typically 120 Ω on each end for a 60 Ω load on the CAN driver. The MAX33040E shield EV kit features a selectable 60 Ω load and a 60 Ω –60 Ω split termination circuit between the CANH and CANL driver outputs. The 60 Ω –60 Ω split termination has a footprint for a capacitor to reduce high-frequency noise and common-mode drift. If the board is evaluated in a system and is connected at the end of the cable, then select the 120 Ω (60 Ω –60 Ω split) termination. The termination resistors on the MAX33040E shield EV kit changes to 60 Ω with a 100pF load (using JU7 and JU8), to simulate a complete system load during evaluation.

TXD and RXD Configuration

Digital channels for TXD and RXD are selected through JU1. It consists of three columns and 16 rows. The columns labeled TXD and RXD are connected to MAX33040E through the digital isolator (MAX14931FASE+ (U2)). The middle column is the digital I/O pins, D0 to D15, from the Arduino/Mbed header. This provides flexibility for the user to select different resources on the microcontroller to transmit and receive signals to and from the CAN transceiver. [Table 2](#) shows the list of JU1 jumper options.

DB9 Connector

The MAX33040E shield EV kit has a DB9 connector to CANH and CANL (pins 7 and 2, respectively).

The MAX33040E shield EV kit allows multiple points of connection to the MAX33040E transceiver. The EV kit board can be placed on a Arduino/Mbed-compatible board to connect all the digital pins (TXD, RXD, STBY, SHDN) through the P1 and P2 headers. These signals can also be connected directly at their respective test points on the board, bypassing the digital isolator (U2). The CANH, CANL signals are connected to a terminal block (JU13) to easily connect to a twisted pair cable. These signals are also routed to a DB9 connector (CANH and CANL on pins 7 and 2, respectively). Alternately, the CANH and CANL test points can be used.

SD Card

The MAX33040E shield EV kit has a microSD card socket for easy use in OBD applications. The microSD card is connected to D10–D13 to interface with the Arduino/Mbed board through the SPI interface.

Table 1. Jumper Settings

| JUMPER | SHUNT POSITION | DESCRIPTION |
|-------------|----------------|---|
| JU1 | - | See Table 2 |
| JU5 | 1-2 | Connects TVS diode (optional, not populated) to CANH |
| | Open* | Disconnects TVS diode (optional, not populated) from CANH |
| JU6 | 1-2 | Connects TVS diode (optional, not populated) to CANL |
| | Open* | Disconnects TVS diode (optional, not populated) to CANL |
| JU7 and JU8 | 1-2 | Connects 120Ω between CANH and CANL |
| | 2-3* | Connects 60Ω between CANH and CANL |
| | Open | No load is connected between CANH and CANL |
| JU9 | 1-2* | Connects SHDN to D7 of P2 |
| | Open | Disconnects SHDN from D7 of P2 |
| JU10 | 1-2* | Connects STBY to D6 of P2 |
| | Open | Disconnects STBY from D6 of P2 |
| JU11 | 1-2 | VDD is shorted to 3.3V supply |
| | 2-3* | VDD is shorted to VDD_EXT supply |
| | Open | VDD is open |
| JU12 | 1-2* | Connects STBY to ground |
| | 1-3 | Connects STBY to a 39.2kΩ resistor to ground |
| | 1-4 | Connects STBY to U2's OUTB1 pin used for Arduino/Mbed interface |
| | Open | Internal pullup for standby mode |
| JU14 | 1-2* | Connects SHDN to U2 |
| | Open | Disconnects SHDN from U2 |
| JU15 | 1-2* | Connects TXD to U2 |
| | Open | Disconnects TXD from U2 |
| JU16 | 1-2* | Connects RXD to U2 |
| | Open | Disconnects RXD from U2 |
| JU17 | 1-2* | Connects STBY to JU12 |
| | Open | Disconnects STBY from JU12 |
| JU18 | 1-2* | Connects CANH to JU5 and JU7 |
| | Open | Disconnects CANH from JU5 and JU7 |
| JU19 | 1-2* | Connects CANL to JU6 and JU8 |
| | Open | Disconnects CANL from JU6 and JU8 |
| JU20 | 1-2* | Connects VDD pin of U1 to VDD supply rail |
| | Open | Disconnects VDD pin of U1 to VDD supply rail |

*Indicates default jumper state.

Table 2. TXD and RXD Jumper Setting

| JUMPER | SHUNT POSITION | DESCRIPTION |
|--------|---------------------|---------------------|
| JU1 | 1-2 | Connects TXD to D0 |
| | 4-5* | Connects TXD to D1 |
| | 7-8 | Connects TXD to D2 |
| | 10-11 | Connects TXD to D3 |
| | 13-14 | Connects TXD to D4 |
| | 16-17 | Connects TXD to D5 |
| | 19-20 | Connects TXD to D6 |
| | 22-23 | Connects TXD to D7 |
| | 25-26 | Connects TXD to D8 |
| | 28-29 | Connects TXD to D9 |
| | 31-32 | Connects TXD to D10 |
| | 34-35 | Connects TXD to D11 |
| | 37-38 | Connects TXD to D12 |
| | 40-41 | Connects TXD to D13 |
| | 43-44 | Connects TXD to D14 |
| | 46-47 | Connects TXD to D15 |
| | 2-3* | Connects RXD to D0 |
| | 5-6 | Connects RXD to D1 |
| | 8-9 | Connects RXD to D2 |
| | 11-12 | Connects RXD to D3 |
| | 14-15 | Connects RXD to D4 |
| | 17-18 | Connects RXD to D5 |
| | 20-21 | Connects RXD to D6 |
| | 23-24 | Connects RXD to D7 |
| | 26-27 | Connects RXD to D8 |
| | 29-30 | Connects RXD to D9 |
| | 32-33 | Connects RXD to D10 |
| | 35-36 | Connects RXD to D11 |
| | 38-39 | Connects RXD to D12 |
| | 41-42 | Connects RXD to D13 |
| 44-45 | Connects RXD to D14 | |
| 47-48 | Connects RXD to D15 | |

*Indicates default jumper state.

Ordering Information


| PART | TYPE |
|----------------|--------|
| MAX33040ESHLD# | Shield |

#Denotes RoHS compliance.


MAX33040E Shield EV Kit Bill of Materials

| ITEM | REF_DES | DNI/DNP | QTY | MFG PART # | MANUFACTURER | VALUE | DESCRIPTION |
|-------|---|---------|-----|--|--|------------------------|--|
| 1 | C1-C3 | - | 3 | C0402C104J4RAC; GCM155R71C104JA55 | KEMET;MURATA | 0.1UF | CAPACITOR; SMT (0402); CERAMIC CHIP; 0.1UF; 16V; TOL=5%; MODEL=; TG=-55 DEGC TO +125 DEGC; TC=X7R |
| 2 | C4 | - | 1 | C0402X7R160-103JNP; X7R0402CTT; 0402YC103JAT2A | VENKEL LTD; KOA SPEER ELECTRONICS INC; AVX | 0.01UF | CAPACITOR; SMT; 0402; CERAMIC; 0.01uF; 16V; 5%; X7R; -55degC to + 125degC; 0 +/-15% degC MAX. |
| 3 | C6 | - | 1 | C0402C101J5GAC; NMC0402NPO101J; CC0402JRNPO9BN101; GRM1555C1H101JA01; C1005C0G1H101J050BA; CGA2B2C0G1H101J050BA | KEMET; NIC COMPONENTS CORP. ; YAGEO PHICOMP;MURATA; TDK;TDK | 100PF | CAPACITOR; SMT (0402); CERAMIC CHIP; 100PF; 50V; TOL=5%; TG=-55 DEGC TO +125 DEGC; TC=C0G |
| 4 | C7, C8 | - | 2 | GRM21BR61A106KE19; ECJ-2FB1A106; CL21A106KPCLQNC; GRM219R61A106KE44 | MURATA;PANASONIC; SAMSUNG ELECTRONICS; MURATA | 10UF | CAPACITOR; SMT (0805); CERAMIC CHIP; 10UF; 10V; TOL=10%; MODEL=; TG=-55 DEGC TO +85 DEGC; TC=X5R |
| 5 | CANH, CANL, RXD, SHDN, STBY, TXD | - | 6 | 5012 | KEYSTONE | N/A | TEST POINT; PIN DIA=0.125IN; TOTAL LENGTH=0.445IN; BOARD HOLE=0.063IN; WHITE; PHOSPHOR BRONZE WIRE SILVER PLATE FINISH; |
| 6 | J3 | - | 1 | 502570-0893;5025700893 | MOLEX;MOLEX | 502570-0893;5025700893 | CONNECTOR; FEMALE; SMT; MICROSD CARD CONNECTOR; RIGHT ANGLE; 10PINS |
| 7 | J7 | - | 1 | 182-009-113R531 | NORCOMP | 182-009-113R531 | CONNECTOR; MALE; THROUGH HOLE; D-SUBMINIATURE CONNECTOR; RIGHT ANGLE; 9PINS |
| 8 | JU1 | - | 1 | TSW-116-07-T-T | SAMTEC | TSW-116-07-T-T | CONNECTOR; MALE; THROUGH HOLE; 0.025IN SQ POST HEADER; STRAIGHT; 48PINS |
| 9 | JU5, JU6, JU9, JU10, JU14-JU20 | - | 11 | PBC02SAAN | SULLINS ELECTRONICS CORP. | PBC02SAAN | CONNECTOR; MALE; THROUGH HOLE; BREAKAWAY; STRAIGHT; 2PINS |
| 10 | JU7, JU8 | - | 2 | PBC03SAAN | SULLINS | PBC03SAAN | CONNECTOR; MALE; THROUGH HOLE; BREAKAWAY; STRAIGHT; 3PINS; -65 DEGC TO +125 DEGC |
| 11 | JU11 | - | 1 | PCC03SAAN | SULLINS | PCC03SAAN | CONNECTOR; MALE; THROUGH HOLE; BREAKAWAY; STRAIGHT THROUGH; 3PINS; -65 DEGC TO +125 DEGC |
| 12 | JU12 | - | 1 | TSW-104-07-L-S | SAMTEC | TSW-104-07-L-S | EVKIT PART-CONNECTOR; MALE; THROUGH HOLE; TSW SERIES; SINGLE ROW; STRAIGHT; 4PINS |
| 13 | JU13 | - | 1 | OSTTA024163 | ON-SHORE TECHNOLOGY INC. | OSTTA024163 | CONNECTOR; FEMALE; THROUGH HOLE; 5.08MM TERM BLOCK CONNECTOR; STRAIGHT; 2PINS; -30 DEGC TO +105 DEGC |
| 14 | P1 | - | 1 | SSQ-110-24-G-S | SAMTEC | SSQ-110-24-G-S | CONNECTOR; FEMALE; THROUGH HOLE; .025INCH SQ POST SOCKET; STRAIGHT; 10PINS ; |
| 15 | P2, P4 | - | 2 | SSQ-108-24-G-S | SAMTEC | SSQ-108-24-G-S | CONNECTOR; FEMALE; THROUGH HOLE; .025INCH SQ POST SOCKET; STRAIGHT; 8PINS ; |
| 16 | P3 | - | 1 | SSQ-106-24-G-S | SAMTEC | SSQ-106-24-G-S | CONNECTOR; FEMALE; THROUGH HOLE; .025INCH SQ POST SOCKET; STRAIGHT; 6PINS ; |
| 17 | R2, R3 | - | 2 | CRCW060360R4FK | VISHAY DALE | 60.4 | RESISTOR; 0603; 60.4 OHM; 1%; 100PPM; 0.10W; THICK FILM |
| 18 | R4 | - | 1 | CRCW121060R4FKEAHP | VISHAY DRALORIC | 60.4 | RES; SMT (1210); 60.4R; 1%; +/-100PPM/DEGC; 0.75W |
| 19 | R5 | - | 1 | ERJ-2RKF3922 | PANASONIC | 39.2K | RESISTOR; 0402; 39.2K OHM; 1%; 100PPM; 0.10W; METAL FILM |
| 20 | R6, R8, R10, R12 | - | 4 | CRCW04021K80FK; RC0402FR-071K8L | VISHAY DALE; YAGEO PHICOMP | 1.8K | RESISTOR, 0402, 1.8K OHM, 1%, 100PPM, 0.0625W, THICK FILM |
| 21 | R7, R9, R11, R13 | - | 4 | CRCW04023K30FK | VISHAY DALE | 3.3K | RESISTOR, 0402, 3.3K OHM, 1%, 100PPM, 0.0625W, THICK FILM |
| 22 | TP8, TP9 | - | 2 | 5011 | KEYSTONE | N/A | TEST POINT; PIN DIA=0.125IN; TOTAL LENGTH=0.445IN; BOARD HOLE=0.063IN; BLACK; PHOSPHOR BRONZE WIRE SILVER PLATE FINISH; |
| 23 | U1 | - | 1 | MAX33040EAKA+ | MAXIM | MAX33040EAKA+ | EVKIT PART - IC; MAX33040EAKA+; +3.3V; 5MBPS CAN TRANSCEIVER WITH +/-40V FAULT PROTECTION; +/-25VCMR AND +/-25KV ESD; PACKAGE OUTLINE DRAWING: 21-0078; PACKAGE CODE: K8CN+2; LAND PATTERN DRAWING: 90-0176 |
| 24 | U2 | - | 1 | MAX14931FASE+ | MAXIM | MAX14931FASE+ | IC; DISO; 3/1 CHANNEL; 150MBPS; DEFAULT LOW; 2.75KV RMS DIGITAL ISOLATOR; NSOIC16 150MIL |
| 25 | VDD_EXT | - | 1 | 5010 | KEYSTONE | N/A | TEST POINT; PIN DIA=0.125IN; TOTAL LENGTH=0.445IN; BOARD HOLE=0.063IN; RED; PHOSPHOR BRONZE WIRE SIL; |
| 26 | PCB | - | 1 | MAX33040ESHIELD | MAXIM | PCB | PCB:MAX33040ESHIELD |
| 27 | C5 | DNP | 0 | C1005X7R1E473K050BC; GRM155R71E473K; GCM155R71E473KA55 | TDK;MURATA;MURATA | 0.047UF | CAPACITOR; SMT (0402); CERAMIC CHIP; 0.047UF; 25V; TOL=10%; TG=-55 DEGC TO +125 DEGC |
| 28 | D1, D2 | DNP | 0 | SM15T30CA | ST MICROELECTRONICS | 25.6V | DIODE; TVS; SMC (DO-214AB); VRM=25.6V; IPP=36A |
| 29 | R1 | DNP | 0 | N/A | N/A | OPEN | RESISTOR; 0402; OPEN; FORMFACTOR |
| TOTAL | | | 54 | | | | |


MAX33040E Shield EV Kit Schematics

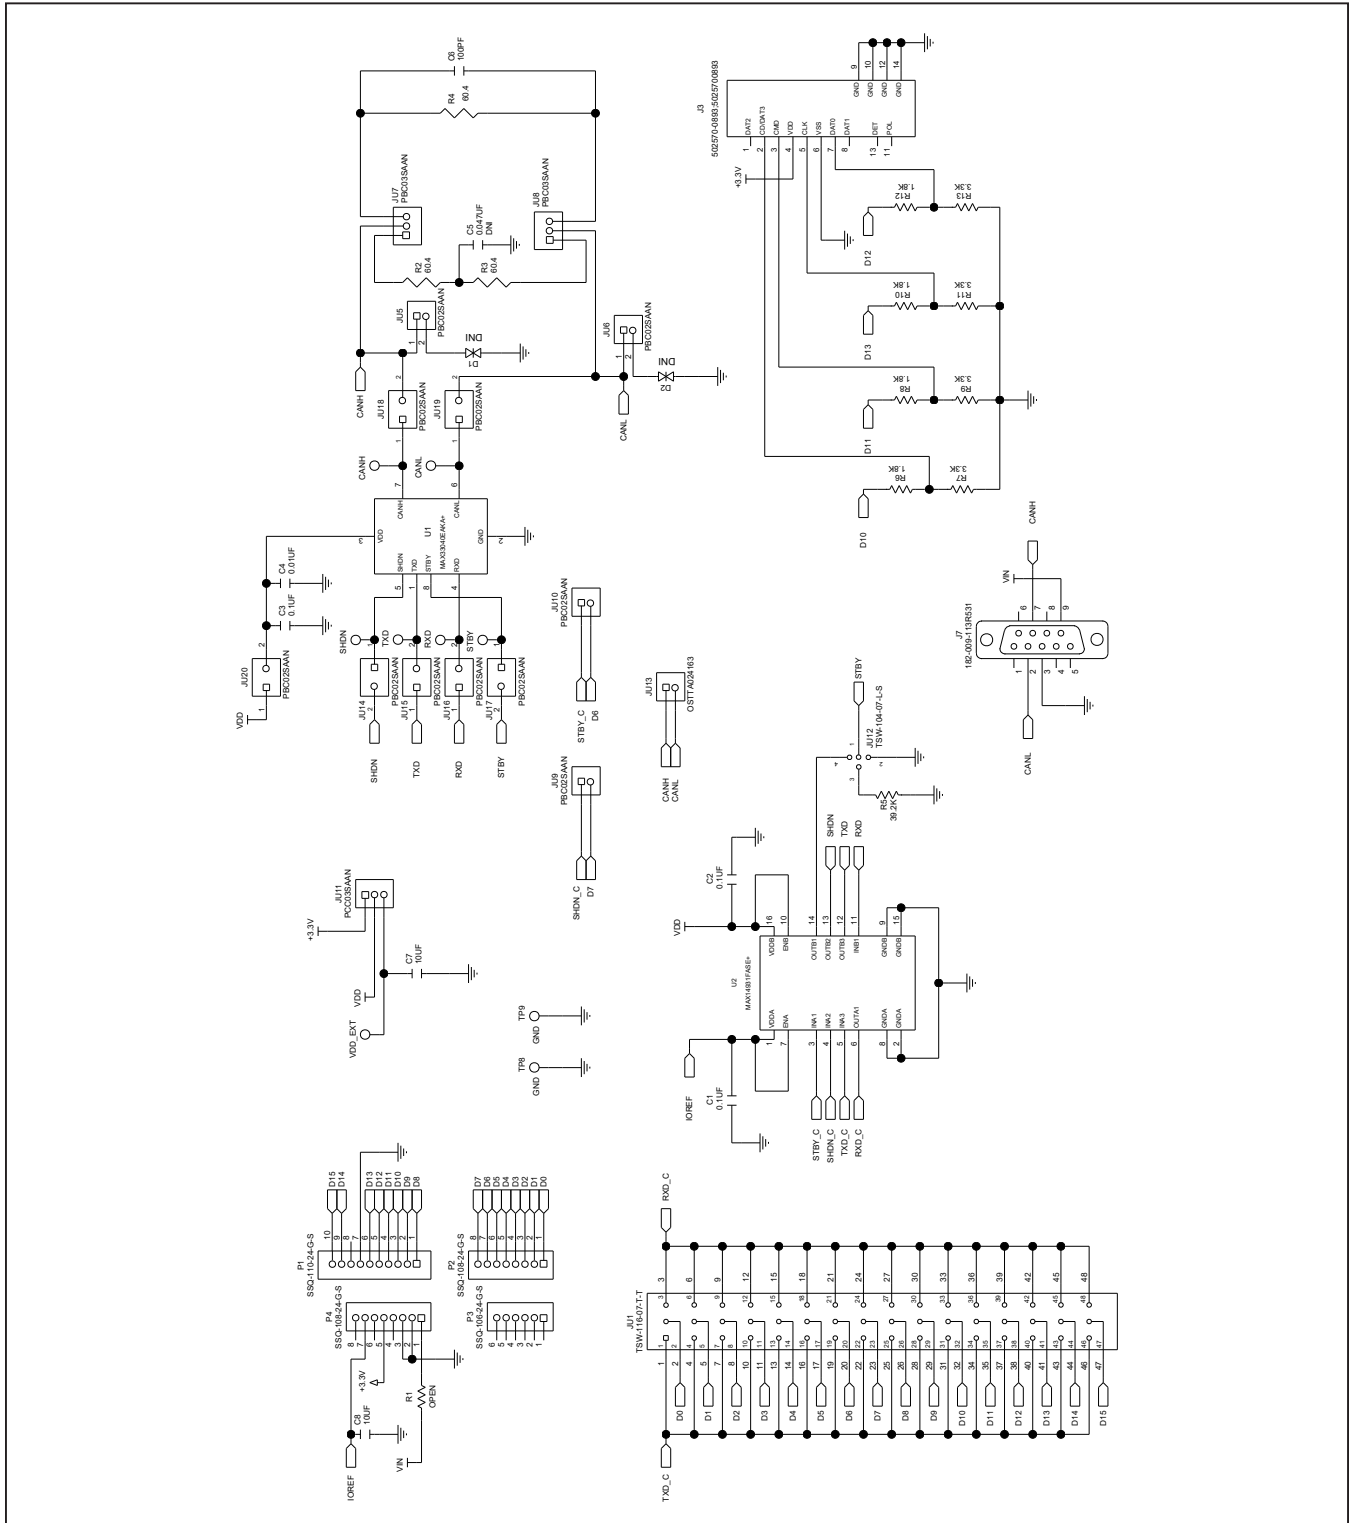


MAX33040E Shield EV Kit PCB Layouts

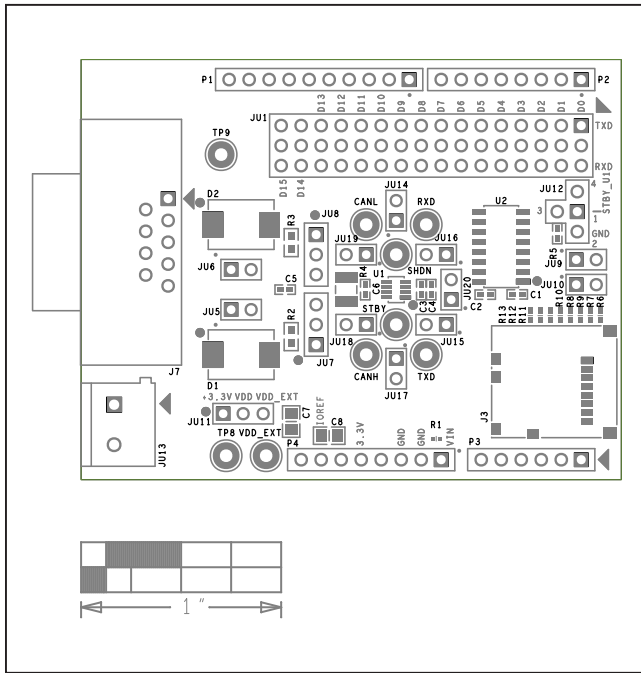


MAX33040E Shield Component Placement Guide—Top Silkscreen

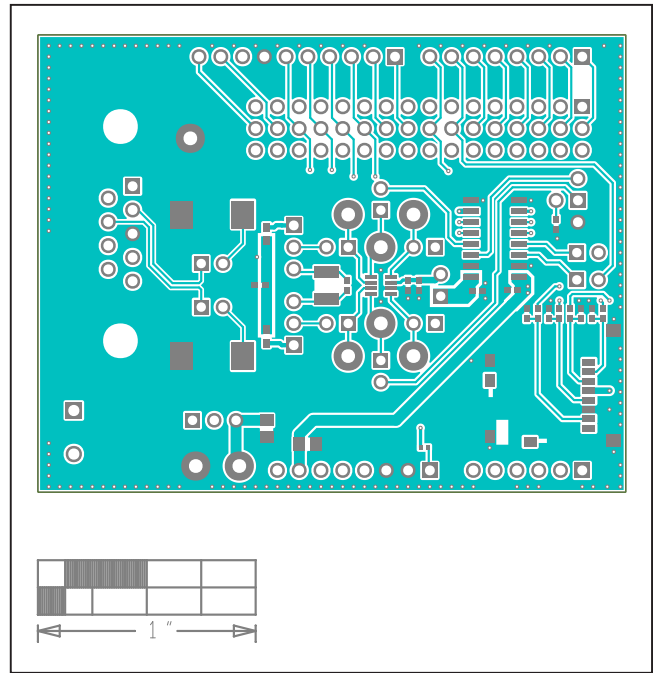

MAX33040E Shield PCB Layout—Top

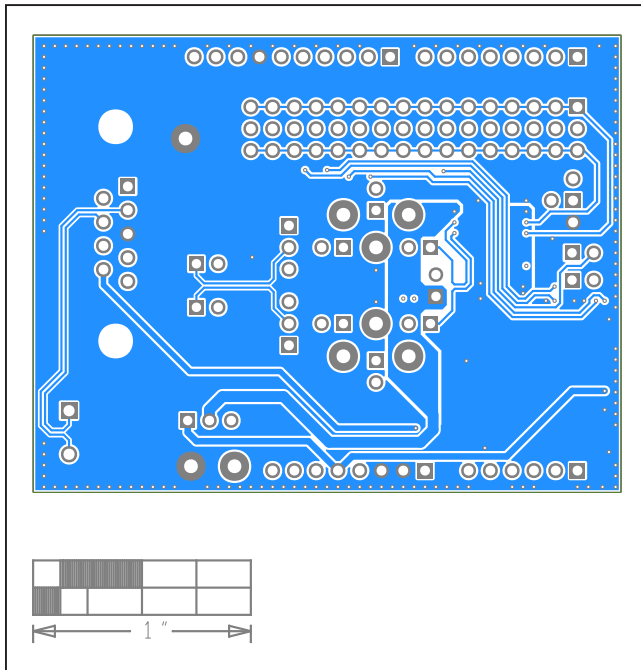

MAX33040E Shield PCB Layout—Bottom

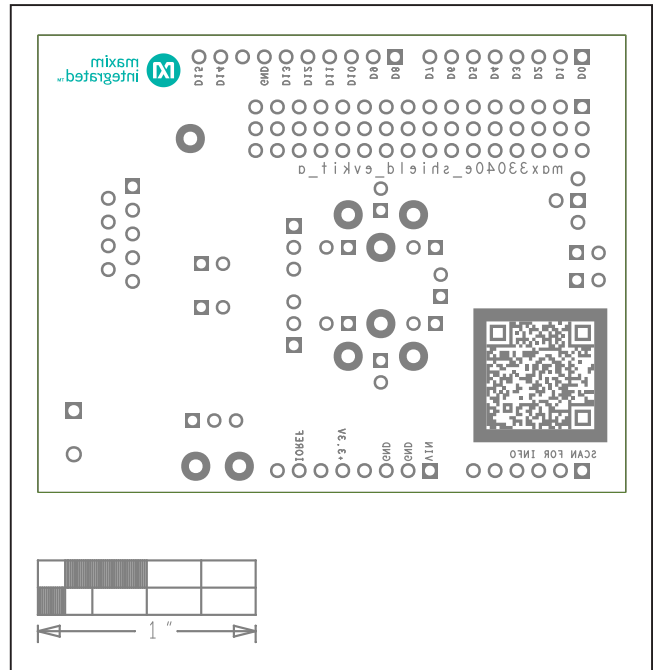

MAX33040E Shield Component Placement Guide—Bottom Silkscreen

Revision History

| REVISION NUMBER | REVISION DATE | DESCRIPTION | PAGES CHANGED |
|-----------------|---------------|-----------------|---------------|
| 0 | 11/20 | Initial release | — |

For pricing, delivery, and ordering information, please visit Maxim Integrated's online storefront at <https://www.maximintegrated.com/en/storefront/storefront.html>.

Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[MAX33040ESHLD#](#)