

EC200T

Hardware Design

LTE Standard Module Series

Rev. EC200T_Hardware_Design_V1.0

Date: 2019-09-12

Status: Released



Our aim is to provide customers with timely and comprehensive service. For any assistance, please contact our company headquarters:

Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233

Tel: +86 21 5108 6236

Email: info@quectel.com

Or our local office. For more information, please visit:

<http://www.quectel.com/support/sales.htm>

For technical support, or to report documentation errors, please visit:

<http://www.quectel.com/support/technical.htm>

Or email to: support@quectel.com

GENERAL NOTES

QUECTEL OFFERS THE INFORMATION AS A SERVICE TO ITS CUSTOMERS. THE INFORMATION PROVIDED IS BASED UPON CUSTOMERS' REQUIREMENTS. QUECTEL MAKES EVERY EFFORT TO ENSURE THE QUALITY OF THE INFORMATION IT MAKES AVAILABLE. QUECTEL DOES NOT MAKE ANY WARRANTY AS TO THE INFORMATION CONTAINED HEREIN, AND DOES NOT ACCEPT ANY LIABILITY FOR ANY INJURY, LOSS OR DAMAGE OF ANY KIND INCURRED BY USE OF OR RELIANCE UPON THE INFORMATION. ALL INFORMATION SUPPLIED HEREIN IS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

COPYRIGHT

THE INFORMATION CONTAINED HERE IS PROPRIETARY TECHNICAL INFORMATION OF QUECTEL WIRELESS SOLUTIONS CO., LTD. TRANSMITTING, REPRODUCTION, DISSEMINATION AND EDITING OF THIS DOCUMENT AS WELL AS UTILIZATION OF THE CONTENT ARE FORBIDDEN WITHOUT PERMISSION. OFFENDERS WILL BE HELD LIABLE FOR PAYMENT OF DAMAGES. ALL RIGHTS ARE RESERVED IN THE EVENT OF A PATENT GRANT OR REGISTRATION OF A UTILITY MODEL OR DESIGN.

Copyright © Quectel Wireless Solutions Co., Ltd. 2019. All rights reserved.

About the Document

History

Revision	Date	Author	Description
1.0	2019-09-12	Jaye SANG/ Niko WU	Initial

Contents

About the Document	2
Contents	2
Table Index	4
Figure Index	6
1 Introduction	8
1.1. Safety Information.....	9
2 Product Concept	10
2.1. General Description.....	10
2.2. Key Features.....	11
2.3. Functional Diagram.....	13
2.4. Evaluation Board.....	14
3 Application Interfaces	15
3.1. General Description.....	15
3.2. Pin Assignment.....	16
3.3. Pin Description.....	17
3.4. Operating Modes.....	25
3.5. Power Saving.....	26
3.5.1. Sleep Mode.....	26
3.5.1.1. UART Application.....	26
3.5.1.2. USB Application with USB Remote Wakeup Function.....	26
3.5.1.3. USB Application with USB Suspend/Resume and MAIN_RI Wakeup Function.....	27
3.5.1.4. USB Application without USB Suspend Function.....	28
3.5.2. Airplane Mode.....	28
3.6. Power Supply.....	29
3.6.1. Power Supply Pins.....	29
3.6.2. Decrease Voltage Drop.....	30
3.6.3. Reference Design for Power Supply.....	31
3.7. Power-on/off/Reset Scenarios.....	31
3.7.1. Turn on Module Using the PWRKEY.....	31
3.7.2. Turn off Module.....	33
3.7.2.1. Turn off Module Using the PWRKEY Pin.....	34
3.7.2.2. Turn off Module Using AT Command.....	34
3.7.3. Reset the Module.....	34
3.8. (U)SIM Interface.....	36
3.9. USB Interface.....	38
3.10. UART Interfaces.....	40
3.11. PCM and I2C Interfaces.....	42
3.12. SD Card Interface*.....	44
3.13. WLAN Interface*.....	46
3.14. ADC Interfaces.....	47

3.15.	Network Status Indication	48
3.16.	STATUS	49
3.17.	Behaviors of the MAIN_RI	50
3.18.	FORCE_USB_BOOT Interface	51
4	Antenna Interfaces.....	53
4.1.	Main/Rx-diversity Antenna Interfaces.....	53
4.1.1.	Pin Definition	53
4.1.2.	Operating Frequency	53
4.1.3.	Reference Design of RF Antenna Interface	55
4.1.4.	Reference Design of RF Layout.....	56
4.2.	Antenna Installation	58
4.2.1.	Antenna Requirement	58
4.2.2.	Recommended RF Connector for Antenna Installation	58
5	Electrical, Reliability and Radio Characteristics	60
5.1.	Absolute Maximum Ratings.....	60
5.2.	Power Supply Ratings	61
5.3.	Operation and Storage Temperatures	61
5.4.	Current Consumption	62
5.5.	RF Output Power	65
5.6.	RF Receiving Sensitivity	66
5.7.	Electrostatic Discharge.....	67
6	Mechanical Dimensions	68
6.1.	Mechanical Dimensions of the Module.....	68
6.2.	Recommended Footprint	70
6.3.	Design Effect Drawings of the Module	71
7	Storage, Manufacturing and Packaging	72
7.1.	Storage.....	72
7.2.	Manufacturing and Soldering	73
7.3.	Packaging	74
8	Appendix A References.....	76
9	Appendix B GPRS Coding Schemes	80
10	Appendix C GPRS Multi-slot Classes.....	81
11	Appendix D EDGE Modulation and Coding Schemes	83

Table Index

TABLE 1: FREQUENCY BANDS OF EC200T-CN MODULE	10
TABLE 2: FREQUENCY BANDS OF EC200T-EU MODULE	10
TABLE 3: KEY FEATURES OF EC200T MODULE	11
TABLE 4: I/O PARAMETERS DEFINITION	17
TABLE 5: PIN DESCRIPTION	17
TABLE 6: OVERVIEW OF OPERATING MODES	25
TABLE 7: POWER SUPPLY AND GND PINS	29
TABLE 8: PIN DESCRIPTION OF PWRKEY	31
TABLE 9: PIN DESCRIPTION OF RESET_N	35
TABLE 10: PIN DEFINITION OF (U)SIM INTERFACE	36
TABLE 11: PIN DESCRIPTION OF USB INTERFACE	39
TABLE 12: PIN DEFINITION OF MAIN UART INTERFACE	40
TABLE 13: PIN DEFINITION OF DEBUG UART INTERFACE	41
TABLE 14: LOGIC LEVELS OF DIGITAL I/O	41
TABLE 15: PIN DEFINITION OF PCM AND I2C INTERFACES	43
TABLE 16: PIN DEFINITION OF SD CARD INTERFACE	44
TABLE 17: PIN DEFINITION OF WLAN INTERFACE	46
TABLE 18: PIN DEFINITION OF ADC INTERFACES	48
TABLE 19: CHARACTERISTIC OF THE ADC	48
TABLE 20: PIN DEFINITION OF NETWORK CONNECTION STATUS/ACTIVITY INDICATION	48
TABLE 21: WORKING STATE OF NETWORK CONNECTION STATUS/ACTIVITY INDICATION	49
TABLE 22: PIN DEFINITION OF STATUS	50
TABLE 23: BEHAVIORS OF THE MAIN_RI	51
TABLE 24: PIN DEFINITION OF FORCE_USB_BOOT INTERFACE	51
TABLE 25: PIN DEFINITION OF RF ANTENNAS	53
TABLE 26: EC200T-CN OPERATING FREQUENCIES	53
TABLE 27: EC200T-EU OPERATING FREQUENCIES	54
TABLE 28: ANTENNA REQUIREMENTS	58
TABLE 29: ABSOLUTE MAXIMUM RATINGS	60
TABLE 30: THE MODULE POWER SUPPLY RATINGS	61
TABLE 31: OPERATION AND STORAGE TEMPERATURES	61
TABLE 32: EC200T-CN CURRENT CONSUMPTION	62
TABLE 33: EC200T-CN RF OUTPUT POWER	65
TABLE 34: EC200T-EU RF OUTPUT POWER	65
TABLE 35: EC200T-CN CONDUCTED RF RECEIVING SENSITIVITY	66
TABLE 36: ELECTROSTATICS DISCHARGE CHARACTERISTICS (25°C, 45% RELATIVE HUMIDITY)	67
TABLE 37: RECOMMENDED THERMAL PROFILE PARAMETERS	73
TABLE 38: RELATED DOCUMENTS	76
TABLE 39: TERMS AND ABBREVIATIONS	76
TABLE 40: DESCRIPTION OF DIFFERENT CODING SCHEMES	80
TABLE 41: GPRS MULTI-SLOT CLASSES	81

TABLE 42: EDGE MODULATION AND CODING SCHEMES..... 83

Figure Index

FIGURE 1: FUNCTIONAL DIAGRAM	14
FIGURE 2: EC200T MODULE PIN ASSIGNMENT (TOP VIEW).....	16
FIGURE 3: SLEEP MODE APPLICATION VIA UART	26
FIGURE 4: SLEEP MODE APPLICATION WITH USB REMOTE WAKEUP	27
FIGURE 5: SLEEP MODE APPLICATION WITH MAIN_RI	27
FIGURE 6: SLEEP MODE APPLICATION WITHOUT SUSPEND FUNCTION	28
FIGURE 7: POWER SUPPLY LIMITS DURING BURST TRANSMISSION.....	30
FIGURE 8: STAR STRUCTURE OF POWER SUPPLY.....	30
FIGURE 9: REFERENCE CIRCUIT OF POWER SUPPLY	31
FIGURE 10: REFERENCE CIRCUIT OF TURNING ON THE MODULE USING DRIVING CIRCUIT	32
FIGURE 11: REFERENCE CIRCUIT OF TURNING ON THE MODULE USING KEYSTROKE.....	32
FIGURE 12: TIMING OF TURNING ON MODULE	33
FIGURE 13: TIMING OF TURNING OFF MODULE	34
FIGURE 14: REFERENCE CIRCUIT OF RESETTING THE MODULE BY USING DRIVING CIRCUIT.....	35
FIGURE 15: REFERENCE CIRCUIT OF RESETTING THE MODULE BY USING KEYSTROKE	35
FIGURE 16: TIMING OF RESETTING MODULE	36
FIGURE 17: REFERENCE CIRCUIT OF (U)SIM INTERFACE WITH AN 8-PIN (U)SIM CARD CONNECTOR	37
FIGURE 18: REFERENCE CIRCUIT OF (U)SIM INTERFACE WITH A 6-PIN (U)SIM CARD CONNECTOR.	38
FIGURE 19: REFERENCE CIRCUIT OF USB APPLICATION	39
FIGURE 20: REFERENCE CIRCUIT WITH TRANSLATOR CHIP	41
FIGURE 21: REFERENCE CIRCUIT WITH TRANSISTOR CIRCUIT	42
FIGURE 22: PRIMARY MODE TIMING	43
FIGURE 23: REFERENCE CIRCUIT OF PCM APPLICATION WITH AUDIO CODEC	44
FIGURE 24: REFERENCE CIRCUIT OF SD CARD INTERFACE.....	45
FIGURE 25: REFERENCE CIRCUIT OF NETWORK STATUS INDICATION	49
FIGURE 26: REFERENCE CIRCUITS OF STATUS	50
FIGURE 27: REFERENCE CIRCUIT OF FORCE_USB_BOOT INTERFACE	52
FIGURE 28: TIMING SEQUENCE FOR ENTERING EMERGENCY DOWNLOAD MODE	52
FIGURE 29: REFERENCE CIRCUIT OF RF ANTENNA INTERFACE	55
FIGURE 30: MICROSTRIP DESIGN ON A 2-LAYER PCB.....	56
FIGURE 31: COPLANAR WAVEGUIDE DESIGN ON A 2-LAYER PCB.....	56
FIGURE 32: COPLANAR WAVEGUIDE DESIGN ON A 4-LAYER PCB (LAYER 3 AS REFERENCE GROUND)	57
FIGURE 33: COPLANAR WAVEGUIDE DESIGN ON A 4-LAYER PCB (LAYER 4 AS REFERENCE GROUND)	57
FIGURE 34: DIMENSIONS OF U.FL-R-SMT CONNECTOR (UNIT: MM).....	58
FIGURE 35: MECHANICALS OF U.FL-LP CONNECTORS.....	59
FIGURE 36: SPACE FACTOR OF MATED CONNECTOR (UNIT: MM)	59
FIGURE 37: MODULE TOP AND SIDE DIMENSIONS.....	68
FIGURE 38: MODULE BOTTOM DIMENSIONS (BOTTOM VIEW)	69

FIGURE 39: RECOMMENDED FOOTPRINT (TOP VIEW) 70
FIGURE 40: TOP VIEW OF THE MODULE 71
FIGURE 41: BOTTOM VIEW OF THE MODULE 71
FIGURE 42: REFLOW SOLDERING THERMAL PROFILE 73
FIGURE 43: TAPE SPECIFICATIONS 74
FIGURE 44: REEL SPECIFICATIONS 75
FIGURE 45: TAPE AND REEL DIRECTIONS 75

1 Introduction

This document defines the EC200T module and describes its air interface and hardware interface which are connected with customers' applications.

This document can help customers quickly understand module interface specifications, electrical and mechanical details, as well as other related information of EC200T module. Associated with application note and user guide, customers can use EC200T module to design and set up wireless applications easily.

1.1. Safety Information

The following safety precautions must be observed during all phases of operation, such as usage, service or repair of any cellular terminal or mobile incorporating EC200T module. Manufacturers of the cellular terminal should send the following safety information to users and operating personnel, and incorporate these guidelines into all manuals supplied with the product. If not so, Quectel assumes no liability for customers' failure to comply with these precautions.



Full attention must be given to driving at all times in order to reduce the risk of an accident. Using a mobile while driving (even with a handsfree kit) causes distraction and can lead to an accident. Please comply with laws and regulations restricting the use of wireless devices while driving.



Switch off the cellular terminal or mobile before boarding an aircraft. The operation of wireless appliances in an aircraft is forbidden to prevent interference with communication systems. If the device offers an Airplane Mode, then it should be enabled prior to boarding an aircraft. Please consult the airline staff for more restrictions on the use of wireless devices on boarding the aircraft.



Wireless devices may cause interference on sensitive medical equipment, so please be aware of the restrictions on the use of wireless devices when in hospitals, clinics or other healthcare facilities.



The cellular terminal or mobile contains a transmitter and receiver. When it is ON, it receives and transmits radio frequency signals. RF interference can occur if it is used close to TV set, radio, computer or other electric equipment.



In locations with potentially explosive atmospheres, obey all posted signs to turn off wireless devices such as your phone or other cellular terminals. Areas with potentially explosive atmospheres include fuelling areas, below decks on boats, fuel or chemical transfer or storage facilities, areas where the air contains chemicals or particles such as grain, dust or metal powders, etc.

2 Product Concept

2.1. General Description

EC200T is a series of LTE-FDD, LTE-TDD, WCDMA and GSM wireless communication module with receive diversity, which provides data connectivity on LTE-FDD, LTE-TDD, HSDPA, HSUPA, HSPA+, WCDMA, EDGE and GPRS networks. It also provides voice functionality for customers' specific applications. EC200T contains 2 variants: EC200T-CN and EC200T-EU. Customers can choose a dedicated type based on the region or operator. The following table shows the frequency bands of EC200T series module.

Table 1: Frequency Bands of EC200T-CN Module

Network Type	Bands
LTE-FDD (with Rx-diversity) ¹⁾	B1/B3/B5/B8
LTE-TDD (with Rx-diversity) ¹⁾	B34/B38/B39/B40/B41
WCDMA	B1/B5/B8
GSM	900/1800MHz

Table 2: Frequency Bands of EC200T-EU Module

Network Type	Bands
LTE-FDD (with Rx-diversity) ¹⁾	B1/B3/B5 ²⁾ /B7/B8/B20 ²⁾ /B28
LTE-TDD (with Rx-diversity) ¹⁾	B38/B40/B41
WCDMA	B1/B5 ²⁾ /B8
GSM	900/1800MHz

With a compact profile of 29.0mm × 32.0mm × 2.4mm, EC200T can meet almost all requirements for M2M applications such as automotive, metering, tracking system, security, router, wireless POS, mobile computing device, PDA phone, tablet PC, etc.

EC200T is an SMD type module which can be embedded into applications through its 144-pin pads, including 80 LCC signal pads and 64 LGA pads.

NOTES

1. ¹⁾ Rx-diversity is optional.
2. ²⁾ B5 and B20 cannot be simultaneously supported on EC200T-EU, and this is an either-or option.

2.2. Key Features

The following table describes the detailed features of EC200T module.

Table 3: Key Features of EC200T Module

Feature	Details
Power Supply	Supply voltage: 3.4V~4.5V Typical supply voltage: 3.8V
Transmitting Power	Class 4 (33dBm±2dB) for EGSM900 Class 1 (30dBm±2dB) for DCS1800 Class E2 (27dBm±3dB) for EGSM900 8-PSK Class E2 (26dBm±3dB) for DCS1800 8-PSK Class 3 (24dBm+1/-3dB) for WCDMA bands Class 3 (23dBm±2dB) for LTE-FDD bands Class 3 (23dBm±2dB) for LTE-TDD bands
LTE Features	Support up to non-CA Cat 4 FDD and TDD Support 1.4/3/5/10/15/20MHz RF bandwidth Support MIMO in DL direction FDD: Max 150Mbps (DL), Max 50Mbps (UL) TDD: Max 130Mbps (DL), Max 30Mbps (UL)
UMTS Features	Support 3GPP R7 HSDPA, HSUPA, HSPA+ and WCDMA Support QPSK, 16-QAM modulation HSPA+: Max 21Mbps (DL) HSUPA: Max 5.76Mbps (UL) WCDMA: Max 384Kbps (DL), Max 384Kbps (UL)
GSM Features	GPRS: Support GPRS multi-slot class 12

	<p>Coding scheme: CS-1/CS-2/CS-3/CS-4 Max 85.6Kbps (DL), Max 85.6Kbps (UL)</p> <p>EDGE: Support EDGE multi-slot class 12 Support GMSK and 8-PSK for different MCS (Modulation and Coding Scheme) Downlink coding schemes: CS 1-4 and MCS 1-9 Uplink coding schemes: CS 1-4 and MCS 1-9 Max 236.8Kbps (DL), Max 236.8Kbps (UL)</p>
Internet Protocol Features	<p>Support TCP/UDP/PPP/NTP/NITZ/FTP/HTTP/PING/CMUX/HTTPS/FTPS/SSL/FILE/MQTT/MMS*/SMTP*/SMTPS* protocols Support PAP (Password Authentication Protocol) and CHAP (Challenge Handshake Authentication Protocol) protocols which are usually used for PPP connection</p>
SMS	<p>Text and PDU mode Point-to-point MO and MT SMS cell broadcast SMS storage: (U)SIM card currently</p>
(U)SIM Interface	Support USIM/SIM card: 1.8V, 3.0V
Audio Features	<p>Support one digital audio interface: PCM interface GSM: HR/FR/EFR/AMR/AMR-WB WCDMA: AMR/AMR-WB Support echo cancellation and noise suppression</p>
PCM Interface	<p>Used for audio function with external codec Support 16-bit linear data format Support short frame synchronization Support master and slave modes</p>
USB Interface	<p>Compliant with USB 2.0 specification (slave only); the data transfer rate can reach up to 480Mbps Used for AT command communication, data transmission, software debugging, firmware upgrade Support USB serial drivers for: Windows 7/8/8.1/10, Linux 2.6/3.x/4.1~4.14, Android 4.x/5.x/6.x/7.x/8.x/9.x, etc.</p>
UART Interfaces	<p>Main UART: Used for AT command communication and data transmission Baud rates reach up to 1Mbps; 115200bps by default Support RTS and CTS hardware flow control</p> <p>Debug UART: Used for the output of partial logs 115200bps baud rate</p>
SD Card Interface*	Support SD 3.0 protocol
WLAN Interface*	Support SDIO 3.0 interface for WLAN

Rx-diversity	Support LTE Rx-diversity
AT Commands	Compliant with 3GPP TS 27.007, 27.005 and Quectel enhanced AT commands
Network Indication	NET_MODE and NET_STATUS used to indicate the network connectivity status
Antenna Interfaces	Main antenna interface (ANT_MAIN) and Rx-diversity antenna interface (ANT_DIV) 50Ω impedance
Physical Characteristics	Size: (29.0±0.15)mm × (32.0±0.15)mm × (2.4±0.2)mm Weight: approx. 4.4g
Temperature Range	Operation temperature range: -35°C ~ +75°C ¹⁾ Extended temperature range: -40°C ~ +85°C ²⁾ Storage temperature range: -40°C ~ +90°C
Firmware Upgrade	USB interface and FOTA
RoHS	All hardware components are fully compliant with EU RoHS directive

NOTES

- ¹⁾ Within operation temperature range, the module is 3GPP compliant.
- ²⁾ Within extended temperature range, the module remains the ability to establish and maintain a voice, SMS, data transmission, etc. There is no unrecoverable malfunction. There are also no effects on radio spectrum and no harm to radio network. Only one or more parameters like P_{out} might reduce in their value and exceed the specified tolerances. When the temperature returns to the normal operation temperature levels, the module will meet 3GPP specifications again.
- “*” means under development.

2.3. Functional Diagram

The following figure shows a block diagram of EC200T and illustrates the major functional parts.

- Power management
- Baseband
- Flash
- Radio frequency
- Peripheral interfaces

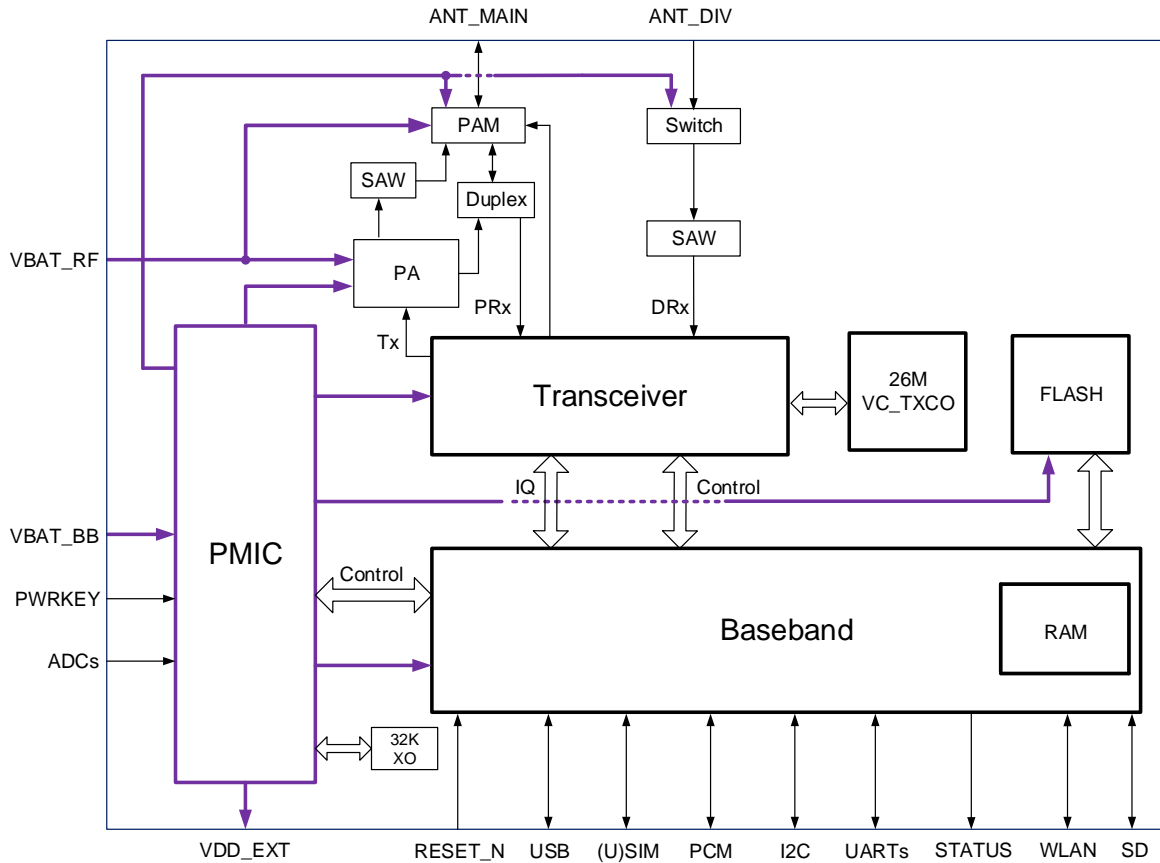


Figure 1: Functional Diagram

2.4. Evaluation Board

In order to help customers develop applications with EC200T, Quectel provides an evaluation board (UMTS<E EVB), USB to RS-232 converter cable, earphone, antenna and other peripherals to control or test the module. For more details, please refer to **document [4]**.

3 Application Interfaces

3.1. General Description

EC200T is equipped with 80 LCC pins plus 64 LGA pins that can be connected to cellular application platform. The subsequent chapters will provide detailed descriptions of the following interfaces.

- Power supply
- (U)SIM interface
- USB interface
- UART interfaces
- PCM and I2C interfaces
- SD card interface*
- WLAN interface*
- ADC interfaces
- Status indication
- FORCE_USB_BOOT interface

NOTE

“*” means under development.

3.2. Pin Assignment

The following figure shows the pin assignment of EC200T module.

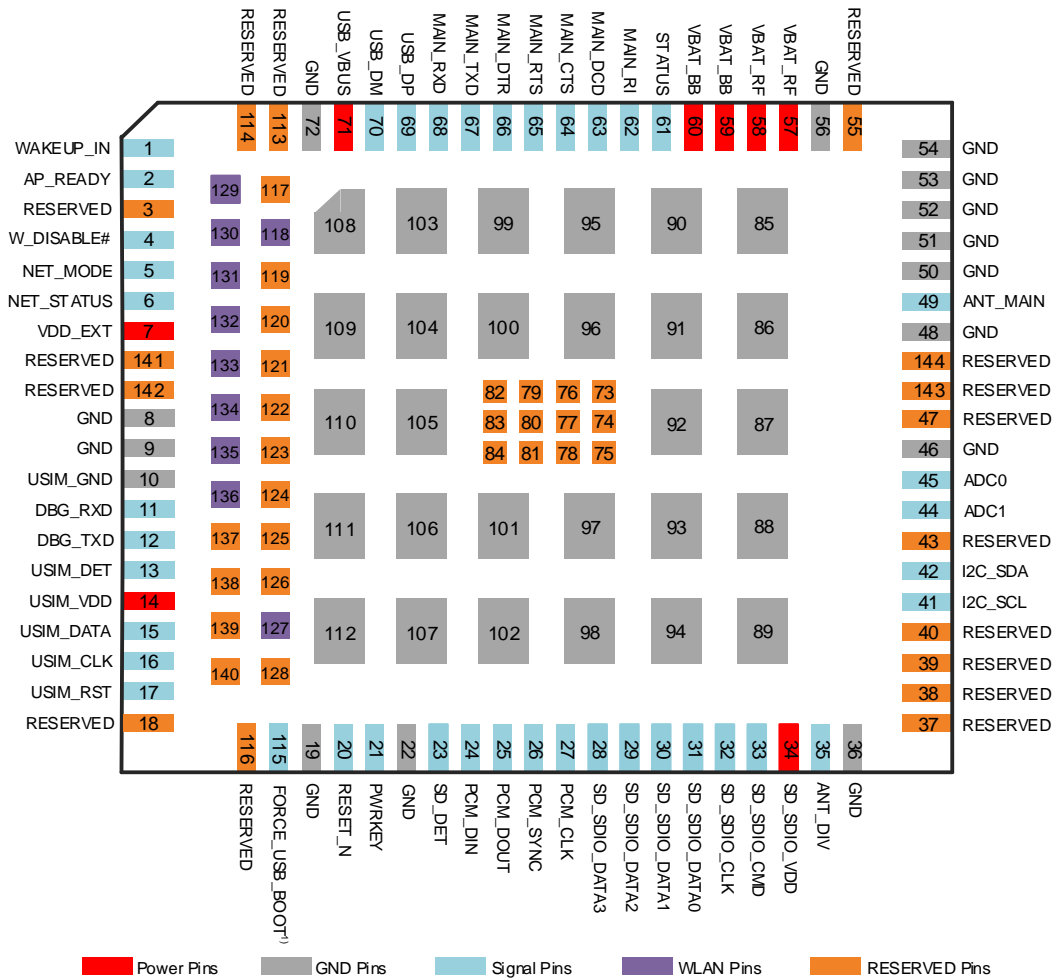


Figure 2: EC200T Module Pin Assignment (Top View)

NOTES

- 1) means pin FORCE_USB_BOOT cannot be pulled up before startup.
- If PCM_CLK, SD_SDIO_CLK, I2C_SCL, WLAN_SLP_CLK and WLAN_SDIO_CLK pins are not used, in order to prevent interference to RF, a 33pF capacitor is suggested to be mounted close to the three pins respectively. Other unused and RESERVED pins are kept open, and all GND pins are connected to the ground network.
- GND pins 85~112 should be connected to ground in the design. RESERVED pins 73~84 should not be designed in schematic and PCB decal, and should be served as a keepout area.
- The WLAN interface and SD card interface functions are under development.

3.3. Pin Description

The following tables show the pin definition of EC200T module.

Table 4: I/O Parameters Definition

Type	Description
AI	Analog Input
AO	Analog Output
DI	Digital Input
DO	Digital Output
IO	Bidirectional
OD	Open Drain
PI	Power Input
PO	Power Output

Table 5: Pin Description

Power Supply Input					
Pin Name	Pin No.	I/O	Description	DC Characteristics	Comment
VBAT_BB	59, 60	PI	Power supply for module's baseband part	Vmax=4.5V Vmin=3.4V Vnorm=3.8V	It must be provided with sufficient current up to 0.8A.
VBAT_RF	57, 58	PI	Power supply for module's RF part	Vmax=4.5V Vmin=3.4V Vnorm=3.8V	It must be provided with sufficient current up to 1.8A.
GND	8, 9, 19, 22, 36, 46, 48, 50~54, 56, 72, 85~112		Ground		
Power Supply Output					

Pin Name	Pin No.	I/O	Description	DC Characteristics	Comment
VDD_EXT	7	PO	Provide 1.8V for external circuit	V _{norm} =1.8V I _o max=50mA	Power supply for external GPIO's pull-up circuits. If unused, keep it open.

Power on/off

Pin Name	Pin No.	I/O	Description	DC Characteristics	Comment
RESET_N	20	DI	Reset the module, low active	V _{IL} max=0.5V	If unused, keep it open.
PWRKEY	21	DI	Turn on/off the module	V _{IL} max=0.5V	VBAT power domain.

Status Indication

Pin Name	Pin No.	I/O	Description	DC Characteristics	Comment
NET_MODE	5	DO	Indicate the module's network registration mode	V _{OH} min=1.35V V _{OL} max=0.45V	1.8V power domain. If unused, keep it open.
NET_STATUS	6	DO	Indicate the module's network activity status	V _{OH} min=1.35V V _{OL} max=0.45V	1.8V power domain. If unused, keep it open.
STATUS	61	OD	Indicate the module's operation status		An external pull-up resistor is required. If unused, keep it open.

USB Interface

Pin Name	Pin No.	I/O	Description	DC Characteristics	Comment
USB_DP	69	IO	USB differential data (+)	USB 2.0 compliant	Require differential impedance of 90Ω. If unused, keep it open.
USB_DM	70	IO	USB differential data (-)	USB 2.0 compliant	Require differential impedance of 90Ω. If unused, keep it open.
USB_VBUS	71	AI	USB connection detection	V _{max} =5.25V V _{min} =3.0V V _{norm} =5.0V	Typical: 5.0V If unused, keep it open.

(U)SIM Interface

Pin Name	Pin No.	I/O	Description	DC Characteristics	Comment
USIM_GND	10		Specified ground for (U)SIM		Connect (U)SIM card connector GND.
USIM_DET	13	DI	(U)SIM card detection	$V_{ILmin}=-0.3V$ $V_{ILmax}=0.6V$ $V_{IHmin}=1.2V$ $V_{IHmax}=2.0V$ $I_{Omax}=50mA$	1.8V power domain. If unused, keep it open.
USIM_VDD	14	PO	Power supply for (U)SIM card	For 1.8V (U)SIM: $V_{max}=1.9V$ $V_{min}=1.7V$ For 3.0V (U)SIM: $V_{max}=3.05V$ $V_{min}=2.7V$	Either 1.8V or 3.0V (U)SIM card is supported and can be identified automatically by the module.
USIM_DATA	15	IO	(U)SIM data	For 1.8V (U)SIM: $V_{ILmax}=0.6V$ $V_{IHmin}=1.2V$ $V_{OLmax}=0.45V$ $V_{OHmin}=1.35V$ For 3.0V (U)SIM: $V_{ILmax}=1.0V$ $V_{IHmin}=1.95V$ $V_{OLmax}=0.45V$ $V_{OHmin}=2.55V$	
USIM_CLK	16	DO	(U)SIM clock	For 1.8V (U)SIM: $V_{OLmax}=0.45V$ $V_{OHmin}=1.35V$ For 3.0V (U)SIM: $V_{OLmax}=0.45V$ $V_{OHmin}=2.55V$	
USIM_RST	17	DO	(U)SIM reset	For 1.8V (U)SIM: $V_{OLmax}=0.45V$ $V_{OHmin}=1.35V$ For 3.0V (U)SIM: $V_{OLmax}=0.45V$ $V_{OHmin}=2.55V$	

Main UART Interface

Pin Name	Pin No.	I/O	Description	DC Characteristics	Comment
MAIN_RI	62	DO	Ring indication	$V_{OLmax}=0.45V$ $V_{OHmin}=1.35V$	1.8V power domain. If unused, keep it open.
MAIN_DCD	63	DO	Data carrier detection	$V_{OLmax}=0.45V$ $V_{OHmin}=1.35V$	1.8V power domain. If unused, keep it open.
MAIN_CTS	64	DO	Clear to send	$V_{OLmax}=0.45V$ $V_{OHmin}=1.35V$	1.8V power domain. If unused, keep it open.
MAIN_RTS	65	DI	Request to send	$V_{ILmin}=-0.3V$ $V_{ILmax}=0.6V$ $V_{IHmin}=1.2V$ $V_{IHmax}=2.0V$	1.8V power domain. If unused, keep it open.
MAIN_DTR	66	DI	Data terminal ready	$V_{ILmin}=-0.3V$ $V_{ILmax}=0.6V$ $V_{IHmin}=1.2V$ $V_{IHmax}=2.0V$	1.8V power domain. If unused, keep it open.
MAIN_TXD	67	DO	Transmit data	$V_{OLmax}=0.45V$ $V_{OHmin}=1.35V$	1.8V power domain. If unused, keep it open.
MAIN_RXD	68	DI	Receive data	$V_{ILmin}=-0.3V$ $V_{ILmax}=0.6V$ $V_{IHmin}=1.2V$ $V_{IHmax}=2.0V$	1.8V power domain. If unused, keep it open.

Debug UART Interface

Pin Name	Pin No.	I/O	Description	DC Characteristics	Comment
DBG_RXD	11	DI	Debug receive data	$V_{ILmin}=-0.3V$ $V_{ILmax}=0.6V$ $V_{IHmin}=1.2V$ $V_{IHmax}=2.0V$	1.8V power domain. If unused, keep it open.
DBG_TXD	12	DO	Debug transmit data	$V_{OLmax}=0.45V$ $V_{OHmin}=1.35V$	1.8V power domain. If unused, keep it open.

ADC Interfaces

Pin Name	Pin No.	I/O	Description	DC Characteristics	Comment
ADC1	44	AI	General-purpose analog to digital converter	Voltage range: 0V to VBAT_BB	If unused, keep it open.

ADC0	45	AI	General-purpose analog to digital converter	Voltage range: 0V to VBAT_BB	If unused, keep it open.
PCM & I2C Interfaces					
Pin Name	Pin No.	I/O	Description	DC Characteristics	Comment
PCM_DIN	24	DI	PCM data input	V _{IL} min=-0.3V V _{IL} max=0.6V V _{IH} min=1.2V V _{IH} max=2.0V	1.8V power domain. If unused, keep it open.
PCM_DOUT	25	DO	PCM data output	V _{OL} max=0.45V V _{OH} min=1.35V	1.8V power domain. If unused, keep it open.
PCM_SYNC	26	IO	PCM data frame synchronization	V _{OL} max=0.45V V _{OH} min=1.35V V _{IL} min=-0.3V V _{IL} max=0.6V V _{IH} min=1.2V V _{IH} max=2.0V	1.8V power domain. In master mode, it serves as an output signal. In slave mode, it is used as an input signal. If unused, keep it open.
PCM_CLK	27	IO	PCM clock	V _{OL} max=0.45V V _{OH} min=1.35V V _{IL} min=-0.3V V _{IL} max=0.6V V _{IH} min=1.2V V _{IH} max=2.0V	1.8V power domain. In master mode, it serves as an output signal. In slave mode, it is used as an input signal. If unused, a 33pF capacitor is suggested to be mounted close to the pin.
I2C_SCL	41	OD	I2C serial clock for external codec		An external 1.8V pull-up resistor is required. If unused, a 33pF capacitor is suggested to be mounted close to the pin.

I2C_SDA	42	OD	I2C serial data for external codec		An external 1.8V pull-up resistor is required. If unused, keep it open.
SD Card Interface*					
Pin Name	Pin No.	I/O	Description	DC Characteristics	Comment
SD_DET	23	DI	SD card detect		1.8V/2.8V power domain. If unused, keep it open.
SD_SDIO_DATA3	28	IO	SD card SDIO data bit 3		1.8V/2.8V power domain. If unused, keep it open.
SD_SDIO_DATA2	29	IO	SD card SDIO data bit 2		1.8V/2.8V power domain. If unused, keep it open.
SD_SDIO_DATA1	30	IO	SD card SDIO data bit 1		1.8V/2.8V power domain. If unused, keep it open.
SD_SDIO_DATA0	31	IO	SD card SDIO data bit 0		1.8V/2.8V power domain. If unused, keep it open.
SD_SDIO_CLK	32	DO	SD card SDIO clock		1.8V/2.8V power domain. If unused, a 33pF capacitor is suggested to be mounted close to the pin.
SD_SDIO_CMD	33	IO	SD card SDIO command		1.8V/2.8V power domain. If unused, keep it open.
SD_SDIO_VDD	34	PO	SD card SDIO power		1.8V/2.8V power domain. If unused, keep it open.

WLAN Interface*					
Pin Name	Pin No.	I/O	Description	DC Characteristics	Comment
WLAN_SLP_CLK	118	DO	WLAN sleep clock		If unused, a 33pF capacitor is suggested to be mounted close to the pin.
WLAN_PWR_EN	127	DO	WLAN power supply enable control	$V_{OLmax}=0.45V$ $V_{OHmin}=1.35V$	1.8V power domain. If unused, keep it open.
WLAN_SDIO_DATA3	129	IO	WLAN SDIO data bit 3	$V_{OLmax}=0.45V$ $V_{OHmin}=1.35V$ $V_{ILmin}=-0.3V$ $V_{ILmax}=0.6V$ $V_{IHmin}=1.2V$ $V_{IHmax}=2.0V$	1.8V power domain. If unused, keep it open.
WLAN_SDIO_DATA2	130	IO	WLAN SDIO data bit 2	$V_{OLmax}=0.45V$ $V_{OHmin}=1.35V$ $V_{ILmin}=-0.3V$ $V_{ILmax}=0.6V$ $V_{IHmin}=1.2V$ $V_{IHmax}=2.0V$	1.8V power domain. If unused, keep it open.
WLAN_SDIO_DATA1	131	IO	WLAN SDIO data bit 1	$V_{OLmax}=0.45V$ $V_{OHmin}=1.35V$ $V_{ILmin}=-0.3V$ $V_{ILmax}=0.6V$ $V_{IHmin}=1.2V$ $V_{IHmax}=2.0V$	1.8V power domain. If unused, keep it open.
WLAN_SDIO_DATA0	132	IO	WLAN SDIO data bit 0	$V_{OLmax}=0.45V$ $V_{OHmin}=1.35V$ $V_{ILmin}=-0.3V$ $V_{ILmax}=0.6V$ $V_{IHmin}=1.2V$ $V_{IHmax}=2.0V$	1.8V power domain. If unused, keep it open.
WLAN_SDIO_CLK	133	DO	WLAN SDIO clock	$V_{OLmax}=0.45V$ $V_{OHmin}=1.35V$	1.8V power domain. If unused, a 33pF capacitor is suggested to be mounted close to the pin.
WLAN_SDIO_CMD	134	DO	WLAN SDIO command	$V_{OLmax}=0.45V$ $V_{OHmin}=1.35V$	1.8V power domain. If unused, keep it

					open.
WLAN_WAKE	135	DI	Wake up the host (module) by an external Wi-Fi module	V _{IL} min=-0.3V V _{IL} max=0.6V V _{IH} min=1.2V V _{IH} max=2.0V	1.8V power domain. If unused, keep it open.
WLAN_EN	136	DO	WLAN function enable control	V _{OL} max=0.45V V _{OH} min=1.35V	1.8V power domain. If unused, keep it open.

RF Interface

Pin Name	Pin No.	I/O	Description	DC Characteristics	Comment
ANT_DIV	35	AI	Receive diversity antenna		50Ω impedance. If unused, keep it open.
ANT_MAIN	49	IO	Main antenna		50Ω impedance.

Other Interfaces

Pin Name	Pin No.	I/O	Description	DC Characteristics	Comment
WAKEUP_IN	1	DI	Wake up the module	V _{IL} min=-0.3V V _{IL} max=0.6V V _{IH} min=1.2V V _{IH} max=2.0V	1.8V power domain. If unused, keep it open.
AP_READY	2	DI	Application processor sleep state detection	V _{IL} min=-0.3V V _{IL} max=0.6V V _{IH} min=1.2V V _{IH} max=2.0V	1.8V power domain. If unused, keep it open.
W_DISABLE#	4	DI	Airplane mode control	V _{IL} min=-0.3V V _{IL} max=0.6V V _{IH} min=1.2V V _{IH} max=2.0V	1.8V power domain. Pull-up by default. In low voltage level, module can enter into airplane mode. If unused, keep it open.
FORCE_USB_BOOT	115	DI	Force the module to enter emergency download mode	V _{IL} min=-0.3V V _{IL} max=0.6V V _{IH} min=1.2V V _{IH} max=2.0V	1.8V power domain. Active high. It is recommended to reserve test points.

RESERVED Pins

Pin Name	Pin No.	I/O	Description	DC Characteristics	Comment
----------	---------	-----	-------------	--------------------	---------

	3, 18, 37~40, 43, 47, 55, 73~84, 113, 114, 116, 117, 119~126, 128, 137~144	Reserved	Keep these pins unconnected.
RESERVED			

NOTE

“*” means WLAN interface and SD card interface functions are under development.

3.4. Operating Modes

The following table briefly outlines the operating modes to be mentioned in the following chapters.

Table 6: Overview of Operating Modes

Mode	Details
Normal Operation	Idle Software is active. The module has registered on the network, and it is ready to send and receive data.
	Talk/Data Network connection is ongoing. In this mode, the power consumption is decided by network setting and data transfer rate.
Minimum Functionality Mode	AT+CFUN command can set the module to a minimum functionality mode without removing the power supply. In this case, both RF function and (U)SIM card will be invalid.
Airplane Mode	AT+CFUN command or W_DISABLE# pin can set the module to airplane mode. In this case, RF function will be invalid.
Sleep Mode	In this mode, the current consumption of the module will be reduced to the minimal level. In this mode, the module can still receive paging message, SMS, voice call and TCP/UDP data from the network normally.
Power Down Mode	In this mode, the power management unit (PMU) shuts down the power supply, software goes inactive and the serial interfaces are not accessible. However, the VBAT_RF and VBAT_BB pins are still powered.

3.5. Power Saving

3.5.1. Sleep Mode

EC200T is able to reduce its current consumption to an ultra-low value in the sleep mode. The following section describes power saving procedures of EC200T module.

3.5.1.1. UART Application

If the host communicates with module via UART interface, the following preconditions should be met to let the module enter sleep mode.

- Execute **AT+QSCLK=1** to enable sleep mode.
- Drive MAIN_DTR to high level.

The following figure shows the connection between the module and the host.

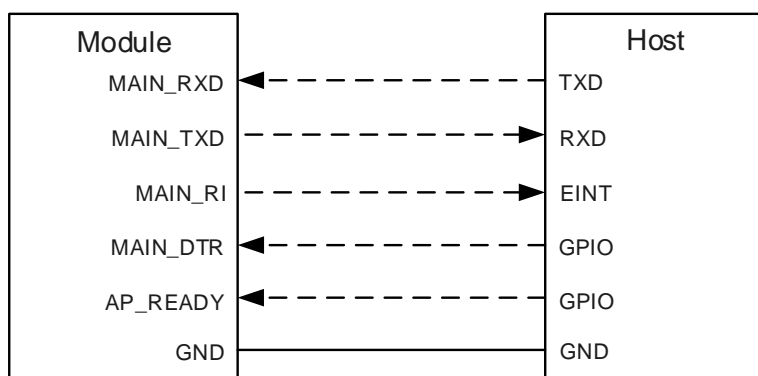


Figure 3: Sleep Mode Application via UART

- Driving MAIN_DTR to low level by host will wake up the module.
- When EC200T has a URC to report, the URC will trigger the behavior of MAIN_RI pin. Please refer to **Chapter 3.17** for details about MAIN_RI behavior.

3.5.1.2. USB Application with USB Remote Wakeup Function

If the host supports USB Suspend/Resume and remote wakeup functions, the following three preconditions must be met to let the module enter sleep mode.

- Execute **AT+QSCLK=1** command to enable the sleep mode.
- Ensure the MAIN_DTR is kept at high level or kept open.
- The host's USB bus, which is connected with the module's USB interface, enters Suspend state.

The following figure shows the connection between the module and the host.

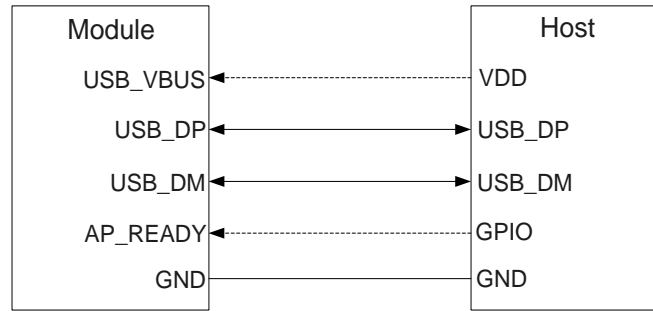


Figure 4: Sleep Mode Application with USB Remote Wakeup

- Sending data to EC200T through USB will wake up the module.
- When EC200T has a URC to report, the module will send remote wakeup signals via USB bus so as to wake up the host.

3.5.1.3. USB Application with USB Suspend/Resume and MAIN_RI Wakeup Function

If the host supports USB Suspend/Resume, but does not support remote wakeup function, the MAIN_RI signal is needed to wake up the host.

There are three preconditions to let the module enter sleep mode.

- Execute **AT+QSCLK=1** to enable the sleep mode.
- Ensure the MAIN_DTR is held at high level or keep it open.
- The host's USB bus, which is connected with the module's USB interface, enters Suspend state.

The following figure shows the connection between the module and the host.

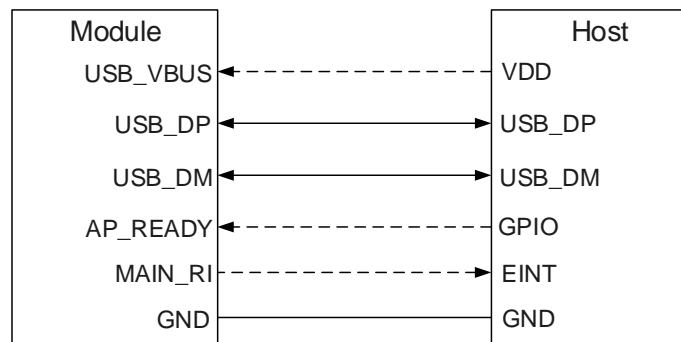


Figure 5: Sleep Mode Application with MAIN_RI

- Sending data to EC200T through USB will wake up the module.
- When EC200T has a URC to report, the URC will trigger the behavior of MAIN_RI pin.

3.5.1.4. USB Application without USB Suspend Function

If the host does not support USB Suspend function, please disconnect USB_VBUS with additional control circuit to let the module enter into sleep mode.

- Execute **AT+QSCLK=1** command to enable the sleep mode.
- Ensure the MAIN_DTR is held at high level or keep it open.
- Disconnect USB_VBUS.

The following figure shows the connection between the module and the host.

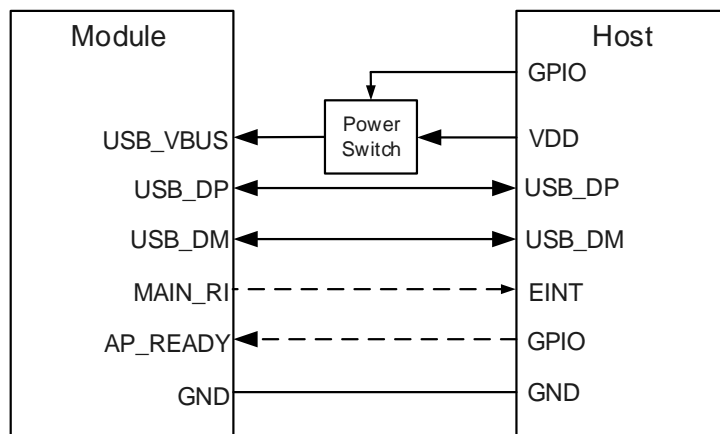


Figure 6: Sleep Mode Application without Suspend Function

Switching on the power switch to supply power to USB_VBUS will wake up the module.

NOTE

Please pay attention to the level match shown in dotted line between the module and the host.

3.5.2. Airplane Mode

When the module enters airplane mode, the RF function will be disabled, and all AT commands related to it will be inaccessible. This mode can be set via the following ways.

Hardware:

The W_DISABLE# pin is pulled up by default. Its control function for airplane mode is disabled by default, and **AT+QCFG="airplanecontrol",1** can be used to enable the function. Driving it to low level can make the module enter airplane mode.

Software:

AT+CFUN=<fun> command provides the choice of the functionality level through setting <fun> into 0, 1 or 4.

- **AT+CFUN=0:** Minimum functionality mode; both (U)SIM and RF functions are disabled.
- **AT+CFUN=1:** Full functionality mode (by default).
- **AT+CFUN=4:** Airplane mode. RF function is disabled.

3.6. Power Supply

3.6.1. Power Supply Pins

EC200T provides four VBAT pins dedicated to connecting with the external power supply. There are two separate voltage domains for VBAT.

- Two VBAT_RF pins for module's RF part
- Two VBAT_BB pins for module's baseband part

The following table shows the details of power supply and GND pins.

Table 7: Power Supply and GND Pins

Pin Name	Pin No.	Description	Min.	Typ.	Max.	Unit
VBAT_RF	57, 58	Power supply for module's RF part	3.4	3.8	4.5	V
VBAT_BB	59, 60	Power supply for module's baseband part	3.4	3.8	4.5	V
GND	8, 9, 19, 22, 36, 46, 48, 50~54, 56, 72, 85~112	Ground	-	0	-	V

3.6.2. Decrease Voltage Drop

The power supply range of the module is from 3.4V to 4.5V. Please make sure that the input voltage will never drop below 3.4V. The following figure shows the voltage drop during burst transmission in 2G network. The voltage drop will be less in 3G and 4G networks.

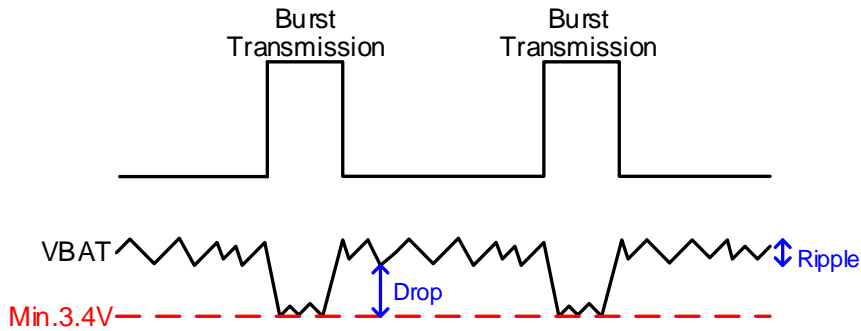


Figure 7: Power Supply Limits during Burst Transmission

To decrease voltage drop, a bypass capacitor of about 100μF with low ESR (ESR=0.7Ω) should be used, and a multi-layer ceramic chip (MLCC) capacitor array should also be reserved due to its ultra-low ESR. It is recommended to use three ceramic capacitors (100nF, 33pF, 10pF) for composing the MLCC array, and place these capacitors close to the VBAT_BB and VBAT_RF pins. The main power supply from an external application has to be a single voltage source and can be expanded to two sub paths with star structure. The width of VBAT_BB trace should be no less than 1mm; and the width of VBAT_RF trace should be no less than 2mm. In principle, the longer the VBAT trace is, the wider it will be.

In addition, in order to ensure the stability of power source, it is suggested that a TVS diode of which reverse stand-off voltage is 4.7V and peak pulse power is up to 2550W should be used. The following figure shows the star structure of the power supply.

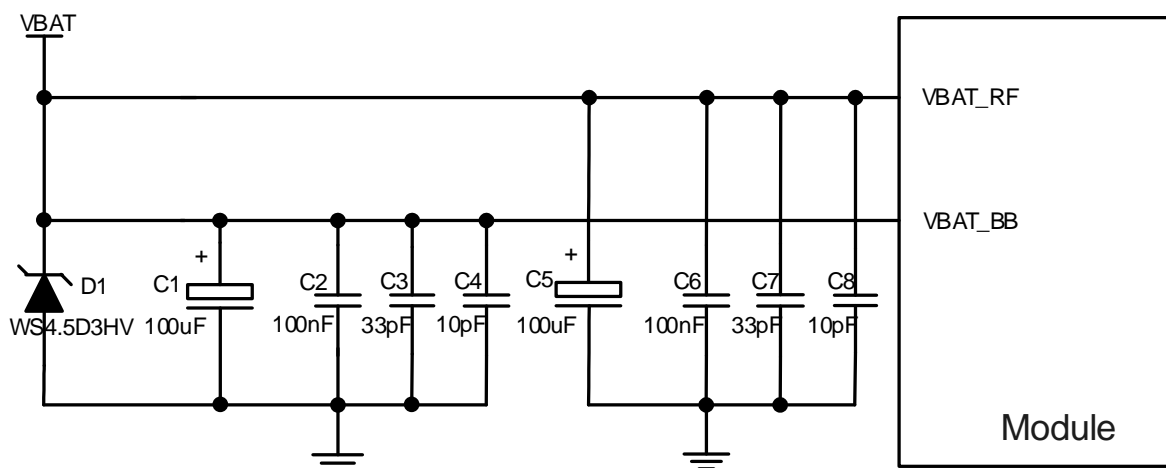


Figure 8: Star Structure of Power Supply

3.6.3. Reference Design for Power Supply

Power design for the module is very important, as the performance of the module largely depends on the power source. The power supply should be able to provide sufficient current up to 2.0A at least to the module. If the voltage drop between the input and output is not too high, it is suggested that an LDO should be used to supply power for the module. If there is a big voltage difference between the input source and the desired output (VBAT), a buck converter is preferred to be used as the power supply.

The following figure shows a reference design for +5V input power source. The typical output of the power supply is about 3.8V and the maximum load current is 3.0A.

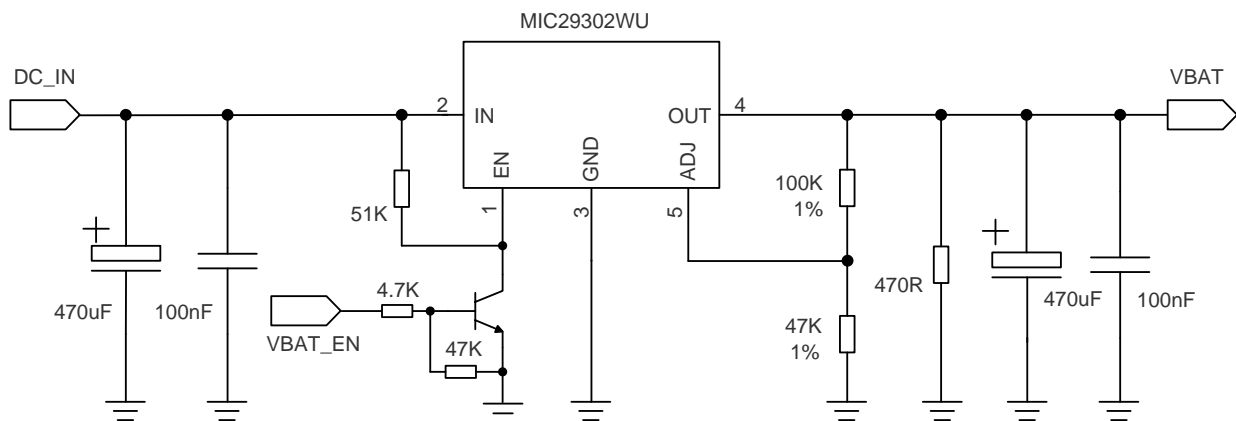


Figure 9: Reference Circuit of Power Supply

3.7. Power-on/off/Reset Scenarios

3.7.1. Turn on Module Using the PWRKEY

The following table shows the pin definition of PWRKEY.

Table 8: Pin Description of PWRKEY

Pin Name	Pin No.	I/O	Description	Comment
PWRKEY	21	DI	Turn on/off the module	VBAT power domain

When EC200T is in power down mode, it can be turned on to normal mode by driving the PWRKEY pin to a low level for at least 500ms. It is recommended to use an open drain/collector driver to control the PWRKEY. A simple reference circuit is illustrated in the following figure.

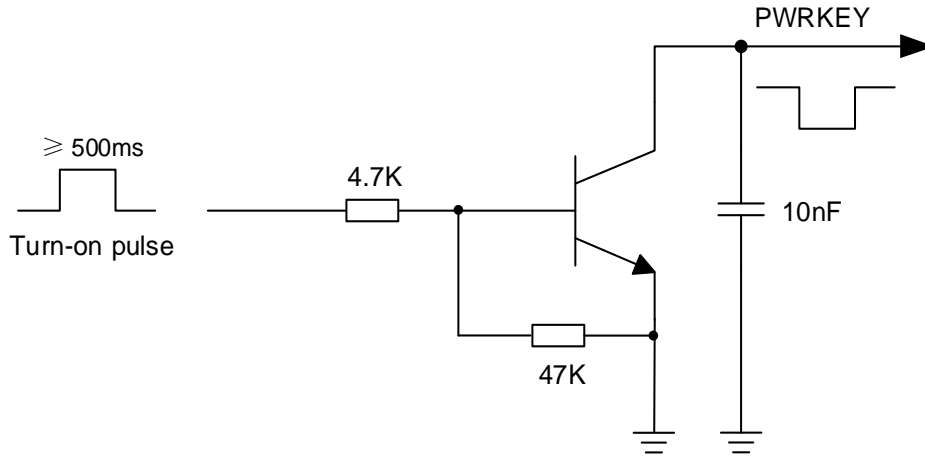


Figure 10: Reference Circuit of Turing on the Module Using Driving Circuit

The other way to control the PWRKEY is using a button directly. When pressing the key, electrostatic strike may generate from finger. Therefore, a TVS component is indispensable to be placed nearby the button for ESD protection. A reference circuit is shown in the following figure.

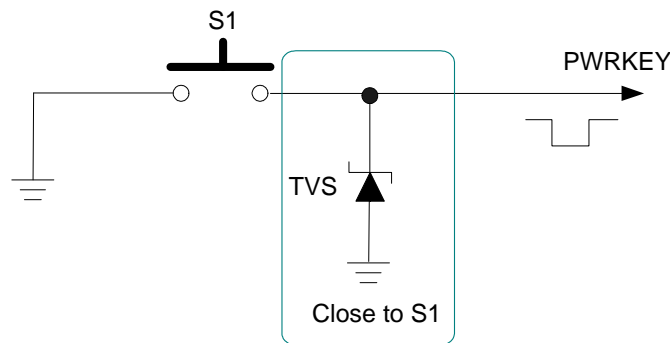


Figure 11: Reference Circuit of Turing on the Module Using Keystroke

The timing of turning on the module is illustrated in the following figure.

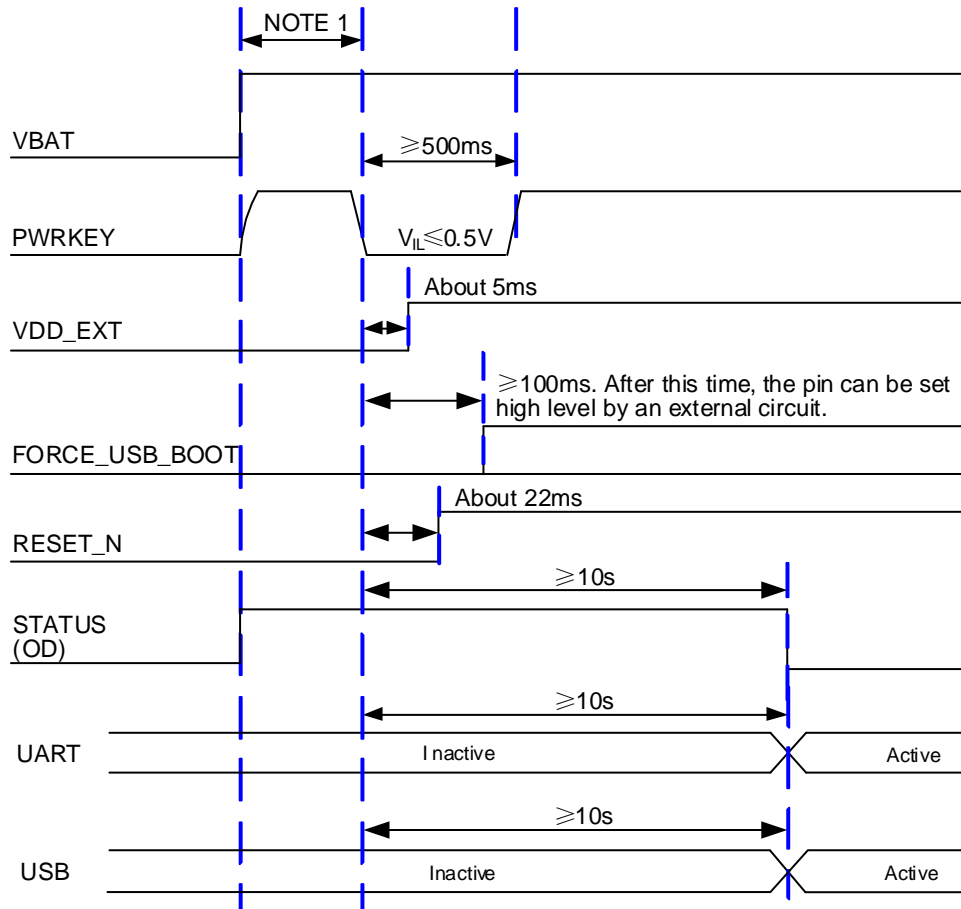


Figure 12: Timing of Turning on Module

NOTES

1. Please make sure that VBAT is stable before pulling down PWRKEY pin. The time between them is no less than 30ms.
2. PWRKEY can be pulled down directly to GND with a recommended 4.7kΩ resistor if module needs to be powered on automatically and shutdown is not needed.

3.7.2. Turn off Module

The following procedures can be used to turn off the module:

- Using the PWRKEY pin.
- Using **AT+QPOWD** command.

3.7.2.1. Turn off Module Using the PWRKEY Pin

Driving the PWRKEY pin to a low level voltage for at least 650ms, the module will execute power-down procedure after the PWRKEY is released. The timing of turning off the module is illustrated in the following figure.

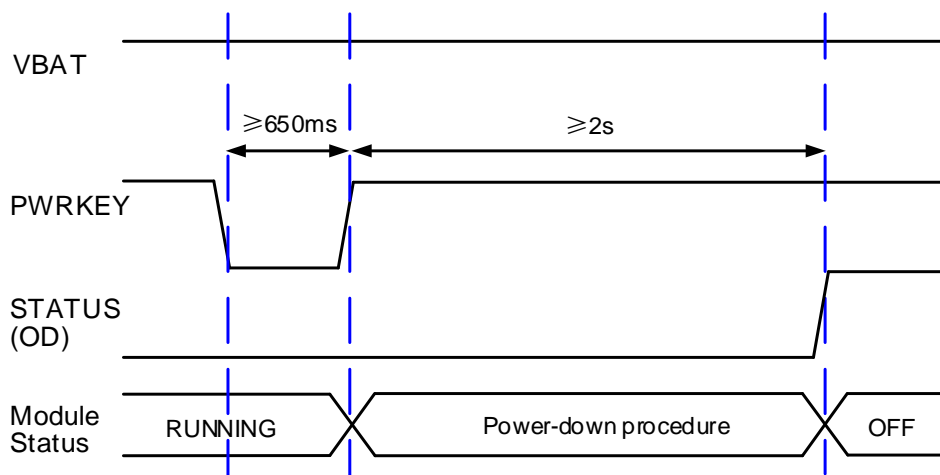


Figure 13: Timing of Turning off Module

3.7.2.2. Turn off Module Using AT Command

It is also a safe way to use **AT+QPOWD** command to turn off the module, which is similar to the procedure of turning off the module via PWRKEY pin.

Please refer to **document [2]** for details about **AT+QPOWD** command.

NOTES

1. In order to avoid damaging internal flash, please do not switch off the power supply when the module works normally. Only after the module is shut down by PWRKEY or AT command, the power supply can be cut off.
2. When turning off module with the AT command, please keep PWRKEY at a high level after the execution of the command. Otherwise, the module will turn itself back on after being shut down.

3.7.3. Reset the Module

The RESET_N pin can be used to reset the module. The module can be reset by pulling the RESET_N pin low for at least 300ms and then releasing it. The RESET_N signal is sensitive to interference, so it is recommended to route the trace as short as possible and surround it with ground.

Table 9: Pin Description of RESET_N

Pin Name	Pin No.	I/O	Description	Comment
RESET_N	20	DI	Reset the module	1.8V power domain

The recommended circuit is similar to the PWRKEY control circuit. An open drain/collector driver or button can be used to control the RESET_N.

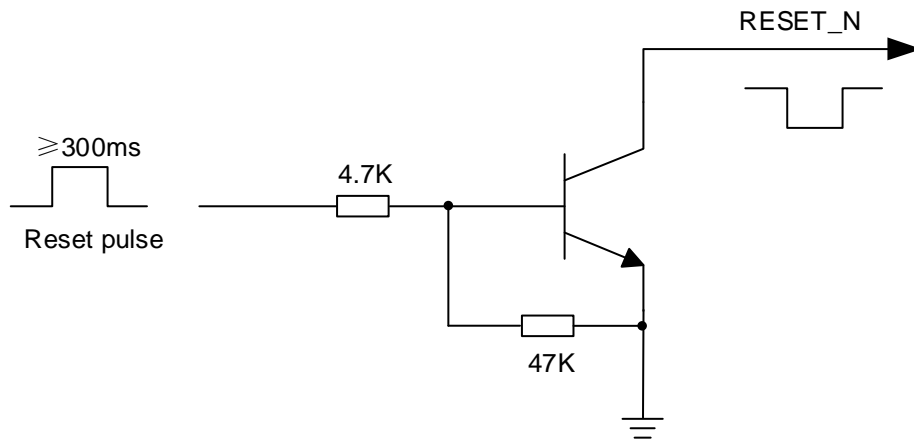


Figure 14: Reference Circuit of Resetting the Module by Using Driving Circuit

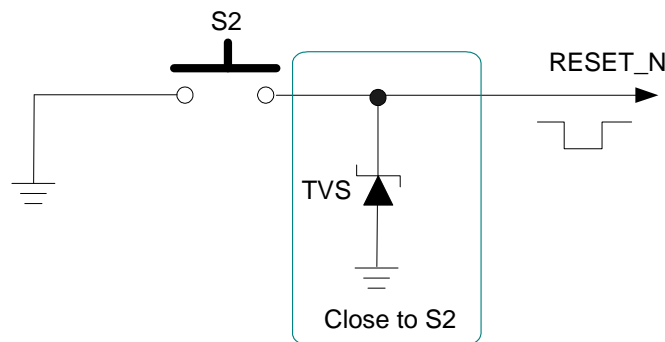


Figure 15: Reference Circuit of Resetting the Module by Using Keystroke

The timing of resetting module is illustrated in the following figure.

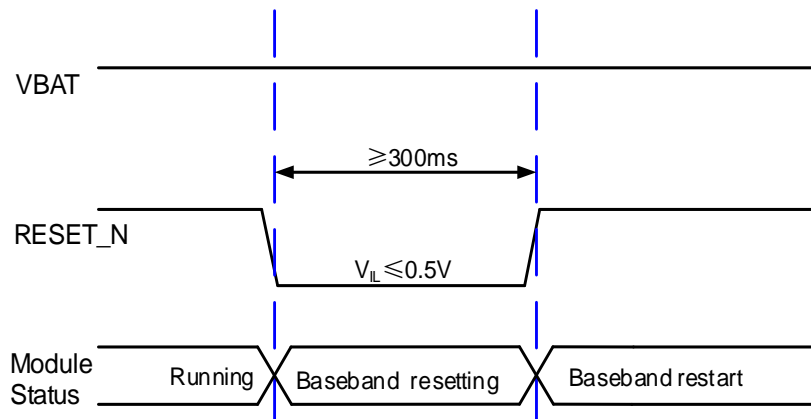


Figure 16: Timing of Resetting Module

NOTES

1. Please ensure that there is no large capacitance with the max value exceeding 10nF on PWRKEY and RESET_N pins.
2. RESET_N only resets the internal baseband chip of the module and does not reset the power management chip.
3. It is recommended to use RESET_N only when failing to turn off the module by **AT+QPOWD** command or PWRKEY pin.

3.8. (U)SIM Interface

The (U)SIM interface circuitry meets ETSI and IMT-2000 requirements. Both 1.8V and 3.0V (U)SIM cards are supported.

Table 10: Pin Definition of (U)SIM Interface

Pin Name	Pin No.	I/O	Description	Comment
USIM_GND	10		Specified ground for (U)SIM	
USIM_DET	13	DI	(U)SIM card detection	1.8V power domain. If unused, keep it open.
USIM_VDD	14	PO	Power supply for (U)SIM card	Either 1.8V or 3.0V (U)SIM card is supported and can be identified automatically by the module.

USIM_DATA	15	IO	(U)SIM data
USIM_CLK	16	DO	(U)SIM clock
USIM_RST	17	DO	(U)SIM reset

EC200T supports (U)SIM card hot-plug via the USIM_DET pin. The function supports low level and high level detections. By default, It is disabled, and can be configured via **AT+QSIMDET** command. Please refer to **document [2]** for details about the command.

The following figure shows a reference design for (U)SIM interface with an 8-pin (U)SIM card connector.

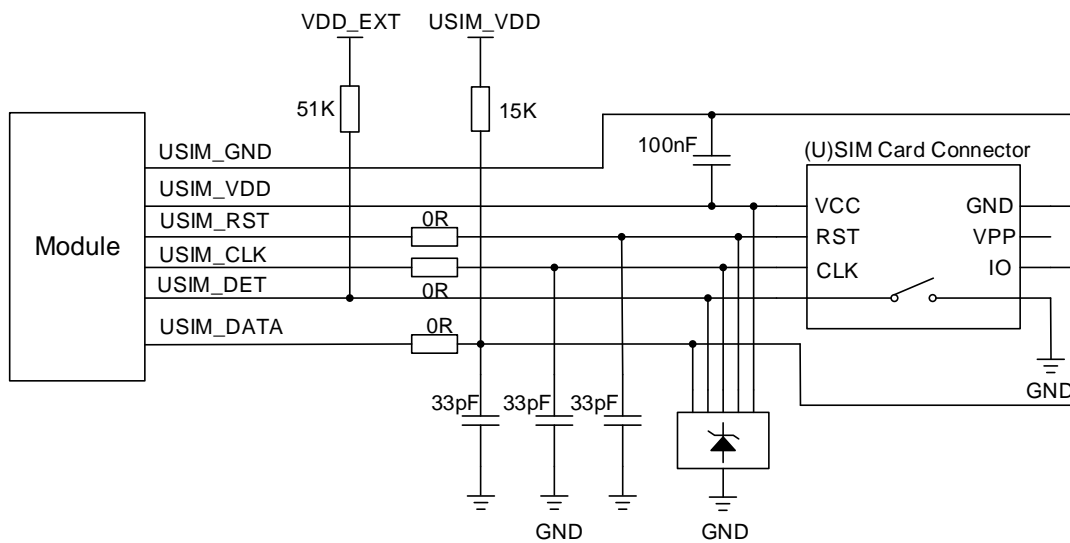


Figure 17: Reference Circuit of (U)SIM Interface with an 8-pin (U)SIM Card Connector

If (U)SIM card detection function is not needed, please keep USIM_DET unconnected. A reference circuit for (U)SIM interface with a 6-pin (U)SIM card connector is illustrated in the following figure.

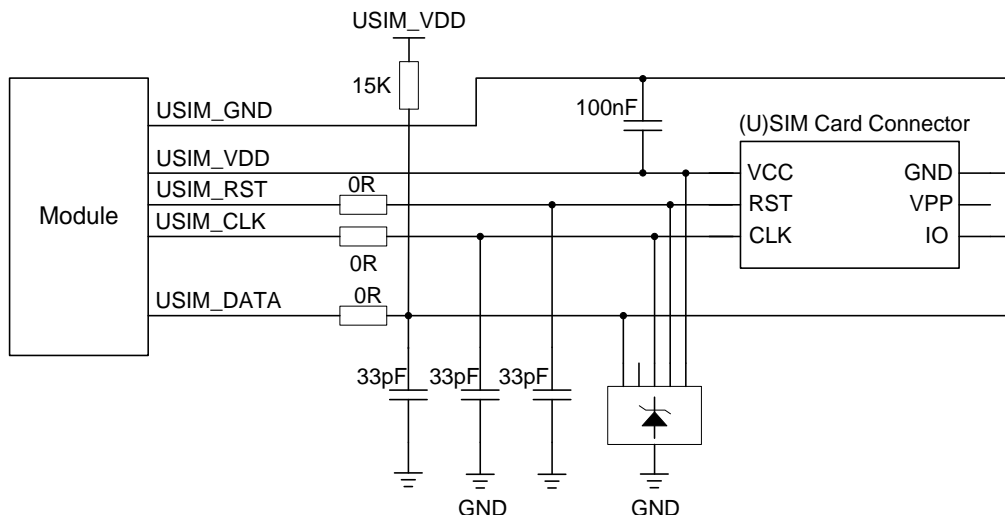


Figure 18: Reference Circuit of (U)SIM Interface with a 6-pin (U)SIM Card Connector

In order to enhance the reliability and availability of the (U)SIM card in customers' applications, please follow the criteria below in (U)SIM circuit design:

- Keep placement of (U)SIM card connector as close to the module as possible. Keep the trace length less than 200mm as far as possible.
- Keep (U)SIM card signals away from RF and VBAT traces.
- Assure the ground between the module and the (U)SIM card connector short and wide. Keep the trace width of ground and USIM_VDD no less than 0.5mm to maintain the same electric potential. If the ground is complete on customers' PCB, USIM_GND can be connected to PCB ground directly.
- To avoid cross-talk between USIM_DATA and USIM_CLK, keep them away from each other and shield them with surrounded ground.
- In order to offer good ESD protection, it is recommended to add a TVS diode array whose parasitic capacitance should not be more than 15pF. The 0Ω resistors should be added in series between the module and the (U)SIM card to facilitate debugging. The 33pF capacitors are used for filtering interference of EGSM900. Please note that the (U)SIM peripheral circuit should be close to the (U)SIM card connector.
- The pull-up resistor on USIM_DATA can improve anti-jamming capability of the (U)SIM card. If the (U)SIM card traces are too long, or the interference source is relatively close, it is recommended to add a pull-up resistor near the (U)SIM card connector.

3.9. USB Interface

EC200T provides one integrated Universal Serial Bus (USB) interface which complies with the USB 2.0 specification and supports full-speed (12Mbps) and high-speed (480Mbps) modes. The USB interface can only serve as a slave device and is used for AT command communication, data transmission, software debugging and firmware upgrade. The following table shows the pin definition of USB interface.

Table 11: Pin Description of USB Interface

Pin Name	Pin No.	I/O	Description	Comment
USB_DP	69	IO	USB differential data (+)	Require differential impedance of 90Ω
USB_DM	70	IO	USB differential data (-)	Require differential impedance of 90Ω
USB_VBUS	71	AI	USB connection detection	Typical 5.0V
GND	72		Ground	

For more details about the USB 2.0 specifications, please visit <http://www.usb.org/home>.

It is recommended to reserve test points for debugging and firmware upgrade in customers' designs. The following figure shows a reference circuit of USB interface.

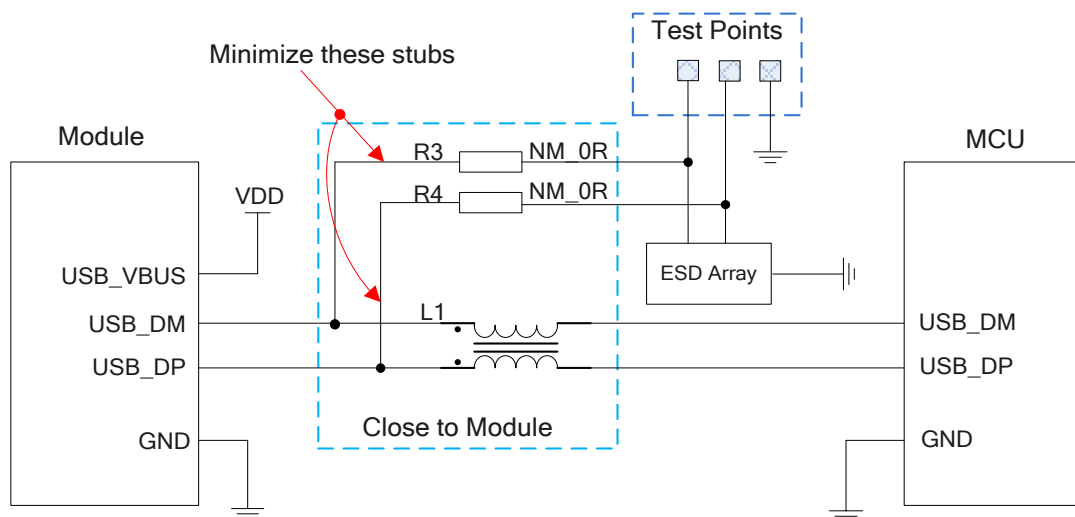


Figure 19: Reference Circuit of USB Application

A common mode choke L1 is recommended to be added in series between the module and customer's MCU in order to suppress EMI spurious transmission. Meanwhile, the 0Ω resistors (R3 and R4) should be added in series between the module and the test points so as to facilitate debugging, and the resistors are not mounted by default. In order to ensure the integrity of USB data line signal, L1, R3 and R4 components must be placed close to the module, and also resistors R3 and R4 should be placed close to each other. The extra stubs of trace must be as short as possible.

The following principles should be complied with when design the USB interface, so as to meet USB 2.0 specification.

- It is important to route the USB signal traces as differential pairs with total grounding. The impedance of USB differential trace is 90Ω.
- Do not route signal traces under crystals, oscillators, magnetic devices and RF signal traces. It is important to route the USB differential traces in inner-layer of the PCB, and surround the traces with ground on that layer and ground planes above and below.
- Please pay attention to the selection of the ESD component on the USB data line. Its parasitic capacitance should not exceed 2pF and should be placed as close as possible to the USB interface.

3.10. UART Interfaces

The module provides two UART interfaces: the main UART interface and the debug UART interface. The following shows their features.

- The main UART interface supports 4800bps, 9600bps, 19200bps, 38400bps, 57600bps, 115200bps, 230400bps, 460800bps, 921600bps and 1Mbps baud rates, and the default is 115200bps. This interface is used for data transmission and AT command communication.
- The debug UART interface supports 115200bps baud rate. It is used for the output of partial logs.

The following tables show the pin definition of main UART interface.

Table 12: Pin Definition of Main UART Interface

Pin Name	Pin No.	I/O	Description	Comment
MAIN_RI	62	DO	Ring indication	
MAIN_DCD	63	DO	Data carrier detection	
MAIN_CTS	64	DO	Clear to send	
MAIN_RTS	65	DI	Request to send	1.8V power domain. If unused, keep it open.
MAIN_DTR	66	DI	Data terminal ready	
MAIN_TXD	67	DO	Transmit data	
MAIN_RXD	68	DI	Receive data	

Table 13: Pin Definition of Debug UART Interface

Pin Name	Pin No.	I/O	Description	Comment
DBG_RXD	11	DI	Debug receive data	1.8V power domain.
DBG_TXD	12	DO	Debug transmit data	If unused, keep it open.

The logic levels are described in the following table.

Table 14: Logic Levels of Digital I/O

Parameter	Min.	Max.	Unit
V _{IL}	-0.3	0.6	V
V _{IH}	1.2	2.0	V
V _{OL}	0	0.45	V
V _{OH}	1.35	1.8	V

The module provides a 1.8V UART interface. A level translator should be used if the application is equipped with a 3.3V UART interface. A level translator TXS0108EPWR provided by *Texas Instruments* is recommended. The following figure shows a reference design.

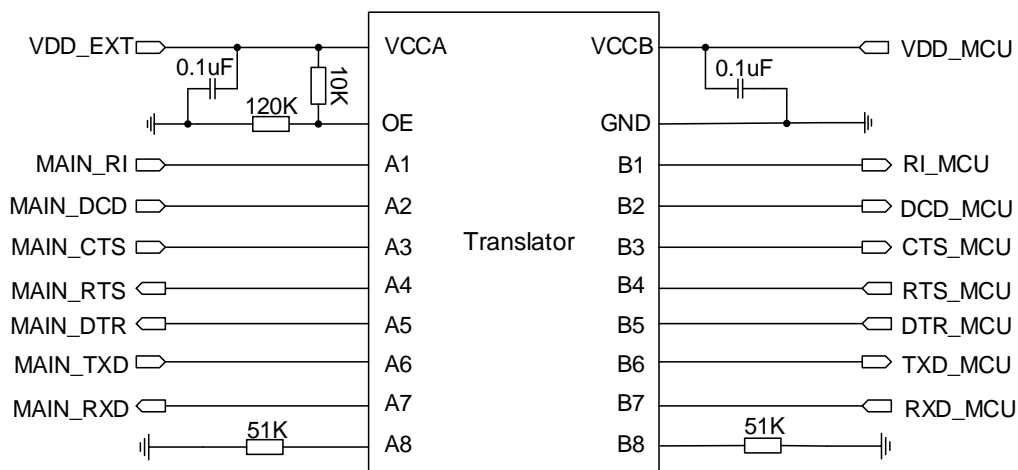


Figure 20: Reference Circuit with Translator Chip

Please visit <http://www.ti.com> for more information.

Another example with transistor translation circuit is shown as below. For the design of circuits in dotted lines, please refer to that of the circuits in solid lines, but please pay attention to the direction of connection.

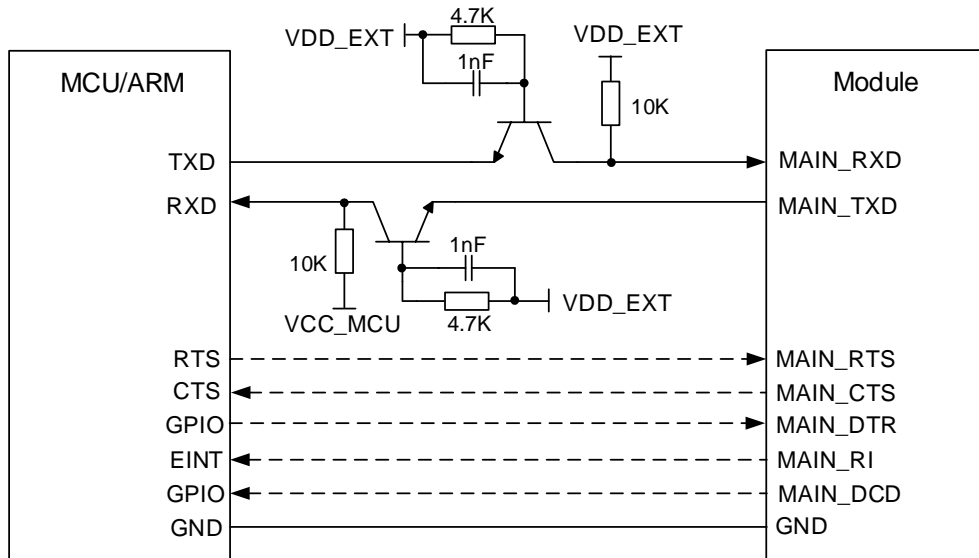


Figure 21: Reference Circuit with Transistor Circuit

NOTE

Transistor circuit solution is not suitable for applications with baud rates exceeding 460Kbps.

3.11. PCM and I2C Interfaces

EC200T provides one Pulse Code Modulation (PCM) digital interface for audio design, which supports the primary mode (short frame synchronization) and EC200T works as both master and slave.

EC200T works as a master device pertaining to I2C interface.

In primary mode, the data is sampled on the falling edge of the PCM_CLK and transmitted on the rising edge. The PCM_SYNC falling edge represents the MSB. In this mode, the PCM interface supports 256kHz, 512kHz, 1024kHz or 2048kHz PCM_CLK at 8kHz PCM_SYNC, and also supports 4096kHz PCM_CLK at 16kHz PCM_SYNC.

EC200T supports 16-bit linear data format. The following figure shows the primary mode's timing relationship with 8kHz PCM_SYNC and 2048kHz PCM_CLK.

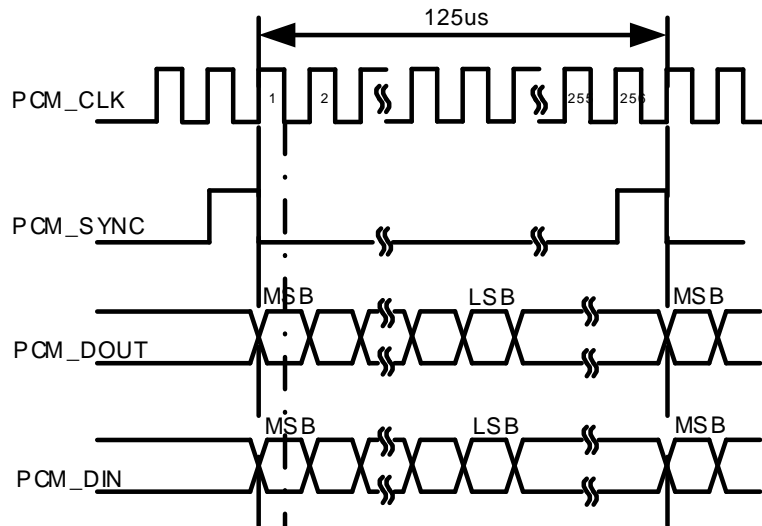


Figure 22: Primary Mode Timing

The following table shows the pin definition of PCM and I2C interfaces which can be applied on audio codec design.

Table 15: Pin Definition of PCM and I2C Interfaces

Pin Name	Pin No.	I/O	Description	Comment
PCM_DIN	24	DI	PCM data input	1.8V power domain. If unused, keep it open.
PCM_DOUT	25	DO	PCM data output	1.8V power domain. If unused, keep it open.
PCM_SYNC	26	IO	PCM data frame synchronization	1.8V power domain. In master mode, it serves as an output signal. In slave mode, it is used as an input signal. If unused, keep it open.
PCM_CLK	27	IO	PCM clock	1.8V power domain. In master mode, it serves as an output signal. In slave mode, it is used as an input signal. If unused, a 33pF capacitor is suggested to be mounted close to the pin.
I2C_SCL	41	OD	I2C serial clock for external codec	An external 1.8V pull-up resistor is required. If unused, a 33pF capacitor is suggested to be mounted close to the pin.
I2C_SDA	42	OD	I2C serial data for external codec	An external 1.8V pull-up resistor is required. If unused, keep it open.

Clock and mode can be configured by AT command, and the default configuration is short frame synchronization format with 2048kHz PCM_CLK and 8kHz PCM_SYNC.

The following figure shows a reference design of PCM interface with external codec IC.

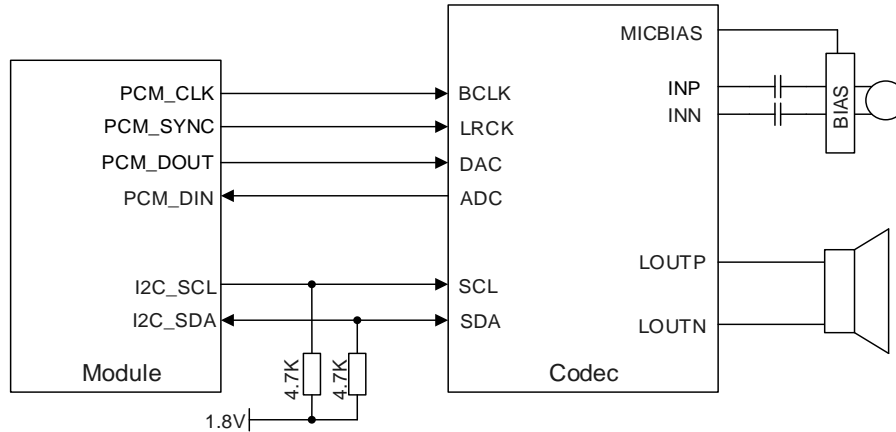


Figure 23: Reference Circuit of PCM Application with Audio Codec

NOTE

It is recommended to reserve an RC (R=22Ω, C=22pF) circuit on the PCM lines, especially for PCM_CLK.

3.12. SD Card Interface*

EC200T provides an SD card interface, which complies with SD 3.0 specification.

The following table shows the pin definition of SD card interface.

Table 16: Pin Definition of SD Card Interface

Pin Name	Pin No.	I/O	Description	Comment
SD_DET	23	DI	SD card detect	1.8V/2.8V power domain. If unused, keep it open.
SD_SDIO_DATA3	28	IO	SD card SDIO data bit 3	1.8V/2.8V power domain. If unused, keep it open.
SD_SDIO_DATA2	29	IO	SD card SDIO data bit 2	1.8V/2.8V power domain. If unused, keep it open.

SD_SDIO_DATA1	30	IO	SD card SDIO data bit 1	1.8V/2.8V power domain. If unused, keep it open.
SD_SDIO_DATA0	31	IO	SD card SDIO data bit 0	1.8V/2.8V power domain. If unused, keep it open.
SD_SDIO_CLK	32	DO	SD card SDIO clock	1.8V/2.8V power domain. If unused, a 33pF capacitor is suggested to be mounted close to the pin.
SD_SDIO_CMD	33	IO	SD card SDIO command	1.8V/2.8V power domain. If unused, keep it open.
SD_SDIO_VDD	34	PO	SD card SDIO power	1.8V/2.8V power domain. If unused, keep it open.

The following figure shows a reference design of SD card interface.

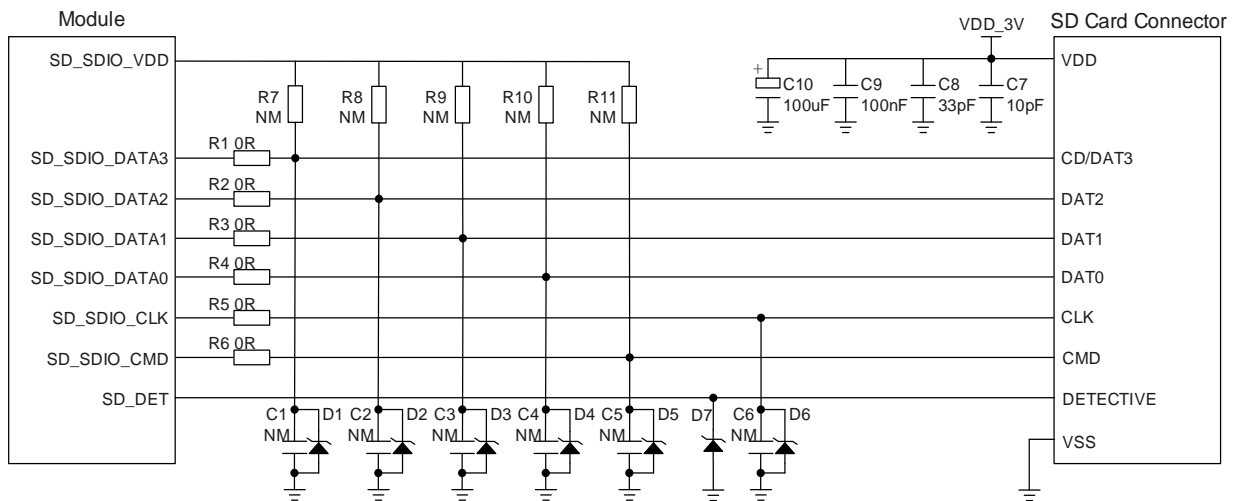


Figure 24: Reference Circuit of SD Card Interface

In SD card interface design, in order to ensure good communication performance with SD card, the following design principles should be complied with:

- The voltage range of SD card power supply VDD_3V is 2.7V~3.6V and a sufficient current up to 0.8A should be provided. As the maximum output current of SD_SDIO_VDD is 50mA which can only be used for SDIO pull-up resistors, an externally power supply is needed for SD card.
- To avoid jitter of bus, resistors R7~R11 are needed to pull up the SDIO to SD_SDIO_VDD. Value of these resistors is among 10kΩ~100kΩ and the recommended value is 100kΩ. SD_SDIO_VDD should be used as the pull-up power.
- In order to adjust signal quality, it is recommended to add 0Ω resistors R1~R6 in series between the module and the SD card. The bypass capacitors C1~C6 are reserved and not mounted by default. All resistors and bypass capacitors should be placed close to the module.

- In order to offer good ESD protection, it is recommended to add a TVS diode on SD card pins near the SD card connector with junction capacitance less than 15pF.
- Keep SDIO signals far away from other sensitive circuits/signals such as RF circuits, analog signals, etc., as well as noisy signals such as clock signals, DC-DC signals, etc.
It is important to route the SDIO signal traces with total grounding. The impedance of SDIO data trace is 50Ω (±10%).
- Make sure the adjacent trace spacing is two times of the trace width and the load capacitance of SDIO bus should be less than 15pF.
- It is recommended to keep the traces of SD_SDIO_CLK, SD_SDIO_DATA[0:3] and SD_SDIO_CMD with equal length (the difference among them is less than 1mm) and the total routing length needs to be less than 50mm.

NOTE

“*” means under development.

3.13. WLAN Interface*

EC200T supports a SDIO 3.0 interface for WLAN.

The following table shows the pin definition of WLAN interface

Table 17: Pin Definition of WLAN Interface

Pin Name	Pin No.	I/O	Description	Comment
WLAN_SLP_CLK	118	DO	WLAN sleep clock	If unused, a 33pF capacitor is suggested to be mounted close to the pin.
WLAN_PWR_EN	127	DO	WLAN power supply enable control	
WLAN_SDIO_DATA3	129	IO	WLAN SDIO data bit 3	
WLAN_SDIO_DATA2	130	IO	WLAN SDIO data bit 2	1.8V power domain If unused, keep it open.
WLAN_SDIO_DATA1	131	IO	WLAN SDIO data bit 1	
WLAN_SDIO_DATA0	132	IO	WLAN SDIO data bit 0	
WLAN_SDIO_CLK	133	DO	WLAN SDIO clock	1.8V power domain

				If unused, a 33pF capacitor is suggested to be mounted close to the pin.
WLAN_SDIO_CMD	134	DO	WLAN SDIO command	
WLAN_WAKE	135	DI	Wake up the host (module) by an external Wi-Fi module	1.8V power domain If unused, keep it open.
WLAN_EN	136	DO	WLAN function enable control	

As SDIO signals are very high-speed, in order to ensure the SDIO interface design meets SDIO 3.0 specification, please comply with the following principles:

- It is important to route the SDIO signal traces with total grounding. The impedance of SDIO signal trace is $50\Omega \pm 10\%$.
- Keep SDIO signals far away from other sensitive circuits/signals such as RF circuits, analog signals, etc., as well as noisy signals such as clock signals, DC-DC signals, etc.
- It is recommended to keep the traces of WLAN_SDIO_CLK, WLAN_SDIO_DATA[0:3] and WLAN_SDIO_CMD with equal length (the difference among them is less than 1mm) and the total routing length needs to be less than 50mm.
- Make sure the adjacent trace spacing is 2 times of the trace width and bus capacitance is less than 15pF.

NOTE

“*” means under development.

3.14. ADC Interfaces

The module provides two analog-to-digital converter (ADC) interfaces. **AT+QADC=0** can be used to read the voltage value on ADC0 pin. **AT+QADC=1** can be used to read the voltage value on ADC1 pin. For more details about these AT commands, please refer to **document [2]**.

In order to improve the accuracy of ADC, the trace of ADC should be surrounded by ground.

Table 18: Pin Definition of ADC Interfaces

Pin Name	Pin No.	Description
ADC1	44	General-purpose analog to digital converter
ADC0	45	General-purpose analog to digital converter

The following table describes the characteristic of the ADC function.

Table 19: Characteristic of the ADC

Parameter	Min.	Typ.	Max.	Unit
ADC1 Voltage Range	0		VBAT_BB	V
ADC0 Voltage Range	0		VBAT_BB	V
ADC Resolution		12		bits

NOTE

It is recommended to use a resistor divider circuit for ADC application.

3.15. Network Status Indication

The network indication pins can be used to drive network status indication LEDs. The module provides two pins which are NET_MODE and NET_STATUS for network status indication. The following tables describe pin definition and logic level changes in different network status.

Table 20: Pin Definition of Network Connection Status/Activity Indication

Pin Name	Pin No.	I/O	Description	Comment
NET_MODE	5	DO	Indicate the module's network registration mode	1.8V power domain If unused, keep it open.
NET_STATUS	6	DO	Indicate the module's network activity status	1.8V power domain If unused, keep it open.

Table 21: Working State of Network Connection Status/Activity Indication

Pin Name	Logic Level Changes	Network Status
NET_MODE	Always high	Registered on LTE network
	Always low	Others
NET_STATUS	Flicker slowly (200ms high/1800ms low)	Network searching
	Flicker slowly (1800ms high/200ms low)	Idle
	Flicker quickly (125ms high/125ms low)	Data transfer is ongoing
	Always High	Voice calling

A reference circuit is shown in the following figure.

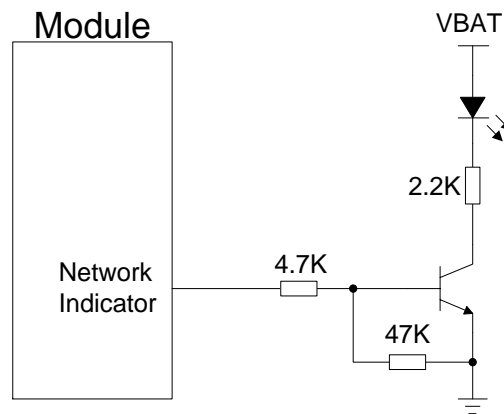


Figure 25: Reference Circuit of Network Status Indication

3.16. STATUS

The STATUS pin is an open drain output for module’s operation status indication. It can be connected to a GPIO of DTE with a pulled-up resistor, or as an LED indication circuit as below. When the module is turned on normally, the STATUS will present the low state. Otherwise, the STATUS will present high-impedance state.

Table 22: Pin Definition of STATUS

Pin Name	Pin No.	I/O	Description	Comment
STATUS	61	OD	Indicate the module's operation status	An external pull-up resistor is required. If unused, keep it open.

The following figure shows different circuit designs of STATUS, and customers can choose either one according to the application demands.

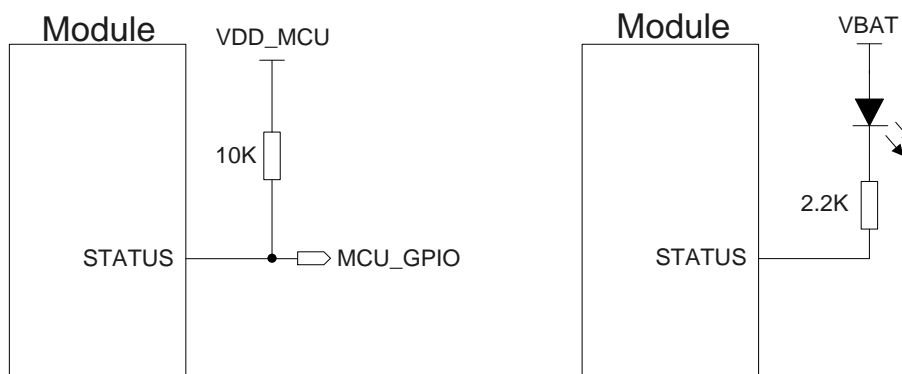


Figure 26: Reference Circuits of STATUS

NOTE

The status pin cannot be used as indication of module shutdown status when VBAT is removed.

3.17. Behaviors of the MAIN_RI

`AT+QCFG="risignaltpe","physical"` can be used to configure MAIN_RI behaviors.

No matter on which port a URC is presented, the URC will trigger the behaviors of MAIN_RI pin.

NOTE

The URC can be outputted via UART port, USB AT port and USB modem port, which can be set by `AT+QURCCFG` command. The default port is USB AT port.

In addition, MAIN_RI behavior can be configured flexibly. The default behavior of the MAIN_RI is shown as below.

Table 23: Behaviors of the MAIN_RI

State	Response
Idle	MAIN_RI keeps at high level
URC	MAIN_RI outputs 120ms low pulse when a new URC returns

The MAIN_RI behavior can be changed via **AT+QCFG="urc/ri/ring"***. Please refer to **document [2]** for details.

NOTE

"*" means under development.

3.18. FORCE_USB_BOOT Interface

EC200T provides a FORCE_USB_BOOT pin. Customers can pull up FORCE_USB_BOOT to 1.8V before VDD_EXT is powered up, and the module will enter emergency download mode when it is powered on. In this mode, the module supports firmware upgrade over USB interface.

Table 24: Pin Definition of FORCE_USB_BOOT Interface

Pin Name	Pin No.	I/O	Description	Comment
FORCE_USB_BOOT	115	DI	Force the module to enter emergency download mode	1.8V power domain. Active high. It is recommended to reserve test points.

The following figure shows a reference circuit of FORCE_USB_BOOT interface.

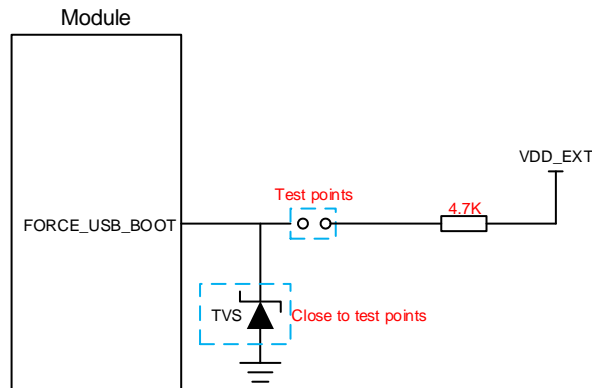


Figure 27: Reference Circuit of FORCE_USB_BOOT Interface

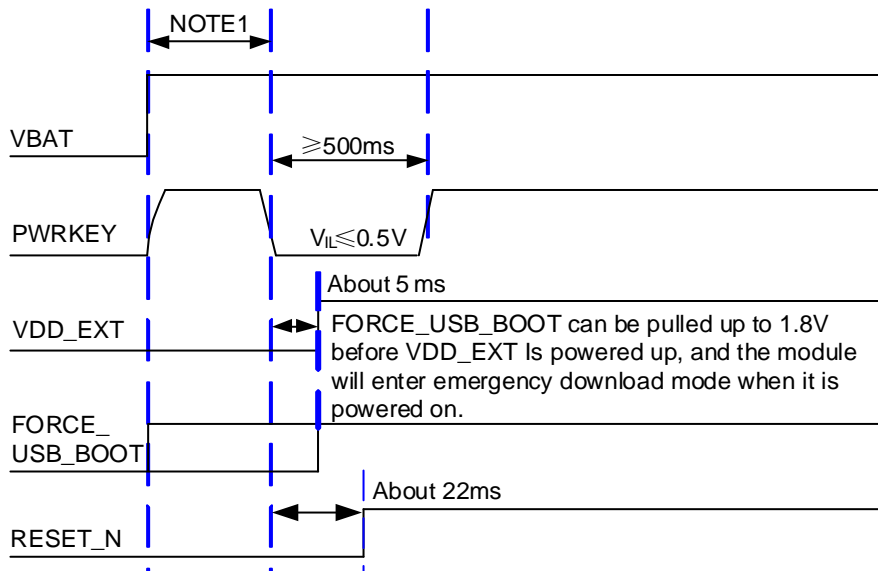


Figure 28: Timing Sequence for Entering Emergency Download Mode

NOTES

1. Please make sure that VBAT is stable before pulling down PWRKEY pin. It is recommended that the time between powering up VBAT and pulling down PWRKEY pin is no less than 30ms.
2. When using MCU to control module to enter the emergency download mode, please follow the above timing sequence. It is not recommended to pull up FORCE_USB_BOOT to 1.8V before powering up VBAT. Directly connect the test points as shown in **Figure 27** can manually force the module to enter download mode.

4 Antenna Interfaces

EC200T antenna interfaces include a main antenna interface, a Rx-diversity antenna interface which is used to resist the fall of signals caused by high speed movement and multipath effect. The antenna ports have an impedance of 50Ω.

4.1. Main/Rx-diversity Antenna Interfaces

4.1.1. Pin Definition

The pin definition of main antenna and Rx-diversity antenna interfaces is shown below.

Table 25: Pin Definition of RF Antennas

Pin Name	Pin No.	I/O	Description	Comment
ANT_DIV	35	AI	Receive diversity antenna	50Ω impedance If unused, keep it open.
ANT_MAIN	49	IO	Main antenna	50Ω impedance

4.1.2. Operating Frequency

Table 26: EC200T-CN Operating Frequencies

3GPP Band	Transmit	Receive	Unit
EGSM900	880~915	925~960	MHz
DCS1800	1710~1785	1805~1880	MHz
WCDMA B1	1920~1980	2110~2170	MHz
WCDMA B5	824~849	869~894	MHz
WCDMA B8	880~915	925~960	MHz
LTE-FDD B1	1920~1980	2110~2170	MHz

LTE-FDD B3	1710~1785	1805~1880	MHz
LTE-FDD B5	824~849	869~894	MHz
LTE-FDD B8	880~915	925~960	MHz
LTE-FDD B20	832~862	791~821	MHz
LTE-FDD B28	703~748	758~803	MHz
LTE-TDD B34	2010~2025	2010~2025	MHz
LTE-TDD B38	2570~2620	2570~2620	MHz
LTE-TDD B39	1880~1920	1880~1920	MHz
LTE-TDD B40	2300~2400	2300~2400	MHz
LTE-TDD B41	2555~2655	2555~2655	MHz

Table 27: EC200T-EU Operating Frequencies

3GPP Band	Transmit	Receive	Unit
EGSM900	880~915	925~960	MHz
DCS1800	1710~1785	1805~1880	MHz
WCDMA B1	1920~1980	2110~2170	MHz
WCDMA B5 ¹⁾	824~849	869~894	MHz
WCDMA B8	880~915	925~960	MHz
LTE-FDD B1	1920~1980	2110~2170	MHz
LTE-FDD B3	1710~1785	1805~1880	MHz
LTE-FDD B5 ¹⁾	824~849	869~894	MHz
LTE-FDD B7	2500~2570	2620~2690	MHz
LTE-FDD B8	880~915	925~960	MHz
LTE-FDD B20 ¹⁾	832~862	791~821	MHz
LTE-FDD B28	703~748	758~803	MHz

LTE-TDD B38	2570~2620	2570~2620	MHz
LTE-TDD B40	2300~2400	2300~2400	MHz
LTE-TDD B41	2555~2655	2555~2655	MHz

NOTE

1) B5 and B20 cannot be simultaneously supported on EC200T-EU, and this is an either-or option.

4.1.3. Reference Design of RF Antenna Interface

A reference design of ANT_MAIN and ANT_DIV antenna pads is shown as below. A π -type matching circuit should be reserved for better RF performance. The capacitors are not mounted by default.

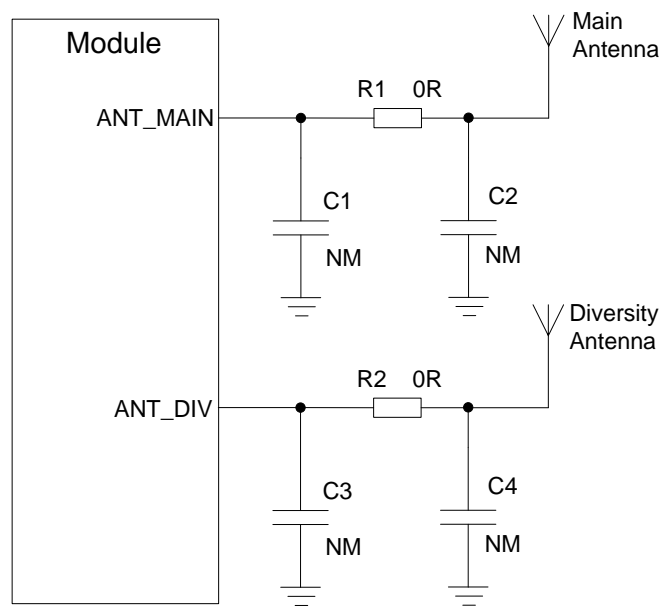


Figure 29: Reference Circuit of RF Antenna Interface

NOTES

1. Keep a proper distance between the main antenna and the Rx-diversity antenna to improve the receiving sensitivity.
2. Place the π -type matching components (R1&C1&C2 and R2&C3&C4) as close to the antenna as possible.

4.1.4. Reference Design of RF Layout

For user's PCB, the characteristic impedance of all RF traces should be controlled as 50Ω . The impedance of the RF traces is usually determined by the trace width (W), the materials' dielectric constant, height from the reference ground to the signal layer (H), and the space between the RF trace and the ground (S). Microstrip and coplanar waveguide are typically used in RF layout to control characteristic impedance. The following figures are reference designs of microstrip or coplanar waveguide with different PCB structures.

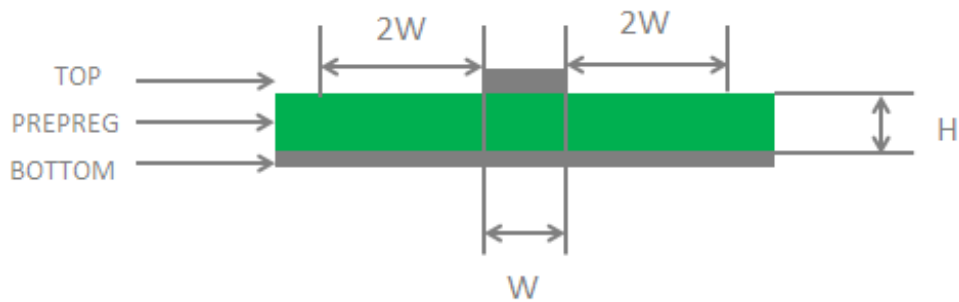


Figure 30: Microstrip Design on a 2-layer PCB

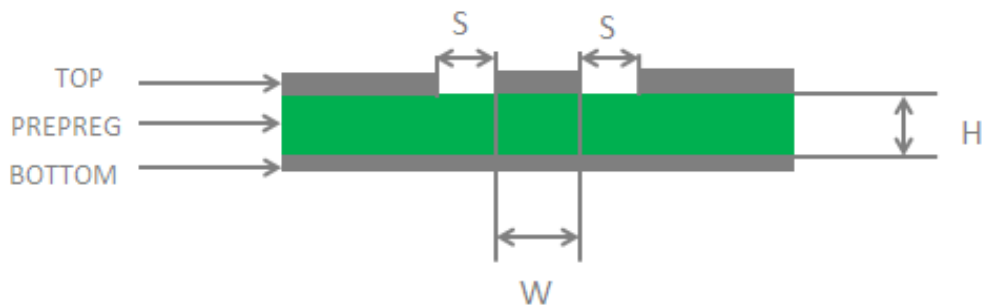


Figure 31: Coplanar Waveguide Design on a 2-layer PCB

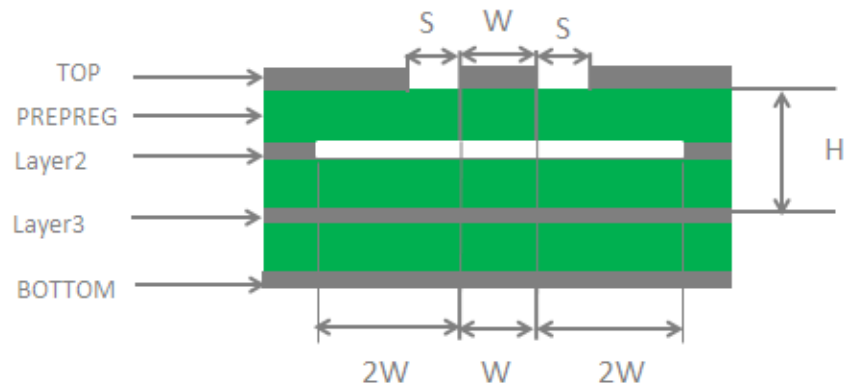


Figure 32: Coplanar Waveguide Design on a 4-layer PCB (Layer 3 as Reference Ground)

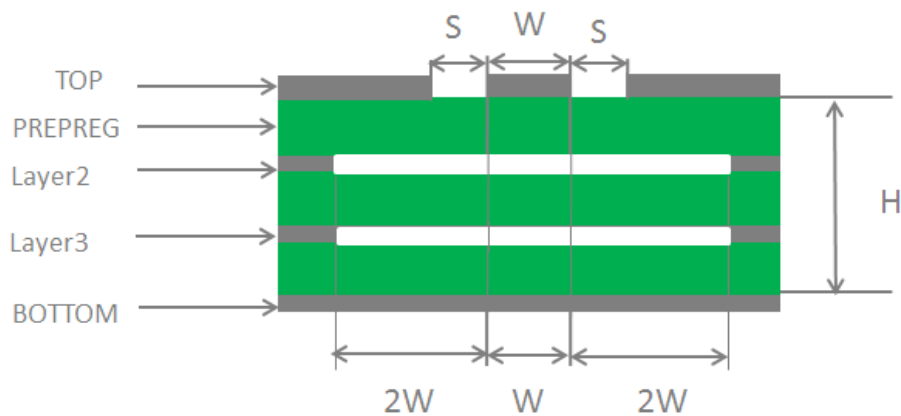


Figure 33: Coplanar Waveguide Design on a 4-layer PCB (Layer 4 as Reference Ground)

In order to ensure RF performance and reliability, the following principles should be complied with in RF layout design:

- Use impedance simulation tool to control the characteristic impedance of RF traces as 50Ω .
- The GND pins adjacent to RF pins should not be designed as thermal relief pads, and should be fully connected to ground.
- The distance between the RF pins and the RF connector should be as short as possible, and all the right angle traces should be changed to curved ones.
- There should be clearance area under the signal pin of the antenna connector or solder joint.
- The reference ground of RF traces should be complete. Meanwhile, adding some ground vias around RF traces and the reference ground could help to improve RF performance. The distance between the ground vias and RF traces should be no less than two times the width of RF signal traces ($2 \times W$).

For more details about RF layout, please refer to **document [3]**.

4.2. Antenna Installation

4.2.1. Antenna Requirement

The following table shows the requirements on main antenna and RX-diversity antenna.

Table 28: Antenna Requirements

Type	Requirements
GSM/UMTS/LTE	VSWR: ≤ 2
	Efficiency: $> 30\%$
	Max input power: 50W
	Input impedance: 50Ω
	Cable insertion loss: $< 1\text{dB}$ (EGSM900, WCDMA B5, WCDMA B8, LTE-FDD B5/B8/B20/B28)
	Cable insertion loss: $< 1.5\text{dB}$ (DCS1800, WCDMA B1, LTE B1/B3/B34/B39)
	Cable insertion loss: $< 2\text{dB}$ (LTE-TDD B7/B38/B40/B41)

4.2.2. Recommended RF Connector for Antenna Installation

If RF connector is used for antenna connection, it is recommended to use U.FL-R-SMT connector provided by Hirose.

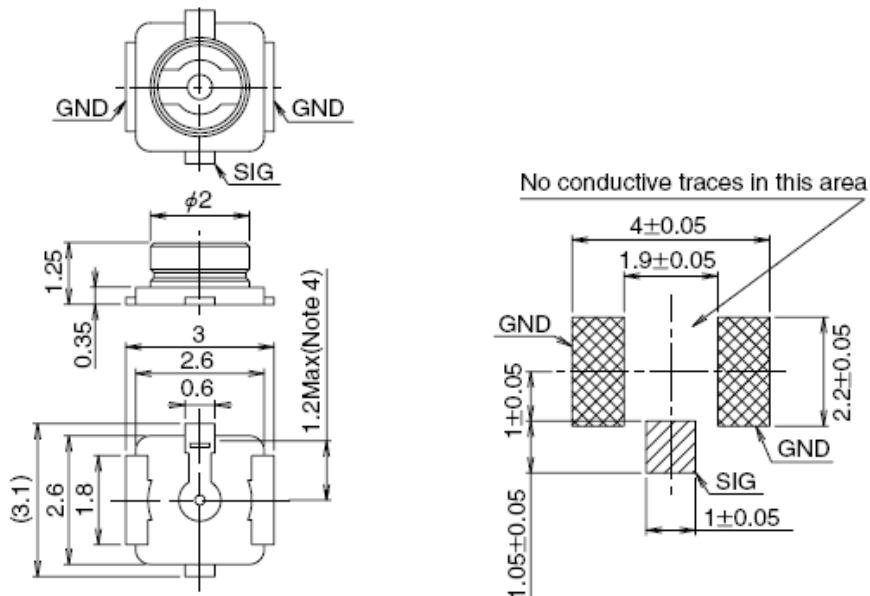


Figure 34: Dimensions of U.FL-R-SMT Connector (Unit: mm)

U.FL-LP serial connectors listed in the following figure can be used to match the U.FL-R-SMT.

Part No.	U.FL-LP-040	U.FL-LP-066	U.FL-LP(V)-040	U.FL-LP-062	U.FL-LP-088
Mated Height	2.5mm Max. (2.4mm Nom.)	2.5mm Max. (2.4mm Nom.)	2.0mm Max. (1.9mm Nom.)	2.4mm Max. (2.3mm Nom.)	2.4mm Max. (2.3mm Nom.)
Applicable cable	Dia. 0.81mm Coaxial cable	Dia. 1.13mm and Dia. 1.32mm Coaxial cable	Dia. 0.81mm Coaxial cable	Dia. 1mm Coaxial cable	Dia. 1.37mm Coaxial cable
Weight (mg)	53.7	59.1	34.8	45.5	71.7
RoHS	YES				

Figure 35: Mechanicals of U.FL-LP Connectors

The following figure describes the space factor of mated connector.

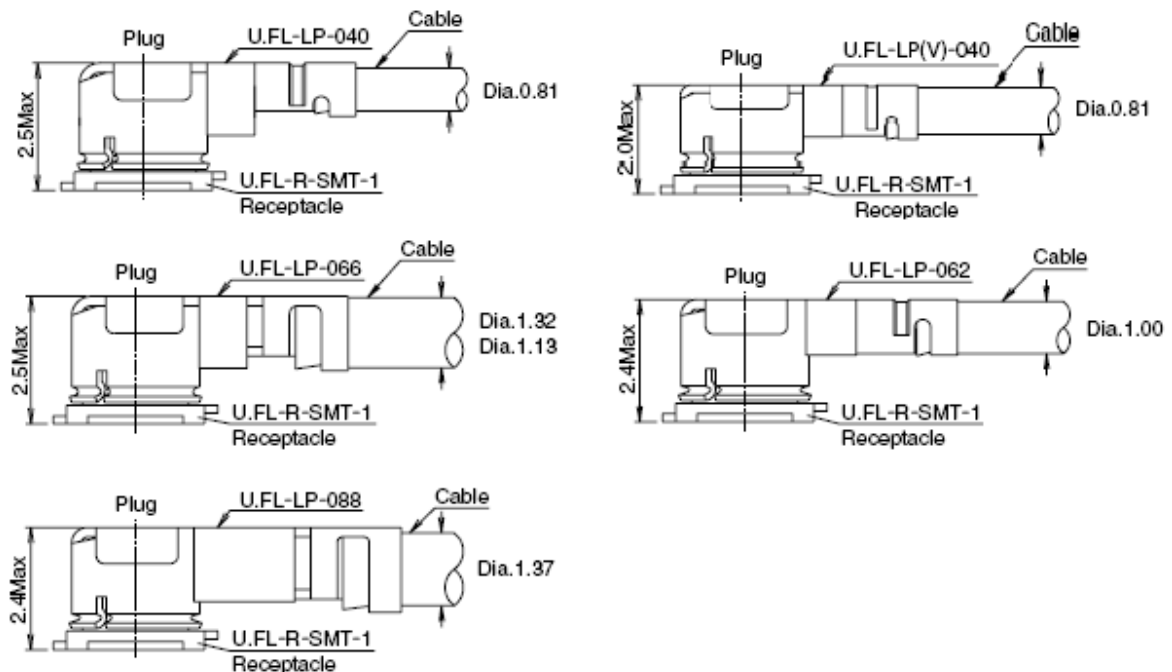


Figure 36: Space Factor of Mated Connector (Unit: mm)

For more details, please visit <http://hirose.com>.

5 Electrical, Reliability and Radio Characteristics

5.1. Absolute Maximum Ratings

Absolute maximum ratings for power supply and voltage on digital and analog pins of the module are listed in the following table.

Table 29: Absolute Maximum Ratings

Parameter	Min.	Max.	Unit
VBAT_RF/VBAT_BB	-0.3	6.0	V
USB_VBUS	-0.3	5.5	V
Peak Current of VBAT_BB	0	0.8	A
Peak Current of VBAT_RF	0	1.8	A
Voltage at Digital Pins	-0.3	2.3	V
Voltage at ADC0	0	VBAT_BB	V
Voltage at ADC1	0	VBAT_BB	V

5.2. Power Supply Ratings

Table 30: The Module Power Supply Ratings

Parameter	Description	Conditions	Min.	Typ.	Max.	Unit
VBAT	VBAT_BB and VBAT_RF	The actual input voltages must be kept between the minimum and maximum values.	3.4	3.8	4.5	V
	Voltage drop during burst transmission	Maximum power control level on EGSM900.			400	mV
I _{VBAT}	Peak supply current (during transmission slot)	Maximum power control level on EGSM900.		1.8	2.0	A
USB_VBUS	USB connection detection		3.0	5.0	5.25	V

5.3. Operation and Storage Temperatures

The operation and storage temperatures are listed in the following table.

Table 31: Operation and Storage Temperatures

Parameter	Min.	Typ.	Max.	Unit
Operation Temperature Range ¹⁾	-35	+25	+75	°C
Extended Operation Range ²⁾	-40		+85	°C
Storage Temperature Range	-40		+90	°C

NOTES

- ¹⁾ Within operation temperature range, the module is 3GPP compliant.
- ²⁾ Within extended temperature range, the module remains the ability to establish and maintain a voice, SMS, data transmission, etc. There is no unrecoverable malfunction. There are also no effects on radio spectrum and no harm to radio network. Only one or more parameters like P_{out} might reduce in their value and exceed the specified tolerances. When the temperature returns to the normal

operation temperature levels, the module will meet 3GPP specifications again.

5.4. Current Consumption

The following table shows the current consumption of EC200T-CN. And the current consumption for EC200T-EU will be supplemented in subsequent versions of this document.

Table 32: EC200T-CN Current Consumption

Parameter	Description	Conditions	Typ.	Unit
I _{VBAT}	OFF state	Power down	11	uA
		AT+CFUN=0 (USB disconnected)	1.67	mA
		EGSM900 @DRX=2 (USB disconnected)	3.04	mA
		EGSM900 @DRX=5 (USB disconnected)	1.94	mA
		EGSM900 @DRX=5 (USB suspend)	2.11	mA
		EGSM900 @DRX=9 (USB disconnected)	1.64	mA
		DCS1800 @DRX=2 (USB disconnected)	3.01	mA
		DCS1800 @DRX=5 (USB disconnected)	1.93	mA
		DCS1800 @DRX=5 (USB suspend)	2.08	mA
	Sleep state	DCS1800 @DRX=9 (USB disconnected)	1.61	mA
		WCDMA @PF=64 (USB disconnected)	3.93	mA
		WCDMA @PF=64 (USB suspend)	4.08	mA
		WCDMA @PF=128 (USB disconnected)	2.70	mA
		WCDMA @PF=256 (USB disconnected)	2.12	mA
		WCDMA @ PF=512 (USB disconnected)	1.75	mA
		LTE-FDD @PF=32 (USB disconnected)	4.21	mA
		LTE-FDD @PF=64 (USB disconnected)	2.59	mA

	LTE-FDD @PF=64 (USB suspend)	2.79	mA
	LTE-FDD @PF=128 (USB disconnected)	1.78	mA
	LTE-FDD @PF=256 (USB disconnected)	1.49	mA
	LTE-TDD @PF=32 (USB disconnected)	4.99	mA
	LTE-TDD @PF=64 (USB disconnected)	3.26	mA
	LTE-TDD @PF=64 (USB suspend)	3.52	mA
	LTE-TDD @PF=128 (USB disconnected)	2.43	mA
	LTE-TDD @PF=256 (USB disconnected)	2.01	mA
Idle state	EGSM900 @DRX=5 (USB disconnected)	30.55	mA
	EGSM00 @DRX=5 (USB connected)	30.64	mA
	WCDMA @PF=64 (USB disconnected)	30.85	mA
	WCDMA @PF=64 (USB connected)	31.44	mA
	LTE-FDD @PF=64 (USB disconnected)	31.58	mA
	LTE-FDD @PF=64 (USB connected)	31.68	mA
	LTE-TDD @ PF=64 (USB disconnected)	31.78	mA
	LTE-TDD @ PF=64 (USB connected)	31.99	mA
GPRS data transfer	EGSM900 4DL/1UL @32.25dBm	249.1	mA
	EGSM900 3DL/2UL @32.17dBm	407.3	mA
	EGSM900 2DL/3UL @31.18dBm	511.1	mA
	EGSM900 1DL/4UL @29.18dBm	534.8	mA
	DCS1800 4DL/1UL @29.95dBm	233.6	mA
	DCS1800 3DL/2UL @29.94dBm	372.1	mA
	DCS1800 2DL/3UL @28.45dBm	445.9	mA
EDGE data	DCS1800 1DL/4UL @26.53dBm	470.3	mA
	EGSM900 4DL/1UL @28.21dBm	221.8	mA

transfer	EGSM900 3DL/2UL @27.51dBm	351.8	mA
	EGSM900 2DL/3UL @25.46dBm	470.2	mA
	EGSM900 1DL/4UL @23.28dBm	582.1	mA
	DCS1800 4DL/1UL @27.31dBm	195.8	mA
	DCS1800 3DL/2UL @26.84dBm	301.1	mA
	DCS1800 2DL/3UL @25.56dBm	393.9	mA
	DCS1800 1DL/4UL @22.87dBm	476.3	mA
WCDMA data transfer	WCDMA B1 HSDPA @23.57dBm	675.2	mA
	WCDMA B1 HSUPA @22.91dBm	657.9	mA
	WCDMA B5 HSDPA @23.06dBm	574.5	mA
	WCDMA B5 HSUPA @22.73dBm	575.9	mA
	WCDMA B8 HSDPA @23.36dBm	673.2	mA
	WCDMA B8 HSUPA @22.97dBm	669.2	mA
LTE data transfer	LTE-FDD B1 @22.54dBm	684.1	mA
	LTE-FDD B3 @22.22dBm	690.1	mA
	LTE-FDD B5 @22.39dBm	613.2	mA
	LTE-FDD B8 @22.42dBm	676.8	mA
	LTE-TDD B34 @23.01dBm	336.5	mA
	LTE-TDD B38 @22.81dBm	405.2	mA
	LTE-TDD B39 @22.87dBm	334.1	mA
	LTE-TDD B40 @23.12dBm	469.3	mA
LTE-TDD B41 @23.37dBm	428.5	mA	
GSM voice call	EGSM900PCL=5 @32.27dBm	242.2	mA
	EGSM900PCL=12 @19.64dBm	120.1	mA
	EGSM900PCL=19 @5.75dBm	94.2	mA

	DCS1800 PCL=0 @29.95dBm	223.6	mA
	DCS1800 PCL=7 @16.27dBm	116.2	mA
	DCS1800 PCL=15 @1.11dBm	92.2	mA
WCDMA voice call	WCDMA B1 @23.57dBm	646.9	mA
	WCDMA B5 @23.07dBm	556.1	mA
	WCDMA B8 @23.21dBm	653.1	mA

5.5. RF Output Power

The following table shows the RF output power of EC200T module.

Table 33: EC200T-CN RF Output Power

Frequency	Max.	Min.
EGSM900	33dBm±2dB	5dBm±5dB
DCS1800	30dBm±2dB	0dBm±5dB
EGSM900 (8-PSK)	27dBm±3dB	5dBm±5dB
DCS1800 (8-PSK)	26dBm±3dB	0dBm±5dB
WCDMA B1/B5/B8	24dBm+1/-3dB	< -49dBm
LTE-FDD B1/B3/B5/B8	23dBm±2dB	< -39dBm
LTE-TDD B34/B38/B39/B40/B41	23dBm±2dB	< -39dBm

Table 34: EC200T-EU RF Output Power

Frequency	Max.	Min.
EGSM900	33dBm±2dB	5dBm±5dB
DCS1800	30dBm±2dB	0dBm±5dB
EGSM900 (8-PSK)	27dBm±3dB	5dBm±5dB

DCS1800 (8-PSK)	26dBm±3dB	0dBm±5dB
WCDMA B1/B5/B8	24dBm+1/-3dB	< -49dBm
LTE-FDD B1/B3/B5 ¹⁾ /B7/B8/B20 ¹⁾ /B28	23dBm±2dB	< -39dBm
LTE-TDD B38/B40/B41	23dBm±2dB	< -39dBm

NOTES

- ¹⁾ B5 and B20 cannot be simultaneously supported on EC200T-EU, and this is an either-or option.
- In GPRS 4 slots Tx mode, the maximum output power is reduced by 2.5dB. The design conforms to the GSM specification as described in **Chapter 13.16** of 3GPP TS 51.010-1.

5.6. RF Receiving Sensitivity

The following table shows conducted RF receiving sensitivity of EC200T-CN module. And the data for EC200T-EU will be supplemented in subsequent versions of this document.

Table 35: EC200T-CN Conducted RF Receiving Sensitivity

Frequency	Receiving Sensitivity (Typ.)			3GPP (SIMO)
	Primary	Diversity	SIMO	
EGSM900	-108dBm	NA	NA	-102dBm
DCS1800	-108dBm	NA	NA	-102dBm
WCDMA B1	-108dBm	NA	NA	-106.7dBm
WCDMA B5	-109dBm	NA	NA	-104.7dBm
WCDMA B8	-110dBm	NA	NA	-103.7dBm
LTE-FDD B1 (10MHz)	-97dBm	-98.5dBm	-100dBm	-96.3dBm
LTE-FDD B3 (10MHz)	-97.5dBm	-97.5dBm	-100.5dBm	-93.3dBm
LTE-FDD B5 (10MHz)	-98dBm	-99dBm	-101dBm	-94.3dBm
LTE-FDD B8 (10MHz)	-98dBm	-98dBm	-101dBm	-93.3dBm

LTE-TDD B34 (10MHz)	-96.5dBm	-97dBm	-100dBm	-96.3dBm
LTE-TDD B38 (10MHz)	-97dBm	-97.5dBm	-100dBm	-96.3dBm
LTE-TDD B39 (10MHz)	-97dBm	-97.5dBm	-100dBm	-96.3dBm
LTE-TDD B40 (10MHz)	-97dBm	-97dBm	-100dBm	-96.3dBm
LTE-TDD B41 (10MHz)	-96dBm	-97dBm	-99dBm	-94.3dBm

5.7. Electrostatic Discharge

The module is not protected against electrostatics discharge (ESD) in general. Consequently, it is subject to ESD handling precautions that typically apply to ESD sensitive components. Proper ESD handling and packaging procedures must be applied throughout the processing, handling and operation of any application that incorporates the module.

The following table shows the module electrostatics discharge characteristics.

Table 36: Electrostatics Discharge Characteristics (25°C, 45% Relative Humidity)

Tested Interfaces	Contact Discharge	Air Discharge	Unit
VBAT, GND	±8	±12	kV
All Antenna Interfaces	±8	±12	kV
Other Interfaces	±0.5	±1	kV

6 Mechanical Dimensions

This chapter describes the mechanical dimensions of the module. All dimensions are measured in millimeter (mm), and the dimensional tolerances are $\pm 0.05\text{mm}$ unless otherwise specified.

6.1. Mechanical Dimensions of the Module

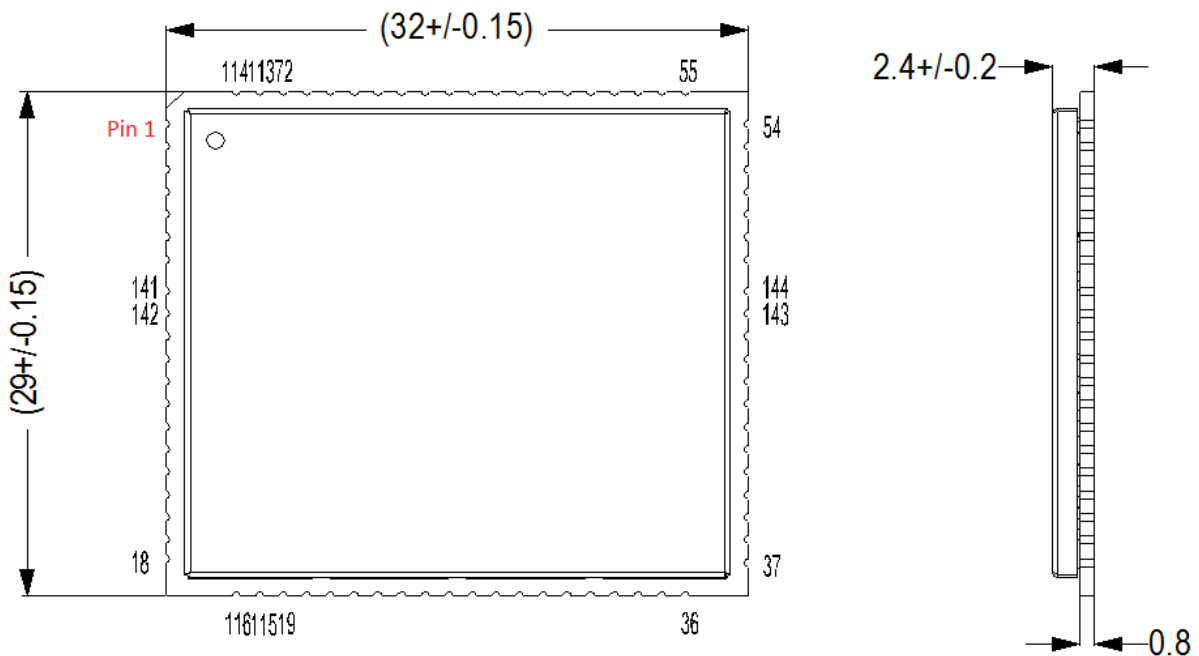


Figure 37: Module Top and Side Dimensions

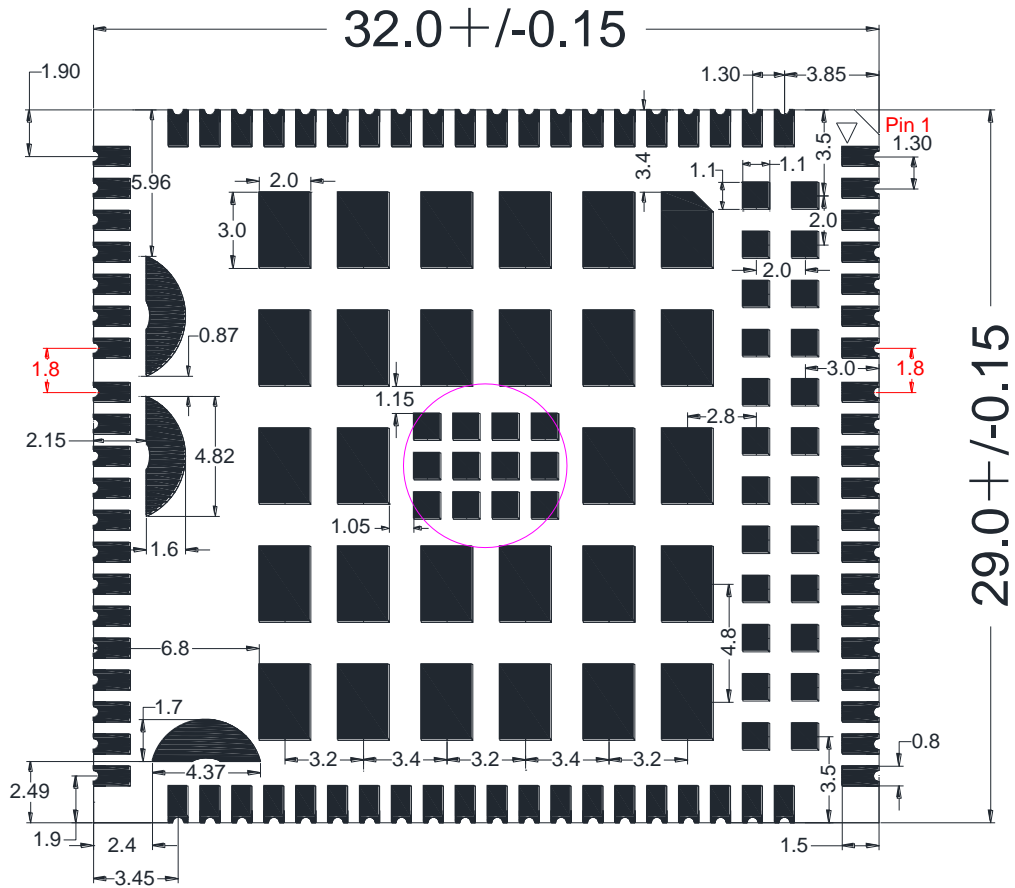


Figure 38: Module Bottom Dimensions (Bottom View)

6.2. Recommended Footprint

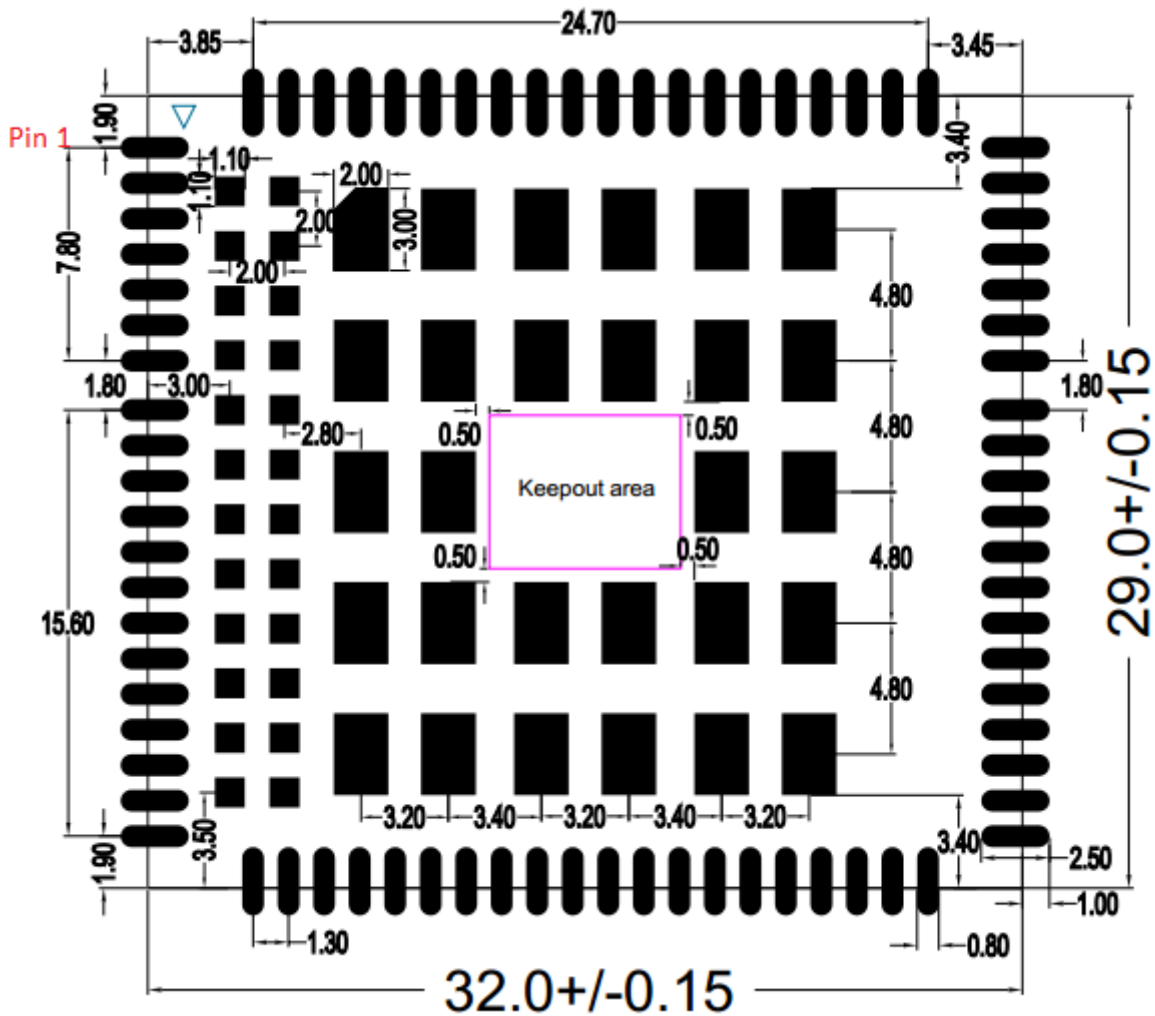


Figure 39: Recommended Footprint (Top View)

NOTES

1. The keepout area should not be designed.
2. For easy maintenance of the module, please keep about 3mm between the module and other components in the host PCB.

6.3. Design Effect Drawings of the Module



Figure 40: Top View of the Module

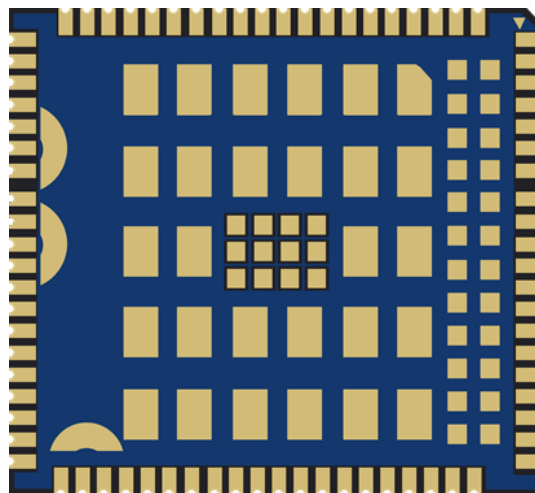


Figure 41: Bottom View of the Module

NOTE

These are renderings of EC200T module. For authentic appearance, please refer to the module that you receive from Quectel.

7 Storage, Manufacturing and Packaging

7.1. Storage

EC200T is stored in a vacuum-sealed bag. It is rated at MSL 3, and its storage restrictions are listed below.

1. Shelf life in vacuum-sealed bag: 12 months at <math><40^{\circ}\text{C}/90\%\text{RH}</math>.
2. After the vacuum-sealed bag is opened, devices that will be subjected to reflow soldering or other high temperature processes must be:
 - Mounted within 168 hours at the factory environment of $\leq 30^{\circ}\text{C}/60\%\text{RH}$.
 - Stored at $<10\%\text{RH}$.
3. Devices require baking before mounting, if any circumstances below occurs:
 - When the ambient temperature is $23^{\circ}\text{C}\pm 5^{\circ}\text{C}$ and the humidity indicator card shows the humidity is $>10\%$ before opening the vacuum-sealed bag.
 - Device mounting cannot be finished within 168 hours at factory conditions of $\leq 30^{\circ}\text{C}/60\%\text{RH}$.
4. If baking is required, devices may be baked for 8 hours at $120^{\circ}\text{C}\pm 5^{\circ}\text{C}$.

NOTE

As the plastic package cannot be subjected to high temperature, it should be removed from devices before high temperature (120°C) baking. If shorter baking time is desired, please refer to *IPC/JEDECJ-STD-033* for baking procedure.

7.2. Manufacturing and Soldering

Push the squeegee to apply the solder paste on the surface of stencil, thus making the paste fill the stencil openings and then penetrate to the PCB. The force on the squeegee should be adjusted properly so as to produce a clean stencil surface on a single pass. To ensure the module soldering quality, the thickness of stencil for the module is recommended to be 0.18mm~0.20mm. For more details, please refer to **document [1]**.

It is suggested that the peak reflow temperature is 238°C ~245°C, and the absolute maximum reflow temperature is 245°C. To avoid damage to the module caused by repeated heating, it is strongly recommended that the module should be mounted after reflow soldering for the other side of PCB has been completed. The recommended reflow soldering thermal profile (lead-free reflow soldering) and related parameters are shown below.

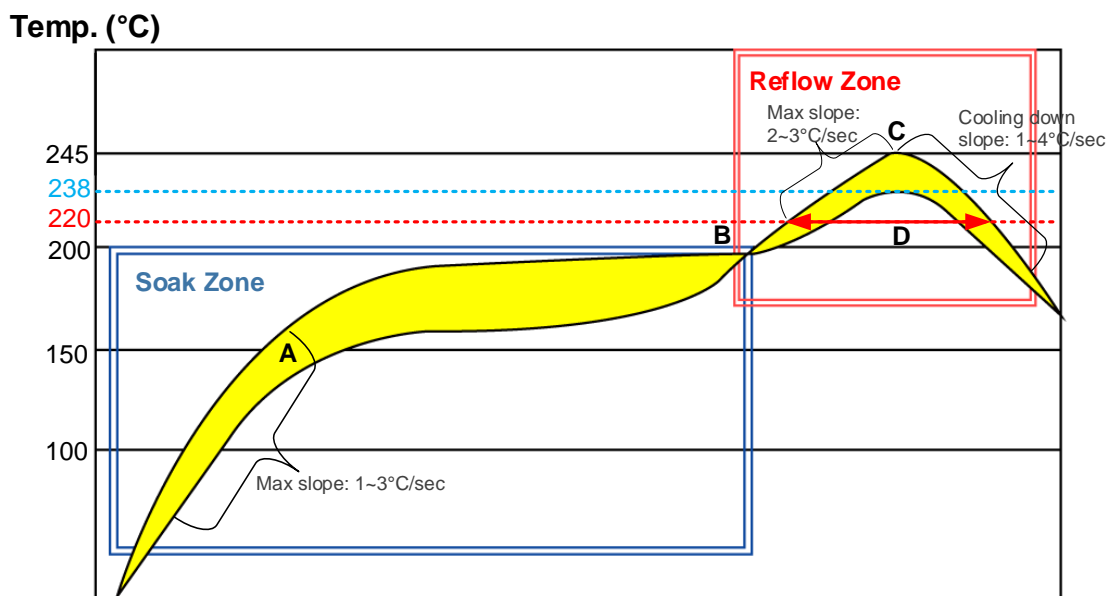


Figure 42: Reflow Soldering Thermal Profile

Table 37: Recommended Thermal Profile Parameters

Factor	Recommendation
Soak Zone	
Max slope	1°C/sec~3°C/sec
Soak time (between A and B: 150°C and 200°C)	60sec~120sec
Reflow Zone	

Max slope	2°C/sec~3°C/sec
Reflow time (D: over 220°C)	40sec~60sec
Max temperature	238°C~245°C
Cooling down slope	1°C/sec~4°C/sec
Reflow Cycle	
Max reflow cycle	1

7.3. Packaging

EC200T is packaged in tape and reel carriers. One reel is 11.88m long and contains 250 modules. The figure below shows the package details, measured in mm.

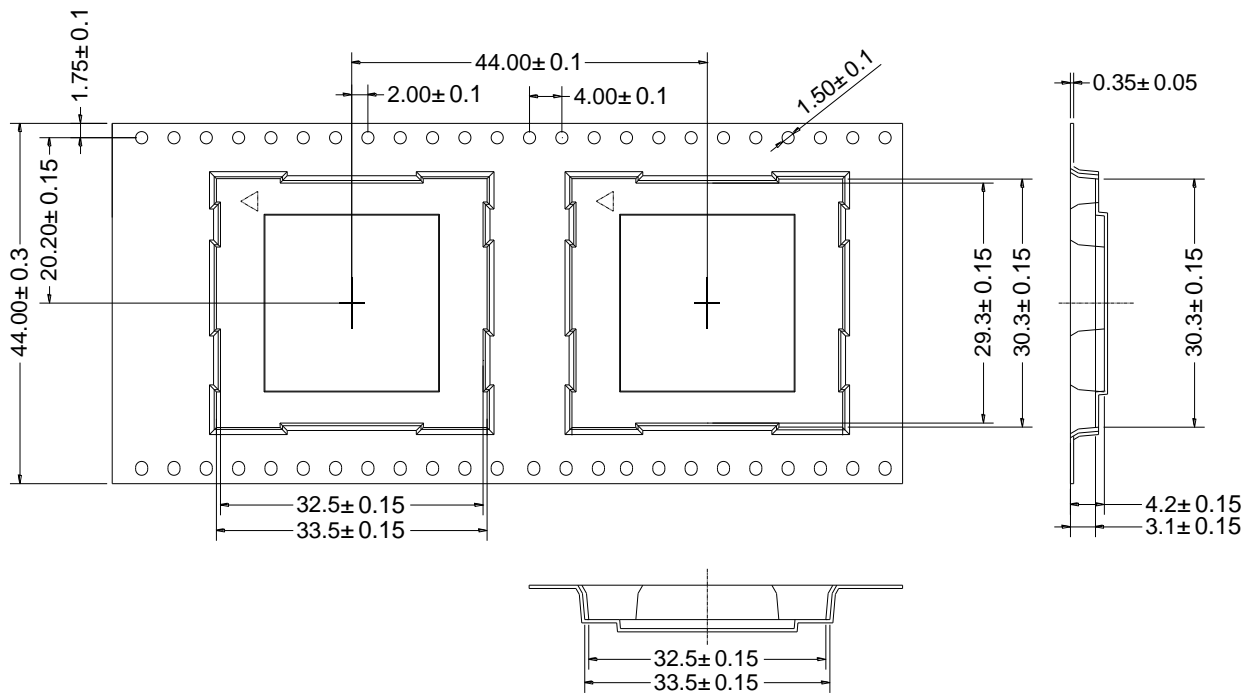


Figure 43: Tape Specifications

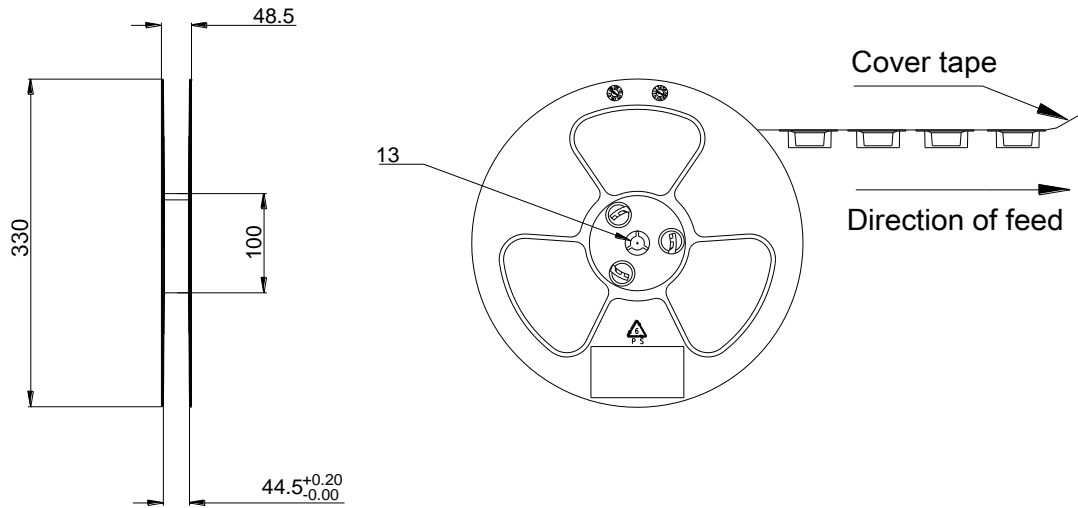


Figure 44: Reel Specifications

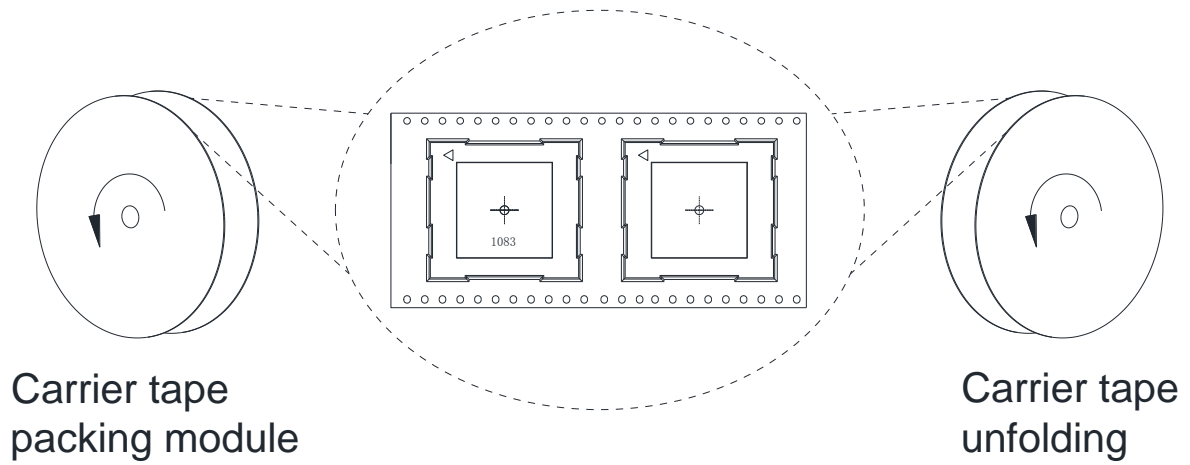


Figure 45: Tape and Reel Directions

8 Appendix A References

Table 38: Related Documents

SN	Document Name	Remark
[1]	Quectel_Module_Secondary_SMT_User_Guide	Module Secondary SMT User Guide
[2]	Quectel_EC200T_AT_Commands_Manual	EC200T AT Commands Manual
[3]	Quectel_RF_Layout_Application_Note	RF Layout Application Note
[4]	Quectel_UMTS<E_EVB_User_Guide	UMTS<E EVB user guide for UMTS<E modules

Table 39: Terms and Abbreviations

Abbreviation	Description
AMR	Adaptive Multi-rate
AMR	Adaptive Multi-rate
bps	Bits Per Second
CHAP	Challenge Handshake Authentication Protocol
CS	Coding Scheme
CTS	Clear To Send
DL	Downlink
DTE	Data Terminal Equipment
DTR	Data Terminal Ready
EFR	Enhanced Full Rate
EGSM	Extended GSM900 Band (including standard GSM900 band)

ESD	Electrostatic Discharge
FDD	Frequency Division Duplex
FR	Full Rate
FTP	File Transfer Protocol
FTPS	FTP over SSL
GMSK	Gaussian Minimum Shift Keying
GSM	Global System for Mobile Communications
HR	Half Rate
HSDPA	High Speed Downlink Packet Access
HSPA	High Speed Packet Access
HSUPA	High Speed Uplink Packet Access
HTTP	Hyper Text Transfer Protocol
HTTPS	Hyper Text Transfer Protocol over Secure Socket Layer
LED	Light Emitting Diode
LTE	Long Term Evolution
MIMO	Multiple Input Multiple Output
MMS	Multimedia Messaging Service
MSL	Moisture Sensitivity Level
NITZ	Network Identity and Time Zone
NTP	Network Time Protocol
PAP	Password Authentication Protocol
PCB	Printed Circuit Board
PDU	Protocol Data Unit
PF	Paging Frame
PPP	Point-to-Point Protocol

PSK	Phase Shift Keying
QAM	Quadrature Amplitude Modulation
QPSK	Quadrature Phase Shift Keying
RF	Radio Frequency
SIMO	Single Input Multiple Output
SMS	Short Message Service
SMTP	Simple Mail Transfer Protocol
SMTPS	Simple Mail Transfer Protocol Secure
SSL	Secure Sockets Layer
TCP	Transmission Control Protocol
TDD	Time Division Duplexing
UART	Universal Asynchronous Receiver & Transmitter
UDP	User Datagram Protocol
UL	Uplink
UMTS	Universal Mobile Telecommunications System
URC	Unsolicited Result Code
(U)SIM	(Universal)Subscriber Identity Module
V _{max}	Maximum Voltage Value
V _{norm}	Normal Voltage Value
V _{min}	Minimum Voltage Value
V _{IHmax}	Maximum Input High Level Voltage Value
V _{IHmin}	Minimum Input High Level Voltage Value
V _{ILmax}	Maximum Input Low Level Voltage Value
V _{ILmin}	Minimum Input Low Level Voltage Value
V _{I,max}	Absolute Maximum Input Voltage Value

V _{OHmax}	Maximum Output High Level Voltage Value
V _{OHmin}	Minimum Output High Level Voltage Value
V _{OLmax}	Maximum Output Low Level Voltage Value
V _{OLmin}	Minimum Output Low Level Voltage Value
VSWR	Voltage Standing Wave Ratio
WCDMA	Wideband Code Division Multiple Access
WLAN	Wireless Local Area Network

9 Appendix B GPRS Coding Schemes

Table 40: Description of Different Coding Schemes

Scheme	CS-1	CS-2	CS-3	CS-4
Code Rate	1/2	2/3	3/4	1
USF	3	3	3	3
Pre-coded USF	3	6	6	12
Radio Block excl.USF and BCS	181	268	312	428
BCS	40	16	16	16
Tail	4	4	4	-
Coded Bits	456	588	676	456
Punctured Bits	0	132	220	-
Data Rate Kb/s	9.05	13.4	15.6	21.4

10 Appendix C GPRS Multi-slot Classes

Thirty-three classes of GPRS multi-slot modes are defined for MS in GPRS specification. Multi-slot classes are product dependent, and determine the maximum achievable data rates in both the uplink and downlink directions. Written as 3+1 or 2+2, the first number indicates the amount of downlink timeslots, while the second number indicates the amount of uplink timeslots. The active slots determine the total number of slots the GPRS device can use simultaneously for both uplink and downlink communications.

The description of different multi-slot classes is shown in the following table.

Table 41: GPRS Multi-slot Classes

Multislot Class	Downlink Slots	Uplink Slots	Active Slots
1	1	1	2
2	2	1	3
3	2	2	3
4	3	1	4
5	2	2	4
6	3	2	4
7	3	3	4
8	4	1	5
9	3	2	5
10	4	2	5
11	4	3	5
12	4	4	5
13	3	3	NA

14	4	4	NA
15	5	5	NA
16	6	6	NA
17	7	7	NA
18	8	8	NA
19	6	2	NA
20	6	3	NA
21	6	4	NA
22	6	4	NA
23	6	6	NA
24	8	2	NA
25	8	3	NA
26	8	4	NA
27	8	4	NA
28	8	6	NA
29	8	8	NA
30	5	1	6
31	5	2	6
32	5	3	6
33	5	4	6

11 Appendix D EDGE Modulation and Coding Schemes

Table 42: EDGE Modulation and Coding Schemes

Coding Scheme	Modulation	Coding Family	Timeslot 1	Timeslot 2	Timeslot 4
CS-1	GMSK	/	9.05kbps	18.1kbps	36.2kbps
CS-2	GMSK	/	13.4kbps	26.8kbps	53.6kbps
CS-3	GMSK	/	15.6kbps	31.2kbps	62.4kbps
CS-4	GMSK	/	21.4kbps	42.8kbps	85.6kbps
MCS-1	GMSK	C	8.80kbps	17.60kbps	35.20kbps
MCS-2	GMSK	B	11.2kbps	22.4kbps	44.8kbps
MCS-3	GMSK	A	14.8kbps	29.6kbps	59.2kbps
MCS-4	GMSK	C	17.6kbps	35.2kbps	70.4kbps
MCS-5	8-PSK	B	22.4kbps	44.8kbps	89.6kbps
MCS-6	8-PSK	A	29.6kbps	59.2kbps	118.4kbps
MCS-7	8-PSK	B	44.8kbps	89.6kbps	179.2kbps
MCS-8	8-PSK	A	54.4kbps	108.8kbps	217.6kbps
MCS-9	8-PSK	A	59.2kbps	118.4kbps	236.8kbps