




50W DALI-2 LED Driver with Smooth Dimming to 1%

ECOdrive

Programmable digital ECOdrive LED driver providing standard LED fixtures with the smoothest flicker-free dimming to 1% light output, delivering value to any application. The LED driver is compatible with the DALI-2 lighting control protocol, and works seamlessly together with LED modules, controls and intelligent luminaire elements.

Product offering

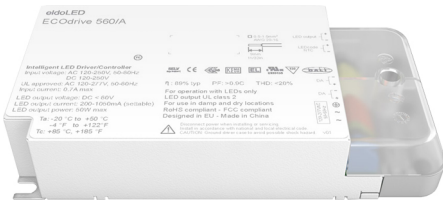

ECOdrive 560/A

| | |
|---------------------|--|
| Part number (P/N) | EC0560A5 |
| Product description | ECOdrive, 50W, DALI-2, 1 control channel, constant current, 1x 55V output, side feed, square metal/plastic |

Features & benefits

| | |
|----------------------|--|
| Natural dimming | Dim to 1%, smooth brightness changes, excellent flicker performance, adaptable dimming curves, configurable minimum dimming level |
| LEDcode | LEDcode2 connects to integrated digital accessories, supports location-based IoT applications and enables wired and wireless lighting control through LEDcode peripheral devices |
| Programmable | Fine-tune your driver for any application |
| Performance | Universal input voltage range, low inrush current and total harmonic distortion (THD), high power factor and efficiency |
| Camera compatibility | Hybrid HydraDrive technology is proven to work in TV studios and security camera environments |
| Pulse dimming | Different switching and dimming functions are initiated by pressing and holding the standard mains voltage switch for varying lengths of time |


Programming tools

| | |
|-------------------------------------|---|
| Programming interface | TOOLbox pro (TLU20504) |
| Programming cable set | TOOLbox pro to LED driver, programming cable, 5pcs (TLC03051) |
| Programming Hand-held, Touch-and-Go | PJ0035HH1 |
| Programming jig | PJ0500S1 |
| Programming software | FluxTool |

Warranty

| | |
|-----------------|--|
| Warranty period | General Terms and Conditions |
|-----------------|--|

Order number configurator

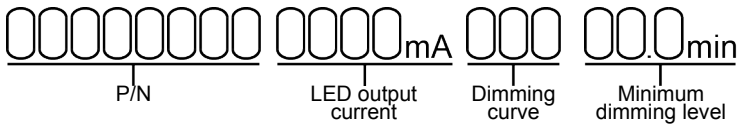

| | |
|-----------------------|---|
| P/N | LED driver part number |
| LED output current | Enter value in 1mA increments, e.g. "811" for 811mA |
| Dimming curve | "LOG" for logarithmic (default) "LIN" for linear |
| Minimum dimming level | Leave blank for default minimum dimming level of 1.0%. Specify in 0.1% increments, e.g. "10.5" for 10.5%. |

Input characteristics

| | |
|-----------------------------|---|
| Nominal input voltage range | 120 - 250 VAC (ENEC), 120 - 277 VAC (UL) 120 - 250 VDC |
|-----------------------------|---|

| | |
|------------------------------|---------------|
| Absolute input voltage range | 108 - 305 VAC |
|------------------------------|---------------|

| | |
|-----------------------|------------|
| Input frequency range | 50 - 60 Hz |
|-----------------------|------------|

| | |
|-----------------------|--|
| Maximum input current | 0.65A @ 120 VAC 0.36A @ 230 VAC 0.3A @ 277 VAC |
|-----------------------|--|

| | |
|-------------------------|-------|
| Efficiency at full load | 87.5% |
|-------------------------|-------|

| | |
|---------------------------|--------|
| Power factor at full load | > 0.95 |
|---------------------------|--------|

| | |
|------------------|-------|
| THD at full load | < 15% |
|------------------|-------|

| | |
|------------------------|--|
| Maximum inrush current | < 100mA ² s @ 120 VAC < 100mA ² s @ 230 VAC < 100mA ² s @ 277 VAC |
|------------------------|--|


| | |
|------------------|--|
| Surge protection | 2kV differential mode (DM) 2kV common mode (CM) |
|------------------|--|

| | |
|-----------------------|--------|
| Maximum standby power | < 0.5W |
|-----------------------|--------|

Output characteristics

| | |
|---------------------------------------|---|
| Maximum LED output power | 50W |
| Number of LED outputs | 1 (UL Class 2) |
| Programmable LED output current range | 150 - 1400mA |
| LED output type | Programmable in 1mA increments within specified current range |
| LED output current tolerance | +/- 5% at programmed LED output current |
| LED output voltage range | 2 - 55V |


Operating window

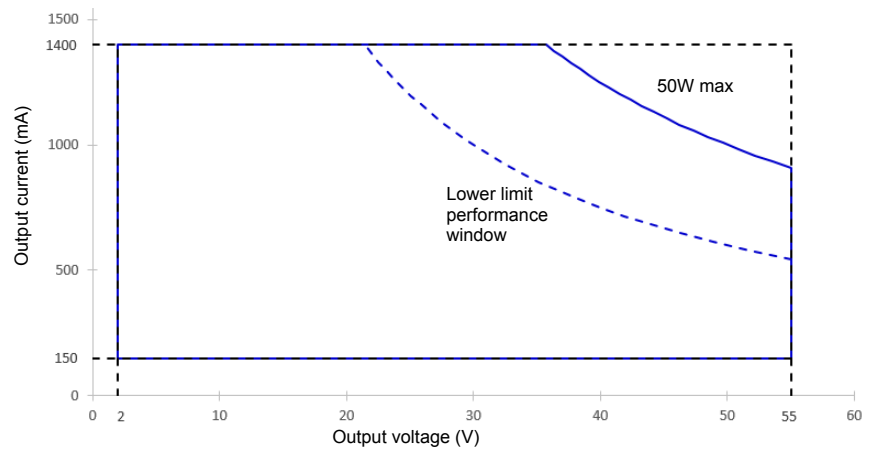

Control characteristics

| | |
|-----------------------|--|
| Control channels | 1 |
| Control protocol | DALI-2 Device type 6 & Pulse dimming LEDcode2 |
| Dimming range | 100% - 1% |
| Dimming curve options | Logarithmic (default) Linear |
| Dimming method | Hybrid HydraDrive |
| Time delay to standby | < 30s |

Dimming curves

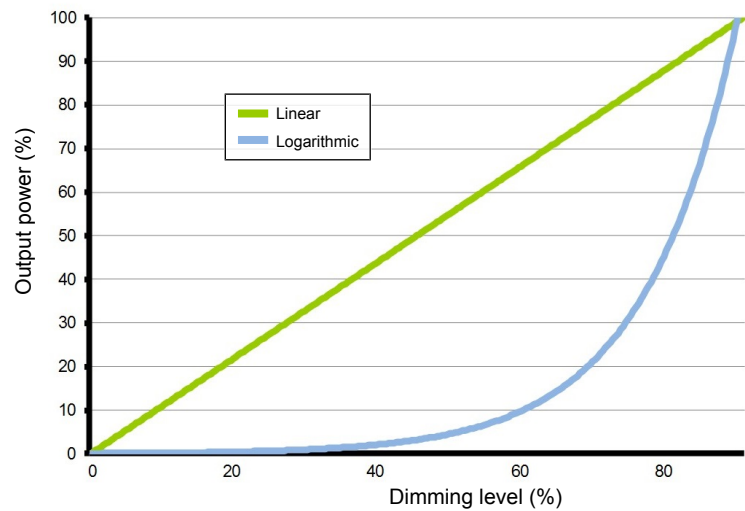


Pulse dimming control

| | |
|--|---|
| End-user functionality & Installation requirements | Detailed explanation in the eldoLED Quick Start Guide |
| LEDcode compatibility | In an installation using Pulse dimming, LEDcode functionality cannot be used with a Bluetooth radio, sensor, or other LEDcode devices |
| Supported input voltage range AC | 100 – 250V |

Performance


Typical efficiency vs load

Tested with a load of 16 LEDs in series, programmed for 1000mA and at 25 °C ambient temperature. The measurements below 50W were performed by dimming the light output.

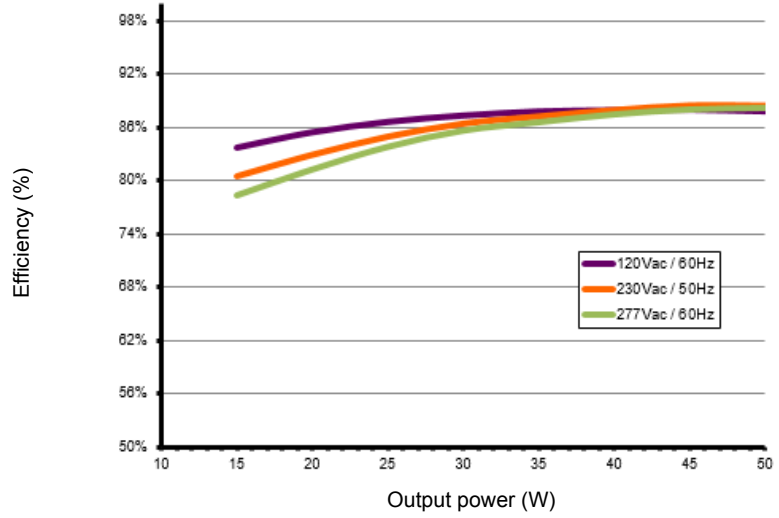


Typical power factor vs load

Tested with a load of 16 LEDs in series, programmed for 1000mA and at 25 °C ambient temperature. The measurements below 50W were performed by dimming the light output.

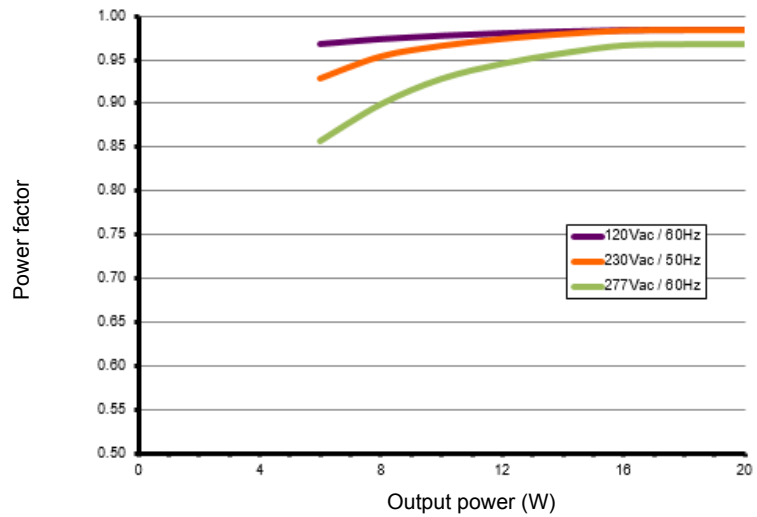


Typical THD vs load

Tested with a load of 16 LEDs in series, programmed for 1000mA and at 25 °C ambient temperature. The measurements below 50W were performed by dimming the light output.

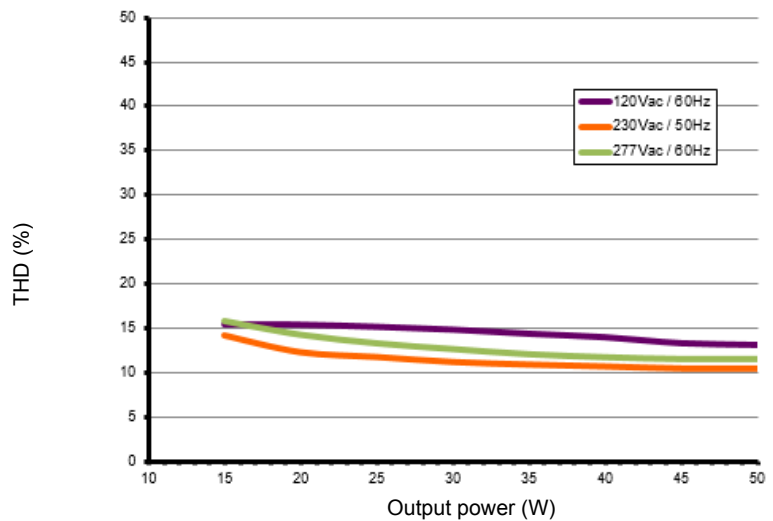

Typical flicker performance

Typical flicker percent as a function of frequency, measured across the dimming range. The results are overlaid with the low-risk (yellow) and no observable effect (green) levels as defined in IEEE P1789.

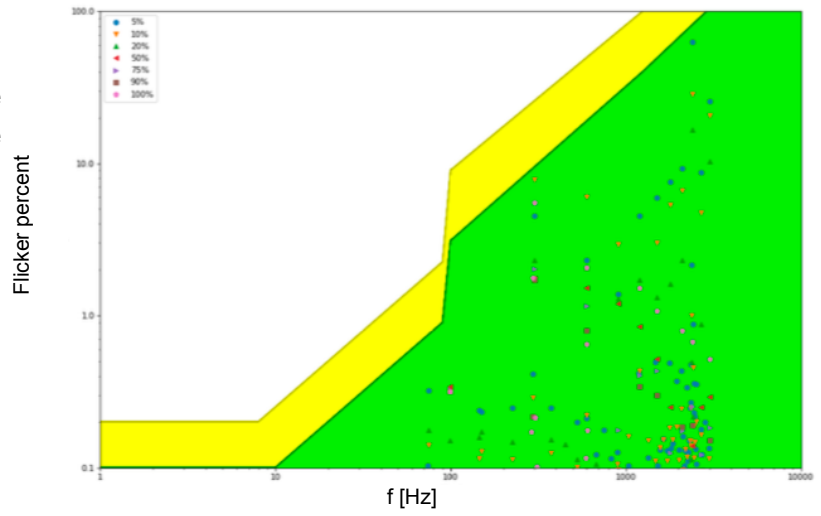

Environmental conditions


Operating ambient temperature (Ta) range -20 °C to +50 °C

Maximum operating case temperature (Tc max) 75 °C

Acoustic noise – steady state <24dBA (Class A)

Lifetime 50,000 hours at a maximum case temperature (Tc) of 75 °C

Tc point location

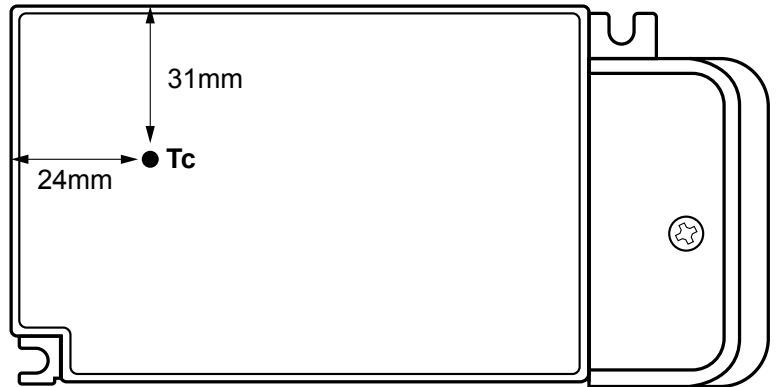


LED driver protection

| | |
|--------------------------|---|
| Thermal | The LED output current is automatically decreased whenever the internal driver temperature exceeds a factory preset temperature. The LED output current is increased once the internal driver temperature drops below the preset temperature threshold. If the internal driver temperature continues to increase, despite a decrease in output current, the LED driver will eventually shut down. |
| LED output short circuit | The LED output current is cut off whenever the LED driver detects a short-circuit. The LED driver will attempt a restart every 400ms after a short-circuit is detected. |
| LED output open circuit | The LED output is turned off whenever the LED driver detects an open circuit. The LED driver will attempt a restart every 400ms after an open circuit is detected. |
| LED output overload | The driver monitors the LED output load. Whenever the output load exceeds the maximum output power rating of the LED driver, the output current is sequentially scaled down until the cumulative load drops below the maximum output power rating of the LED driver. |
| Reverse polarity | The LED driver will not yield any current if the polarity of the load on the LED output is reversed. This situation will not damage the LED driver but may damage the LED load. |

LED protection

| | |
|------------------------|---|
| Thermal protection LED | An external NTC thermistor, which is placed on a PCB near the LEDs, can be connected to the driver via the LEDcode/NTC terminals. The output current to the LEDs is then decreased by 75% whenever the NTC exceeds a maximum allowable temperature, which is specified by the user in the FluxTool software. The default NTC temperature limit is set to 70 °C. |
| Thermistor value | 47kΩ |
| Suitable thermistors | Leaded: Vishay, P/N 238164063473 Screw: Vishay, P/N NTCASCWE3473J |

LED driver mechanical details

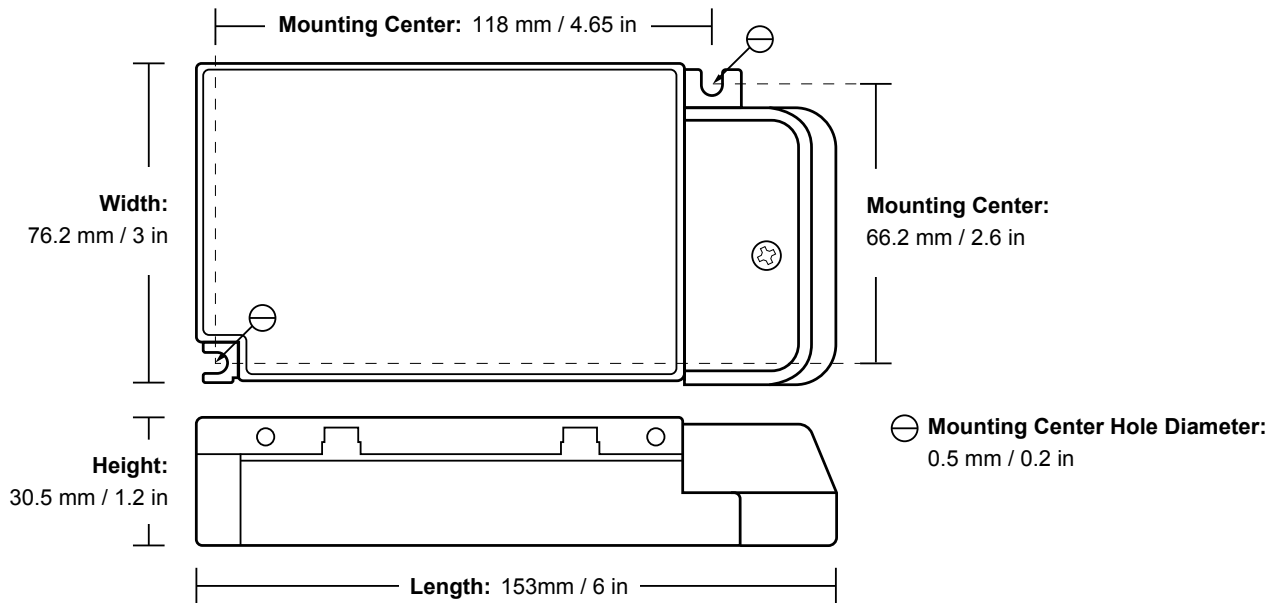


| | |
|-----------------|---------------------|
| Weight | 295 g |
| Mounting torque | Not to exceed 0.5Nm |

3D Mechanical files for this product are available on the eldoLED website.

Packaging

| | |
|-----------------------------|---|
| Length x Width x Height | 480 x 380 x 200 mm / 18.9 x 14.96 x 7.87 in |
| Weight (including products) | 15 kg |
| Products per box | 40 pcs |

Connector layout

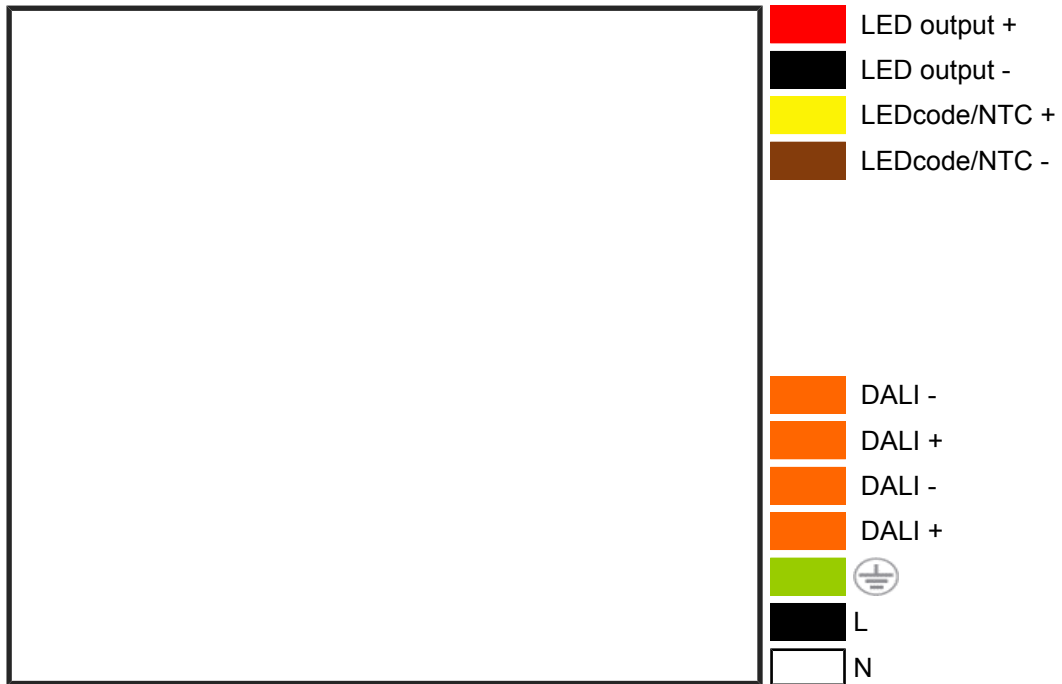

Input wiring specifications

| | |
|-------------------------------|--|
| Connector type | push-in terminals |
| Connector supplier and series | Wago 250 series |
| Wire type | solid or stranded copper |
| Wire core cross section | 0.5 - 1.5mm ² / AWG 20 – 16 |
| Wire strip length | 9.0mm (11/32in) |

Output wiring specifications

| | |
|--|--|
| Connector type | push-in terminals |
| Connector supplier and series | Wago 250 series |
| Wire type | solid or stranded copper |
| Wire core cross section | 0.5 - 1.5mm ² / AWG 20 – 16 |
| Wire strip length | 9.0mm (11/32in) |
| Maximum remote mounting distance of LED load | For independent use: 2 m / 6.5 ft For in-fixture use: AWG 20 (0.52 mm ²) - 14 m / 46 ft AWG 19 (0.65 mm ²) - 18 m / 59 ft AWG 18 (0.82 mm ²) - 22 m / 72 ft AWG 17 (1.04 mm ²) - 28 m / 92 ft AWG 16 (1.31 mm ²) - 36 m / 118 ft |

Automatic circuit breakers (MCB)

| | | | | | | | |
|-----------------|-----------------------|-----|-----|-----|-----|-----|-----|
| Maximum loading | MCB type | B10 | B13 | B16 | C10 | C13 | C16 |
| | Number of LED drivers | 14 | 18 | 22 | 14 | 18 | 22 |

RCM independent control gear classification

| | | |
|--|---|-----------------|
| Regulation AS/NZS 60598.2.2 | Applies when the control gear is built inside constructions | |
| Clearance type | Description | Distance |
| Height clearance to building element (HCB) | Minimum distance between the top of the control gear and any building element above it | 50 mm |
| Minimum insulation clearance (MIC) | Minimum distance between the top of the control gear and the building insulation above it | 50 mm |
| Side clearance to building element (SCB) | Minimum distance between the side of the control gear and any building element | 50 mm |
| Side clearance to insulation (SCI) | Minimum distance between the side of the control gear and any building insulation | 50 mm |
| RISK OF FIRE | BUILDING INSULATION MUST NOT COVER THE CONTROL GEAR | |

Standards and compliance

| | |
|-------------------------------------|--|
| UL, recognized component | UL 1310 UL 8750 (Class 2 output) |
| ENEC safety | EN 61347-1 EN 61347-2-13 (Emergency lighting) |
| ENEC performance | EN 62384 |
| Conducted emissions | EN 55015 |
| Radiated emissions | EN 55015 |
| Radio disturbance characteristics | EN 55022 |
| Harmonic current emissions | EN 61000-3-2 |
| Electromagnetic immunity | EN 61547 |
| DALI-2 | IEC 62386-101 Edition 2.0, IEC 62386-102 Edition 2.0, IEC 62386-207 Edition 1 |
| Surge protection | IEC 61000-4-5 level 3: 2kV DM, 2kV CM @ 2 Ohm |
| Surge protection | ANSI 62.41 1991 category B1: 2.5kV DM, 2.5kV CM @ 30 Ohm DALI input: 0.5 kV DM, 1 kV CM surge |
| FCC | 47 CFR Part 15 class B |
| RCM | AS/NZS 61347.1, AS/NZS 61347.2.13 |
| Restriction of hazardous substances | RoHS3 (Directives 2011/65/EU-2015/863/EU) |
| SVHC-list substances | REACH Art.33 |

Certifications



Safety



An independent control gear that can be used where normally flammable materials, including building insulation, are or may be present, but cannot be abutted against any material and cannot be covered in normal use.



FELV control terminals marked “Risk of electric shock” are not safe to touch. Dimming connected to FELV control terminal shall be insulated for Low Voltage supply of the control gear. Any terminals connected to the FELV circuit shall be protected against accidental contact.



Risk of electrical shock. May result in serious injury or death. Disconnect power before servicing or installing.



The LED driver may only be connected and installed by a qualified electrician. All applicable regulations, legislation, and building codes must be observed. Incorrect installation of the LED driver can cause irreparable damage to the LED driver and the connected LEDs.

Pay attention when connecting the LEDs: polarity reversal results in no light output and often damages the LEDs.



LED drivers are designed and intended to operate LED loads only. Powering non-LED loads may push the LED driver outside its specified design limits and is, therefore, not covered by any warranty.



eldoLED products are designed to meet the performance specifications as outlined at certain operating conditions in the data sheet. It is the responsibility of the fixture manufacturer to test and validate the design and operation of the system under expected and potential use cases, including faults.



Please observe voltage drop over long cable lengths. Longer cable lengths increase EMI susceptibility.



Product renderings and dimensional drawings are generic for the housing type. Product label, connector type and quantity may vary.

Europe, Rest of World

eldoLED B.V.
Science Park Eindhoven 5125
5692 ED Son
The Netherlands

E: info@eldoled.com
W: www.eldoled.com

North America

eldoLED America
One Lithonia Way
Conyers, GA 30012
USA

E: info@eldoled.com
W: www.eldoled.com
