

Future Technology Devices International Ltd.

DS_FT311D_Development_Module: UMFT311EV (USB Android Host Module)

The FT311D Development Module is a development module which utilises the FT311D IC to develop USB accessories connecting to Android platforms via Android Open Accessory mode. It is a Full Speed USB host specifically targeted at providing access to peripheral hardware from an Android platform with a USB device port. The FT311D IC will bridge the USB port to any one of the six user selectable interface types like GPIO, UART, PWM, I2C Master, SPI Master, SPI Slave and has the following advanced features:



- Based on single chip USB Android Host FT311D IC.
- Entire USB protocol handled on the chip.
- Any one of the six user selectable interface types:- GPIO, UART, PWM, I2C Master, SPI Master, SPI Slave Interface options selectable via 3 mode select pins.
- 7 GPIO lines interface option
- USB error indicator pin
- Basic UART interface with RXD, TXD, RTS, CTS, TX_ACTIVE pins option.
- 4 PWM channels option.
- I²C Master interface option.
- SPI Slave interface option supporting modes 0, 1, 2 and 3 with MSB/LSB options
- SPI Master interface option supporting modes 0, 1, 2 and 3 with MSB/LSB options.
- Suitable for use on any Android platform supporting Android Open Accessory Mode (Typically 3.1 onwards, however some platforms may port Open Accessory Mode to version 2.3.4)
- 12MHz external crystal.
- Standard USB Host connector to connect with Android USB Slave device.
- +5V Single Supply Operation.
- USB 2.0 Full Speed compatible.
- Extended operating temperature range; -40 to +85°C.
- Board dimensions: 68.58mm x 55.38mm x 14.00mm (L x W x H).
- Reduce development time.
- Rapid integration into existing systems.

Neither the whole nor any part of the information contained in, or the product described in this manual, may be adapted or reproduced in any material or electronic form without the prior written consent of the copyright holder. This product and its documentation are supplied on an as-is basis and no warranty as to their suitability for any particular purpose is either made or implied. Future Technology Devices International Ltd will not accept any claim for damages howsoever arising as a result of use or failure of this product. Your statutory rights are not affected. This product or any variant of it is not intended for use in any medical appliance, device or system in which the failure of the product might reasonably be expected to result in personal injury. This document provides preliminary information that may be subject to change without notice. No freedom to use patents or other intellectual property rights is implied by the publication of this document. Future Technology Devices International Ltd, Unit 1, 2 Seaward Place, Centurion Business Park, Glasgow G41 1HH United Kingdom. Scotland Registered Company Number: SC136640

1 Typical Applications

- Connecting Android phones to USB accessories
- Connecting Android tablets to USB accessories
- Controlling instrumentation from Android devices.
- Home automation via Android devices
- Data logging from USB accessories
- Connecting printing devices to Android devices

1.1 Part Numbers

Part Number	Description
UMFT311EV	Development module for FT311D

Table 1.1 : Part Numbers

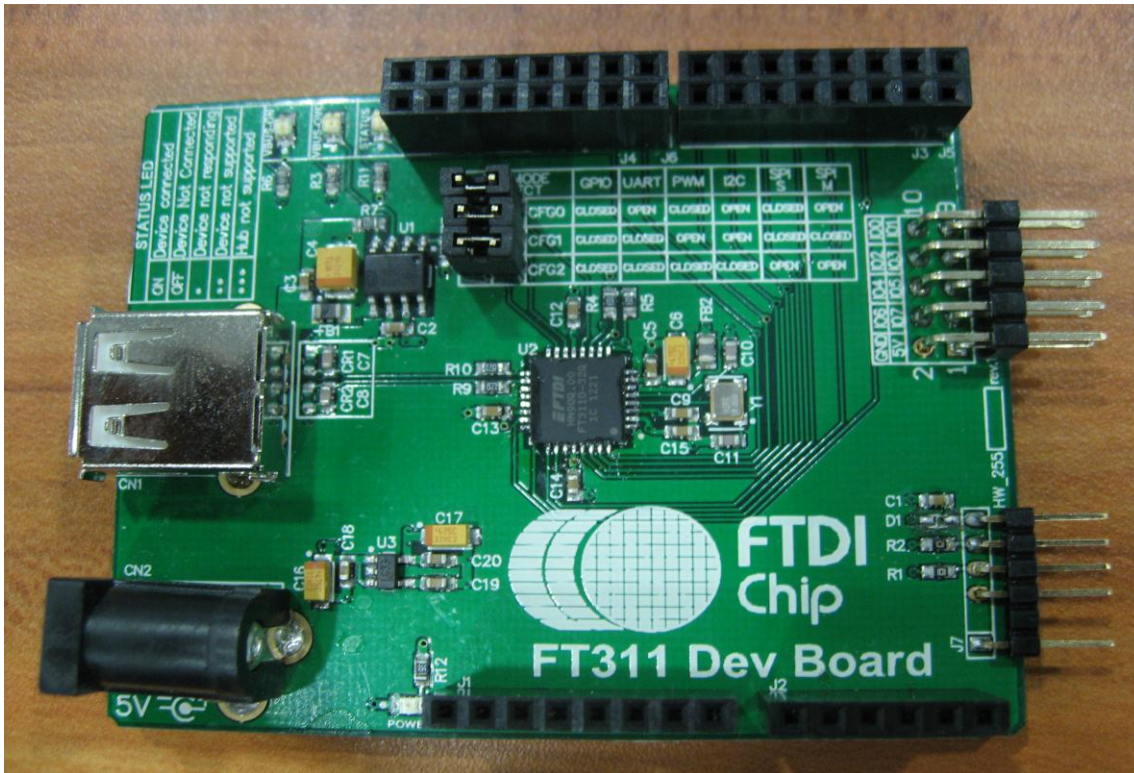


Figure 1.1 : FT311D Development Module: UMFT311EV

2 FT311D Development Module Block Diagram

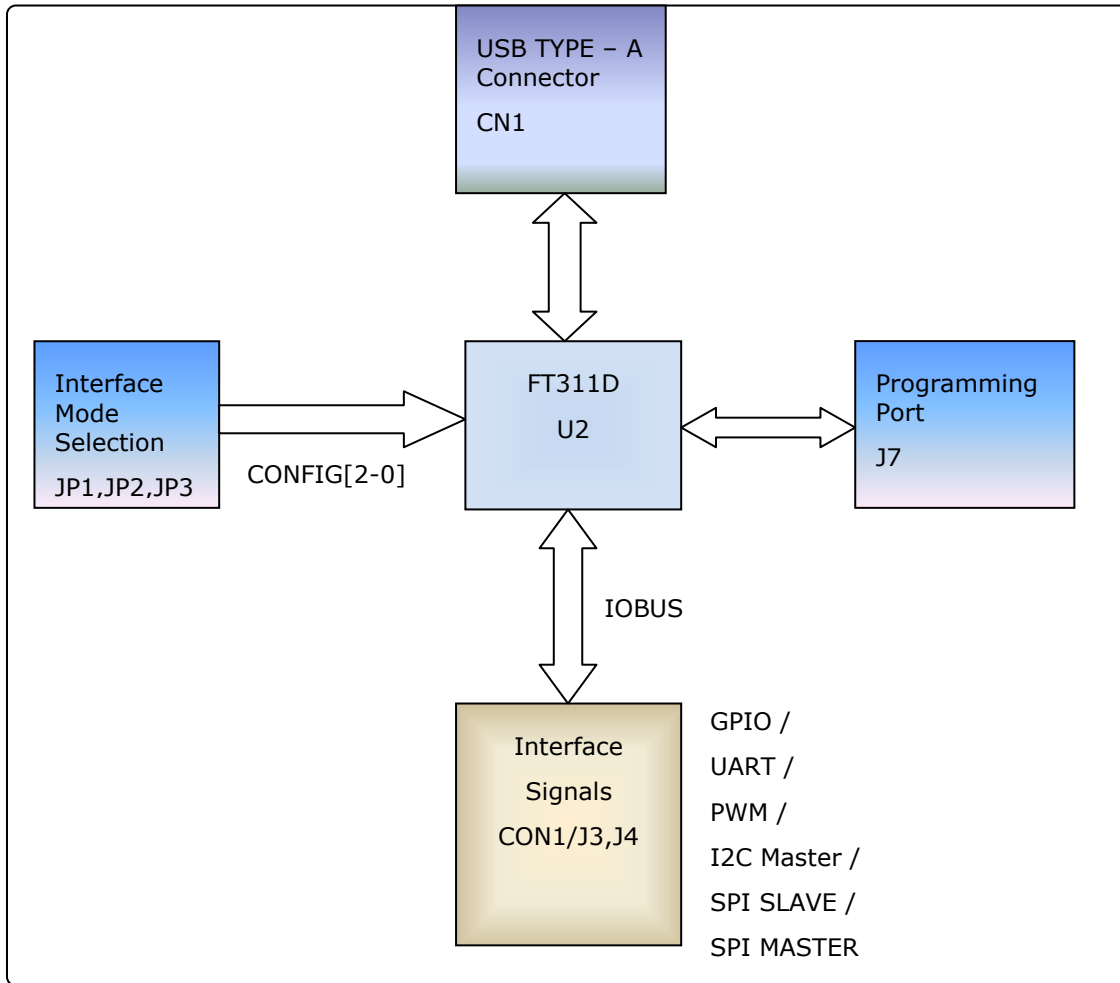


Figure 2.1 : FT311D Development Module Block Diagram

For a description of each function please refer to Section 3.

Table of Contents

1	Typical Applications.....	2
1.1	Part Numbers.....	2
2	FT311D Development Module Block Diagram	3
3	Function Description.....	5
3.1	Key Features.....	5
3.2	Functional Block Descriptions	5
3.2.1	FT311D Development Module Layout.....	6
4	Detailed Description of Interface.....	7
4.1	Interface Mode selection	7
4.1.1	GPIO Mode	7
4.1.2	UART Mode	8
4.1.3	PWM Mode	8
4.1.4	I2C Master Mode	9
4.1.5	SPI Slave.....	9
4.1.6	SPI Master	9
5	Schematics	10
6	Absolute Maximum Ratings	11
7	Contact Information	12
	Appendix A – References	13
	Appendix B - List of Figures and Tables	14
	Appendix C - Revision History.....	15

3 Function Description

The FT311D Development Module is intended for use as a hardware platform to enable easy evaluation of FTDI's FT311D Android Open Accessory USB Host controller. The FT311D Development Module includes all the necessary components required by a user to begin developing Android Open Accessory applications based on the FT311D device. The FT311D Development Module behaves like a bridge between an Android device and the various I/O available. Selection of various modes is performed using CONFIG[2:0] pins as shown in the Table 4.2.

3.1 Key Features

Easy to use Android Open Accessory Module translating the USB Device port of the android tablet into any one of the six selectable interfaces like GPIO, UART, PWM, I²C Master, SPI Slave or SPI Master.

- Selection of interface mode using jumpers JP1, JP2 and JP3
- USB Type-A connector CN1 for connecting to Android USB slave peripherals.
- IO port connectors CON1 / J3 and J4 used for the interface signals based on the selected interface mode.

3.2 Functional Block Descriptions

The following paragraphs describe each function within the FT311D Development Module. Please refer to the block diagram shown in Error! Reference source not found. Error! Reference source not found. **Error! Reference source not found..**

Interface Mode Selection

Interface Mode selection is done using CONFIG[2:0] pins. Refer to chapter 4 for the details.

USB Host

USB Host port at CN1 is used for connecting the Android Open Accessory device. The USB host port does not support other USB device classes.

Interface Signals

The interface signals at CON1 are based on the mode selected by the Interface Mode Selection.

Programming Port

The Programming Port at J7 is used for re-programming the FT311D device with new ROM file.

(NOTE: This is unlikely to be required as the module is delivered ready to use).

3.2.1 FT311D Development Module Layout

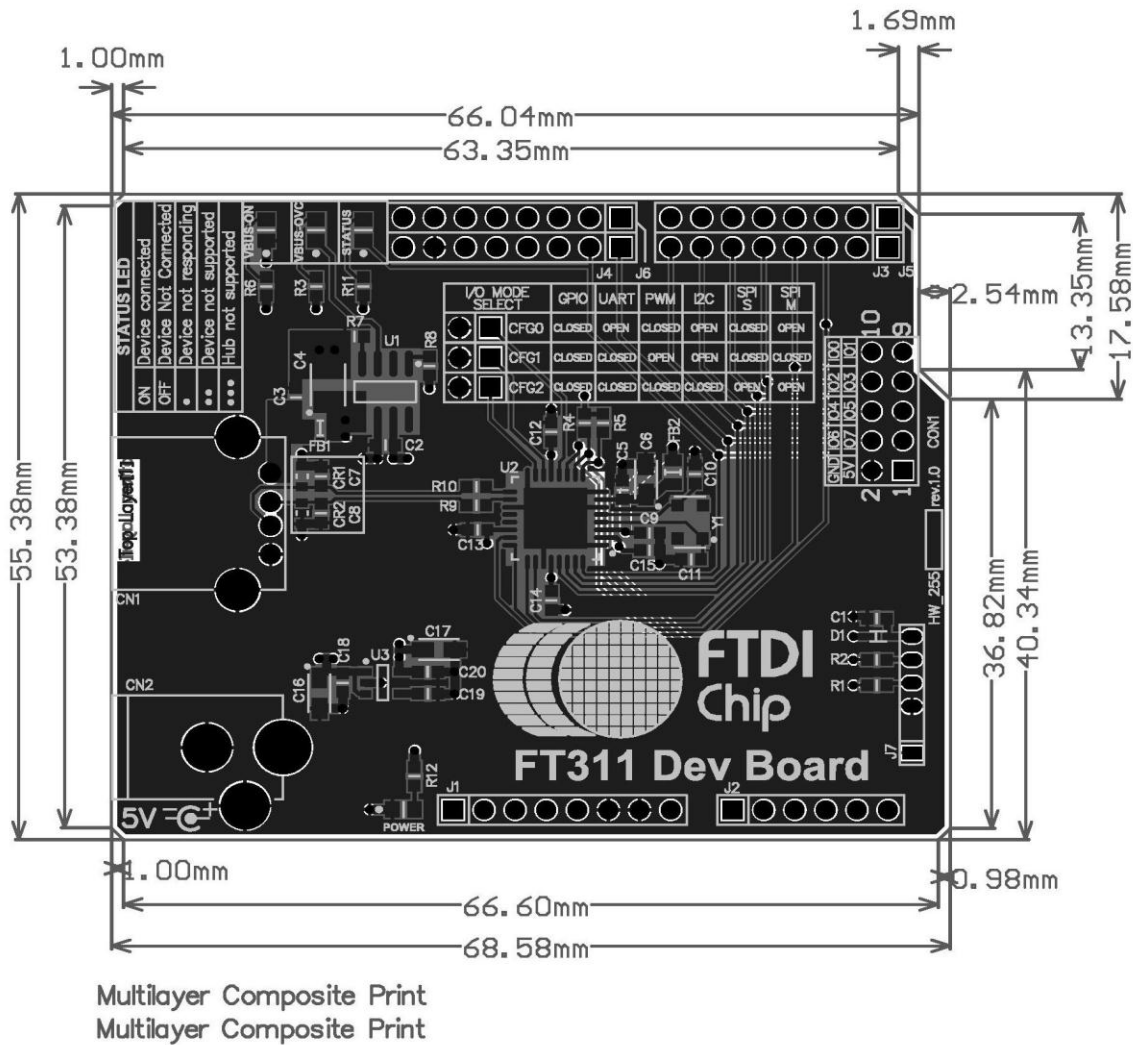


Figure 3.1 : FT311D Development Module Layout

Note: This is not compatible with Vinco electrically. The placement of the the pin headers are similar to the Vinco headers.

4 Detailed Description of Interface

The defined operation of the FT311D IC is configured using 3 GPIO pins, as shown in the table 4.1. These GPIO pins define the interface mode required which in turn defines the IO signalling available on the module connector CON1. This information is available in the [FT311D Datasheet](#)

Signal Name	Jumper selection	FT311D pin Number	I/O Type	Description
CONFIG2	JP1	15	Input	Configuration input 2
CONFIG1	JP2	14	Input	Configuration input 1
CONFIG0	JP3	12	Input	Configuration input 0

Table 4.1 : Pins used in interface mode selection

CONFIG2 or CONFIG1 or CONFIG0 is at logic 1 when the corresponding jumper is not present and at logic 0 when the corresponding jumper is present.

4.1 Interface Mode selection

The interface mode selection is done using the CONFIG[2-0] pins. The CONFIG[2:0] pins have to be set at this value before the chip is powered on.

Interface Mode	Selection of Interface Mode		
	CONFIG2	CONFIG1	CONFIG0
GPIO	0	0	0
UART	0	0	1
PWM	0	1	0
I2C Master	0	1	1
SPI Slave	1	0	0
SPI Master	1	0	1

Table 4.2 : Selection of Mode

4.1.1 GPIO Mode

In the GPIO mode the GPIO signals are available at the connector CON1, J3 and J4 as shown in the table 4.3 below.

Signal Name	Connector CON1	Connector J3, J4	FT311D pin Number	I/O Type	Description
GPIO(0)	CON1 -10	J3-3	23	IO	GPIO data bit 0, bidirectional
GPIO(1)	CON1 -9	J3-4	24	IO	GPIO data bit 1, bidirectional
GPIO(2)	CON1 -8	J3-5	25	IO	GPIO data bit 2, bidirectional

GPIO(3)	CON1 -7	J3-6	26	IO	GPIO data bit 3, bidirectional
GPIO(4)	CON1 -6	J3-7	29	IO	GPIO data bit 4, bidirectional
GPIO(5)	CON1 -5	J3-8	30	IO	GPIO data bit 5, bidirectional
GPIO(6)	CON1 -4	J4-1	31	IO	GPIO data bit 6, bidirectional

Table 4.3 : GPIO mode

4.1.2 UART Mode

In the UART mode the UART signals are available at the connector CON1 and J3 as shown in the table 4.4 below.

Signal Name	Connector CON1	Connector J3	FT311D pin Number	I/O Type	Description
UART_TXD	CON1 -10	J3-3	23	Output	Transmit data
UART_RXD	CON1 -9	J3-4	24	Input	Receive data
UART_RTS#	CON1 -8	J3-5	25	Output	Request to Send Control Output / Handshake signal.
UART_CTS#	CON1 -7	J3-6	26	Input	Clear to Send Input / Handshake signal.
UART_TX_ACTIVE	CON1 -6	J3-7	29	Output	Enable transmit data for RS485 designs

Table 4.4 : UART mode

Note: # - Denotes active low signal

4.1.3 PWM Mode

In the PWM mode the PWM signals are available at the connector CON1 and J3 as shown in the table 4.5 below.

Signal Name	Connector CON1	Connector J3	FT311D pin Number	I/O Type	Description
PWM(0)	CON1 -10	J3-3	23	Output	PWM channel 0
PWM(1)	CON1 -9	J3-4	24	Output	PWM channel 1
PWM(2)	CON1 -8	J3-5	25	Output	PWM channel 2
PWM(3)	CON1 -7	J3-6	26	Output	PWM channel 3

Table 4.5 : PWM mode

4.1.4 I2C Master Mode

In the I2C Master mode the I2C Master signals are available at the connector CON1 and J3 as shown in the table 4.6 below.

Signal Name	Connector CON1	Connector J3	FT311D pin Number	I/O Type	Description
I2C_CLK	CON1 -10	J3-3	23	Output	I2C clock
I2C_DATA	CON1 -9	J3-4	24	IO	I2C Data

Table 4.6 : I2C Master mode

4.1.5 SPI Slave

In the SPI Slave mode the SPI Slave signals are available at the connector CON1, J3 and J4 as shown in the table 4.7 below.

Signal Name	Connector CON1	Connector J3, J4	FT311D pin Number	I/O Type	Description
SPI_S_SS#	CON1 -7	J3-6	26	Input	SPI slave chip select
SPI_S_CLK	CON1 -6	J3-7	29	Input	SPI CLK Input
SPI_S_MOSI	CON1 -5	J3-8	30	Input	SPI Master out slave in
SPI_S_MISO	CON1 -4	J4-1	31	Output	SPI Master in slave out

Table 4.7 : SPI Slave mode

Note: # - Denotes active low signal

4.1.6 SPI Master

In the SPI Master mode the SPI Master signals are available at the connector CON1, J3 and J4 as shown in the table 4.8 below.

Signal Name	Connector CON1	Connector J3, J4	FT311D pin Number	I/O Type	Description
SPI_M_SS#	CON1 -7	J3-6	26	Output	SPI slave chip select
SPI_M_CLK	CON1 -6	J3-7	29	Output	SPI CLK Output
SPI_M_MOSI	CON1 -5	J3-8	30	Output	SPI Master out slave in
SPI_M_MISO	CON1 -4	J4-1	31	Input	SPI Master in slave out

Table 4.8 : SPI Master mode

Note: # - Denotes active low signal

5 Schematics

Schematic for the FT311D Development Module is shown in the figure below.

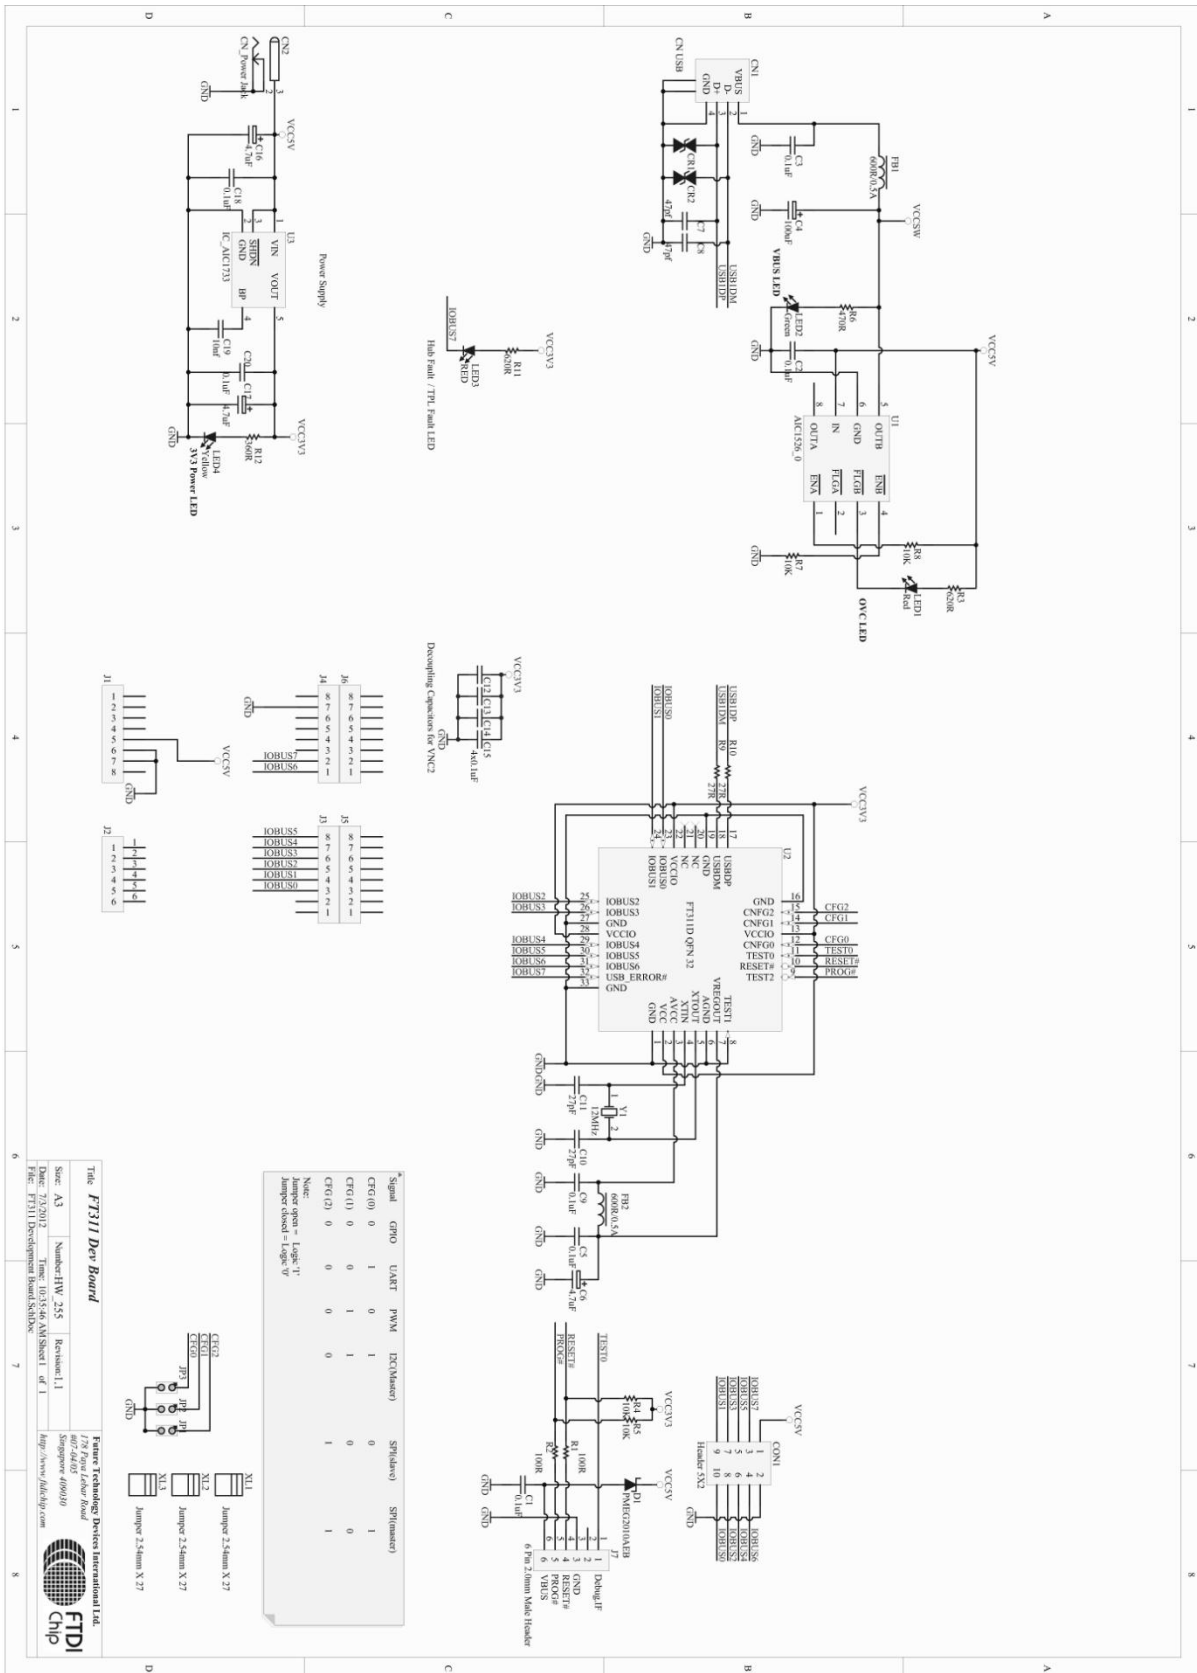


Figure 5.1 : FT311D Development Module Schematics

6 Absolute Maximum Ratings

The absolute maximum ratings for FT311D Development Module are shown in

Parameter	Value	Unit
Storage Temperature	-65°C to 150°C	Degrees C
Ambient Temperature (Power Applied)	-40°C to 80°C	Degrees C.
Recommended Operating Temperature	0°C to 55°C	Degrees C.
Vcc Supply Voltage	0 to +5.25	V
DC Input Voltage - All other Inputs	-0.5 to +3.3	V

. These are in accordance with the Absolute Maximum Rating System (IEC 60134). Exceeding these may cause permanent damage to the device.

Parameter	Value	Unit
Storage Temperature	-65°C to 150°C	Degrees C
Ambient Temperature (Power Applied)	-40°C to 80°C	Degrees C.
Recommended Operating Temperature	0°C to 55°C	Degrees C.
Vcc Supply Voltage	0 to +5.25	V
DC Input Voltage - All other Inputs	-0.5 to +3.3	V

Table 6.1 : Absolute Maximum Ratings

7 Contact Information

Head Office – Glasgow, UK

Future Technology Devices International Limited
Unit 1, 2 Seaward Place, Centurion Business Park
Glasgow G41 1HH
United Kingdom
Tel: +44 (0) 141 429 2777
Fax: +44 (0) 141 429 2758

E-mail (Sales) sales1@ftdichip.com
E-mail (Support) support1@ftdichip.com
E-mail (General Enquiries) admin1@ftdichip.com

Branch Office – Hillsboro, Oregon, USA

Future Technology Devices International Limited
(USA)
7235 NW Evergreen Parkway, Suite 600
Hillsboro, OR 97123-5803
USA
Tel: +1 (503) 547 0988
Fax: +1 (503) 547 0987

E-Mail (Sales) us.sales@ftdichip.com
E-Mail (Support) us.support@ftdichip.com
E-Mail (General Enquiries) us.admin@ftdichip.com

Branch Office – Taipei, Taiwan

Future Technology Devices International Limited
(Taiwan)
2F, No. 516, Sec. 1, NeiHu Road
Taipei 114
Taiwan, R.O.C.
Tel: +886 (0) 2 8791 3570
Fax: +886 (0) 2 8791 3576

E-mail (Sales) asia.sales1@ftdichip.com
E-mail (Support) asia.support1@ftdichip.com
E-mail (General Enquiries) asia.admin1@ftdichip.com

Branch Office – Shanghai, China

Future Technology Devices International Limited
(China)
Room 1103, No. 666,
West Huaihai Road,
Shanghai, 200052
China
Tel: +86 21 62351596
Fax: +86 21 62351595

E-mail (Sales) cn.sales@ftdichip.com
E-mail (Support) cn.support@ftdichip.com
E-mail (General Enquiries) cn.admin@ftdichip.com

Web Site

<http://ftdichip.com>

System and equipment manufacturers and designers are responsible to ensure that their systems, and any Future Technology Devices International Ltd (FTDI) devices incorporated in their systems, meet all applicable safety, regulatory and system-level performance requirements. All application-related information in this document (including application descriptions, suggested FTDI devices and other materials) is provided for reference only. While FTDI has taken care to assure it is accurate, this information is subject to customer confirmation, and FTDI disclaims all liability for system designs and for any applications assistance provided by FTDI. Use of FTDI devices in life support and/or safety applications is entirely at the user's risk, and the user agrees to defend, indemnify and hold harmless FTDI from any and all damages, claims, suits or expense resulting from such use. This document is subject to change without notice. No freedom to use patents or other intellectual property rights is implied by the publication of this document. Neither the whole nor any part of the information contained in, or the product described in this document, may be adapted or reproduced in any material or electronic form without the prior written consent of the copyright holder. Future Technology Devices International Ltd, Unit 1, 2 Seaward Place, Centurion Business Park, Glasgow G41 1HH, United Kingdom. Scotland Registered Company Number: SC136640



Appendix A – References

Useful Application Notes

[FT311D Datasheet](#)

Appendix B - List of Figures and Tables

List of Figures

Figure 1.1 : FT311D Development Module.....	2
Figure 2.1 : FT311D Development Module Block Diagram	3
Figure 3.1 : FT311D Development Module Layout	6
Figure 5.1 : FT311D Development Module Schematics.....	10

List of Tables

Table 1.1 : Part Numbers.....	2
Table 4.1 : Pins used in interface mode selection	7
Table 4.2 : Selection of Mode	7
Table 4.3 : GPIO mode	8
Table 4.4 : UART mode	8
Table 4.5 : PWM mode	8
Table 4.6 : I2C Master mode.....	9
Table 4.7 : SPI Slave mode.....	9
Table 4.8 : SPI Master mode	9
Table 6.1 : Absolute Maximum Ratings.....	11

Appendix C - Revision History

Document Title: DS_UMFT311EV
Document Reference No.: FT_000689
Clearance No.: FTDI# 303
Product Page: <http://www.ftdichip.com/FTProducts.htm>
Document Feedback: [Send Feedback](#)

Version 1.0 Initial Release

July 2012



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FTDI:](#)

[UMFT311EV](#)