


INSTRUCTION MANUAL

POCKET AUTORANGING DMM

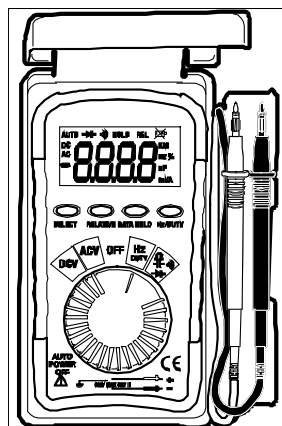

Safety

International Safety Symbols



This symbol, adjacent to another symbol or terminal, indicates the user must refer to the manual for further information.



This symbol, adjacent to a terminal, indicates that, under normal use, hazardous voltages may be present.



Double insulation

Safety Precautions

1. Improper use of this meter can cause damage, shock, injury or death. Read and understand this users manual before operating the meter.
2. Make sure any covers or battery doors are properly closed and secured.
3. Always disconnect the test leads from any voltage source before replacing the battery or fuses.
4. Do not exceed the maximum rated input limits.
5. Use great care when making measurements if the voltages are greater than 25VAC rms or 35VDC. These voltages are considered a shock hazard.
6. Always discharge capacitors and remove power from the device under test before performing Capacitance, Diode, Resistance or Continuity tests.
7. Remove the battery from the meter if the meter is to be stored for long periods.

Specifications


Electrical Specifications

Function	Range	Accuracy
DC Voltage	400.0mV	±(0.7% rdg + 3d)
	4.000V, 40.00V,	±(1.0% rdg + 3d)
	400.0V, 500V	±(1.3% rdg + 3d)
AC Voltage 40-60Hz	4.000V, 40.00V	±(1.0% rdg + 10d)
	400.0V, 500V	±(2.3% rdg + 5d)
Resistance	400.0Ω, 4.000kΩ, 40.00kΩ, 400.0kΩ	±(2.0% rdg + 5d)
	4.000MΩ	±(5.0% rdg + 5d)
	40.00MΩ	±(10.0% rdg + 5d)
Capacitance	4.000nF	±(5.0% rdg + 30d)
	40.00nF	
	400.0nF	±(3.0% rdg + 15d)
	4.000μF, 40.00μF, 200.0μF	±(10.0% rdg + 15d)
Frequency	5.000Hz, 50.00Hz, 5000.0Hz, 5.000kHz, 50.00kHz, 500.0kHz, 10MHz	±(2.0% rdg + 5d)
Duty Cycle	0.1-99%	

Description

Meter Description

1. 3 3/4 Digit (4000 count)
2. RELATIVE button
3. SELECT button
4. DATA HOLD button
5. Hz/DUTY button
6. Function switch
7. Plastic case
8. Test leads

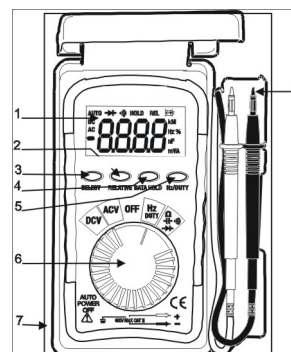

Max input voltage 500V AC/DC

Input Sensitivity, 10Vrms min. <9.999KHz

(Frequency Ranges) 40Vrms min. >99.99KHz

Diode Test Test current 1mA max., open circuit voltage of 1.5V typical

Continuity Check Audible signal if the resistance is < 60Ω

Display 4000 count 3 3/4 digit LCD

Over range indication LCD displays "OL"

Polarity Minus (-) sign for negative polarity.

Low Battery Indication "BAT" symbol indicates low battery condition.

Battery CR2032 3V Lithium

Operating Temperature 32°F to 104°F (0°C to 40°C)

Storage Temperature 14°F to 122°F (-10°C to 50°C)

Weight 1.7oz (50g)

Size 4.25x2.2x.5" (108x56x11.5mm)

Standard IEC1010 CAT II 500V Pollution degree II, CE Approved

