



LA6242H — Monolithic Linear IC Four-Channel Bridge Driver for CD Player

Overview

The LA6242H is a four-channel motor driver IC for home and car CD players. It provides a pin for switching the channel 1 input.

Functions and Features

- Four bridge-connected (BTL) power amplifier circuits
- I_O max: 1 A
- Built-in level shifter circuits
- Muting circuit (on/off control for all outputs)
- High output voltage (dynamic range): 6.5 V (typical, channel 1 only)
- Built-in input operational amplifier (channel 1 only)
- Channel 1 input operational amplifier switching function
- Built-in regulator that uses an external PNP transistor and is set by the value of an external resistor.

Specifications

Maximum Ratings at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Supply voltage	V_{CC_S}	*1	14	V
	VCCP	VCCP1, VCCP2	*1	14
Allowable power dissipation	Pdmax	Independent IC	0.8	W
		Mounted on the specified PCB (114.3 × 76.1 × 1.6 mm, glass epoxy)	1.8	W
Maximum input voltage	VINB		13	V
Maximum output current	I_O max	Each output	1	A
MUTE pin voltage	VMUTE		13	V
Operating temperature	T_{opr}		-30 to +85	$^\circ\text{C}$
Storage temperature	T_{stg}		-55 to +150	$^\circ\text{C}$

Note *1: All of the power supply pins, V_{CC_S} , VCCP1, and VCCP2, must be connected to the power supply system externally to the IC.

Recommended Operating Conditions at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Supply voltage	V_{CC}		5 to 13	V

- Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.
- SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

LA6242H

Electrical Characteristics

(Unless specified otherwise, the conditions are $V_{CC_S} = V_{CCP1} = V_{CCP2} = 8\text{ V}$, $V_{REF} = 2.5\text{ V}$, $MUTE = 5\text{ V}$, $T_a = 25^\circ\text{C}$.)

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
[Overall]						
Quiescent current 1	I_{CC-ON}	All channel outputs on, MUTE pin: high		30	45	mA
Quiescent current 2	I_{CC-OFF}	All channel outputs off, MUTE pin: low		5	10	mA
Muting function on voltage	$V_{MUTE-ON}$	MUTE *1	2			V
Muting function off voltage	$V_{MUTE-OFF}$	MUTE *1			0.5	V
[BTL Amplifier] (Channel 1) (Output Amplifier Block)						
Input amplifier offset voltage	V_{OFF_OP-AMP}	Channel 1, input operational amplifiers A and B	-50		+50	mV
Output voltage	V_{O1}	$R_L = 8\ \Omega$ *2	6.2	6.5		V
I/O gain	V_{G1}	*3	5.4	6	6.6	Multiplier
Slew rate	$SR1$	With the amplifier operating independently, twice the value measured between outputs *4		0.5		V/ μ s
[Input Operational Amplifier]						
Output offset voltage	V_{OFF1}	Input operational amplifiers A and B	-10		+10	mV
OP-AMP_SINK	OP_SINK	Input operational amplifier sink current	2			mA
OP-AMP_SOURCE	OP_SOURCE	Input operational amplifier source current	300	500		μ A
[Input Operational Amplifier Switching]						
Input amplifier switching voltage 1	V_{IN1-SW}	Channel 1, with input operational amplifier B selected *5			0.5	V
Input amplifier switching voltage 2	V_{IN1-SW}	Channel 1, with input operational amplifier A selected *5	2			V
[BTL Amplifier] (Channels 2 to 4) (Output Amplifier Block)						
Output offset voltage	V_{OFF2}	Between the + and - outputs for each channel	-50		+50	mV
Output voltage	V_{O2}	$R_L = 8\ \Omega$, between the + and - outputs for each channel *2	5	5.4		V
I/O gain	V_{G2}		5.4	6	6.6	Multiplier
Slew rate	$SR2$	Amplifier independently, twice the value measured between outputs *4		0.5		V/ μ s
[Regulator Voltage]						
VREG output voltage	V_{REG}	*6	1.21	1.26	1.31	V
REG-IN sink current	$REG-IN-SINK$	The base current of the external PNP transistor	5	10		mA
Line regulation	ΔV_{OLN}	$6\text{ V} \leq V_{CC} \leq 12\text{ V}$, $I_O = 200\text{ mA}$		20	150	mV
Load regulation	ΔV_{OLD}	$5\text{ mA} \leq I_O \leq 200\text{ mA}$		50	200	mV

Note *1: When the MUTE pin is high, the outputs will be on, and when low, the outputs will be off. (In the amplifier output off state, the outputs are in the high-impedance state.) This operation applies to all channels.

*2: The voltage across the load terminals when an $8\ \Omega$ load is connected across the outputs. With the input either high or low. With the output in the saturated state.

*3: The channel 1 input operational amplifier has a 0 dB gain, i.e. it is a buffer amplifier.

*4: Design guarantee value



*5: When V_{IN1-SW} is high, operational amplifier A operates, and when low, operational amplifier B operates.

*6: For testing, short the REGOUT to the collector of the external pnp transistor.

LA6242H

Package Dimensions

unit: mm
3234B

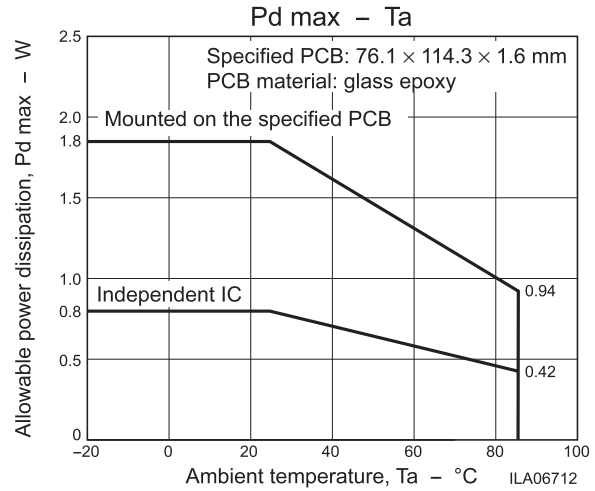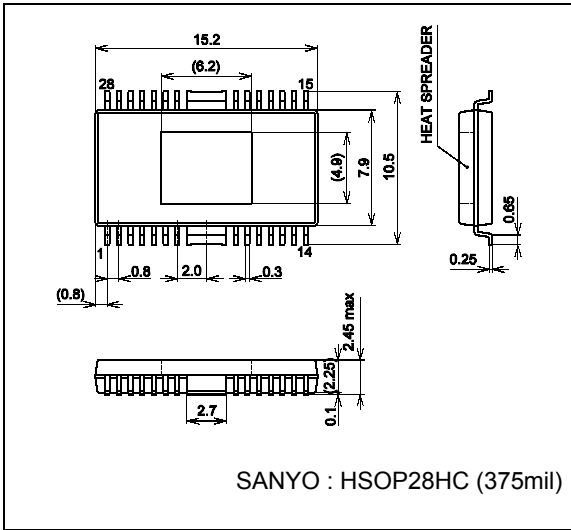

Pin Functions

Pin No.	Symbol	Pin description
1	V _{IN1-A}	Channel 1 input amplifier A inverting input
2	V _{IN1+A}	Channel 1 input amplifier A noninverting input
3	V _{CCP1}	Channels 1 and 2: power stage power supply
4	V _{O1+}	Channel 1 output (+)
5	V _{O1-}	Channel 1 output (-)
6	V _{O2+}	Channel 2 output (+)
7	V _{O2-}	Channel 2 output (-)
8	V _{O3+}	Channel 3 output (+)
9	V _{O3-}	Channel 3 output (-)
10	V _{O4+}	Channel 4 output (+)
11	V _{O4-}	Channel 4 output (-)
12	V _{CCP2}	Channels 3 and 4: power stage power supply
13	V _{IN4}	Channel 4 input
14	V _{IN4G}	Channel 4 input (gain adjustment)
15	V _{IN3}	Channel 3 input
16	V _{IN3G}	Channel 3 input (gain adjustment)
17	V _{IN2}	Channel 2 input
18	V _{IN2G}	Channel 2 input (gain adjustment)
19	REGIN	Base connection of external PNP transistor
20	REGOUT	Regulator error amplifier input (+)
21	V _{CC-S}	Signal system power supply
22	VREFIN	Reference voltage input
23	MUTE	Output on/off control
24	V _{IN1-SW}	Channel 1 input operational amplifier switching
25	S_GND	Signal system ground
26	V _{IN1+B}	Channel 1 amplifier B noninverting input
27	V _{IN1-B}	Channel 1 amplifier B inverting input
28	V _{IN1}	Channel 1 input and input operational amplifier output

- Note:
- The center frame (FR) is used as the power system ground (P-GND). Along with the signal system ground (S-GND), this level must be the lowest potential in the system.
 - The V_{CC-S} (signal system power supply), V_{CCP1}, and V_{CCP2} (output stage power supplies) must be shorted together externally.

LA6242H

Pin Functions

Pin No.	Pin name	Symbol	Pin description	Equivalent circuit
1 2 26 27 28	Input (channel 1)	V_{IN1-A} V_{IN1+A} V_{IN1+B} V_{IN1-B} V_{IN1}	Inputs The total gain is set by setting the gain of the input amplifier.	
4 5	Output (channel 1)	V_{O1+} V_{O1-}	Channel 1 output	
6 7 8 9 10 11	Output (channels 2 to 4)	V_{O2+} V_{O2-} V_{O3+} V_{O3-} V_{O4+} V_{O4-}	Channel 2 to 4 outputs	
23	MUTE	MUTE	Controls the on/off states of the corresponding channel output. MUTE = high: Output on MUTE = low: Output off *: When the MUTE pin is open, the outputs will be off. (The same as when the MUTE pin is low.)	
24	Channel 1 input amplifier switching	V_{IN1-SW}	Channel 1 input operational amplifier switching function. Either amplifier A or amplifier B is selected according to the voltage applied to the V_{IN1-SW} pin. High: V_{IN_A} Low: V_{IN_B}	

Continued on next page.

LA6242H

Continued from preceding page.

Pin No.	Pin name	Symbol	Pin description	Equivalent circuit
17 18 15 16 13 14	Input (channels 2 to 4)	V_{IN2} V_{IN2G} V_{IN3} V_{IN3G} V_{IN4} V_{IN4G}	Inputs	
22	VREF	VREFIN	Reference voltage	
19 20	REG	REGIN REGOUT	Regulator block	

MUTE, V_{IN}1-SW


- Relationship between the MUTE pin and the outputs

MUTE	Outputs			
	CH1	CH2	CH3	CH4
H	on			
L	off			

Note *1: When the outputs are off, they are in the high-impedance state.
 *2: The muting function applies to all channels.

- V_{IN}1-SW and the channel 1 input operational amplifier


V _{IN} 1_SW	Channel 1 input operational amplifier
H	AMP_A
L	AMP_B

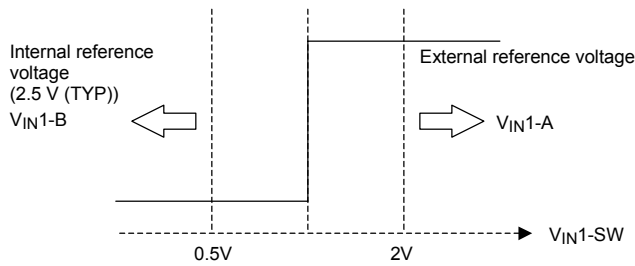

- Muting

MUTE	Output amplifiers
L	off
H	on


Overview of the input/output relationship

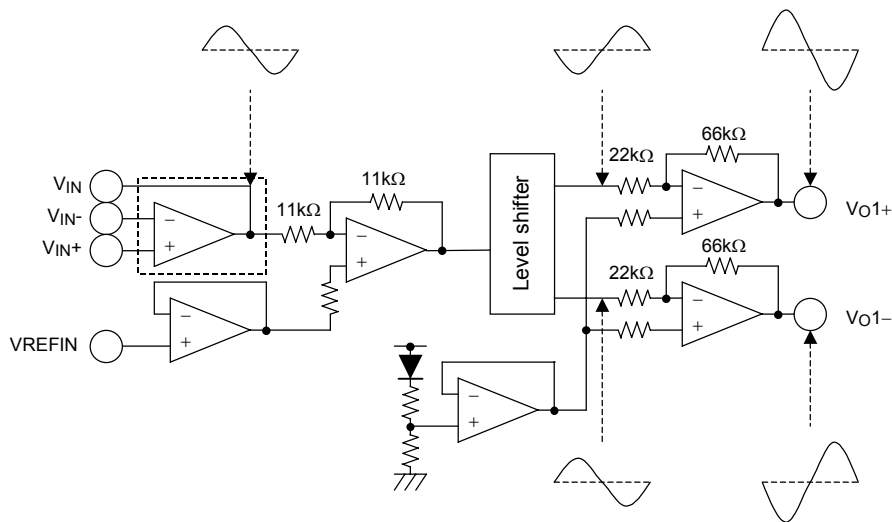

Note *: Only channel 1 has an added input operational amplifier.


LA6242H

Block Diagram

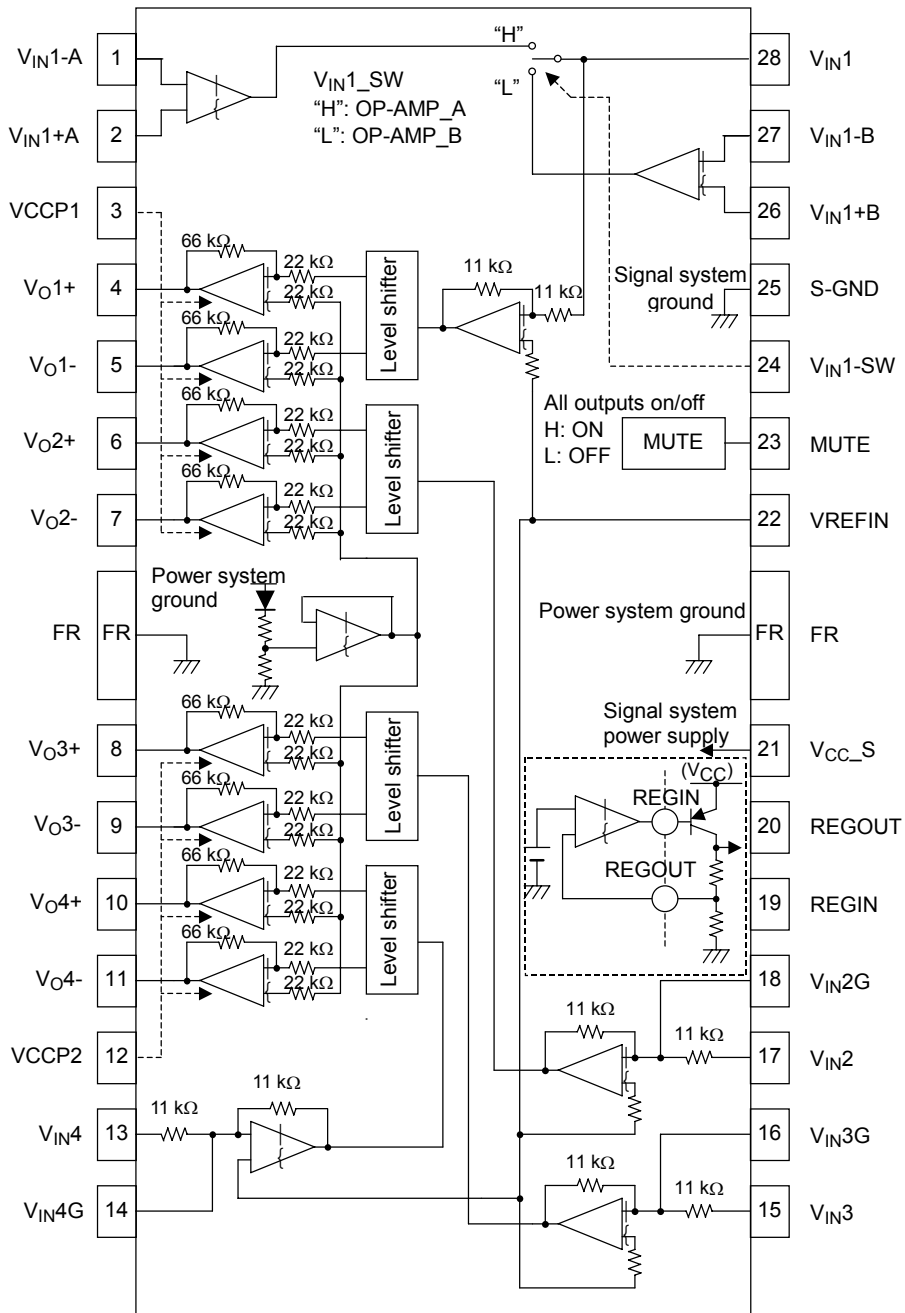

LA6242H

Sample Application Circuit

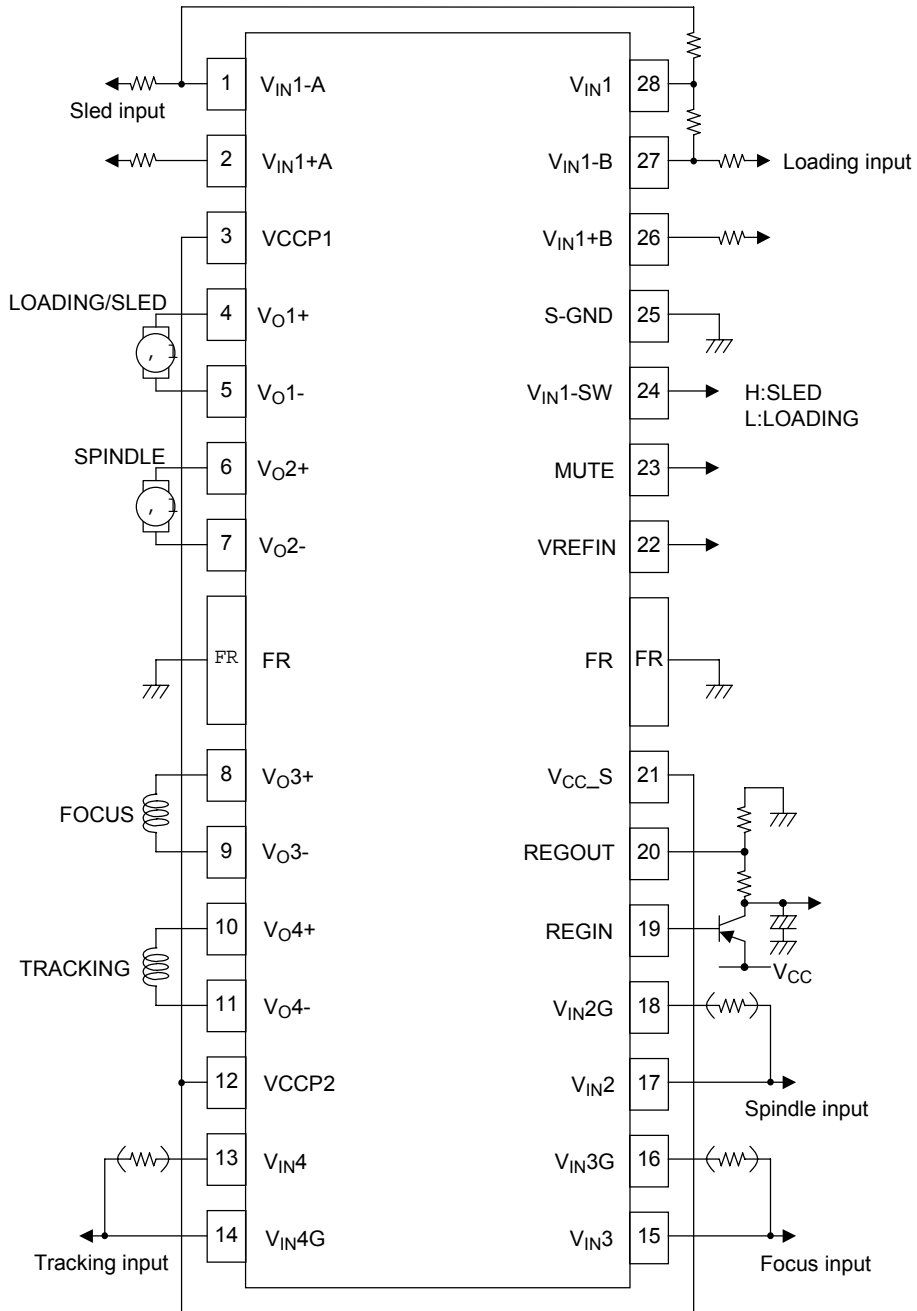

- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, of otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or

This catalog provides information as of August, 2004. Specifications and information herein are subject to change without notice.

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.