


Shiratech LTE and Sensor Mezzanine

User Manual V0.1

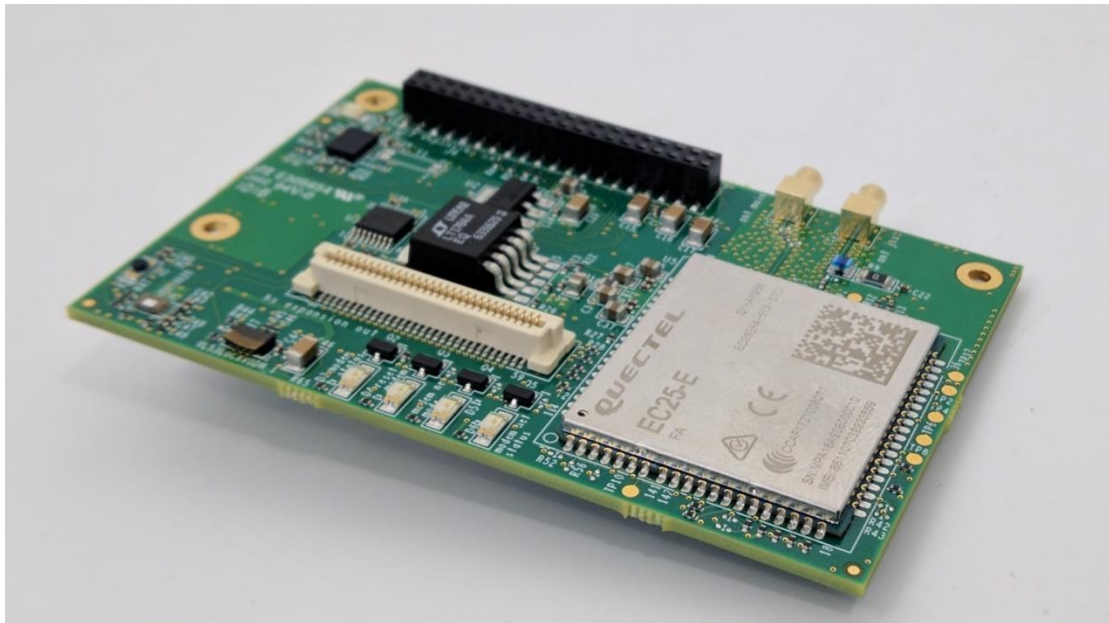


Introduction


Shiratech LTE and Sensor Mezzanine is a 96Boards compatible mezzanine board that adds LTE modem functionality and a set of sensors to any 96Boards compatible board, both consumer addition (CE) and enterprise edition (EE).

The mezzanine consists of the following key elements:

- Quectel EC25 LTE – A high throughput LTE CAT-4 delivering 150Mbit/s downlink 50Mbit/s uplink data rates.
- Bosch BNO055 – A high quality 9-axis absolute orientation sensor that includes a triaxial gyroscope, triaxial accelerometer and magnetometer.
- Analog Device ADUX1020 – Gesture and proximity sensor.
- ST VL53L0CX – Range and gesture detection sensor.
- Analog Device ADT7410 – High accuracy digital temperature sensor.
- 96Boards High Speed and Low Speed Expansion connectors - allows to plugin additional 96Boards mezzanines as needed.

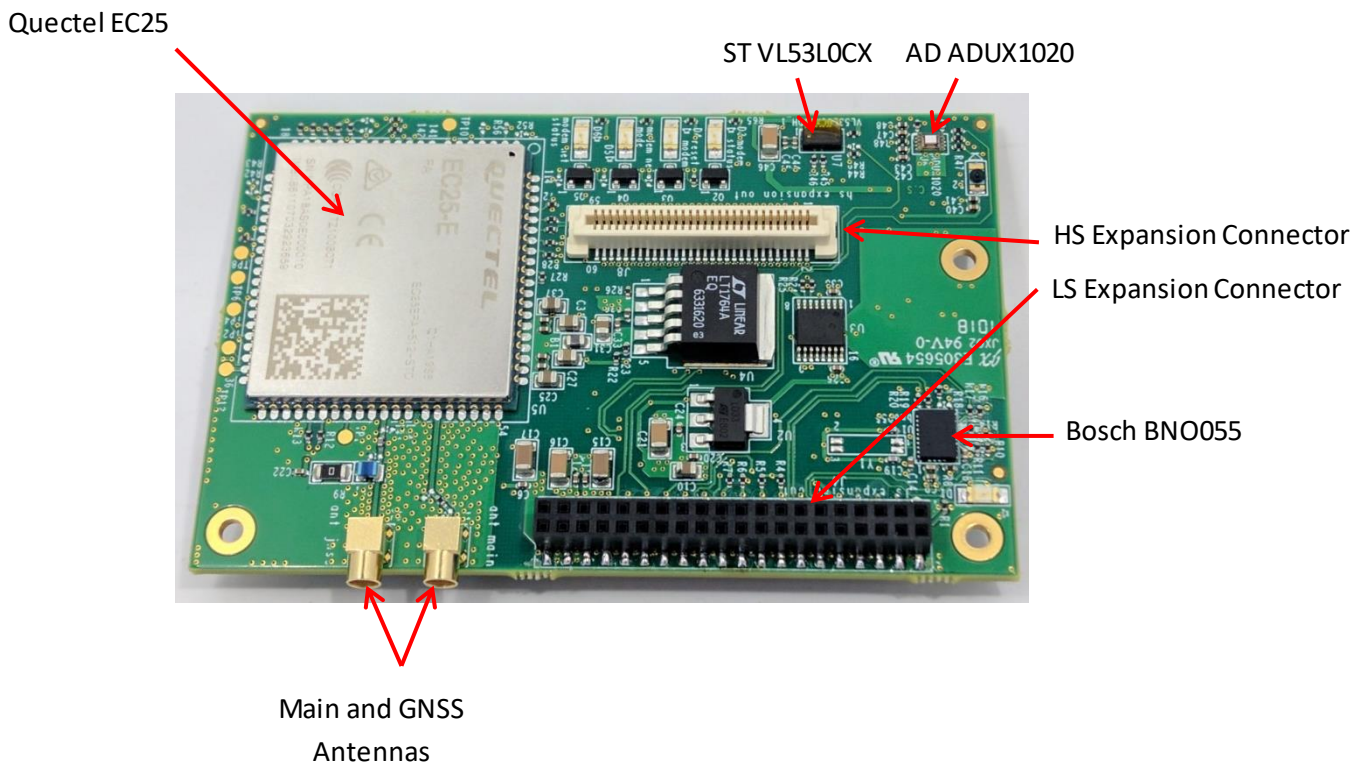

Functional Block Diagram

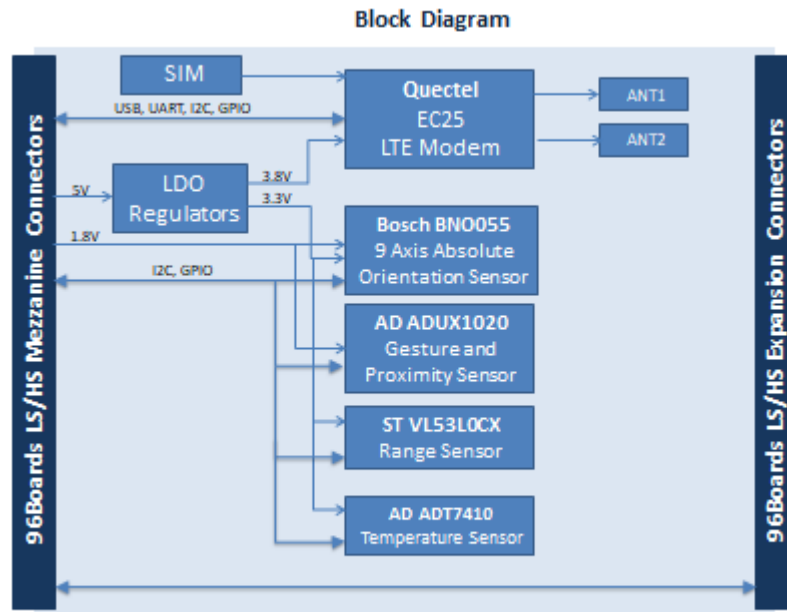

- The mezzanine is connected to 96Boards carrier board through Low Speed and High Speed Connectors (left). Expansion connectors (right) allows to plugin additional 96Boards mezzanines as needed.
- The board is connected to 1.8V and 5V power feeds. LDO regulators provide 3.8V and 3.3V for distribution to the different components.
- Quectel EC25 CAT-4 LTE Modem :
 - The module is powered by 3.8V.
 - Connected to 96Boards carrier board USB0 (HS connector), UART0, I2C0, GPIO A,B,C,K (LS Connector) and (u)SIM connector.
 - Connected to two RF antenna jacks: Main and GNSS.
- Bosch BNO055 9 axis absolute orientation sensor is powered by 3.3V. It is connected to 1.8V I2C1 bus and GPIO D,E and F.
- Analog Devices ADUX1020 gesture and proximity sensor is powered by 1.8V. It is connected to I2C1 bus and GPIO G.
- ST VL53L0CX range sensor is powered by 3.3V. It is connected to 1.8V I2C1 bus and GPIO J.
- Analog Devices ADT7410 temperature sensor is powered by 3.3V. It is connected to I2C1 through 1.8V to 3.3V I2C buffer and to GPIO H and I.


Power Supply

The board accepts 5V and 1.8V from the 96Boards connector. There are two low dropout voltage regulators on the board providing 3.3V and 3.8V.

- Low dropout voltage regulator LD1117S33TR accepts input voltage of 5V and provide 3.3V 0.8A. The following components are powered by this regulator: BNO055, VL53L0CX, ADT7410.



- Low dropout voltage regulator LT1764AEQ-ADJ accepts input voltage of 5V and provide 3.8V 3A to Quectel EC25 modem module.

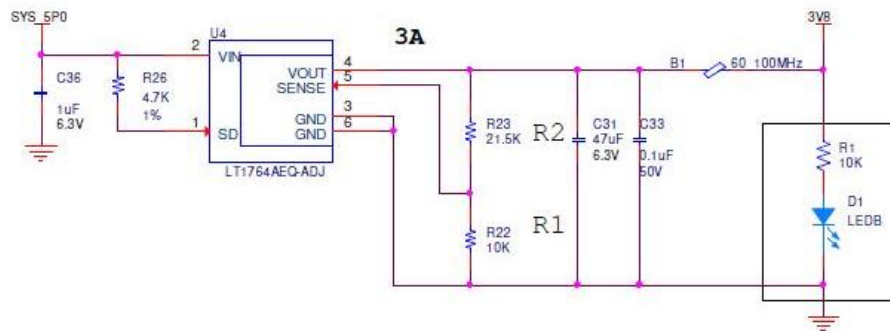

Quectel EC25 LTE Modem

Quectel EC25 is a series of LTE category 4 module optimized specially for M2M and IoT applications. Adopting the 3GPP Rel. 11 LTE technology, it delivers 150Mbit/s downlink and 50Mbit/s uplink data rates. Designed in the compact and unified form factor, EC25 is compatible with Quectel MTS/HSPA+ UC20 module and multi-mode LTE EC20/EC21 module, which allows for flexible migration among them in design and manufacturing.

EC25 contains 6 variants: EC25-V, EC25-J, EC25-A, EC25-AU, EC25-AUT and EC25-E. This makes it backward-compatible with existing EDGE and GSM/GPRS networks, ensuring that it can be connected even in remote areas devoid of 4G or 3G coverage.

EC25 supports Qualcomm® IZat™ location technology Gen8C Lite (GPS, GLONASS, BeiDou, Galileo and QZSS). The integrated GNSS greatly simplifies product design, and provides quicker, more accurate and more dependable positioning.


A rich set of Internet protocols, industry-standard interfaces and abundant functionalities (USB drivers for Windows XP, Windows Vista, Windows 7/8/8.1/10, Linux, Android/eCall) extend the applicability of the module to a wide range of M2M and IoT applications such as industrial router, industrial PDA, rugged tablet PC, video surveillance, and digital signage.

The Quectel EC25 CAT-4 LTE Modem module is powered by 3.8V.

It is connected to 96Boards carrier board USB0 (HS connector), UART0, I2C0, GPIO A,B,C,K (LS Connector) and (u)SIM connector.

RF lines connected to two RF antenna jacks: Main and GNSS.

Four LEDs are used to indicate modem status.

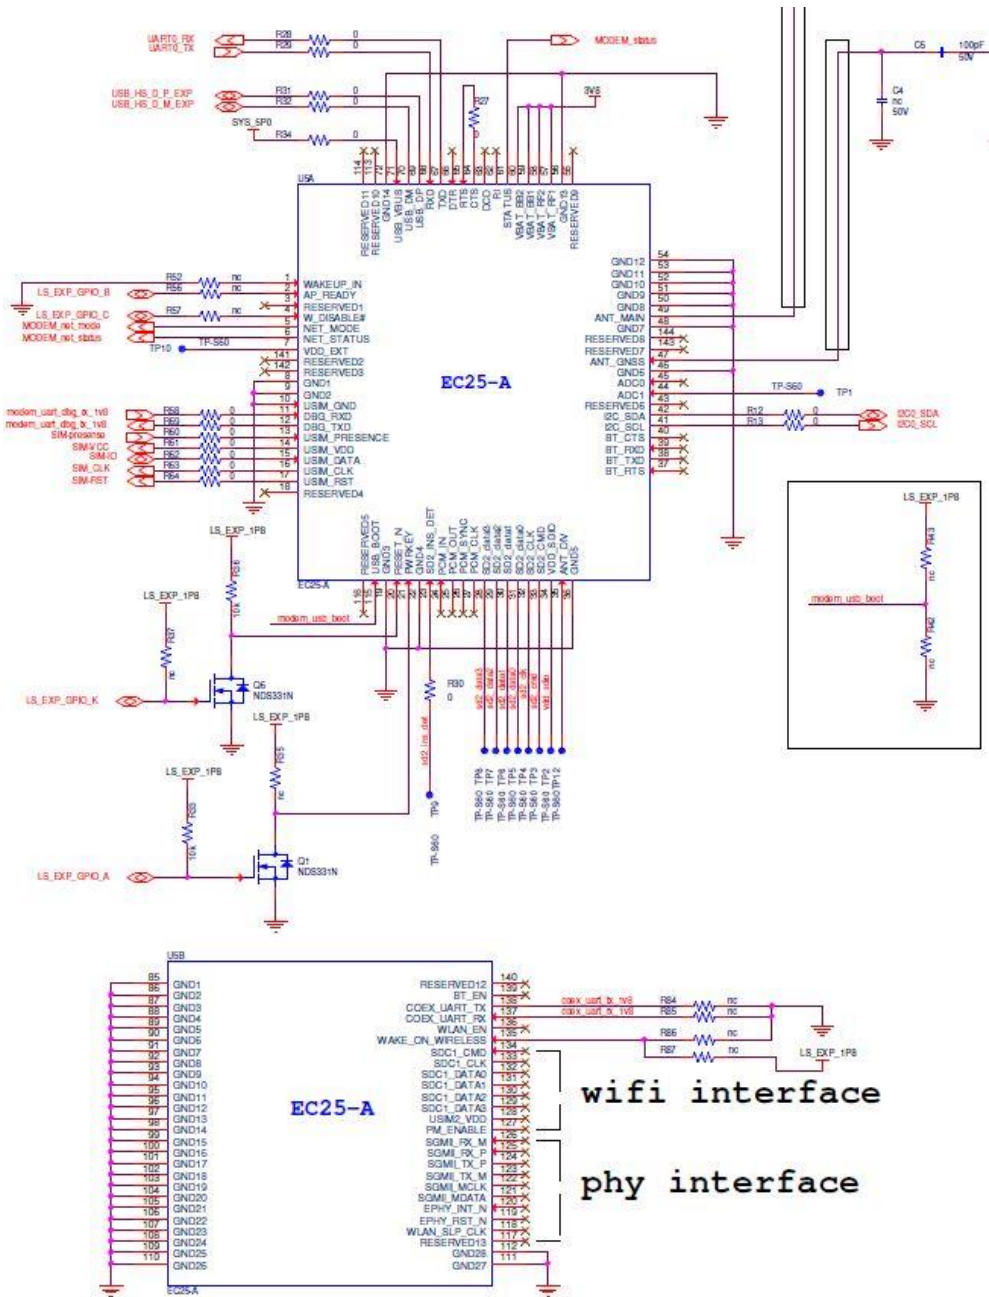

Analog Devices ADUX1020

The ADUX1020 is a highly efficient photometric sensor with an integrated 14-bit analog-to-digital converter (ADC) and a 20-bit burst accumulator that works in concert with a flexible light emitting diode (LED) driver. It is designed to modulate a LED and measure the corresponding optical return signal. The digital engine includes circuitry and control for data aggregation and proximity detection.

The data output and device configuration use a 1.8 V I2C interface.

The control circuitry includes flexible LED pulse width and period generation combined with synchronous detection. This circuitry is complemented by a low noise, low power, and wide dynamic range configurable analog front end (AFE), clock generation, LED driver, and digital logic for position and smart sample mode (event driven x, y coordinates, relative z data). This complete AFE features ambient light rejection, avoiding corruption due to external interference.


One inexpensive standard surface mount, broad angle or narrow angle IR LED (depending upon application) is required. This LED mounts externally to the ADUX1020.

Packaged in a small, clear mold, 2 mm × 3 mm, 8-lead LFCSP, the ADUX1020 is specified over an operating temperature range of -40°C to +85°C.

The Analog Devices ADUX1020 gesture and proximity sensor is powered by 1.8V. It is connected to I2C1 bus and GPIO G.

The sensor controls a high power infrared emitter, SFH4056. It receives the IR returning from an object for gesture and proximity analysis.

Sensor I2C address: 0x64

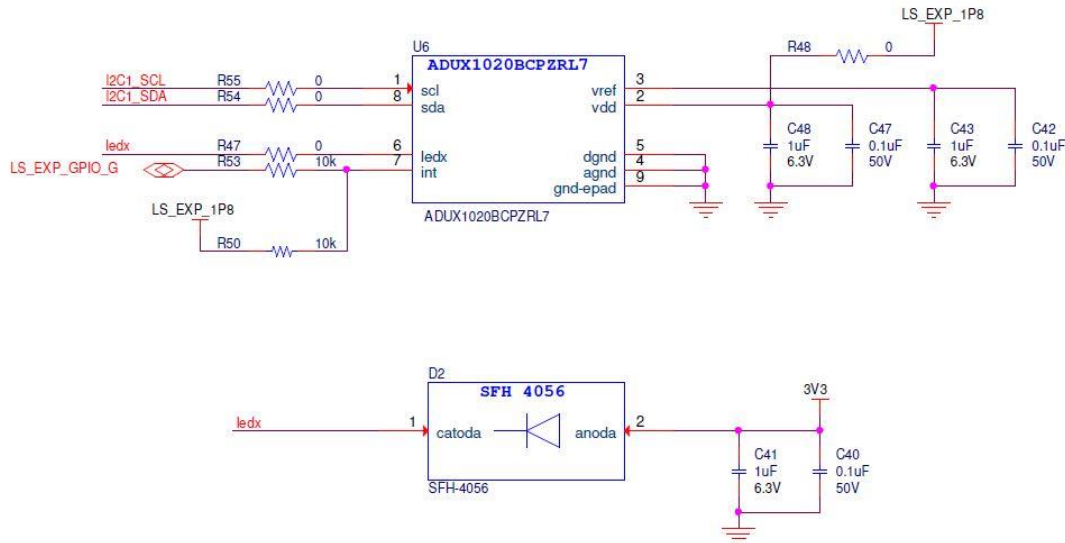

ST VL53L0CX

The VL53L0X is a new generation Time-of-Flight (ToF) laser-ranging module housed in the smallest package on the market today, providing accurate distance measurement whatever the target reflectance's unlike conventional technologies. It can measure absolute distances up to 2m, setting a new benchmark in ranging performance levels, opening the door to various new applications.

The VL53L0X integrates a leading-edge SPAD array (Single Photon Avalanche Diodes) and embeds ST's second generation FlightSense™ patented technology.

The VL53L0X's 940nm VCSEL emitter (Vertical Cavity Surface-Emitting Laser), is totally invisible to the human eye, coupled with internal physical infrared filters, it enables longer ranging distance, higher immunity to ambient light and better robustness to cover-glass optical cross-talk.

The ST VL53L0CX time of flight range and gesture detection sensor is powered by 3.3V. It is connected to 1.8V I2C1 bus and GPIO J.

Sensor I2C address: 0x52

