



Model 5090
BNC (F) to 2 Lug Triaxial (M) Adapter



TRIAIX (M)

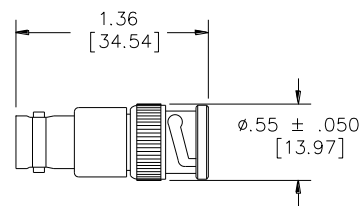

BNC (F)

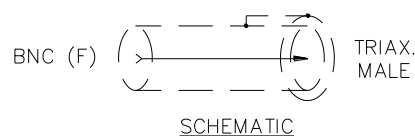

SCHEMATIC

Model 5090
BNC (F) to 2 Lug Triaxial (M) Adapter

Features

- Provides an easy interface between a BNC (F) and a 2 Lug Triax (M).

Materials

<i>Body:</i>	Brass, Tarnish Resistant Nickel Plated
<i>Dielectric:</i>	PTFE per L-P-403
<i>Center Contact:</i>	Male – Brass, Gold Plated Female – Beryllium Copper, Gold Plated
<i>Outer Contact:</i>	Beryllium Copper, Tarnish Resistant
<i>Marking:</i>	“POMONA 5090” (optional)

Ratings

Voltage: For *CE compliance* and for personal safety, do not hold in hand when voltages exceed 30 Vrms/60 Vdc.
Maximum voltage for *hands free use* in controlled testing environments: 500 Vdc
Do not use on circuits where transient stresses can exceed the rated voltage.

Frequency Range: DC to 500 MHz

Ordering Information

Model: 5090
BNC (F)/2 LUG TRIAXIAL (M)

USA: Sales: 800-490-2361
Technical Support: technicalsupport@pomonatest.com
Fax: 425-446-5844
Europe: 31-(0) 40 2675 150 **International:** 425-446-5500
Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ±.02” (.51 mm), .xxx = ± .005” (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.