

2-wire HART transmitter

6335A

- RTD, TC, Ohm, or mV input
- Extremely high measurement accuracy
- HART 5 protocol
- Galvanic isolation
- 1- or 2-channel version













Application


- · Linearized temperature measurement with Pt100...Pt1000, Ni100...Ni1000, or TC sensor.
- · Difference or average temperature measurement of 2 resistance or TC sensors.
- · Conversion of linear resistance variation to a standard analog current signal, for instance from valves or Ohmic level
- · Amplification of a bipolar mV signal to a standard 4...20 mA
- Connection of up to 15 channels to a digital 2-wire signal with HART communication.

Technical characteristics

- Within a few seconds the user can program PR6335A to measure temperatures within all ranges defined by the norms.
- · The RTD and resistance inputs have cable compensation for 2-, 3- and 4-wire connection.
- · The 6335A has been designed according to strict safety requirements and is thus suitable for application in SIL 2
- · Continuous check of vital stored data for safety reasons.
- · Sensor error detection according to the guidelines in NAMUR NE89.

Mounting / installation

· Mounted vertically or horizontally on a DIN rail. As the devices can be mounted without any distance between neighbouring units, up to 84 channels can be mounted per metre.

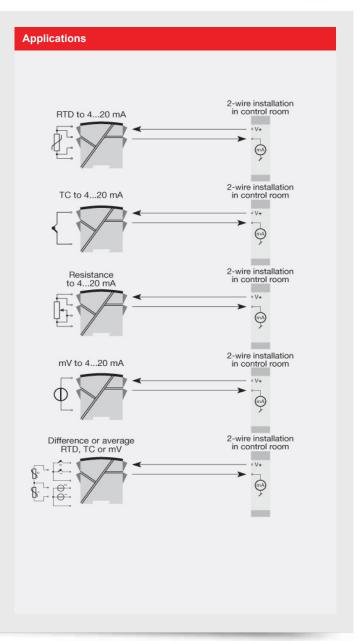

Order:

Type	Galvanic is	olation	Chann	els
6335A	1500 VAC	: 2	Single Double	: A : B

^{*}NB! Please remember to order CJC connectors type 5910 (channel 1) and 5913 (channel 2) for TC inputs with an internal CJC.

Environmental Conditions

Operating temperature	
Calibration temperature	
Relative humidity	< 95% RH (non-cond.)
Protection degree	IP20

Mechanical specifications

Dimensions (HxWxD)	
DIN rail type Wire size	
Screw terminal torque	stranded wire 0.5 Nm

Common specifications

Common specifications	
Supply voltage	8.035 VDC
Isolation voltage Isolation voltage, test / working	1.5 kVAC / 50 VAC
Response time (programmable)	160 s
Voltage drop	30 s Loop Link & HART Min. 60 dB
Signal dynamics, input	range 22 bit 16 bit < 0.005% of span / VDC
NE21 A critorion buret	< ±1% of span

Input specifications Common input specifications	
Max. offset	50% of selected max. value
RTD input	
RTD type	Pt1001000, Ni1001000 lin. R
Cable resistance per wire	5Ω (up to 50Ω per wire is possible with reduced measurement accuracy)
Sensor current	Nom. 0.2 mA
Effect of sensor cable resistance	< 0.002.0 / 0
(3-/4-wire) Sensor error detection	
Linear resistance input	
Linear resistance minmax	0 Ω7000 Ω
TC input	
Thermocouple type	B, E, J, K, L, N, R, S, T, U, W3, W5
Cold junction compensation	
(CJC)	< ±1.0°C
Sensor error current: When	Yes

Measurement range.....-800...+800 mV

NE21, A criterion, burst..... < ±1% of span

Min. measurement range (span)	2.5 mV
Input resistance	10 MΩ

Output specifications

Current output	
Signal range	420 mA
Min. signal range	16 mA
Load (@ current output)	\leq (Vsupply - 8) / 0.023 [Ω]
Load stability	≤ 0.01% of span / 100 Ω
Sensor error indication	Programmable 3.523 mA
NAMUR NE43 Upscale/Downscale	23 mA / 3.5 mA

NAMUR NE43 Upscale/Downscale	23 mA / 3.5 mA
Common output specifications	
Updating time	440 ms
of span	= of the presently selected

Observed authority requirements

EMC	2014/30/EU
EAC	TR-CU 020/2011

Approvals

ATEX 2014/34/EU	KEMA 10ATEX0006 X
IECEx	KEM 10.0084X
SIL	Hardware assessed for use in
	SIL applications