

# Voltage Regulators, 1.0 A Low-Dropout Positive, Fixed and Adjustable



**ON Semiconductor®**

[www.onsemi.com](http://www.onsemi.com)

## NCP1117LP

The NCP1117LP is the low power version of the popular NCP1117 family of low dropout voltage regulators, with reduced quiescent current. It is intended primarily for high volume consumer applications over the 0 to 125 degree temperature range. Capable of providing an output current in excess of 1 A, with a dropout voltage of 1.3 V at 1 A full current load, the series consists of an adjustable and five fixed voltage versions of 1.5 V, 1.8 V, 2.5 V, 3.3 V and 5.0 V.


Internal protection features consist of output current limiting and built-in thermal shutdown. The NCP1117LP series can operate up to 18 V max input voltage. The device is available in the popular SOT-223 and DPAK packages.

### Features

- Output Current in Excess of 1.0 A
- 1.4 V Maximum Dropout Voltage at 1 A
- Quiescent Current over 10 times Lower than Traditional 1117
- Fixed Output Voltages of 1.5 V, 1.8 V, 2.5 V, 3.3 V and 5.0 V
- Adjustable Output Voltage Option
- No Minimum Load Requirement for Fixed Voltage Output Devices
- Good Noise Rejection
- Current Limit and Thermal Shutdown Protection
- Operation up to 18 V Input
- These are Pb-Free Devices

### Applications


- TV and Monitors
- Set Top Boxes and Entertainment Devices
- Switching Power Supply Post Regulation
- Game Consoles and Consumer Applications
- Hard Drive Controllers

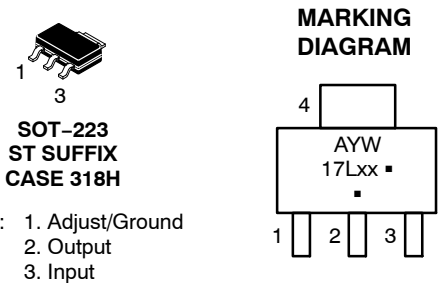


### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 12 of this data sheet.

### TYPICAL APPLICATIONS

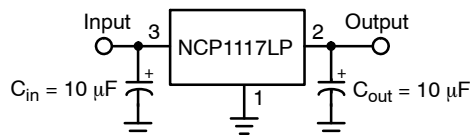

**Figure 1. Fixed Output Regulator**

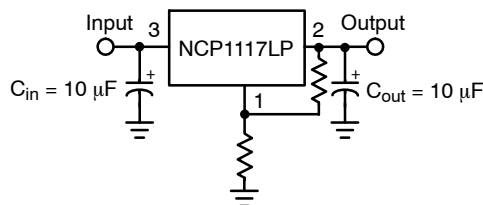

**Figure 2. Adjustable Output Regulator**

# NCP1117LP

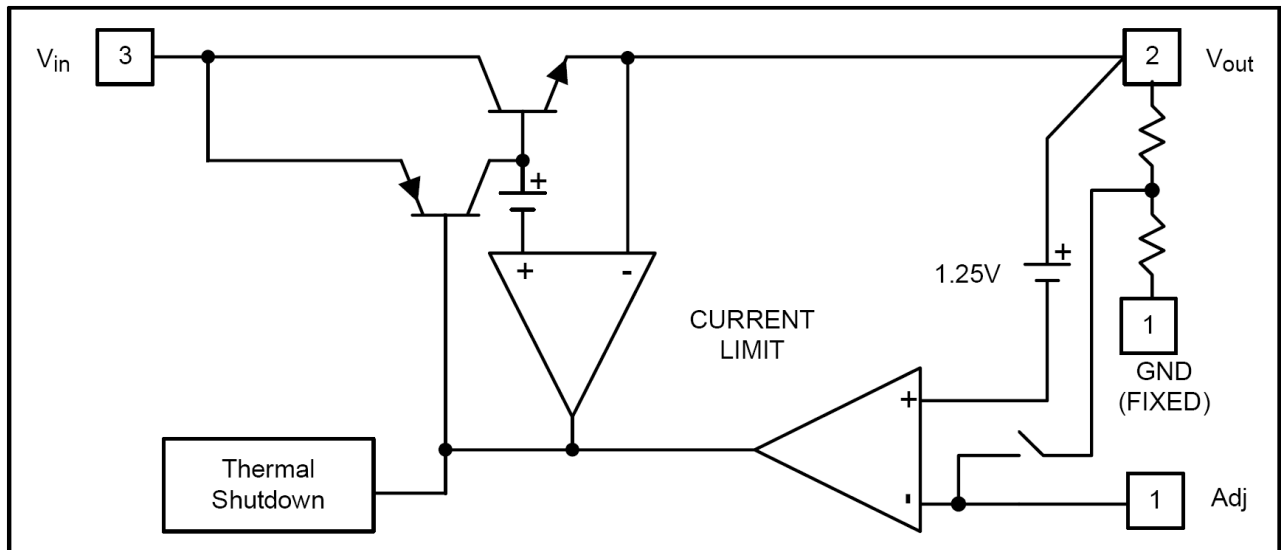


Figure 3. Block Diagram

Table 1. PIN FUNCTION DESCRIPTION

| Pin No. | Pin Name  | Description  |
|---------|-----------|--|
| 1       | Adj (GND) | A resistor divider from this pin to the Vout pin and ground sets the output voltage (Ground only for Fixed-Mode).  |
| 2       | Vout      | The output of the regulator. A minimum of 10 $\mu$ F capacitor ( $20 \text{ m}\Omega \leq \text{ESR} \leq 20 \Omega$ ) must be connected from this pin to ground to insure stability.  |
| 3       | Vin       | The input pin of regulator. Typically a large storage capacitor ( $20 \text{ m}\Omega \leq \text{ESR} \leq 20 \Omega$ ) is connected from this pin to ground to insure that the input voltage does not sag below the minimum dropout voltage during the load transient response. This pin must always be 1.3 V (typ.) higher than Vout in order for the device to regulate properly. |

Table 2. MAXIMUM RATINGS

| Rating  | Symbol                                      | Value                           | Unit  |
|---|---|---------------------------------|---|
| DC Input Voltage  | $V_{in}$                                    | -0.3 to 18                      | V   |
| Operating Junction Temperature Range  | $T_{OP}$                                    | 0 to 125                        | $^{\circ}\text{C}$  |
| Operating Ambient Temperature Range   | $T_A$                                       | 0 to 125                        | $^{\circ}\text{C}$  |
| Maximum Junction Temperature Range  | $T_{J(max)}$                                | -55 to 150                      | $^{\circ}\text{C}$  |
| Power Dissipation and Thermal Characteristics<br>- Power Dissipation (Note 1)<br>- Thermal Resistance, Junction-to-Ambient (Note 2)<br>- Thermal Resistance, Junction-to-Case   | $P_D$<br>$R_{\theta JA}$<br>$R_{\theta JC}$ | Internally Limited<br>108<br>15 | W<br>$^{\circ}\text{C}/\text{W}$<br>$^{\circ}\text{C}/\text{W}$ |
| Electrostatic Discharge   | Human Body Model                            | ESD                             | 2000  |
|   | Machine Model                               |                                 | 200   |
| Storage Temperature Range   | $T_{STG}$                                   | -65 to 150                      | $^{\circ}\text{C}$  |
| NOTE: This device series contains ESD protection and exceeds the following tests:<br>ESD HBM tested per AEC-Q100-002 (EIA/JESD22-A114)<br>ESD MM tested per AEC-Q100-003 (EIA/JESD22-A115)<br>Latch-up Current Maximum Rating: $\leq 150\text{mA}$ per JEDEC standard: JESD78 |   |                                 |   |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

NOTE: All voltages are referenced to GND pin.

1. The maximum package power dissipation is:

$$P_D = \frac{T_{J(max)} - T_A}{R_{\theta JA}}$$

2.  $R_{\theta JA}$  on a 100 x 100 mm PCB Cu thickness 1 oz;  $T_A = 25^{\circ}\text{C}$

# NCP1117LP

**Table 3. ELECTRICAL CHARACTERISTICS** ( $C_{in} = 10 \mu F$ ,  $C_{out} = 10 \mu F$ , for typical value  $T_A = 25^\circ C$ , for min and max values  $T_A$  is the operating ambient temperature range that applies unless otherwise noted.)


| Parameter  | Conditions    |   | Symbol       | Min   | Typ   | Max   | Unit       |
|--|---------------|---|--------------|-------|-------|-------|------------|
| Reference Voltage, Adjustable Output Devices               | NCP1117-ADJ   | $T_J = 25^\circ C$<br>$(V_{in} - V_{out}) = 1.5 V, I_o = 10 mA$                       | $V_{ref}$    | 1.225 | 1.250 | 1.275 | V          |
| Output Voltage, Fixed Output Devices                       | NCP1117-1.5   | $T_J = 25^\circ C$<br>$3 V \leq V_{in} \leq 12 V, I_o = 10 mA$                        | $V_{out}$    | 1.470 | 1.5   | 1.530 | V          |
|  | NCP1117-1.8   | $T_J = 25^\circ C$<br>$3.3 V \leq V_{in} \leq 12 V, I_o = 10 mA$                      |              | 1.760 | 1.8   | 1.840 | V          |
|  | NCP1117-2.5   | $T_J = 25^\circ C$<br>$4 V \leq V_{in} \leq 12 V, I_o = 10 mA$                        |              | 2.450 | 2.5   | 2.550 | V          |
|  | NCP1117-3.3   | $T_J = 25^\circ C$<br>$4.8 V \leq V_{in} \leq 12 V, I_o = 10 mA$                      |              | 3.235 | 3.3   | 3.365 | V          |
|  | NCP1117-5.0   | $T_J = 25^\circ C$<br>$6.5 V \leq V_{in} \leq 12 V, I_o = 10 mA$                      |              | 4.900 | 5     | 5.100 | V          |
| Line Regulation, Adjustable & Fixed (Note 3)               | NCP1117-XXX   | $T_J = 25^\circ C$<br>$V_{out} + 1.5 V < V_{in} < 12 V,$<br>$I_o = 10 mA$             | $Reg_{line}$ |       |       | 0.2   | %          |
| Load Regulation (Note 3)                                   | NCP1117-ADJ   | $T_J = 25^\circ C$<br>$10 mA < I_o < 1 A, V_{in} = 3.3 V$                             | $Reg_{load}$ |       |       | 1     | %          |
|  | NCP1117-1.5   | $T_J = 25^\circ C$<br>$10 mA < I_o < 1 A, V_{in} = 3 V$                               |              |       | 12    | 15    | mV         |
|  | NCP1117-1.8   | $T_J = 25^\circ C$<br>$10 mA < I_o < 1 A, V_{in} = 3.3 V$                             |              |       | 15    | 18    | mV         |
|  | NCP1117-2.5   | $T_J = 25^\circ C$<br>$10 mA < I_o < 1 A, V_{in} = 4 V$                               |              |       | 20    | 25    | mV         |
|  | NCP1117-3.3   | $T_J = 25^\circ C$<br>$10 mA < I_o < 1 A, V_{in} = 4.7 V$                             |              |       | 26    | 33    | mV         |
|  | NCP1117-5.0   | $T_J = 25^\circ C$<br>$10 mA < I_o < 1 A, V_{in} = 6.5 V$                             |              |       | 40    | 50    | mV         |
| Dropout Voltage ( $V_{in} - V_{out}$ ), Adjustable & Fixed | NCP1117-XXX   | $I_{out} = 1 A, T_A = 25^\circ C$<br>$\Delta V_{out} = V_{out} - 100 mV$              |              |       | 1.3   | 1.4   | V          |
| Current Limit, Adjustable & Fixed                          | NCP1117-XXX   | $V_{in} = 7 V, T_A = 25^\circ C$  | $I_{out}$    | 1.1   |       |       | A          |
| Minimum Load Current (Note 4)                              | NCP1117-XXX   | $0^\circ C \leq T_J \leq 125^\circ C$   | $I_{Lmin}$   |       | 1     | 5     | mA         |
| Quiescent Current  | NCP1117-fixed | $V_{in} = 12 V$<br>$I_o = 10 mA$  | $I_{QFIX}$   |       | 550   | 700   | $\mu A$    |
|  | NCP1117-ADJ   |   | $I_{QADJ}$   |       | 30    | 50    | $\mu A$    |
| Thermal Regulation (Note 5)                                |               | $T_A = 25^\circ C, T = 30 ms$ pulse   |              |       | 0.008 | 0.04  | %W         |
| Ripple Rejection   | NCP1117-XXX   | $F = 120 Hz, C_{out} = 25 \mu F$ tantalum,<br>$I_{out} = 1 A, V_{in} = V_{out} + 3 V$ | RR           |       | 60    |       | dB         |
| Thermal Shutdown   | NCP1117-XXX   |   | $T_{shdn}$   |       | 165   |       | $^\circ C$ |
| Thermal Hysteresis   | NCP1117-XXX   |   | $T_{hyst}$   |       | 10    |       | $^\circ C$ |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.


3. Low duty cycle pulse techniques are used during testing to maintain the junction temperature as close to ambient as possible.
4. Guaranteed by design.
5. Thermal Regulation is defined as the change in output voltage at a time after a change in power dissipation is applied, excluding load or line regulation effects. Specifications are for a current pulse equal to  $I_{o,max}$  at  $V_{IN} = V_{IN} + 1.5 V$  for  $T = 30 msec$ . Guaranteed by characterization.

# NCP1117LP


## TYPICAL CHARACTERISTICS

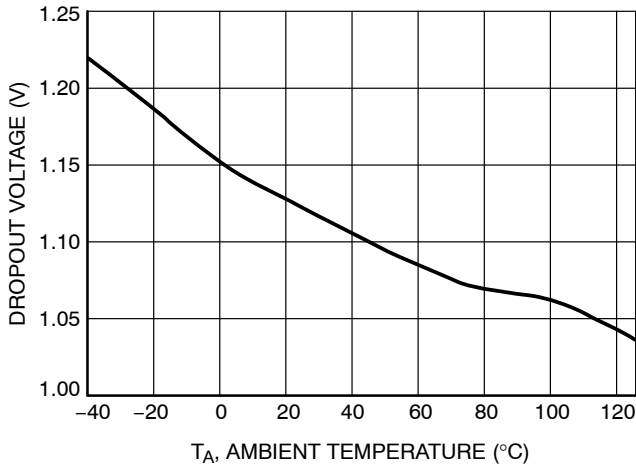


**Figure 4. Dropout Voltage vs. Temperature**  
 $I_{load} = 10\text{ mA}$

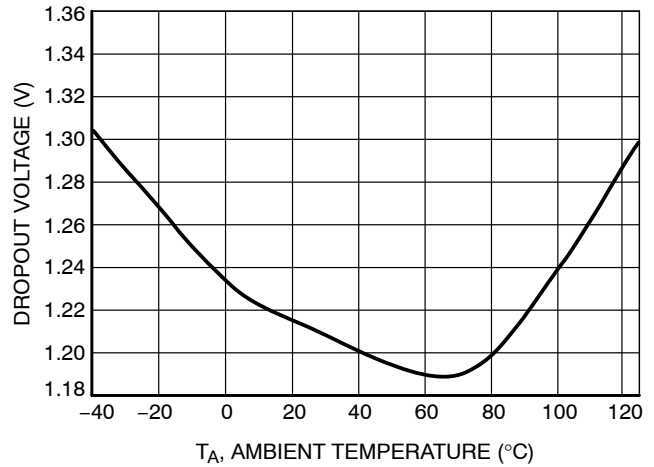


**Figure 5. Dropout Voltage vs. Temperature**  
 $I_{load} = 1\text{ A}$

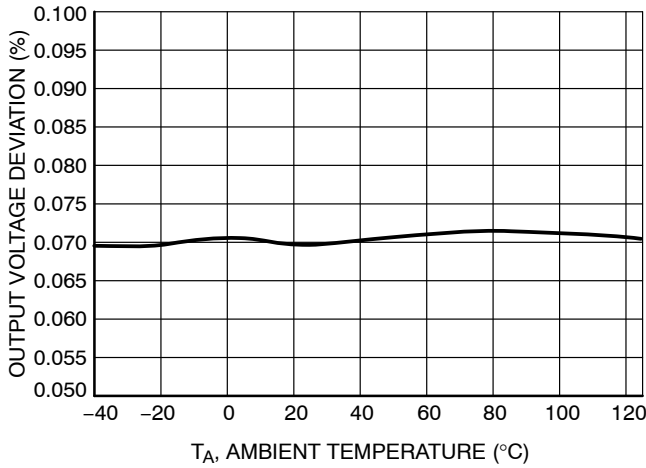


**Figure 6. Line Regulation vs. Temperature**  
 $I_{load} = 10\text{ mA}$

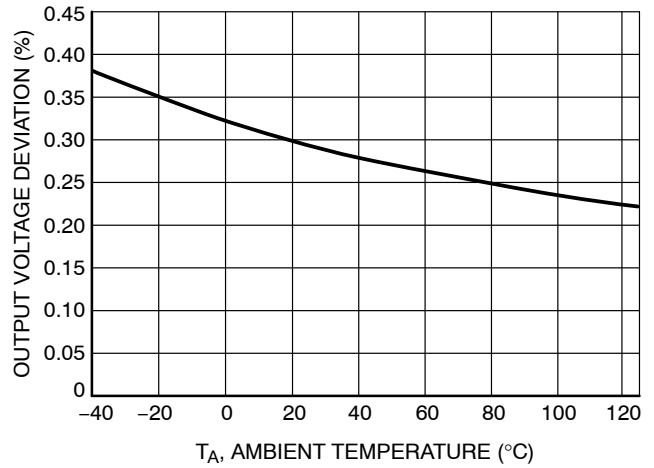

**Figure 7. Load Regulation vs. Temperature**  
 $I_{load} = 1\text{ A}$

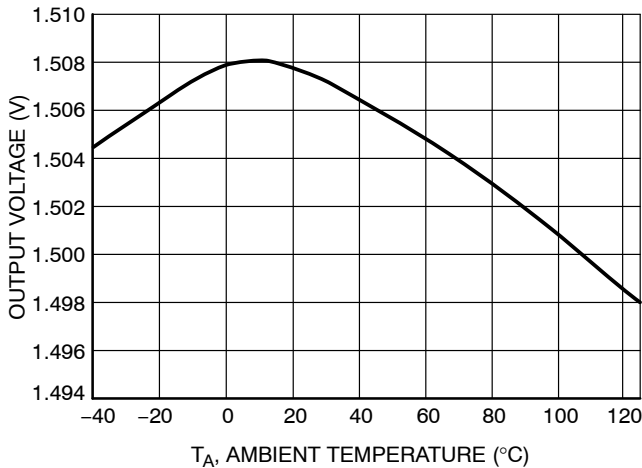


**Figure 8. Output Voltage vs. Temperature**  
 $I_{load} = 10\text{ mA}$

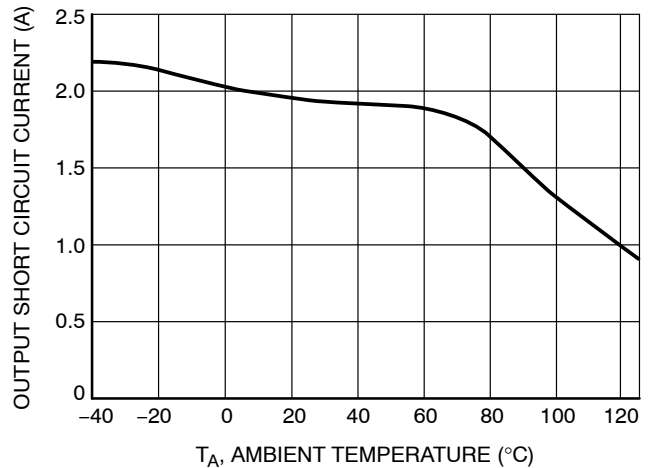


**Figure 9. Output Short Circuit Current vs. Temperature**

# NCP1117LP


## TYPICAL CHARACTERISTICS

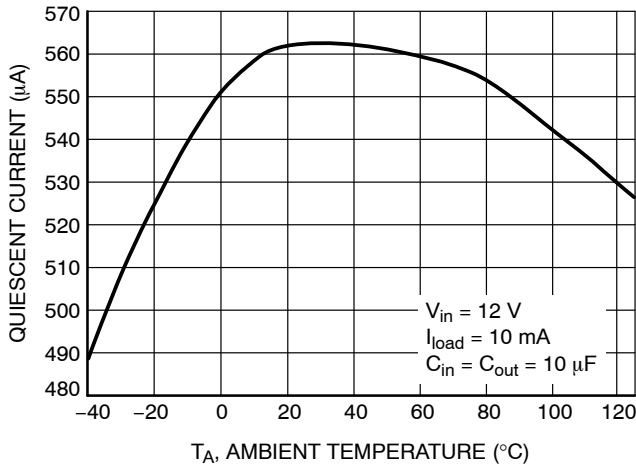


**Figure 10. Quiescent Current vs. Temperature**  
 $I_{load} = 10 \text{ mA}$

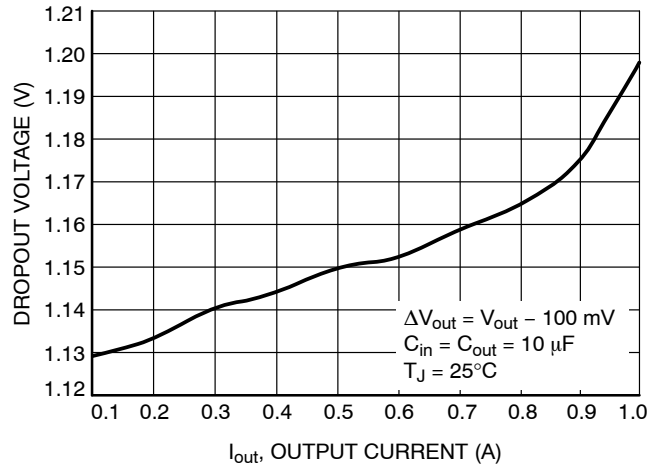


**Figure 11. Dropout Voltage vs. Output Current**

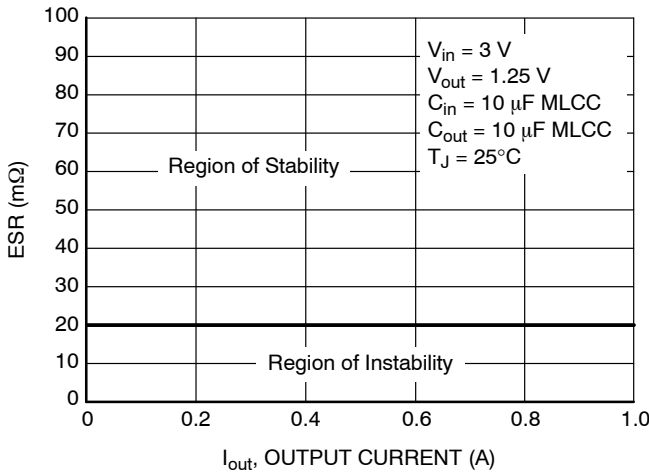


**Figure 12. Equivalent Series Resistance vs. Output Current - MLCC Capacitor**

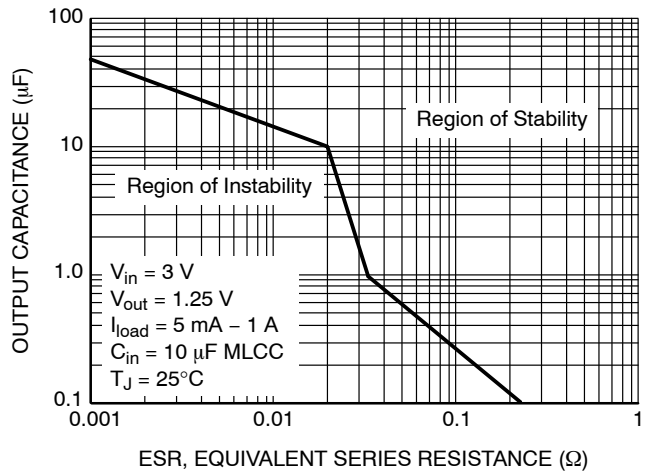

**Figure 13. Output Capacitance vs. ESR MLCC Capacitor**

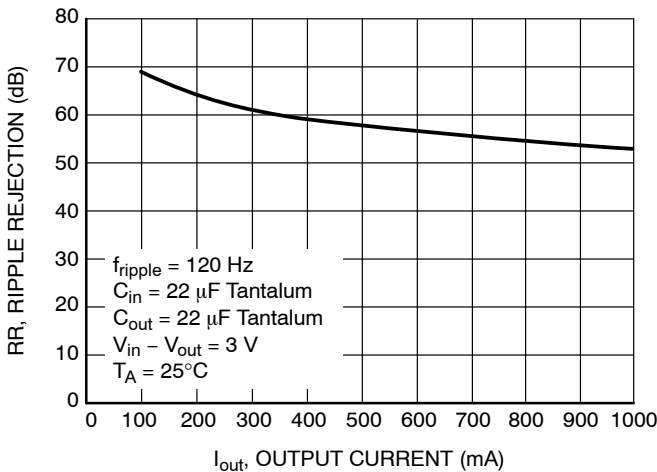

**Figure 14. Ripple Rejection vs. Output Current**  
 - 1.5 V

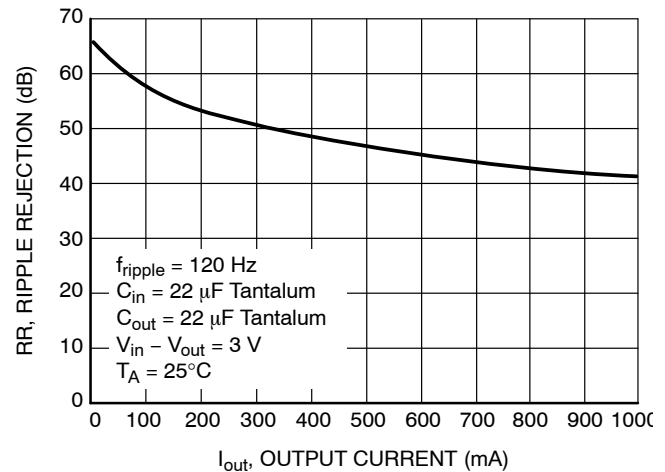

**Figure 15. Ripple Rejection vs. Output Current**  
 - 5 V

TYPICAL CHARACTERISTICS

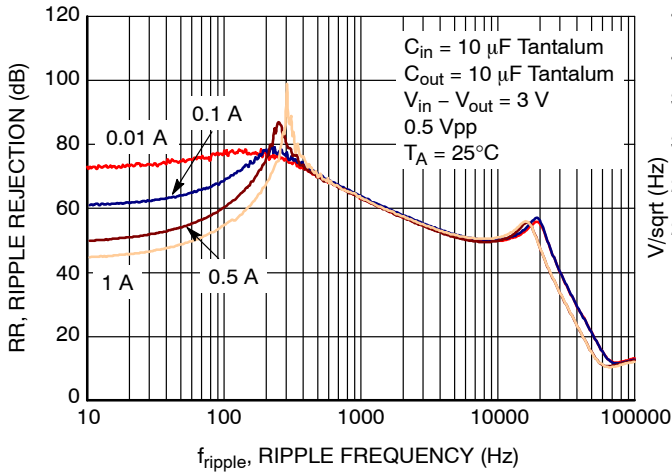


Figure 16. Ripple Rejection vs. Frequency -  $V_{out} = 1.5 V$

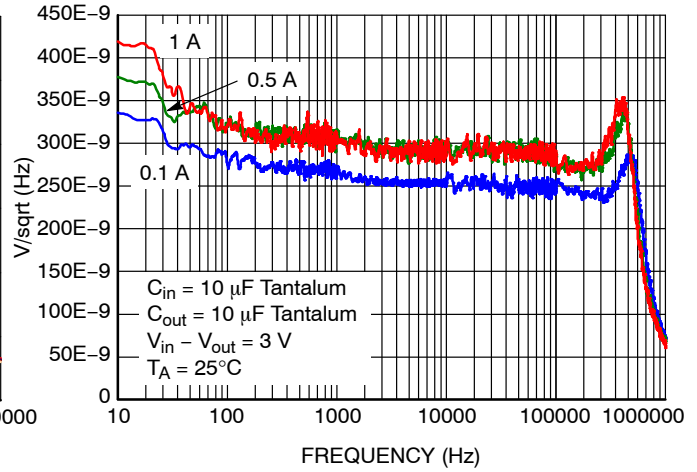


Figure 17. Output Spectral Noise Density vs. Frequency -  $V_{out} = 1V5$

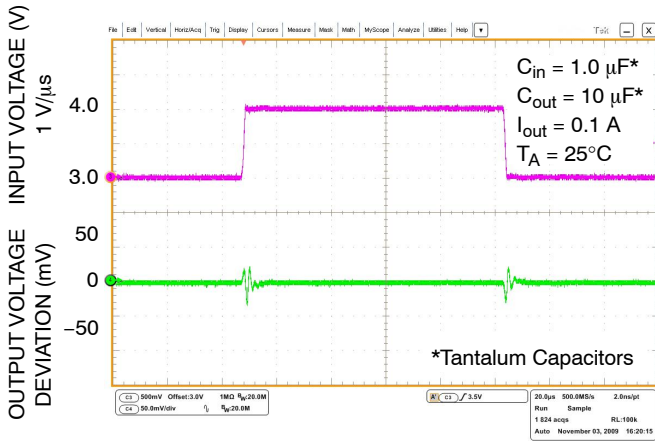


Figure 18. Line Transient Response -  $V_{out} = 1.5 V$

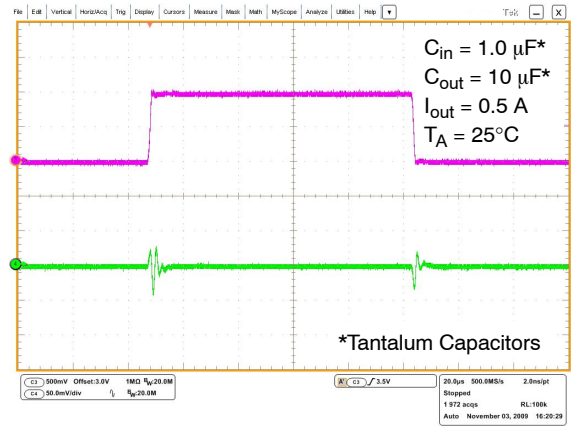


Figure 19. Line Transient Response -  $V_{out} = 1.5 V$

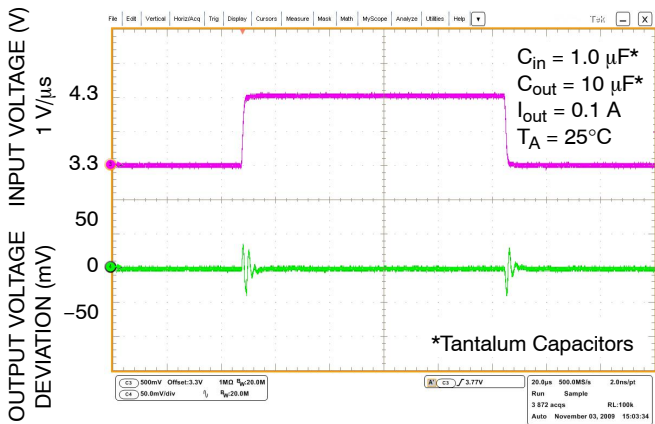


Figure 20. Line Transient Response -  $V_{out} = 1.8 V$

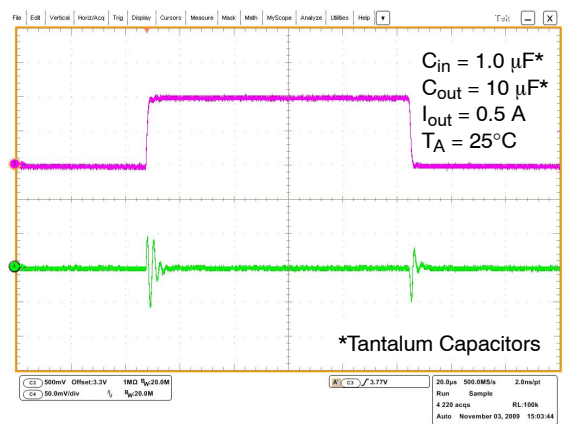


Figure 21. Line Transient Response -  $V_{out} = 1.8 V$

# NCP1117LP

## TYPICAL CHARACTERISTICS

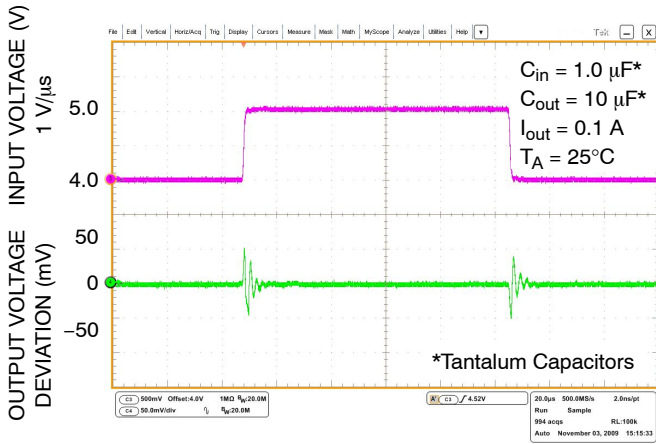


Figure 22. Line Transient Response –  $V_{out} = 2.5\text{ V}$

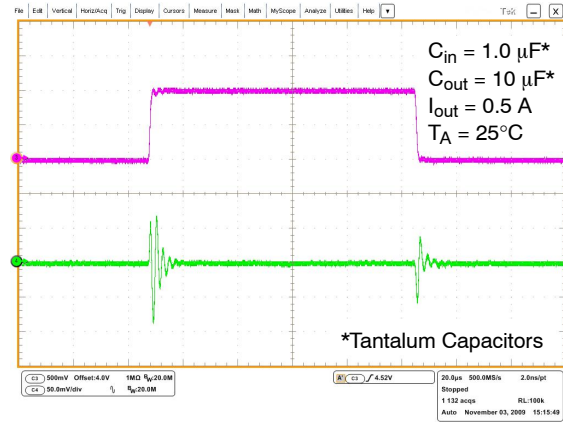


Figure 23. Line Transient Response –  $V_{out} = 2.5\text{ V}$

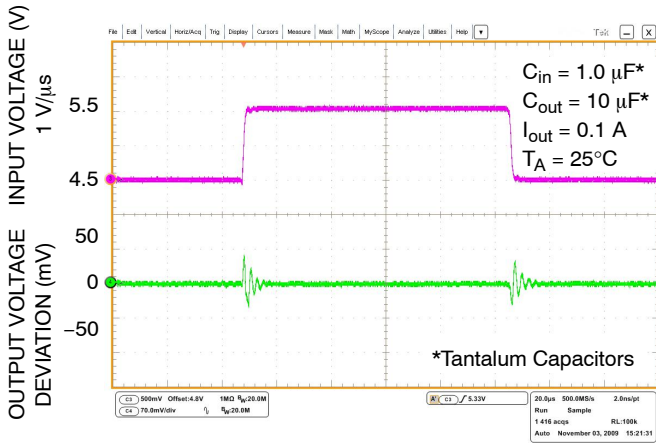


Figure 24. Line Transient Response –  $V_{out} = 3.3\text{ V}$

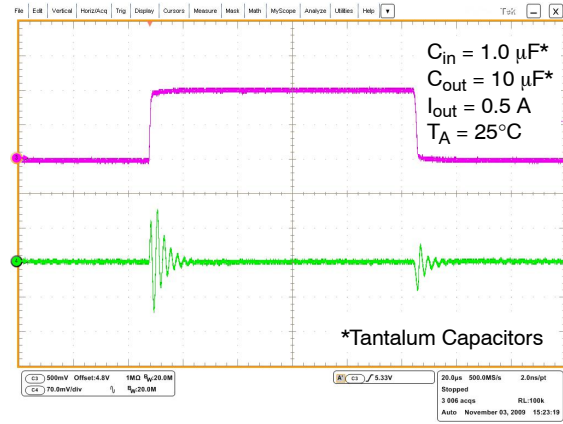


Figure 25. Line Transient Response –  $V_{out} = 3.3\text{ V}$

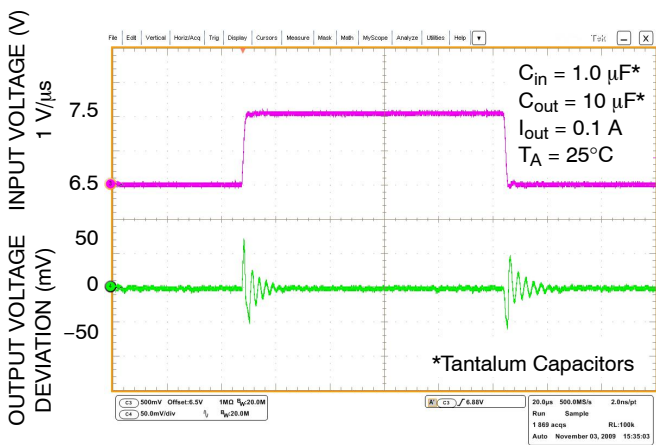


Figure 26. Line Transient Response –  $V_{out} = 5.0\text{ V}$

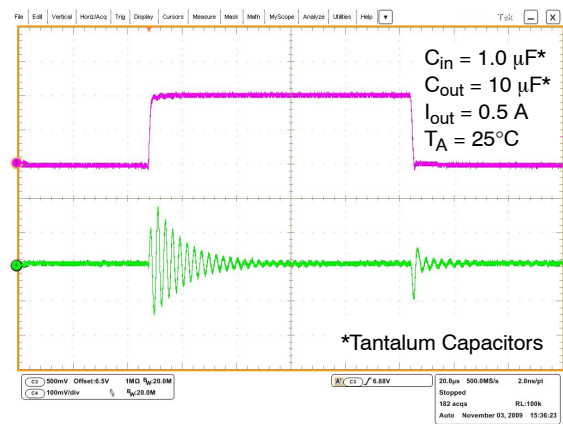


Figure 27. Line Transient Response –  $V_{out} = 5.0\text{ V}$

# NCP1117LP

## TYPICAL CHARACTERISTICS

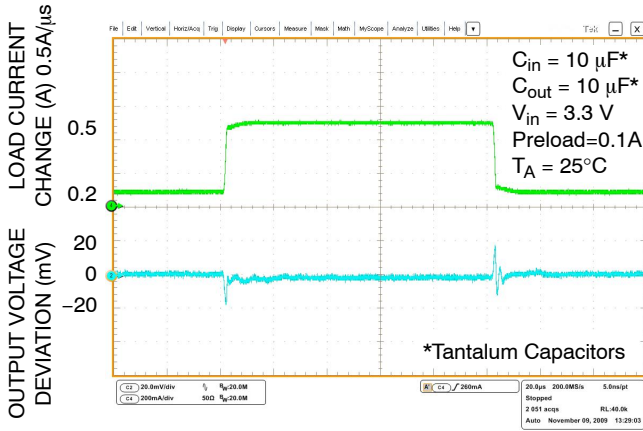


Figure 28. Load Transient Response –  $V_{out} = 1.8V$

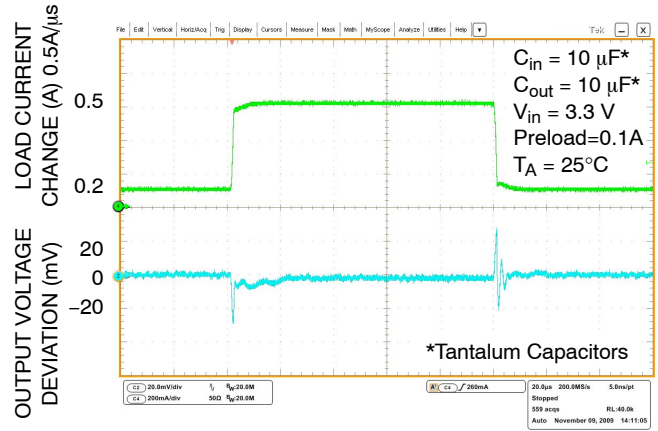


Figure 29. Load Transient Response –  $V_{out} = 2.5V$

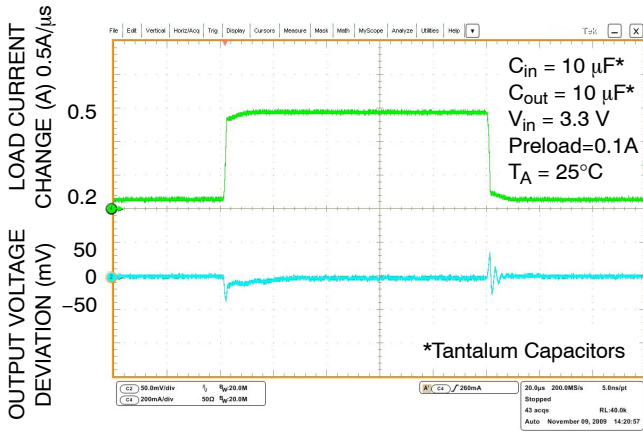


Figure 30. Load Transient Response –  $V_{out} = 3.3V$

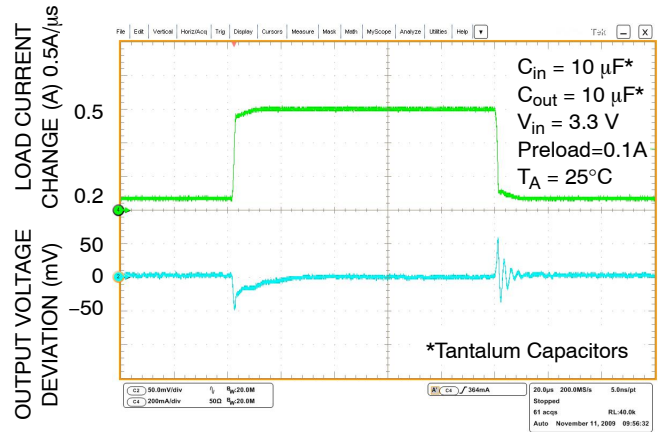


Figure 31. Load Transient Response –  $V_{out} = 5.0V$



# NCP1117LP

## TYPICAL CHARACTERISTICS

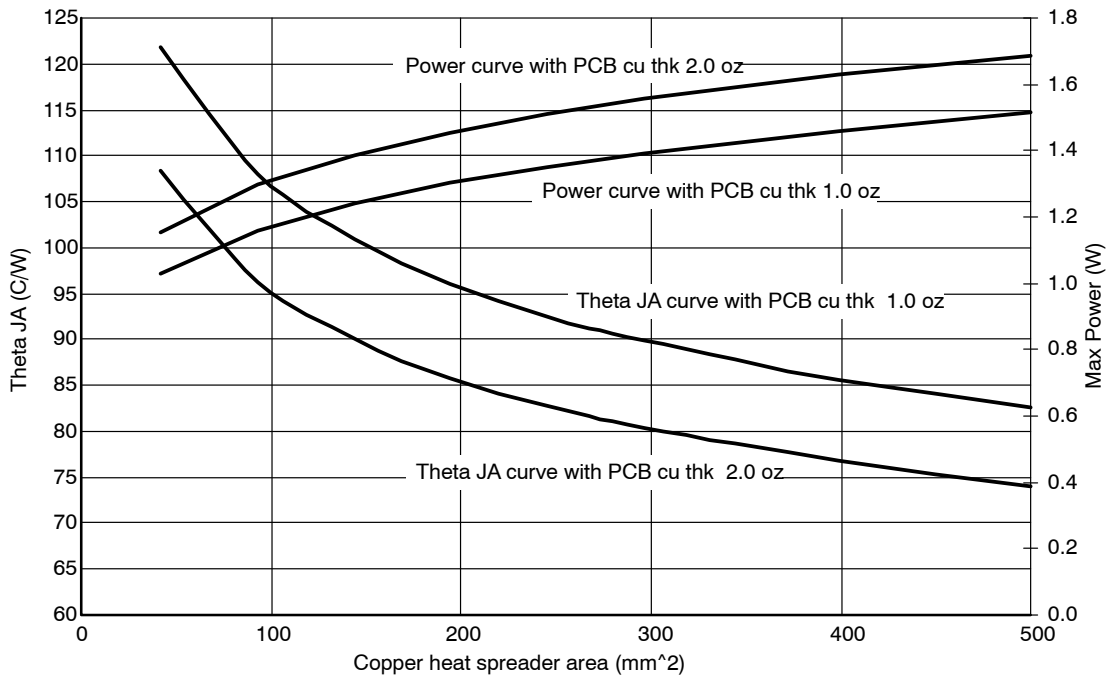


Figure 32. SOT-223 Thermal Resistance and Maximum Power Dissipation vs. P.C.B. Copper Length

APPLICATIONS INFORMATION

**Introduction**

The NCP1117LP is a low dropout positive fixed or adjustable mode regulator with 1 A output capability. This LDO is guaranteed to have a significant reduction in dropout voltage along with enhanced output voltage accuracy and temperature stability when compared to older industry standard three-terminal adjustable regulators.


These devices contain output current limiting, safe operating area compensation and thermal shutdown protection making them designer friendly for powering numerous consumer and industrial products. The NCP1117LP series is pin compatible with the older NCP1117.

**Output Voltage**

The typical application circuits for the fixed and adjustable output regulators are shown in Figures 33 and 34. The adjustable devices are floating voltage regulators. They develop and maintain the nominal 1.25 V reference voltage between the output and adjust pins. The reference voltage is programmed to a constant current source by resistor R1, and this current flows through R2 to ground to set the output voltage. The programmed current level is usually selected to be greater than the specified 5.0 mA minimum that is required for regulation. Since the adjust pin current,  $I_{adj}$ , is significantly lower and constant with respect to the programmed load current, it generates a small output voltage error that can usually be ignored. For the fixed output devices R1 and R2 are included within the device and the ground current  $I_{gnd}$  is 550  $\mu$ A (typ).


**External Capacitors**

Input bypass capacitor  $C_{in}$  may be required for regulator stability if the device is located more than a few inches from the power source. This capacitor will reduce the circuit's sensitivity when powered from a complex source impedance and significantly enhance the output transient response. The input bypass capacitor should be mounted with the shortest possible track length directly across the regulator's input and ground terminals. A 10  $\mu$ F ceramic or tantalum capacitor should be adequate for most applications.

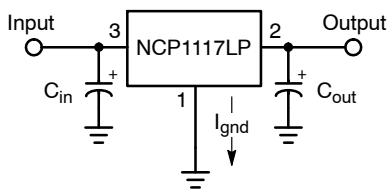

**Figure 33. Fixed Output Regulator**

Frequency compensation for the regulator is provided by capacitor  $C_{out}$  and its use is mandatory to ensure output stability. A minimum capacitance value of 4.7  $\mu$ F with an equivalent series resistance (ESR) that is within the limits of 20 m $\Omega$  to 20  $\Omega$  is required. The capacitor type can be ceramic, tantalum, or aluminum electrolytic as long as it meets the minimum capacitance value and ESR limits over the circuit's entire operating temperature range. Higher values of output capacitance can be used to enhance loop stability and transient response with the additional benefit of reducing output noise.

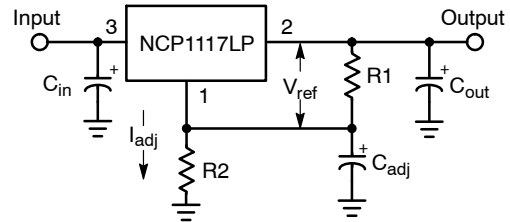

$$V_{out} = V_{ref} \left( 1 + \frac{R2}{R1} \right) + R2 \cdot I_{adj}$$

**Figure 34. Adjustable Output Regulator**

The output ripple will increase linearly for fixed and adjustable devices as the ratio of output voltage to the reference voltage increases. For example, with a 5 V regulator, the output ripple will increase by 5 V/1.25 V or 4 and the ripple rejection will decrease by 20 log of this ratio or 12 dB. The loss of ripple rejection can be restored to the values shown with the addition of bypass capacitor  $C_{adj}$ , shown in Figure 34. The reactance of  $C_{adj}$  at the ripple frequency must be less than the resistance of R1. The value of R1 can be selected to provide the minimum required load current to maintain regulation and is usually in the range of 100  $\Omega$  to 200  $\Omega$ .

$$C_{adj} > \frac{1}{2\pi \cdot f_{ripple} \cdot R1}$$

The minimum required capacitance can be calculated from the above formula. When using the device in an application that is powered from the AC line via a transformer and a full wave bridge, the value for  $C_{adj}$  is:

$$f_{ripple} = 120 \text{ Hz}, R1 = 120 \Omega, \text{ then } C_{adj} > 11.1 \mu\text{F}$$

The value for  $C_{adj}$  is significantly reduced in applications where the input ripple frequency is high. If used as a post regulator in a switching converter under the following conditions:

$$f_{ripple} = 50 \text{ kHz}, R1 = 120 \Omega, \text{ then } C_{adj} > 0.027 \mu\text{F}$$

# NCP1117LP

## Protection Diodes

The NCP1117LP family has two internal low impedance diode paths that normally do not require protection when used in the typical regulator applications. The first path connects between  $V_{out}$  and  $V_{in}$ , and it can withstand a peak surge current of about 15 A. Normal cycling of  $V_{in}$  cannot generate a current surge of this magnitude. Only when  $V_{in}$  is shorted or crowbarred to ground and  $C_{out}$  is greater than 50  $\mu\text{F}$ , it becomes possible for device damage to occur. Under these conditions, diode D1 is required to protect the device. The second path connects between  $C_{adj}$  and  $V_{out}$ , and it can withstand a peak surge current of about 150 mA. Protection diode D2 is required if the output is shorted or crowbarred to ground and  $C_{adj}$  is greater than 1.0  $\mu\text{F}$ .

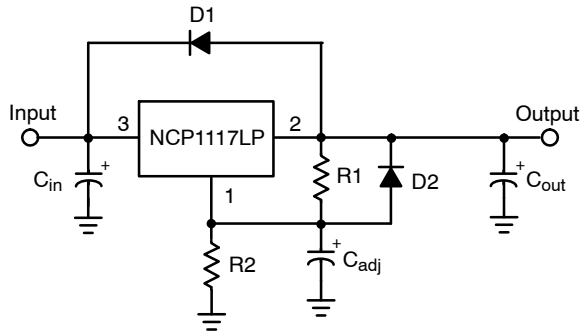


Figure 35. Protection Diode Placement

A combination of protection diodes D1 and D2 may be required in the event that  $V_{in}$  is shorted to ground and  $C_{adj}$  is greater than 50  $\mu\text{F}$ . The peak current capability stated for the internal diodes are for a time of 100  $\mu\text{s}$  with a junction temperature of 25°C. These values may vary and are to be used as a general guide.

## Load Regulation

The NCP1117LP series is capable of providing excellent load regulation; but since these are three terminal devices, only partial remote load sensing is possible. There are two conditions that must be met to achieve the maximum available load regulation performance. The first is that the top side of programming resistor R1 should be connected as close to the regulator case as practicable. This will minimize the voltage drop caused by wiring resistance  $RW+$  from appearing in series with reference voltage that is across R1. The second condition is that the ground end of R2 should be connected directly to the load. This allows true Kelvin sensing where the regulator compensates for the voltage drop caused by wiring resistance  $RW-$ .

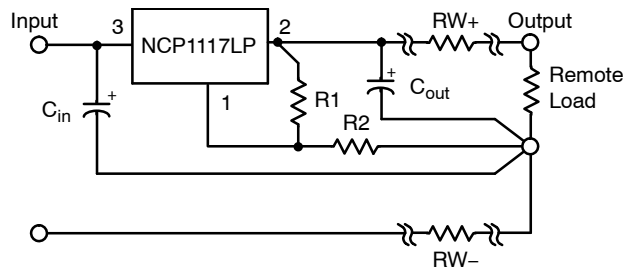



Figure 36. Load Sensing

## Thermal Considerations

This series contains an internal thermal limiting circuit that is designed to protect the regulator in the event that the maximum junction temperature is exceeded. When activated, typically at 165°C, the regulator output switches off and then back on as the die cools. As a result, if the device is continuously operated in an overheated condition, the output will appear to be oscillating. This feature provides protection from a catastrophic device failure due to accidental overheating. It is not intended to be used as a substitute for proper heatsinking. The maximum device power dissipation can be calculated by:

$$P_D = \frac{T_{J(max)} - T_A}{R_{\theta JA}}$$


The devices are available in surface mount SOT-223 package. This package has an exposed metal tab that is specifically designed to reduce the junction to air thermal resistance,  $R_{\theta JA}$ , by utilizing the printed circuit board copper as a heat dissipater. Figure 32 shows typical  $R_{\theta JA}$  values that can be obtained from a square pattern using economical single sided 1.0 oz and 2.0 oz copper board material. The final product thermal limits should be tested and quantified in order to insure acceptable performance and reliability. The actual  $R_{\theta JA}$  can vary considerably from the graphs shown. This will be due to any changes made in the copper aspect ratio of the final layout, adjacent heat sources, and air flow.

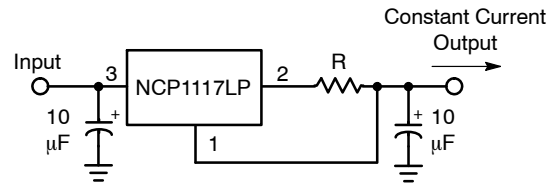


$$I_{out} = \frac{V_{ref}}{R} + I_{adj}$$

Figure 37. Constant Current Regulator

# NCP1117LP

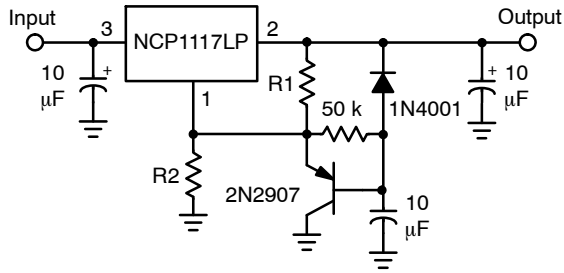


**Figure 38. Slow Turn-On Regulator**

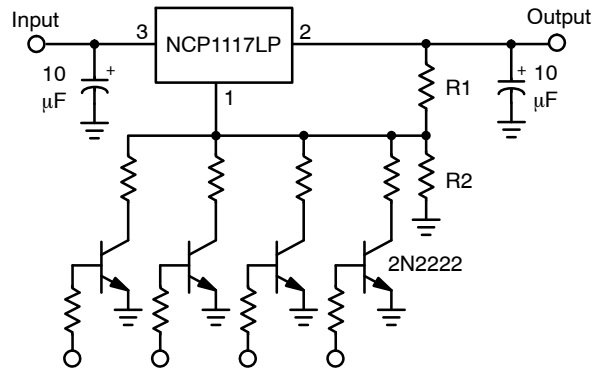

**Output Voltage Control**


Resistor R2 sets the maximum output voltage. Each transistor reduces the output voltage when turned on.

**Figure 39. Digitally Controlled Regulator**

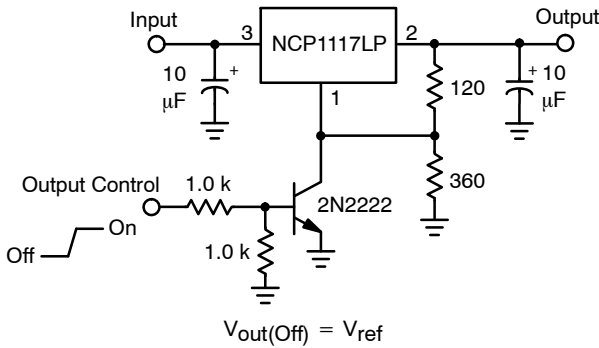

$$V_{out(Off)} = V_{ref}$$

**Figure 40. Regulator with Shutdown**

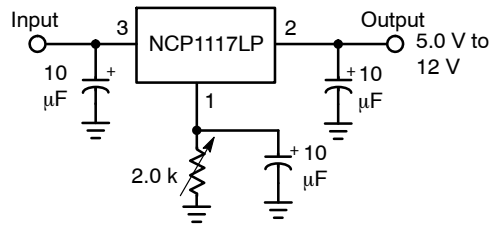

**Figure 41. Adjusting Output of Fixed Voltage Regulators**

## DEVICE ORDERING INFORMATION


| Device            | Package              | Shipping†          |
|-------------------|----------------------|--------------------|
| NCP1117LPST15T3G  | SOT-223<br>(Pb-Free) | 4000 / Tape & Reel |
| NCP1117LPST18T3G  |                      |                    |
| NCP1117LPST25T3G  |                      |                    |
| NCP1117LPST33T3G  |                      |                    |
| NCP1117LPST50T3G  |                      |                    |
| NCP1117LPSTADT3G  |                      |                    |
| NCP1117LPDT18RKG  | DPAK<br>(Pb-Free)    | 2500 / Tape & Reel |
| NCP1117LPDT33RKG  |                      |                    |
| NCP1117LPDTADJRKG |                      |                    |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

# NCP1117LP

## PACKAGE DIMENSIONS

SOT-223  
ST SUFFIX  
CASE 318H  
ISSUE O

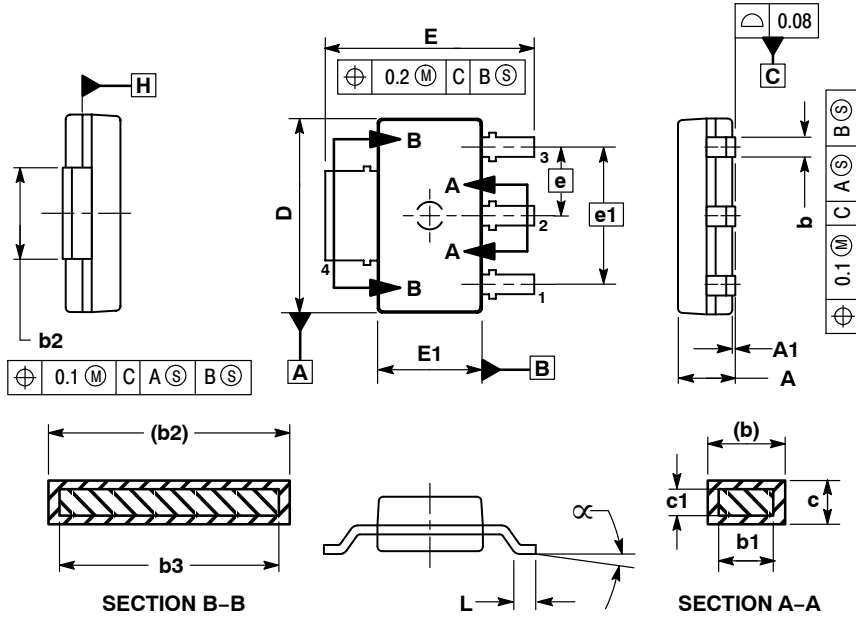


**NOTES:**

1. DIMENSIONS ARE IN MILLIMETERS.
2. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M, 1994.
3. DIMENSION E1 DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.23 PER SIDE.
4. DIMENSIONS b AND b2 DO NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 TOTAL IN EXCESS OF THE b AND b2 DIMENSIONS AT MAXIMUM MATERIAL CONDITION.
5. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
6. DIMENSIONS D AND E1 ARE TO BE DETERMINED AT DATUM PLANE H.

| DIM      | MILLIMETERS |      |
|----------|-------------|------|
|          | MIN         | MAX  |
| A        | ---         | 1.80 |
| A1       | 0.02        | 0.11 |
| b        | 0.60        | 0.88 |
| b1       | 0.60        | 0.80 |
| b2       | 2.90        | 3.10 |
| b3       | 2.90        | 3.05 |
| c        | 0.24        | 0.35 |
| c1       | 0.24        | 0.30 |
| D        | 6.30        | 6.70 |
| E        | 6.70        | 7.30 |
| E1       | 3.30        | 3.70 |
| e        | 2.30        |      |
| e1       | 4.60        |      |
| L        | 0.25        | ---  |
| $\alpha$ | 0°          | 10°  |

### SOLDERING FOOTPRINT\*

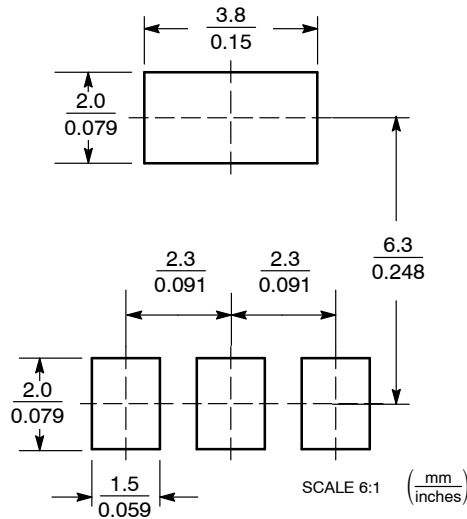


\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# NCP1117LP

## PACKAGE DIMENSIONS

### DPAK (SINGLE GAUGE) DT SUFFIX CASE 369C ISSUE F

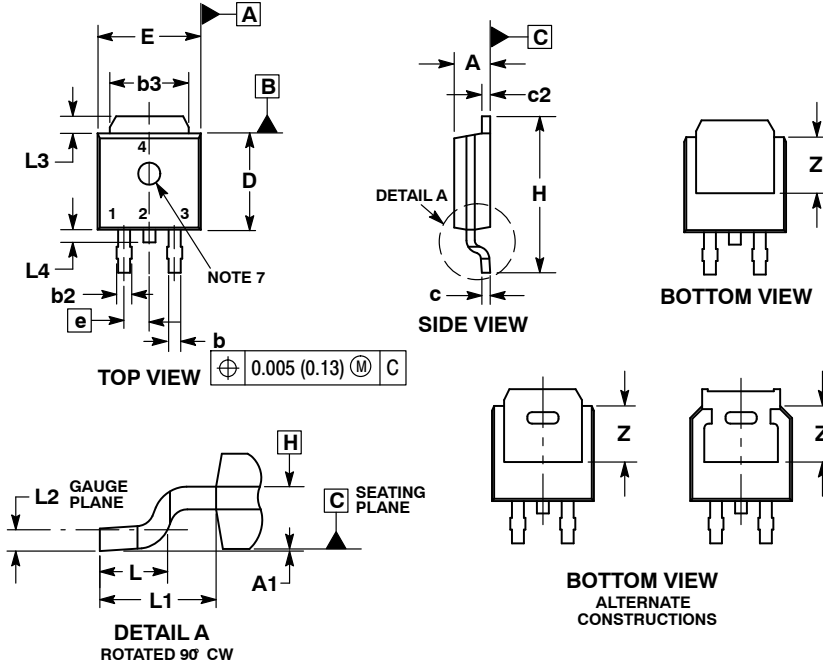


**NOTES:**

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: INCHES.
3. THERMAL PAD CONTOUR OPTIONAL WITHIN DIMENSIONS b3, L3 and Z.
4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEED 0.006 INCHES PER SIDE.
5. DIMENSIONS D AND E ARE DETERMINED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY.
6. DATUMS A AND B ARE DETERMINED AT DATUM PLANE H.
7. OPTIONAL MOLD FEATURE.

| DIM | INCHES |       | MILLIMETERS |       |
|-----|--------|-------|-------------|-------|
|     | MIN    | MAX   | MIN         | MAX   |
| A   | 0.086  | 0.094 | 2.18        | 2.38  |
| A1  | 0.000  | 0.005 | 0.00        | 0.13  |
| b   | 0.025  | 0.035 | 0.63        | 0.89  |
| b2  | 0.028  | 0.045 | 0.72        | 1.14  |
| b3  | 0.180  | 0.215 | 4.57        | 5.46  |
| c   | 0.018  | 0.024 | 0.46        | 0.61  |
| c2  | 0.018  | 0.024 | 0.46        | 0.61  |
| D   | 0.235  | 0.245 | 5.97        | 6.22  |
| E   | 0.250  | 0.265 | 6.35        | 6.73  |
| e   | 0.090  | BSC   | 2.29        | BSC   |
| H   | 0.370  | 0.410 | 9.40        | 10.41 |
| L   | 0.055  | 0.070 | 1.40        | 1.78  |
| L1  | 0.114  | REF   | 2.90        | REF   |
| L2  | 0.020  | BSC   | 0.51        | BSC   |
| L3  | 0.035  | 0.050 | 0.89        | 1.27  |
| L4  | ---    | 0.040 | ---         | 1.01  |
| Z   | 0.155  | ---   | 3.93        | ---   |

### SOLDERING FOOTPRINT\*

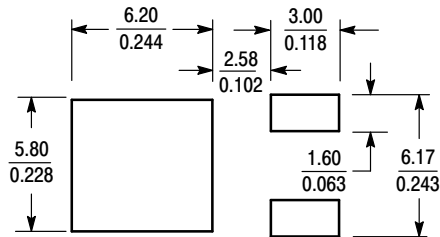

SCALE 3:1 (mm/inches)

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

### PUBLICATION ORDERING INFORMATION

**LITERATURE FULFILLMENT:**  
Email Requests to: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**TECHNICAL SUPPORT**  
**North American Technical Support:**  
Voice Mail: 1 800-282-9855 Toll Free USA/Canada  
Phone: 011 421 33 790 2910

**Europe, Middle East and Africa Technical Support:**  
Phone: 00421 33 790 2910  
For additional information, please contact your local Sales Representative