




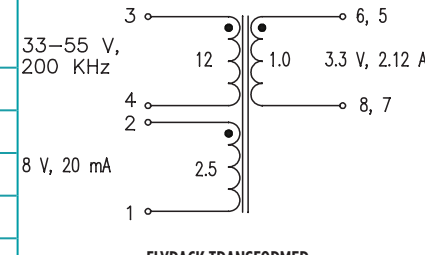
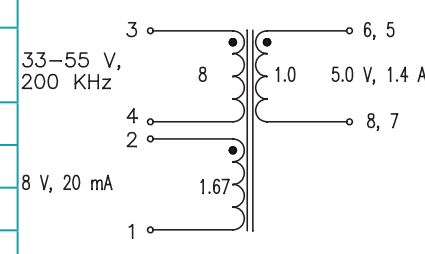
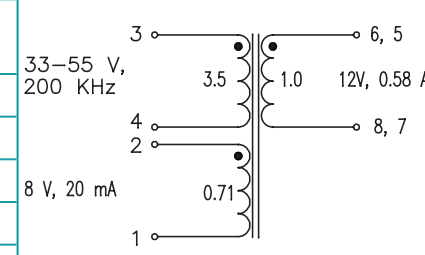


# HIGH FREQUENCY WIRE-WOUND TRANSFORMER

EP10 Platforms - SMT

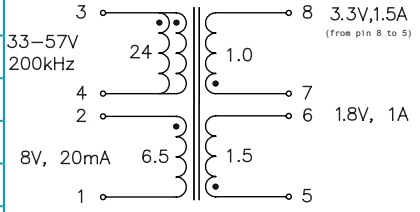
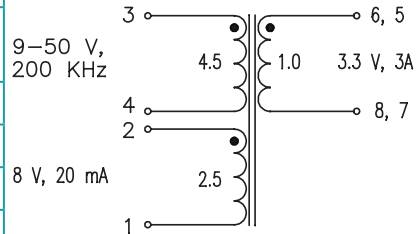
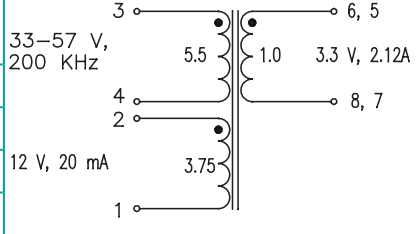
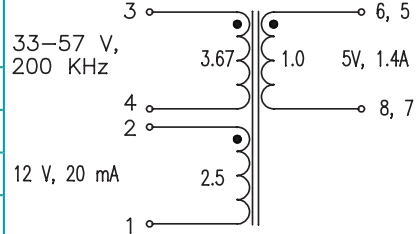


-  **Power Range:** up to 30W
-  **Height:** 11.45mm Max
-  **Footprint:** 15.24mm x 13.1mm Max
-  **Topology:** Forward and Flyback

Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C				
<b>PA1133NL</b>	Pri. Inductance	(3-4)	253.4μH ± 10%	 <p>33-55 V, 200 KHz 8 V, 20 mA</p> <p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	7.5μH MAX	
	DCR	(3-4)	420mΩ MAX	
		(6, 5-8, 7)	7.5mΩ MAX	
	(2-1)	115mΩ MAX		
	Hi-Pot	Pri-Sec	1500Vrms	
K1 Factor	4671.8			
<b>PA1134NL</b>	Pri. Inductance	(3-4)	253.4μH ±10%	 <p>33-55 V, 200 KHz 8 V, 20 mA</p> <p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	7.5μH MAX	
	DCR	(3-4)	420mΩ MAX	
		(6, 5-8, 7)	16mΩ MAX	
	(2-1)	115mΩ MAX		
	Hi-Pot	Pri-Sec	1500Vrms	
K1 Factor	4671.8			
<b>PA1135NL</b>	Pri. Inductance	(3-4)	264.1μH ±10%	 <p>33-55 V, 200 KHz 8 V, 20 mA</p> <p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	6 μH MAX	
	DCR	(3-4)	800mΩ MAX	
		(6, 5-8, 7)	45mΩ MAX	
	(2-1)	115mΩ MAX		
	Hi-Pot	Pri-Sec	1500Vrms	
K1 Factor	4769.7			

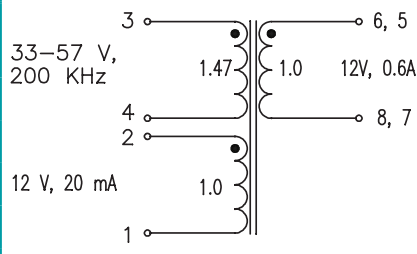
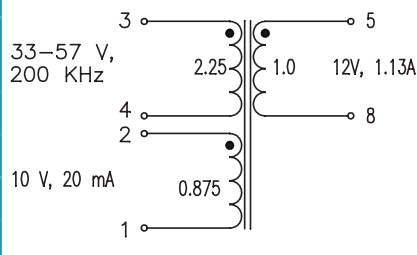
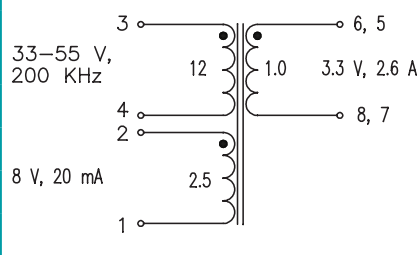
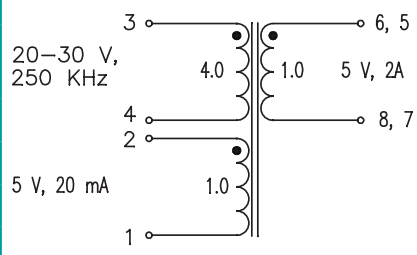
# HIGH FREQUENCY WIRE-WOUND TRANSFORMER

EP10 Platforms - SMT

Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C			
PA1253NL	Pri. Inductance	(3-4)	253.4 $\mu$ H $\pm$ 10%
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	12 $\mu$ H MAX
	DCR	(3-4)	420 m $\Omega$ MAX
		(2-1)	335 m $\Omega$ MAX
		(5-6)	9.5 m $\Omega$ MAX
		(7-8)	7.2 m $\Omega$ MAX
	Hi-Pot	Pri-Sec	1500Vrms
KI Factor	4671.8		
 <p style="text-align: center;"><b>FLYBACK TRANSFORMER</b></p>			
PA1277NL	Pri. Inductance	(3-4)	20.4 $\mu$ H $\pm$ 10%
	Lk. Inductance	(3-4) with (10, 9, 8, 7) shorted	1.5 $\mu$ H MAX
	DCR	(3-4)	80 m $\Omega$ MAX
		(6, 5-8, 7)	7.5 m $\Omega$ MAX
		(2-1)	150 m $\Omega$ MAX
	Hi-Pot	Pri-Sec	1500Vrms
KI Factor	1002.9		
 <p style="text-align: center;"><b>FLYBACK TRANSFORMER</b></p>			
PA1282NL	Pri. Inductance	(3-4)	155 $\mu$ H $\pm$ 10%
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	5 $\mu$ H MAX
	DCR	(3-4)	530 m $\Omega$ MAX
		(6, 5-8, 7)	31 m $\Omega$ MAX
		(2-1)	900 m $\Omega$ MAX
	Hi-Pot	Pri-Sec	1500Vrms
KI Factor	3117.5		
 <p style="text-align: center;"><b>FLYBACK TRANSFORMER</b></p>			
PA1283NL	Pri. Inductance	(3-4)	155 $\mu$ H $\pm$ 10%
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	5 $\mu$ H MAX
	DCR	(3-4)	570 m $\Omega$ MAX
		(6, 5-8, 7)	40 m $\Omega$ MAX
		(2-1)	1000 m $\Omega$ MAX
	Hi-Pot	Pri-Sec	1500 Vrms
KI Factor	3117.5		
 <p style="text-align: center;"><b>FLYBACK TRANSFORMER</b></p>			

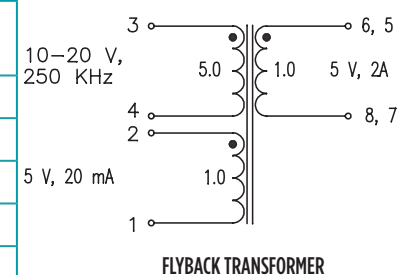
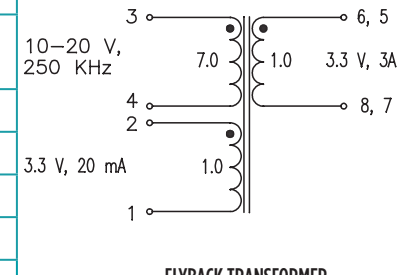
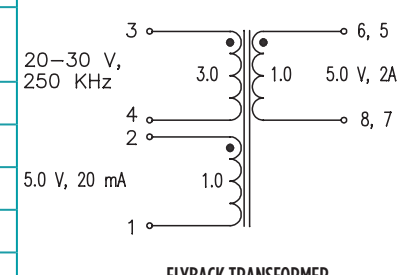
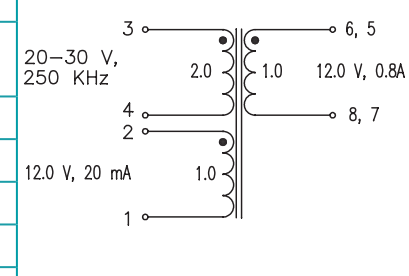
# HIGH FREQUENCY WIRE-WOUND TRANSFORMER

EP10 Platforms - SMT

Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C				
PA1284NL	Pri. Inductance	(3-4)	155 $\mu\text{H} \pm 10\%$	 <p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	5 $\mu\text{H} \text{ MAX}$	
	DCR	(3-4)	540 $\text{m}\Omega \text{ MAX}$	
		(6, 5-8, 7)	370 $\text{m}\Omega \text{ MAX}$	
		(2-1)	920 $\text{m}\Omega \text{ MAX}$	
	Hi-Pot	Pri-Sec	1500 Vrms	
KI Factor	3117.5			
PA1370NL	Pri. Inductance	(3-4)	20.4 $\mu\text{H} \pm 10\%$	 <p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (8,5) shorted	1.5 $\mu\text{H} \text{ MAX}$	
	DCR	(3-4)	80 $\text{m}\Omega \text{ MAX}$	
		(5-8)	30 $\text{m}\Omega \text{ MAX}$	
		(2-1)	105 $\text{m}\Omega \text{ MAX}$	
	Hi-Pot	Pri-Sec	1500 Vrms	
KI Factor	1002.9			
PA1721NL	Pri. Inductance	(3-4)	185 $\mu\text{H} \pm 10\%$	 <p>FORWARD TRANSFORMER</p>
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	10 $\mu\text{H} \text{ MAX}$	
	DCR	(3-4)	420 $\text{m}\Omega \text{ MAX}$	
		(6, 5-8, 7)	12 $\text{m}\Omega \text{ MAX}$	
		(2-1)	115 $\text{m}\Omega \text{ MAX}$	
	Hi-Pot	Pri-Sec	1500 Vrms	
KI Factor	3410.8			
PA2362NL	Pri. Inductance	(3-4)	25.2 $\mu\text{H} \pm 10\%$	 <p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (1, 2, 8, 7, 6, 5) shorted	0.55 $\mu\text{H} \text{ MAX}$	
	DCR	(3-4)	135 $\text{m}\Omega \text{ MAX}$	
		(6, 5-8, 7)	11 $\text{m}\Omega \text{ MAX}$	
		(2-1)	115 $\text{m}\Omega \text{ MAX}$	
	Hi-Pot	Pri-Sec	1500 Vdc	
KI Factor	1115.0			

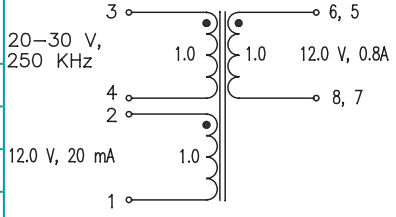
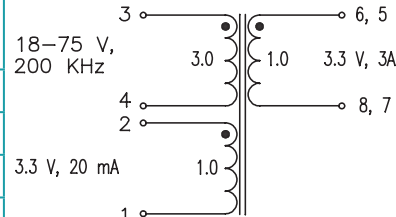
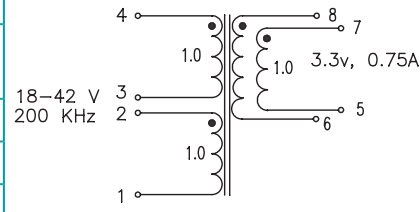
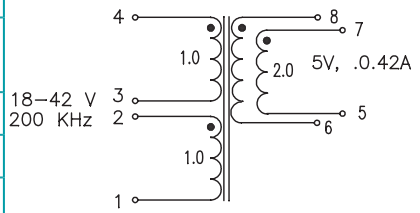
# HIGH FREQUENCY WIRE-WOUND TRANSFORMER

EP10 Platforms - SMT

Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C				
<b>PA2363NL</b>	Pri. Inductance	(3-4)	25.2 $\mu$ H $\pm$ 10%	 <p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (1, 2, 8, 7, 6, 5) shorted	0.85 $\mu$ H MAX	
	DCR	(3-4)	135 m $\Omega$ MAX	
		(6, 5-8, 7)	9 m $\Omega$ MAX	
		(2-1)	180 m $\Omega$ MAX	
	Hi-Pot	Pri-Sec	1500 Vrms	
	KI Factor	1115.0		
<b>PA2364NL</b>	Pri. Inductance	(3-4)	25.2 $\mu$ H $\pm$ 10%	 <p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (1, 2, 8, 7, 6, 5) shorted	1 $\mu$ H MAX	
	DCR	(3-4)	145 m $\Omega$ MAX	
		(6, 5-8, 7)	7.5 m $\Omega$ MAX	
		(2-1)	110 m $\Omega$ MAX	
	Hi-Pot	Pri-Sec	1500 Vrms	
	KI Factor	1059.4		
<b>PA2454NL</b>	Pri. Inductance	(3-4)	24 $\mu$ H $\pm$ 10%	 <p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	0.75 $\mu$ H MAX	
	DCR	(3-4)	82 m $\Omega$ MAX	
		(6, 5-8, 7)	13 m $\Omega$ MAX	
		(2-1)	80 m $\Omega$ MAX	
	Hi-Pot	Pri-Sec	1500 Vrms	
	KI Factor	1179.9		
<b>PA2455NL</b>	Pri. Inductance	(3-4)	24 $\mu$ H $\pm$ 10%	 <p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(1-4) with (8, 7, 6, 5) shorted	0.6 $\mu$ H MAX	
	DCR	(3-4)	90 m $\Omega$ MAX	
		(6, 5-8, 7)	23 m $\Omega$ MAX	
		(2-1)	130 m $\Omega$ MAX	
	Hi-Pot	Pri-Sec	1500 Vdc	
	KI Factor	1179.9		

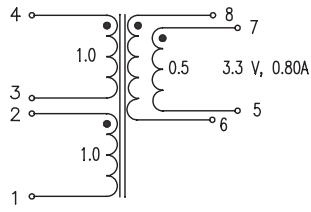
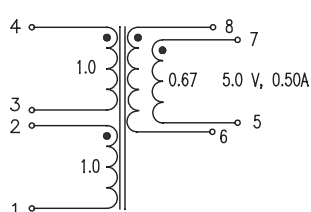
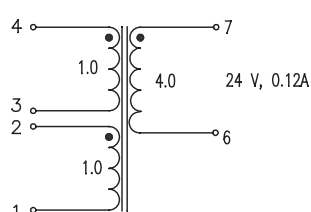
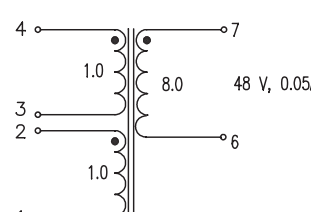
# HIGH FREQUENCY WIRE-WOUND TRANSFORMER

EP10 Platforms - SMT

Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C <sup>3</sup>					
PA2456NL	Pri. Inductance	(3-4)	24 $\mu$ H $\pm$ 10%		FLYBACK TRANSFORMER
	Lk. Inductance	(3,4) with (8, 7, 6, 5) shorted	0.6 $\mu$ H MAX		
	DCR	(3-4)	86 m $\Omega$ MAX		
		(6, 5-8, 7)	86 m $\Omega$ MAX		
		(2-1)	470 m $\Omega$ MAX		
	Hi-Pot	Pri-Sec	1500 Vrms		
KI Factor	1179.9				
PA2627NL	Pri. Inductance	(3-4)	50.5 $\mu$ H $\pm$ 10%		FLYBACK TRANSFORMER
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	1.4 $\mu$ H MAX		
	DCR	(3-4)	420 m $\Omega$ MAX		
		(6, 5-8, 7)	47 m $\Omega$ MAX		
		(2-1)	174 m $\Omega$ MAX		
	Hi-Pot	Pri-Sec	1500 Vrms		
KI Factor	1241.4				
PA3948.001NL	Pri. Inductance	(4-1) with 3,2 shorted	40 $\mu$ H $\pm$ 10%		FLYBACK TRANSFORMER
		(4-1) with 3,2 shorted	32 $\mu$ H Min at 1.88A		
	Lk. Inductance	(4-1) with (5, 6, 7, 8) shorted	1.45 $\mu$ H MAX		
	DCR	(3-4)	410 m $\Omega$ MAX		
		(6, 5-8, 7))	140 m $\Omega$ MAX		
		(2-1)	140 m $\Omega$ MAX		
Hi-Pot	Pri-Sec	1500 Vdc			
KI Factor	1241.4				
PA3948.002NL	Pri. Inductance	(4-1) with 3,2 shorted	40 $\mu$ H $\pm$ 10%		FLYBACK TRANSFORMER
		(4-1) with 3,2 shorted	32 $\mu$ H Min at 1.88A		
	Lk. Inductance	(4-1) with (5, 6, 7, 8) shorted	1.45 $\mu$ H MAX		
	DCR	(4-1)	405 m $\Omega$ MAX		
		(8-6)	470 m $\Omega$ MAX		
		(7-5)	470 m $\Omega$ MAX		
Hi-Pot	Pri-Sec	1500 Vdc			
KI Factor	983.3				

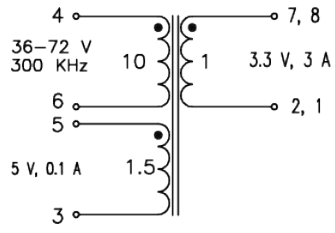
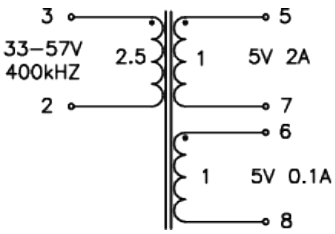
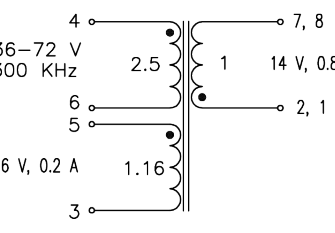
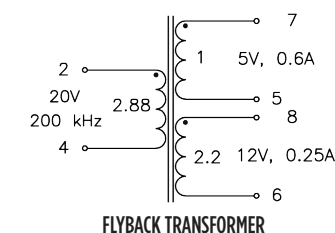
# HIGH FREQUENCY WIRE-WOUND TRANSFORMER

EP10 Platforms - SMT

Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C <sup>2</sup>				
<b>PA3948.003NL</b>	Pri. Inductance	(4-1) with 3, 2 shorted	40 $\mu$ H $\pm$ 10%	
		(4-1) with 3, 2 shorted	32 $\mu$ H Min at 1.88A	
	Lk. Inductance	(4-1) with (5, 6, 7, 8) shorted	1.45 $\mu$ H MAX	
	DCR	(4-1)	405 m $\Omega$ MAX	
		(8-6)	470 m $\Omega$ MAX	
		(7-5)	470 m $\Omega$ MAX	
	Hi-Pot	Pri-Sec	1500 Vrms	
K1 Factor	983.3			
			FLYBACK TRANSFORMER	
<b>PA3948.004NL</b>	Pri. Inductance	(4-1) with 3, 2 shorted	40 $\mu$ H $\pm$ 10%	
		(4-1) with 3, 2 shorted	32 $\mu$ H Min at 1.88A	
	Lk. Inductance	(4-1) with (5, 6, 7, 8) shorted	1.45 $\mu$ H MAX	
	DCR	(4-1)	220 m $\Omega$ MAX	
		(8-6)	58 m $\Omega$ MAX	
		(7-5)	58 m $\Omega$ MAX	
	Hi-Pot	Pri-Sec	1500 Vrms	
K1 Factor	983.3			
			FLYBACK TRANSFORMER	
<b>PA3948.005NL</b>	Pri. Inductance	(4-1) with 3, 2 shorted	40 $\mu$ H $\pm$ 10%	
		(4-1) with 3, 2 shorted	32 $\mu$ H Min at 1.88A	
	Lk. Inductance	(4-1) with (5, 6, 7, 8) shorted	1.6 $\mu$ H MAX	
	DCR	(4-1)	220 m $\Omega$ MAX	
		(7-6)	1275 m $\Omega$ MAX	
	Hi-Pot	Pri-Sec	1500 Vrms	
	K1 Factor	983.3		
			FLYBACK TRANSFORMER	
<b>PA3918.006NL</b>	Pri. Inductance	(4-1) with 3, 2 shorted	40 $\mu$ H $\pm$ 10%	
		(4-1) with 3, 2 shorted	32 $\mu$ H Min at 1.88A	
	Lk. Inductance	(4-1) with (5, 6, 7, 8) shorted	1.65 $\mu$ H MAX	
	DCR	(4-1)	220 m $\Omega$ MAX	
		(7-6)	3350 m $\Omega$ MAX	
	Hi-Pot	Pri-Sec	1500 Vrms	
	K1 Factor	983.3		
			FLYBACK TRANSFORMER	

# HIGH FREQUENCY WIRE-WOUND TRANSFORMER

EP10 Platforms - SMT

Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C <sup>2</sup>				
<b>PB2115NL</b>	Pri. Inductance	(4-6)	25.2 $\mu$ H $\pm$ 10%	 <p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(4-6) with (1,2,3,4,7,8) shorted	1.45 $\mu$ H MAX	
	DCR	(4-6)	250 m $\Omega$ MAX	
		(7, 8-2,1)	3.3 m $\Omega$ MAX	
		(7-5)	20 m $\Omega$ MAX	
	Hi-Pot	Pri-Sec	1500 Vrms	
K1 Factor	1115.0			
<b>PG0686NL</b>	Pri. Inductance	(3-2)	40 $\mu$ H $\pm$ 7%	 <p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-2) with (5, 6, 7, 8) shorted	0.05 $\mu$ H MAX	
	DCR	(3-2)	98 m $\Omega$ MAX	
		(5-7)	50 m $\Omega$ MAX	
		(6-8)	65 m $\Omega$ MAX	
	Hi-Pot	Pri-Sec	1650 Vrms	
K1 Factor	1769.9			
<b>PG0721NL</b>	Pri. Inductance	(4-6)	75 $\mu$ H $\pm$ 15%	 <p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(4-6) with (1,2,3,5,7,8) shorted	1 $\mu$ H MAX	
	DCR	(4-6)	110 m $\Omega$ MAX	
		(7,8-2,1)	35 m $\Omega$ MAX	
		(5-3)	85 m $\Omega$ MAX	
	Hi-Pot	Pri-Sec	1500 Vrms	
K1 Factor	4424.8			
<b>PG0855NL</b>	Pri. Inductance	(2-4)	33.1 $\mu$ H $\pm$ 15%	 <p>FLYBACK TRANSFORMER</p>
	DCR	(2-4)	140 m $\Omega$ MAX	
		(8-6)	115 m $\Omega$ MAX	
		(7-5)	40 m $\Omega$ MAX	
	Hi-Pot	Pri-Sec	1000 Vrms	
K1 Factor	1126.6			

# HIGH FREQUENCY WIRE-WOUND TRANSFORMER

EPI0 Platforms - SMT

**Notes:**

1. The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.
2. The above transformers and inductors have been tested and approved by Pulse's power IC partners and are sited in the appropriate datasheet or evaluation board documentation at these companies. To determine which IC and IC partners are matched with the above Pulse part numbers please consult the IC Cross Reference on the Pulse website.
3. For flyback topology applications, it is necessary to ensure that the transformer will not saturate in the application. The peak flux density (Bpk) should remain below 2700Gauss. To calculate the peak density, use the following formula:  

$$B_{pk} \text{ (Gauss)} = K1\_Factor * I_{pk} \text{ (A)}$$
4. In high volt-sec applications, it is important to calculate the core loss of the transformer. Approximate transformer core loss can be calculated as:

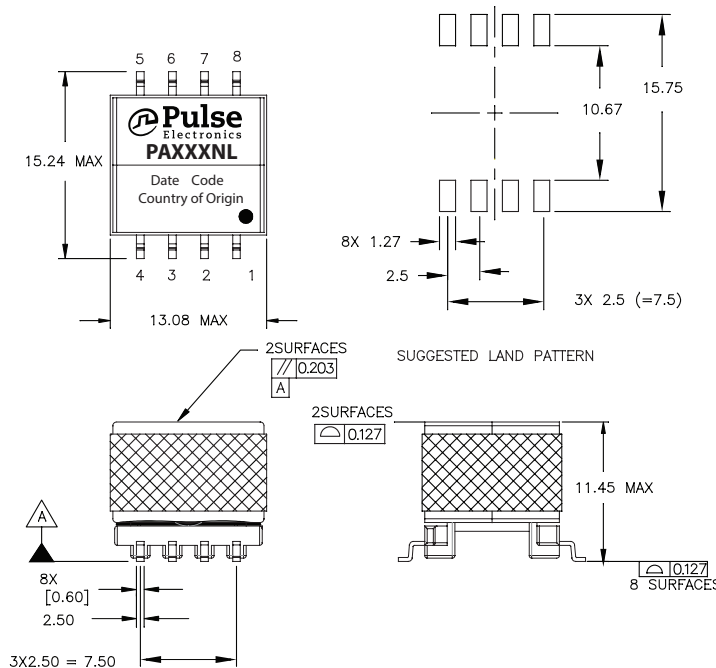
6. Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PA1136NL becomes PA1136NLT). Pulse complies with industry standard tape and reel specification EIA481. The tape and reel for this product has a width (W=32mm), pitch (Po=24mm) an depth (Ko=13.2mm).

$$CoreLoss \text{ (W)} = 2.5E-14 * (Freq\_kHz)^{1.63} * (\Delta B\_Gauss)^{2.63}$$

where  $\Delta B$  can be calculated as:  
 For Flyback Topology:  $\Delta B = K1\_Factor * (A)$   
 For Forward Topology:  $\Delta B = K1\_Factor * Volt-\mu sec$

## Mechanical

### PAXXXNL



## For More Information

**Pulse Worldwide Headquarters**

15255 Innovation Drive Ste 100  
 San Diego, CA 92128  
 U.S.A.

**Pulse Europe**

Pulse Electronics GmbH  
 Am Rottland 12  
 58540 Meinerzhagen  
 Germany

**Pulse China Headquarters**

Pulse Electronics (ShenZhen) CO., LTD  
 D708, Shenzhen Academy of  
 Aerospace Technology,  
 The 10th Keji South Road,  
 Nanshan District, Shenzhen, P.R.  
 China 518057

**Pulse North China**

Room 2704/2705  
 Super Ocean Finance Ctr.  
 2067 Yan An Road West  
 Shanghai 200336  
 China

**Pulse South Asia**

3 Fraser Street  
 0428 DUO Tower  
 Singapore 189352

**Pulse North Asia**

1F, No.111  
 Xiyuan Road  
 Zhongli District  
 Taoyuan City 32057  
 Taiwan (R.O.C)

Tel: 858 674 8100  
 Fax: 858 674 8262

Tel: 49 2354 777 100  
 Fax: 49 2354 777 168

Tel: 86 755 33966678  
 Fax: 86 755 33966700

Tel: 86 21 62787060  
 Fax: 86 2162786973

Tel: 65 6287 8998  
 Fax: 65 6280 0080

Tel: 886 3 4356768  
 Fax: 886 3 4356820

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2018. Pulse Electronics, Inc. All rights reserved.