


LT4000M Rear Module

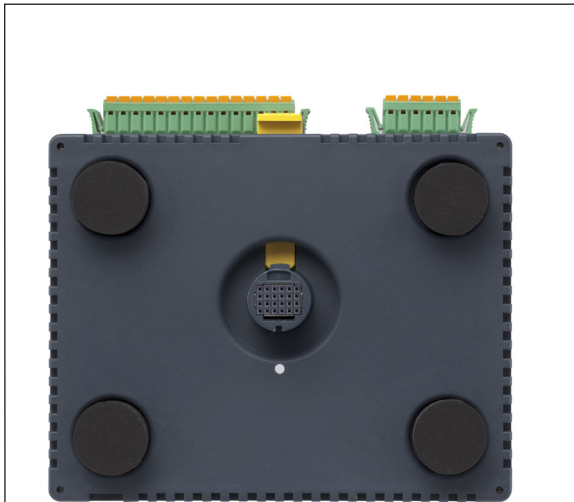

Quick Mount HMI/Controller 24 Vdc

LT4000M Rear Module

Model: PFXLM4301TADAC, PFXLM4301TADAK, PFXLM4301TADDC, PFXLM4301TADDK

Powered by **GP-Pro EX** Screen Editor

Features:

- Blind HMI node that can collect data for Pro-face Remote HMI App on Tablets/Smart phone
- Factory Gateway - allows connectivity for multiple protocols and can bridge those protocols across different networks
- Supports a large selection of Serial or Ethernet protocols. (Set up to 4 protocols)
- USB Interfaces can be used for project transfer and to connect BCR scanners, printers, and memory devices.
- Connectivity to EZ-Series USB Solutions.
- Programmed with the versatile GP-Pro EX Screen Development Software
- Extensive I/O Control

Specifications


Model		LT4000M Rear Module (AIO Type)	LT4000M Rear Module (DIO Type)
Order Numbers		PFXLM4B01DAC (Source) PFXLM4B01DAK (Sink)	PFXLM4B01DDC (Source) PFXLM4B01DDK (Sink)
Memory	Application ^{*1}	16MB FLASH EPROM (Capacity available for user application)	
	Data Backup	128KB nvSRAM	
	Logic Program Area	132KB FLASH EPROM ^{*2} (equivalent to 15,000steps) (expandable to 60,000 steps by using 1MB of user application memory)	
Interfaces	Serial (COM1)	RS-232C/RS485 x 1, RS-232C (Connector type: RJ45, Isolation: None, Maximum baud rate: 115,200 bps, Cable Type: Shielded, Cable Maximum length: 15 m (49 ft), 5 Vdc power supply for RS-232C: None) RS-485 (Connector type: RJ45, Isolation: None, Maximum baud rate: 115,200 bps, Cable Type: Shielded, Cable Maximum length: 200 m (656 ft), Polarization: Setting is required via software when connecting Multiple LTs. Refer to the "GP-Pro EX Device/ PLC Manual" for the setting. 5 Vdc power supply for RS-485: None) ^{*3}	
	Ethernet	x1 10/100BASE-T (Connector type: RJ45, Driver: 10 M half duplex (auto negotiation)/ 100 M full duplex (auto negotiation), Cable type: Shielded, Automatic cross-over detection: Yes)	
	USB	USB 2.0 (Type A) x 1, USB 2.0 (Mini-B) x 1	
	CANOpen (master)	CAN-Cia (ISO 11898-2:2002 Part 2), Connector: D-sub9 (plug)	
Built-in DIO (Input)		12 Points Standard Input (including 2 Points for Fast Input)	20 Points Standard Input (including 2 Points for Fast Input)
Built-in DIO (Output)		6 Points Standard Output and 2 Points Fast Output	10 Points Standard Output and 2 Points Fast Output
Built-in AIO (Input)		2 ch analog inputs (13-bit) and 2 ch analog inputs (16-bit) for Thermocouple 2 ch analog inputs (12-bit)	-
Built-in AIO (Output)		2 channels (Voltage/Current x2)	-

^{*1} Capacity available for user application. ^{*2} Up to 60,000 steps can be converted in software. However, this reduces application memory capacity (for screen data) by 1 MB. ^{*3} 2-wire connection is available for RS-485. When a Device/PLC supports 2-wire connection, 4 wires (RXD+, TXD+, RXD-, and TXD-) can be short-circuited to be 2 wires (RXD+ and TXD+ = D1, RXD- and TXD- = D0). For details on the connection, refer to the connection manual.

General Specifications

Model		PFXLM4B01DAC (Source) PFXLM4B01DAK (Sink)	PFXLM4B01DDC (Source) PFXLM4B01DDK (Sink)
Input Voltage Limits		20 to 28.8 Vdc	
Rated Voltage		24 Vdc	
Power Consumption		≤ 12W	≤ 9W
Ambient Operating Temp	Horizontal Installation	0...50 °C (32...122 °F)	
	Vertical Installation	0...40 °C (32...104 °F)	
Storage Temperature		- 20...60 °C (- 4...140 °F)	
Relative Humidity		5...85% w/o condensation (non-condensing, wet bulb temperature 39 °C (102.2 °F) or less)	
Altitude Operation		0...2,000 m (0...6,560 ft)	
Vibration & Shock Resistance	Mounted on a DIN rail	3.5 mm (0.138 in.) fixed amplitude from 5...8.4 Hz 9.8 m/s ² (1 gn) fixed acceleration from 8.4...150 Hz	
Certifications		CE, UL Listed, RoHS, GOST, DNV-GL, ATEX, IECEx	
Cooling Method		Natural Air Circulation	
Weight		Include Rear module installation adapter : 544g (19.19 oz) / only Rear module : 388g (13.69 oz)	include Rear module installation adapter : 509g (17.96 oz) / only Rear module : 353g (12.46 oz)
Warranty		Two year standard	

LT4000M Rear Module Dimensions

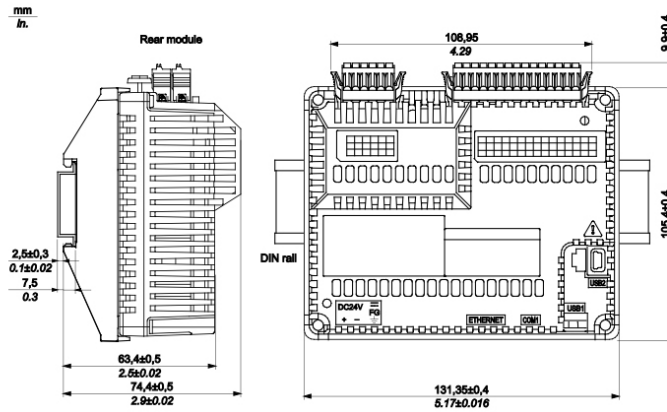


Ordering Information

Part Number	Description
PFXML4B01DAC	LT4000M Analog model Rear Module - Source
PFXML4B01DAK	LT4000M Analog model Rear Module - Sink
PFXML4B01DDC	LT4000M DIO model Rear Module - Source
PFXML4B01DDK	LT4000M DIO model Rear Module - Sink

Optional Items

Part Number	Product Name
EX-ED-Vxx	GP-Pro EX Development Software (download version), xx refers to current version
EX-ED-Vxx-DVD	GP-Pro EX Development Software (download version + DVD backup media), xx refers to current version
PFXZLMCBRJ21	Cable for RS-232C connection between various hosts and the LT4000M (RJ45 Type) -open leads
PFXZLMCBRJ81	Cable for RS-485 connection between various hosts and the LT4000M (RJ45 Type) -open leads
PFXZLMCN101	DIO Connector set for LT4000M
PFXZXMADSA1	Rear Module DIN Rail Adapter for LT4000M

Software Compatibility




Powered By

Screen Editor
GP-Pro EX

HMI Development Software

(Version 3.12 or newer)

DIN Rail Mount

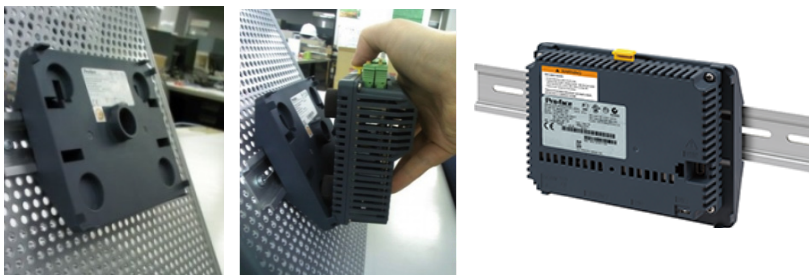

Use as a Blind HMI

Use GP4000M Rear Module as a blind HMI node that can collect data for the Pro-face Remote HMI App on a tablet or smart phone.



Pro-face America
Phone: 734.477.0600
Fax: 734.864.7347
www.profaceamerica.com

Customer Service Hotline: 800.289.9266

For more information

ACCESS www.profaceamerica.com

Pro-face



California Proposition 65 Warning—Lead and Lead Compounds

Advertencia de la Proposición 65 de California—Plomo y compuestos de plomo

Avertissement concernant la Proposition 65 de Californie—Plomb et composés de plomb

⚠ WARNING: This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to: www.P65Warnings.ca.gov.

⚠ ADVERTENCIA: Este producto puede exponerle a químicos incluyendo plomo y compuestos de plomo, que es (son) conocido(s) por el Estado de California como causante(s) de cáncer y defectos de nacimiento u otros daños reproductivos. Para mayor información, visite : www.P65Warnings.ca.gov.

⚠ AVERTISSEMENT: Ce produit peut vous exposer à des agents chimiques, y compris plomb et composés de plomb, identifiés par l'État de Californie comme pouvant causer le cancer et des malformations congénitales ou autres troubles de l'appareil reproducteur. Pour de plus amples informations, prière de consulter: www.P65Warnings.ca.gov.

All trademarks are the property of Schneider Electric SE, its subsidiaries, and affiliated companies.

Schneider Electric USA, Inc.
800 Federal Street
Andover, MA 01810 USA
888-778-2733
www.schneider-electric.us

Todas las marcas comerciales son propiedad de Schneider Electric SE, sus filiales y compañías afiliadas.

Importado en México por:
Schneider Electric México, S.A. de C.V.
Av. Ejercito Nacional No. 904
Col. Palmas, Polanco 11560 México, D.F.
55-5804-5000
www.schneider-electric.com.mx

Toutes les marques commerciales sont la propriété de Schneider Electric SE, ses filiales et compagnies affiliées.

Schneider Electric Canada, Inc.
5985 McLaughlin Road
Mississauga, ON L5R 1B8 Canada
800-565-6699
www.schneider-electric.ca