

# ARTESYN ATA SERIES

8 Watts



Advanced Energy's Artesyn ATA series 8 watt isolated DC-DC converters are suitable for a diverse range of low power applications, including data communication, telecommunication and computer peripheral equipment, industrial automation and mobile battery-powered systems. The series comprises 14 variants, each of which is available in a mini dual-in-line package for through-hole mounting.

## DATA SHEET

### Total Power:

8 W

### Input Voltage:

12, 24 or 48 V

### # of Outputs:

Single and Dual

## SPECIAL FEATURES

- Ultra compact DIP package  
23.8 x 13.7 x 8.0 mm  
(0.94 x 0.54 x 0.31 inches)
- Efficiency up to 86%
- I/O-isolation 1500 VDC
- Ultra-wide 4:1 input range
- Operating temperature range  
-40 °C to +80 °C
- Input filter meets EN 55022, class A  
and FCC, level A
- Three year product warranty
- UL/cUL/IEC/EN 62368-1 (60950-1)  
safety approval and CE marking

## SAFETY

- UL/cUL/IEC/EN 62368-1 (60950-1)  
Safety Approval & CE Marking

**ELECTRICAL SPECIFICATIONS**

Input	
Input range	9 - 36 Vdc, 18 - 75 Vdc
Efficiency	86% @ 24 Vo
Output	
Voltage tolerance	±2.0%
Line regulation	0.8%
Load regulation	1.0%
Noise/ripple	55 mV
Overload protection	150% typ of Io max, Hiccup
Short circuit protection	Hiccup mode
Switching frequency	370 KHz
Isolation	
I/O isolation	I/O: 1500 Vdc
Insulation resistance	1000 Mohm
Insulation capacitance	500 pF


**ENVIRONMENTAL SPECIFICATIONS**

Operating ambient temperature range	-40 °C to +80 °C
Storage temperature	-50 °C to +125 °C
Humidity	5% to 95% non-condensing
MTBF	TBD Khrs calculated

## ORDERING INFORMATION

Part Number	Input Voltage	Output Voltage	Output Current	Efficiency	Power
ATA02F18-L	9-36 Vdc	3.3 V	2000 mA	78%	6.6 W
ATA02A18-L	9-36 Vdc	5 V	1600 mA	82%	8 W
ATA02B18-L	9-36 Vdc	12 V	665 mA	85%	8 W
ATA02C18-L	9-36 Vdc	15 V	535 mA	85%	8 W
ATA02H18-L	9-36 Vdc	24 V	335 mA	86%	8 W
ATA02BB18-L	9-36 Vdc	±12 V	335 mA	85%	8 W
ATA02CC18-L	9-36 Vdc	±15 V	265 mA	86%	8 W
ATA02F36-L	18-75 Vdc	3.3 V	2000 mA	78%	6.6 W
ATA02A36-L	18-75 Vdc	5 V	1600 mA	81%	8 W
ATA02B36-L	18-75 Vdc	12 V	665 mA	85%	8 W
ATA02C36-L	18-75 Vdc	15 V	535 mA	85%	8 W
ATA02H36-L	18-75 Vdc	24 V	335 mA	86%	8 W
ATA02BB36-L	18-75 Vdc	± 12 V	335 mA	86%	8 W
ATA02CC36-L	18-75 Vdc	± 15 V	265 mA	86%	8 W

MECHANICAL DIMENSIONS

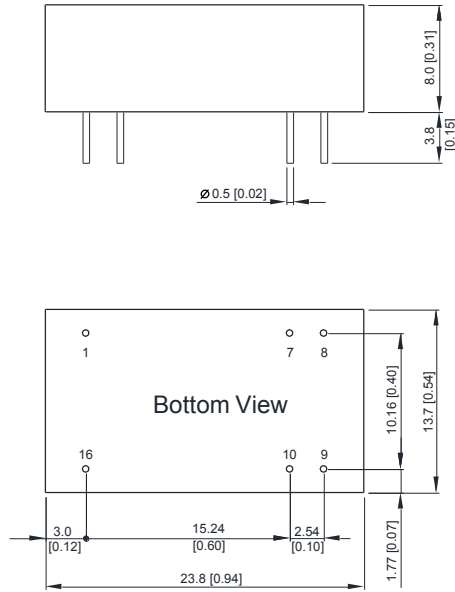

- All dimensions in mm (inches)
- Tolerance: X.X±0.25 (X.XX±0.01)  
X.XX±0.13 (X.XXX±0.005)
- Pin pitch tolerance: ±0.25 (±0.01)
- Pin dimension tolerance: ±0.1 (±0.004)

PIN CONNECTORS

Pin No.	Single Output	Dual Output
1	-Vin	-Vin
7	No Connection	No Connection
8	No Connection	Common
9	+Vout	+Vout
10	-Vout	-Vout
16	+Vin	+Vin



For international contact information,  
visit [advancedenergy.com](http://advancedenergy.com).

[powersales@aei.com](mailto:powersales@aei.com) (Sales Support)  
[productsupport.ep@aei.com](mailto:productsupport.ep@aei.com) (Technical Support)  
+1 888 412 7832

## ABOUT ADVANCED ENERGY

Advanced Energy (AE) has devoted more than three decades to perfecting power for its global customers. AE designs and manufactures highly engineered, precision power conversion, measurement and control solutions for mission-critical applications and processes.

Our products enable customer innovation in complex applications for a wide range of industries including semiconductor equipment, industrial, manufacturing, telecommunications, data center computing, and medical. With deep applications know-how and responsive service and support across the globe, we build collaborative partnerships to meet rapid technological developments, propel growth for our customers, and innovate the future of power.

PRECISION | POWER | PERFORMANCE

---

Specifications are subject to change without notice. Not responsible for errors or omissions. ©2020 Advanced Energy Industries, Inc. All rights reserved. Advanced Energy®, AE® and Artesyn™ are U.S. trademarks of Advanced Energy Industries, Inc.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Artesyn Embedded Technologies:](#)

[ATA02H36-L](#) [ATA02C36-L](#) [ATA02CC18-L](#) [ATA02F36-L](#) [ATA02B18-L](#) [ATA02B36-L](#) [ATA02BB18-L](#) [ATA02CC36-L](#)  
[ATA02H18-L](#) [ATA02A18-L](#) [ATA02C18-L](#) [ATA02BB36-L](#) [ATA02A36-L](#) [ATA02F18-L](#)