

# Multi- Aperture cores (2843002302)

Part Number: 2843002302

43 MULTI- APERTURE CORE

Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade
- Last digit 2 = Burnished

**Multi- aperture cores are used in suppression applications and in balun (balance- unbalance) and other broadband transformers. They are also employed in airbag designs to prevent accidental activation.**

All multi- aperture cores are supplied burnished.

Our “Multi- Aperture Core Kit” (part number 0199000036) is available for prototype evaluation.

**For any multi- aperture requirement not listed here, feel free to contact our customer service group for availability and pricing.**

[Catalog Drawing](#)  
[3D Model](#)

Weight: 0.1 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	3.45	±0.25	0.136	—
B	2.35	±0.25	0.093	—
C	2	±0.15	0.079	—
E	1.45	±0.10	0.057	—
H	0.75	+0.25	0.034	—



Figure 1

**Chart Legend**

+ Test frequency


Typical Impedance (Ω)	
25 MHz	30
100 MHz <sup>+</sup>	46

Multi- aperture cores in 73 and 43 materials are controlled for impedance only. The 61 NiZn material is controlled for both impedance and  $A_L$  value. The high frequency 67 material is controlled for  $A_L$  value. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is listed on our catalog drawing.

[Catalog Drawing](#)

Multi- aperture cores in 73 and 43 material are measured for impedance on the E4990A Impedance Analyzer. The 61 and 67 multi- aperture cores are tested on the E4991A / HP4291B Impedance Analyzer. All impedance measurements are performed with a single turn to both holes, using the shortest practical wire length.

The 61 and 67 material multi- hole beads are tested for  $A_L$  value. The test frequency is 10 kHz at < 10 gauss. The test winding is five turns wound through both holes.

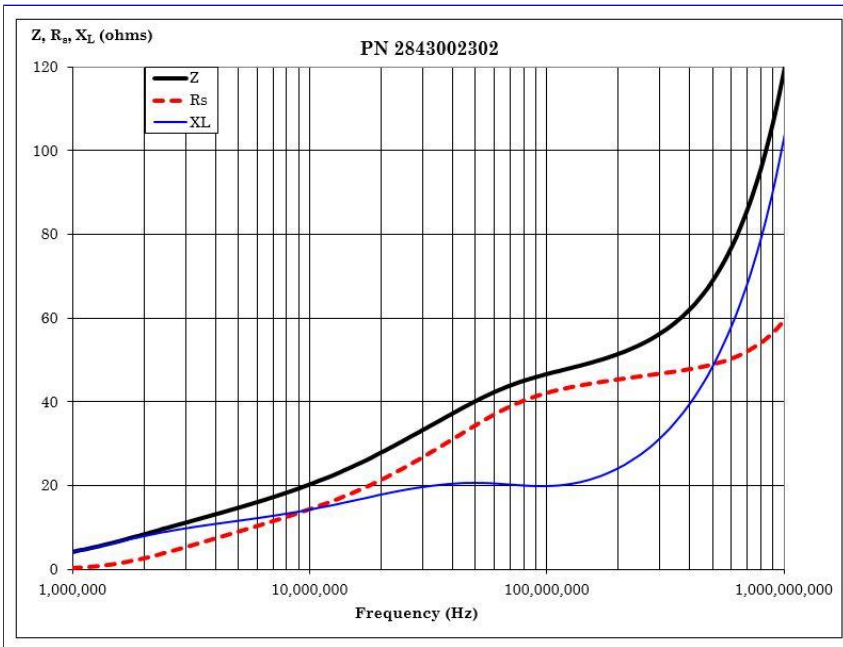

[CSV Download](#)

Fair- Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288  
 888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • [\[email\\_protected\]](#) • [www.fair-rite.com](http://www.fair-rite.com)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Fair-Rite:](#)

[2843002302](#)