


KEMET Part Number: ALS31A472NP400
(A431TS472M400A)

ALS31, Aluminum Electrolytic, 4,700 uF, 20%, 400 VDC, -40/+85°C

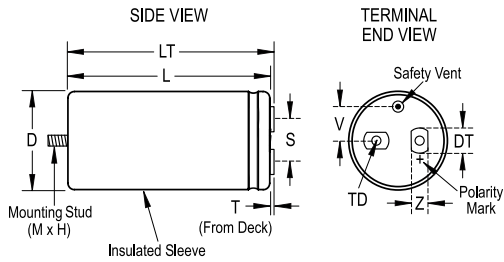

General Information

Supplier:	KEMET
Series:	ALS31
Dielectric:	Aluminum Electrolytic
Description:	Screw Terminal, Aluminum Electrolytic
RoHS:	Yes
Mounting:	Stud
AEC-Q200:	No
Notes:	Dimensions D And L Include Sleevling. MS (MxH) = M12x16

Dimensions

D	77mm +/-1mm
L	146mm +/-2mm
T	5.5mm +/-0.5mm
S	31.8mm +/-0.5mm
DT	13mm +/-0.5mm
LT	150.5mm +/-1mm
TD	10mm MIN
V	19mm NOM
Z	10mm NOM

Specifications

Capacitance:	4,700 uF
Capacitance Tolerance:	20%
Voltage DC:	400 VDC
Temperature Range:	-40/+85°C
Rated Temperature:	85°C
Life:	20000 Hrs (Rated Voltage And Ripple Current At 85C), 40000 Hrs (Rated Voltage At 85C)
Resistance:	33 mOhms (100Hz 20C), 24 mOhms (10kHz 20C)
Ripple Current:	18 Amps (100Hz 85C), 26 Amps (10kHz 85C)
Leakage Current:	6000 uA (5min 20°C)

Packaging Specifications

Weight:	960 g
Sleevling:	Yes
Packaging:	Bulk, Box