

## MOS 24VDC/8-30VDC 2A

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)



Compact and powerful solid-state relays in terminal block format

Saving space in the panel is becoming more and more important, and requires increasingly compact components. With the compact and powerful MICROOPTO solid-state relays, you benefit from our decades of experience in manufacturing products in terminal block format. The MICROOPTO family comprises high-quality solid-state relays for applicationspecific problem solving and delivers high performance in a width of just 6.1 mm. The wide range of accessories from plug-in cross-connections to end-to-end marking solutions makes it particularly versatile. Thanks to international approvals, they can be used worldwide. Reliable function is ensured by the integrated protective suppressor circuit for inputs and outputs. The wide MICROOPTO portfolio includes a range of solutions for special loads. For example, for inductive loads up to 10 A at 24 V DC or for DC loads up to 300 V. In addition, there are solutions for decoupling 5 V TTL inputs and outputs, for frequencies up to 550 kHz, as well as the single CO contact version for inverting signals.

### General ordering data

Version	MICROOPTO, Solid-state relay, Rated control voltage: 24 V DC $\pm 20\%$ , Rated switching voltage: 8...30 V DC, Continuous current: 2 A, Screw connection
Order No.	<a href="#">8937970000</a>
Type	MOS 24VDC/8-30VDC 2A
GTIN (EAN)	4032248716203
Qty.	1 pc(s).

## MOS 24VDC/8-30VDC 2A

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

### Dimensions and weights

Depth	97 mm	Depth (inches)	3.819 inch
Height	88.1 mm	Height (inches)	3.468 inch
Width	6.1 mm	Width (inches)	0.24 inch
Net weight	35.81 g		

### Temperatures

Storage temperature	-40 °C...80 °C	Operating temperature	-25 °C...60 °C
Humidity	5-95% relative humidity, T <sub>u</sub> = 55°C, without condensation		

### Probability of failure

MTTF	847 Years
------	-----------

### Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

### Control side

Rated control voltage	24 V DC ±20 %	Power rating	≤ 170 mW
Pull-in/drop-out voltage, typ.	13.8 V / 13.6 V DC	Protective circuit	Varistor, Reverse polarity protection

### Load side

Rated switching voltage	8...30 V DC	Continuous current	2 A
Max. switching current	4 A	Load category	LC A
Switch-on delay	0.1 ms	Switch-off delay	< 0.5 ms
Voltage drop at max. load	≤ 50 mV	Leakage current	< 10 µA
Min. switching current	100 µA	Short-circuit-proof	Yes (thermal cut-out)
Load side status indicator	LED green, output switched, LED red, short-circuit /overload at the output	Protective circuit, load side	Varistor, Free-wheeling diode
Contact type	1 NO contact (Intelligent POWER MOS-FET)	max. switching frequency (DC control voltage)	125 Hz
Nominal auxiliary voltage	8...30 V DC / max. 6 mA		

### General data

Version	with functional earth connection		
Rail	TS 35		
Colour	black		
UL 94 flammability rating	V-0		
UL94 flammability rating component	Component	Housing	
	UL94 flammability rating	V-0	

**MOS 24VDC/8-30VDC 2A****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Insulation coordination**

Rated voltage	30 V	Pollution severity	2
Surge voltage category	III	Dielectric strength for control side - load side	350 V <sub>eff</sub> / 1 min.
Dielectric strength to mounting rail	350 V <sub>eff</sub> / 1 min.	Impulse withstand voltage	500 V (1,2/50 μ)
Protection degree	IP20		

**Further details of approvals / standards**

Standards	DIN EN 50178, GL 2003-VI-Abs. 9, IEC 62314, UL508	Certificate No. (DNVGL)	TAE000033E
Certificate No. (GERMLLOYD)	54853-08	Certificate no. (cULus)	E141197

**Connection data**

Wire connection method	Screw connection	Stripping length, rated connection	7 mm
Tightening torque, min.	0.4 Nm	Tightening torque, max.	0.6 Nm
Clamping range, rated connection	2.5 mm <sup>2</sup>	Clamping range, min.	0.5 mm <sup>2</sup>
Clamping range, max.	4 mm <sup>2</sup>	Wire cross-section, solid, min.	0.5 mm <sup>2</sup>
Wire cross-section, solid, max.	4 mm <sup>2</sup>	Wire connection cross section, finely stranded, min.	0.5 mm <sup>2</sup>
Wire connection cross section, finely stranded, max.	2.5 mm <sup>2</sup>	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min.	0.5 mm <sup>2</sup>
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max.	1.5 mm <sup>2</sup>	Conductor cross-section, flexible, AEH (DIN 46228-1), min.	0.5 mm <sup>2</sup>
Conductor cross-section, flexible, AEH (DIN 46228-1), max.	1.5 mm <sup>2</sup>	Blade size	0.6 x 3.5 mm

**Classifications**

ETIM 6.0	EC001504	ETIM 7.0	EC001504
ETIM 8.0	EC001504	ECLASS 9.0	27-37-16-04
ECLASS 9.1	27-37-16-04	ECLASS 10.0	27-37-16-04
ECLASS 11.0	27-37-16-04		

**Important note**

Product information                      The cable lengths must not exceed 30 m.

**Approvals**

Approvals



ROHS	Conform
UL File Number Search	E141197

**MOS 24VDC/8-30VDC 2A**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Technical data****Downloads**

---

Approval/Certificate/Document of Conformity	<a href="#">EU Konformitätserklärung / EU Declaration of Conformity</a>
Engineering Data	<a href="#">CAD data – STEP</a>
Engineering Data	<a href="#">EPLAN, WSCAD</a>
User Documentation	<a href="#">Beipackzettel / Package Insert – multilingual</a>
Catalogues	<a href="#">Catalogues in PDF-format</a>
Brochures	

---


**MOS 24VDC/8-30VDC 2A**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany


www.weidmueller.com

**Drawings**

**Wiring diagram**

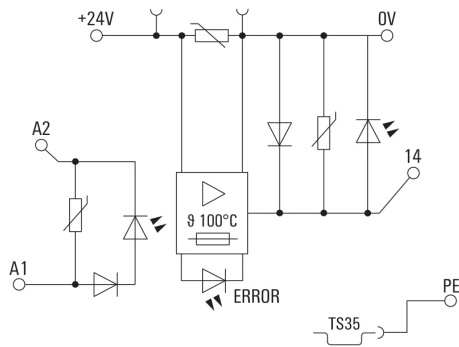

**Graph**

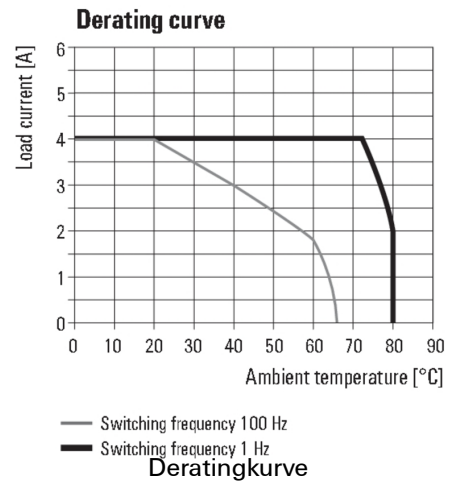

**Dimensional drawing**

