

DATASHEET

# UF3C065040B3

## 650V-42mΩ SiC FET

Rev. B, December 2019

### Description

This SiC FET device is based on a unique ‘cascode’ circuit configuration, in which a normally-on SiC JFET is co-packaged with a Si MOSFET to produce a normally-off SiC FET device. The device’s standard gate-drive characteristics allows for a true “drop-in replacement” to Si IGBTs, Si FETs, SiC MOSFETs or Si superjunction devices. Available in the D<sup>2</sup>PAK-3L package, this device exhibits ultra-low gate charge and exceptional reverse recovery characteristics, making it ideal for switching inductive loads when used with recommended RC-snubbers, and any application requiring standard gate drive.



### Features

- ◆ Typical on-resistance  $R_{DS(on),typ}$  of 42mΩ
- ◆ Maximum operating temperature of 175°C
- ◆ Excellent reverse recovery
- ◆ Low gate charge
- ◆ Low intrinsic capacitance
- ◆ ESD protected, HBM class 2
- ◆ Very low switching losses (required RC-snubber loss negligible under typical operating conditions)

### Typical applications

- ◆ EV charging
- ◆ PV inverters
- ◆ Switch mode power supplies
- ◆ Power factor correction modules
- ◆ Motor drives
- ◆ Induction heating

TAB

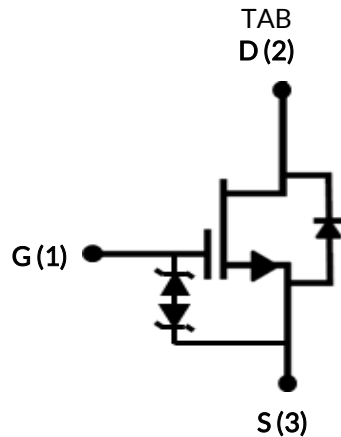

| Part Number  | Package               | Marking      |
|--------------|-----------------------|--------------|
| UF3C065040B3 | D <sup>2</sup> PAK-3L | UF3C065040B3 |



## Maximum Ratings

| Parameter                                   | Symbol         | Test Conditions                      | Value      | Units            |
|---|----------------|--------------------------------------|------------|------------------|
| Drain-source voltage                        | $V_{DS}$       |                                      | 650        | V                |
| Gate-source voltage                         | $V_{GS}$       | DC                                   | -25 to +25 | V                |
| Continuous drain current <sup>1</sup>       | $I_D$          | $T_C = 25^\circ\text{C}$             | 41         | A                |
|   |                | $T_C = 100^\circ\text{C}$            | 30         | A                |
| Pulsed drain current <sup>2</sup>           | $I_{DM}$       | $T_C = 25^\circ\text{C}$             | 125        | A                |
| Single pulsed avalanche energy <sup>3</sup> | $E_{AS}$       | $L=15\text{mH}, I_{AS}=3.19\text{A}$ | 76         | mJ               |
| Power dissipation                           | $P_{tot}$      | $T_C = 25^\circ\text{C}$             | 176        | W                |
| Maximum junction temperature                | $T_{J,max}$    |                                      | 175        | $^\circ\text{C}$ |
| Operating and storage temperature           | $T_J, T_{STG}$ |                                      | -55 to 175 | $^\circ\text{C}$ |
| Reflow soldering temperature                | $T_{solder}$   | reflow MSL 1                         | 260        | $^\circ\text{C}$ |

1. Limited by  $T_{J,max}$

2. Pulse width  $t_p$  limited by  $T_{J,max}$

3. Starting  $T_J = 25^\circ\text{C}$

## Thermal Characteristics

| Parameter                            | Symbol          | Test Conditions | Value |      |      | Units                     |
|--------------------------------------|-----------------|-----------------|-------|------|------|---------------------------|
|                                      |                 |                 | Min   | Typ  | Max  |                           |
| Thermal resistance, junction-to-case | $R_{\theta JC}$ |                 |       | 0.65 | 0.85 | $^\circ\text{C}/\text{W}$ |

## Electrical Characteristics ( $T_J = +25^\circ\text{C}$ unless otherwise specified)

### Typical Performance - Static

| Parameter                      | Symbol       | Test Conditions                                       | Value |     |          | Units         |
|--------------------------------|--------------|---|-------|-----|----------|---------------|
|                                |              |   | Min   | Typ | Max      |               |
| Drain-source breakdown voltage | $BV_{DS}$    | $V_{GS}=0V, I_D=1mA$                                  | 650   |     |          | V             |
| Total drain leakage current    | $I_{DSS}$    | $V_{DS}=650V, V_{GS}=0V, T_J=25^\circ\text{C}$        |       | 0.7 | 150      | $\mu\text{A}$ |
|                                |              | $V_{DS}=650V, V_{GS}=0V, T_J=175^\circ\text{C}$       |       | 10  |          |               |
| Total gate leakage current     | $I_{GSS}$    | $V_{DS}=0V, T_J=25^\circ\text{C}, V_{GS}=-20V / +20V$ |       | 6   | $\pm 20$ | $\mu\text{A}$ |
| Drain-source on-resistance     | $R_{DS(on)}$ | $V_{GS}=12V, I_D=30A, T_J=25^\circ\text{C}$           |       | 42  | 52       | m $\Omega$    |
|                                |              | $V_{GS}=12V, I_D=30A, T_J=125^\circ\text{C}$          |       | 59  |          |               |
|                                |              | $V_{GS}=12V, I_D=30A, T_J=175^\circ\text{C}$          |       | 78  |          |               |
| Gate threshold voltage         | $V_{G(th)}$  | $V_{DS}=5V, I_D=10mA$                                 | 4     | 5   | 6        | V             |
| Gate resistance                | $R_G$        | f=1MHz, open drain                                    |       | 4.5 |          | $\Omega$      |

### Typical Performance - Reverse Diode

| Parameter                                     | Symbol        | Test Conditions   | Value |     |      | Units |
|---|---------------|---|-------|-----|------|-------|
|   |               |   | Min   | Typ | Max  |       |
| Diode continuous forward current <sup>1</sup> | $I_S$         | $T_C=25^\circ\text{C}$  |       |     | 41   | A     |
| Diode pulse current <sup>2</sup>              | $I_{S,pulse}$ | $T_C=25^\circ\text{C}$  |       |     | 125  | A     |
| Forward voltage                               | $V_{FSD}$     | $V_{GS}=0V, I_F=20A, T_J=25^\circ\text{C}$  |       | 1.5 | 1.75 | V     |
|   |               | $V_{GS}=0V, I_F=20A, T_J=175^\circ\text{C}$   |       | 1.8 |      |       |
| Reverse recovery charge                       | $Q_{rr}$      | $V_R=400V, I_F=30A, V_{GS}=-5V, R_{G,EXT}=22\Omega, di/dt=1600A/\mu\text{s}, T_J=25^\circ\text{C}$  |       | 138 |      | nC    |
| Reverse recovery time                         | $t_{rr}$      | $T_J=25^\circ\text{C}$  |       | 26  |      | ns    |
| Reverse recovery charge                       | $Q_{rr}$      | $V_R=400V, I_F=30A, V_{GS}=-5V, R_{G,EXT}=22\Omega, di/dt=1600A/\mu\text{s}, T_J=150^\circ\text{C}$ |       | 137 |      | nC    |
| Reverse recovery time                         | $t_{rr}$      | $T_J=150^\circ\text{C}$   |       | 26  |      | ns    |

## Typical Performance - Dynamic

| Parameter  | Symbol        | Test Conditions   | Value |      |         | Units   |
|--|---------------|---|-------|------|---------|---------|
|  |               |   | Min   | Typ  | Max     |         |
| Input capacitance  | $C_{iss}$     | $V_{DS}=100V, V_{GS}=0V$<br>$f=100kHz$  |       | 1500 |         | pF      |
| Output capacitance   | $C_{oss}$     |   |       | 200  |         |         |
| Reverse transfer capacitance                               | $C_{rss}$     |   |       | 2.2  |         |         |
| Effective output capacitance, energy related               | $C_{oss(er)}$ | $V_{DS}=0V$ to 400V,<br>$V_{GS}=0V$   |       | 146  |         | pF      |
| Effective output capacitance, time related                 | $C_{oss(tr)}$ | $V_{DS}=0V$ to 400V,<br>$V_{GS}=0V$   |       | 325  |         | pF      |
| $C_{oss}$ stored energy                                    | $E_{oss}$     | $V_{DS}=400V, V_{GS}=0V$  |       | 11.7 |         | $\mu J$ |
| Total gate charge  | $Q_G$         | $V_{DS}=400V, I_D=30A,$<br>$V_{GS} = -5V$ to 15V  |       | 51   |         | nC      |
| Gate-drain charge  | $Q_{GD}$      |   |       | 11   |         |         |
| Gate-source charge   | $Q_{GS}$      |   |       | 19   |         |         |
| Turn-on delay time   | $t_{d(on)}$   | $V_{DS}=400V, I_D=30A,$ Gate Driver = -5V to +15V,<br>Turn-on $R_{G,EXT}=1.8\Omega,$<br>Turn-off $R_{G,EXT}=22\Omega$<br>Inductive Load,<br>FWD: same device with<br>$V_{GS} = -5V$ and $R_G = 22\Omega,$<br>RC snubber: $R_S=5\Omega$ and<br>$C_S=150pF, T_J=25^\circ C$ |       | 34   |         | ns      |
| Rise time  | $t_r$         |   |       | 15   |         |         |
| Turn-off delay time  | $t_{d(off)}$  |   |       | 57   |         |         |
| Fall time  | $t_f$         |   |       | 12   |         |         |
| Turn-on energy including $R_S$ energy <sup>4</sup>         | $E_{ON}$      |   |       | 327  |         |         |
| Turn-off energy including $R_S$ energy <sup>4</sup>        | $E_{OFF}$     |   |       | 65   |         |         |
| Total switching energy including $R_S$ energy <sup>4</sup> | $E_{TOTAL}$   |   |       | 392  |         |         |
| Snubber $R_S$ energy during turn-on                        | $E_{RS\_ON}$  |   | 1.5   |      | $\mu J$ |         |
| Snubber $R_S$ energy during turn-off                       | $E_{RS\_OFF}$ |   | 3     |      |         |         |
| Turn-on delay time   | $t_{d(on)}$   |   | 33    |      |         |         |
| Rise time  | $t_r$         |   | 15    |      |         |         |
| Turn-off delay time  | $t_{d(off)}$  |   | 58    |      |         |         |
| Fall time  | $t_f$         |   | 13    |      |         |         |
| Turn-on energy including $R_S$ energy <sup>4</sup>         | $E_{ON}$      |   | 314   |      |         |         |
| Turn-off energy including $R_S$ energy <sup>4</sup>        | $E_{OFF}$     |   | 66    |      |         |         |
| Total switching energy including $R_S$ energy <sup>4</sup> | $E_{TOTAL}$   |   | 380   |      | $\mu J$ |         |
| Snubber $R_S$ energy during turn-on                        | $E_{RS\_ON}$  |   | 1.5   |      |         |         |
| Snubber $R_S$ energy during turn-off                       | $E_{RS\_OFF}$ |   | 2.9   |      |         |         |

4. The switching performance are evaluated with a RC snubber circuit as shown in Figure 24.

## Typical Performance Diagrams

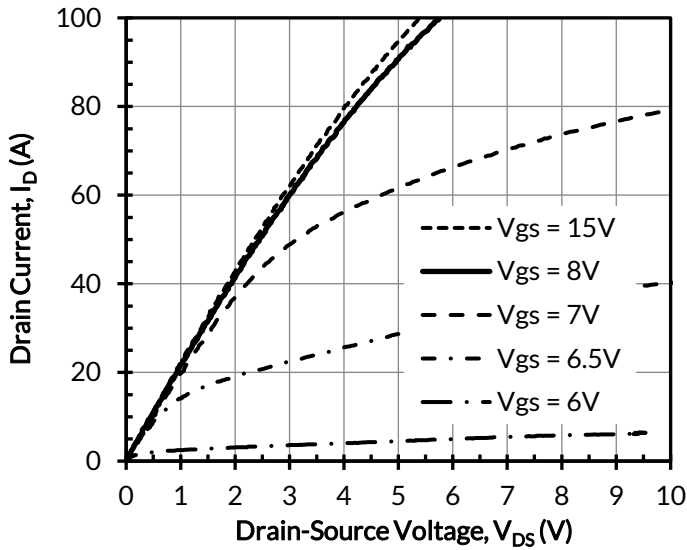


Figure 1. Typical output characteristics at  $T_J = -55^\circ\text{C}$ ,  $t_p < 250\mu\text{s}$

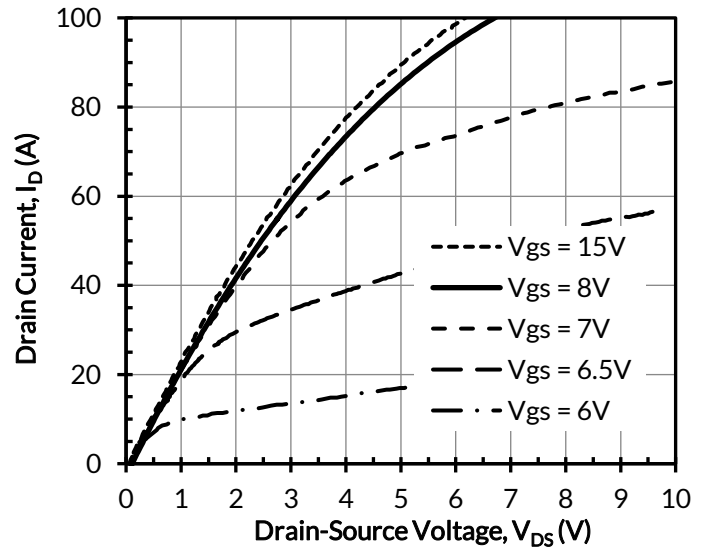


Figure 2. Typical output characteristics at  $T_J = 25^\circ\text{C}$ ,  $t_p < 250\mu\text{s}$

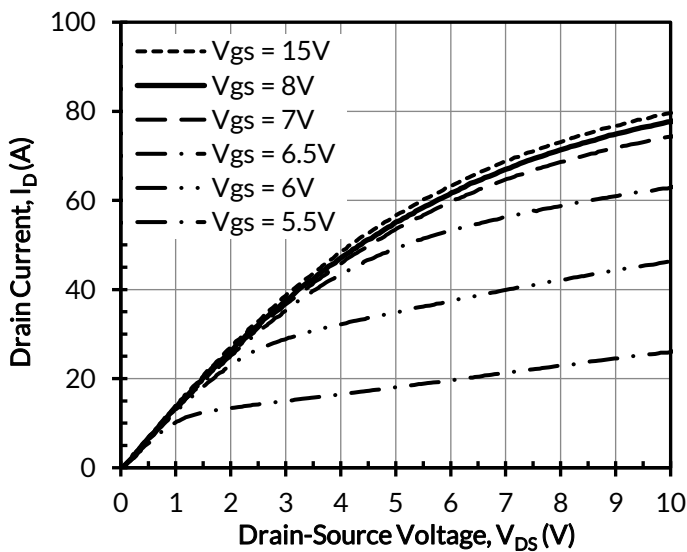


Figure 3. Typical output characteristics at  $T_J = 175^\circ\text{C}$ ,  $t_p < 250\mu\text{s}$

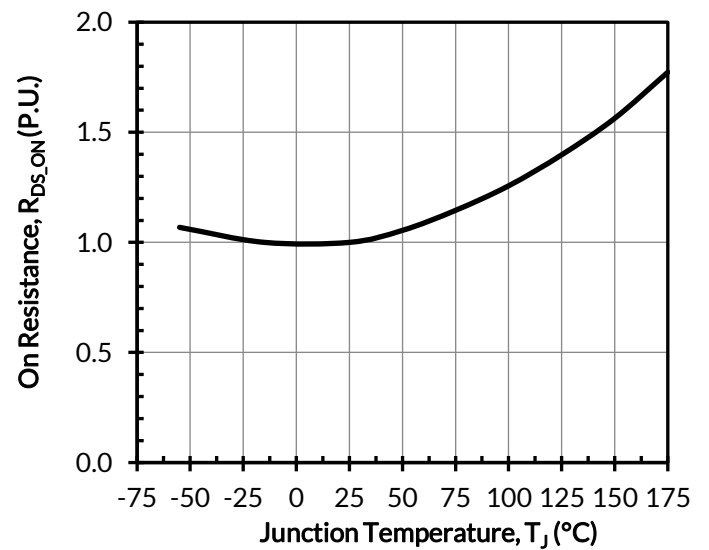


Figure 4. Normalized on-resistance vs. temperature at  $V_{GS} = 12\text{V}$  and  $I_D = 30\text{A}$

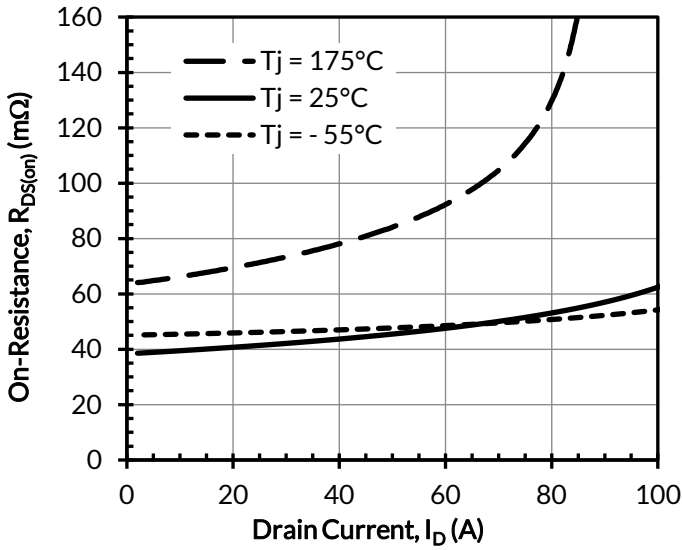


Figure 5. Typical drain-source on-resistances at  $V_{GS} = 12\text{V}$

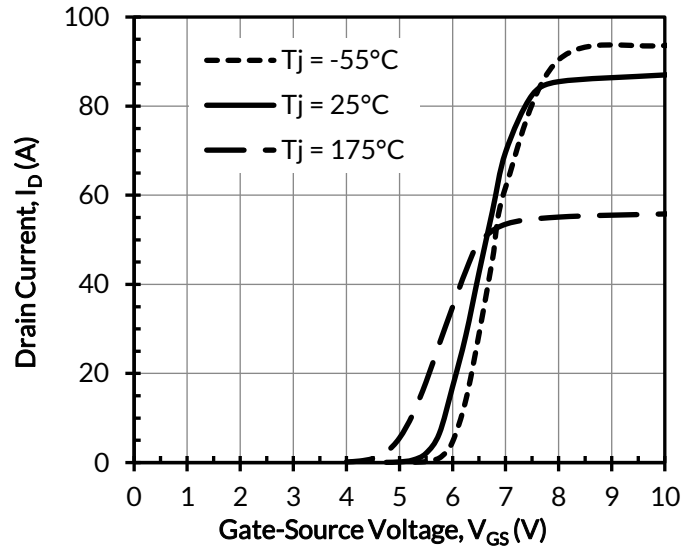


Figure 6. Typical transfer characteristics at  $V_{DS} = 5\text{V}$

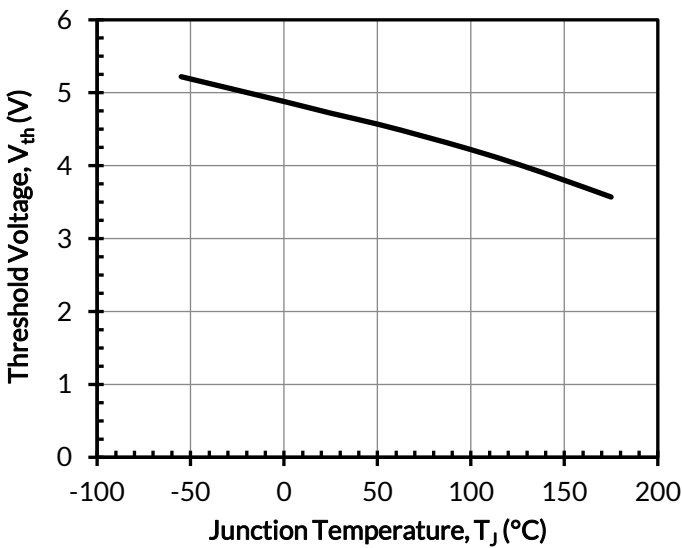


Figure 7. Threshold voltage vs. junction temperature at  $V_{DS} = 5\text{V}$  and  $I_D = 10\text{mA}$

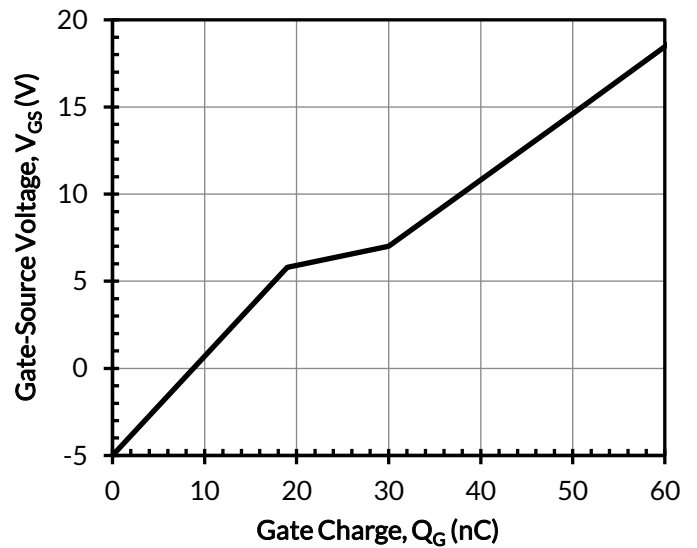


Figure 8. Typical gate charge at  $V_{DS} = 400\text{V}$  and  $I_D = 30\text{A}$

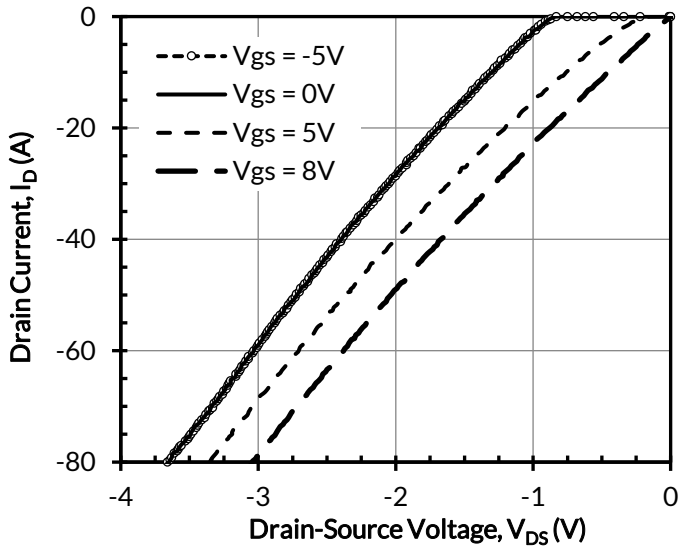


Figure 9. 3rd quadrant characteristics at  $T_j = -55^\circ\text{C}$

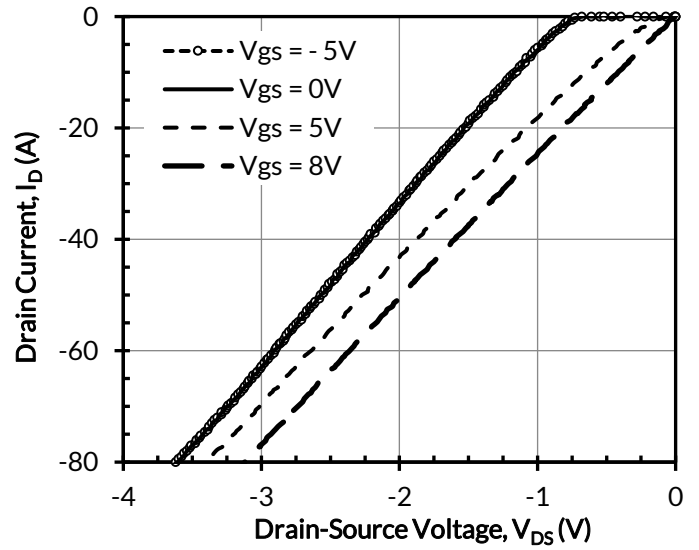


Figure 10. 3rd quadrant characteristics at  $T_j = 25^\circ\text{C}$

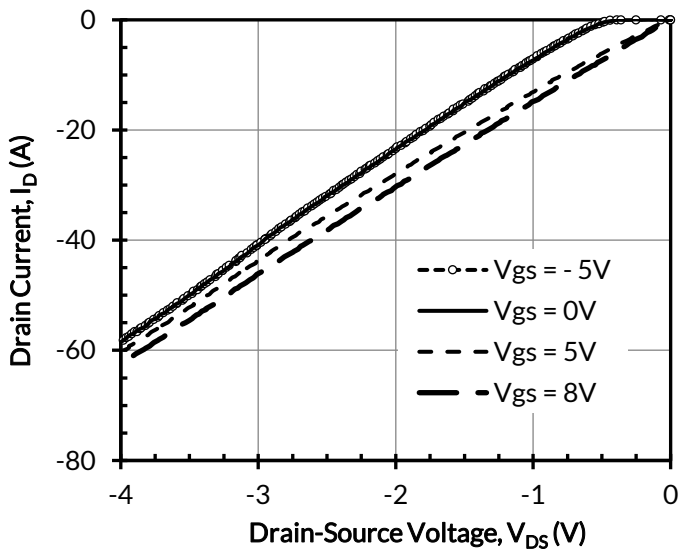


Figure 11. 3rd quadrant characteristics at  $T_j = 175^\circ\text{C}$

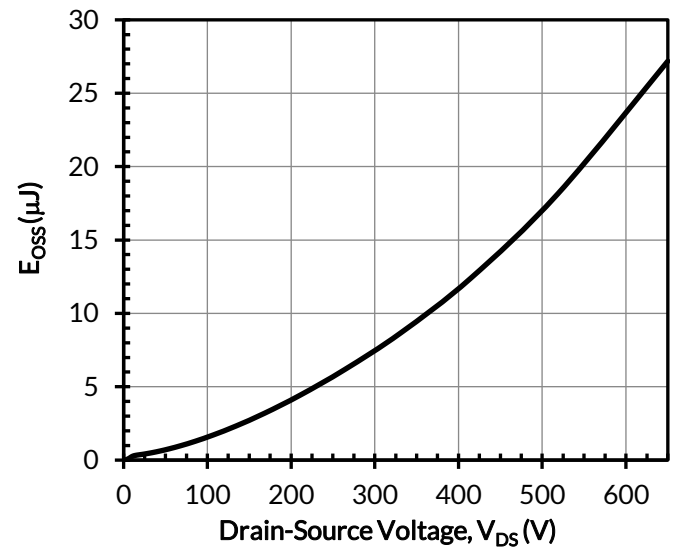


Figure 12. Typical stored energy in  $C_{OSS}$  at  $V_{GS} = 0\text{V}$

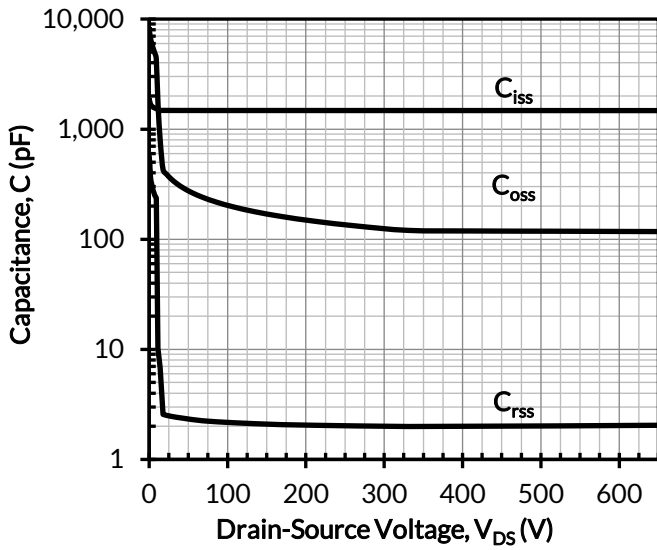


Figure 13. Typical capacitances at  $f = 100\text{kHz}$  and  $V_{GS} = 0\text{V}$

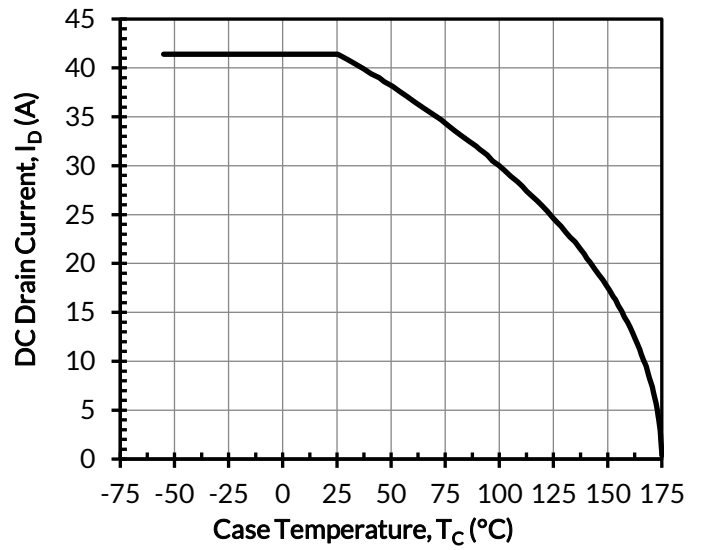


Figure 14. DC drain current derating

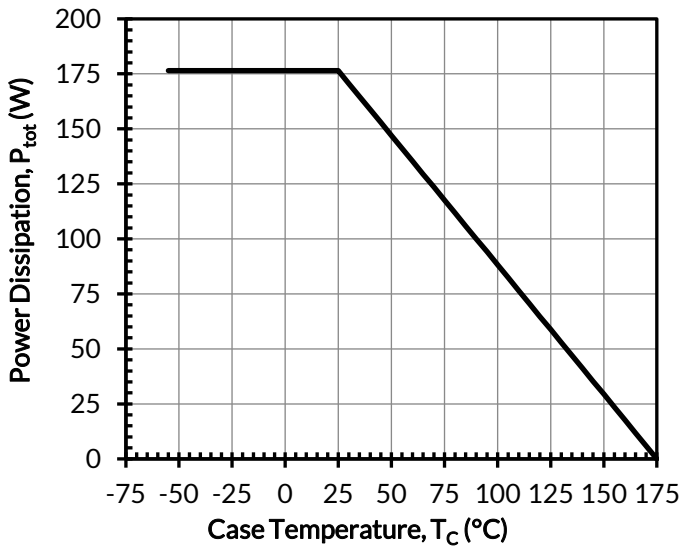


Figure 15. Total power dissipation

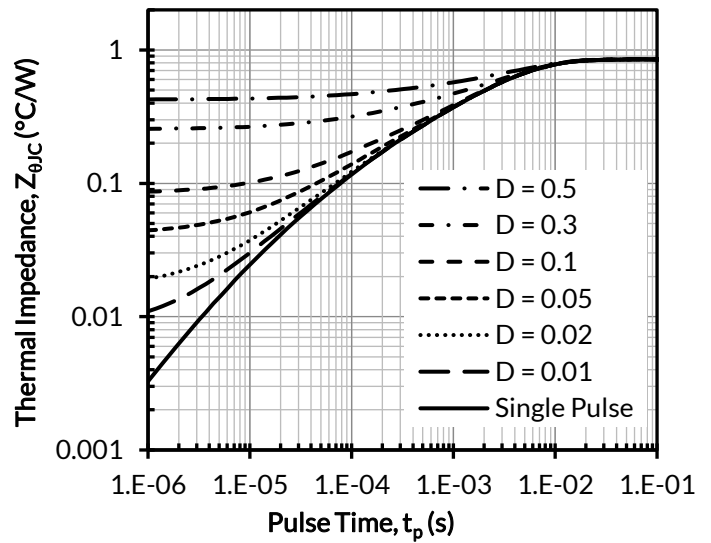


Figure 16. Maximum transient thermal impedance



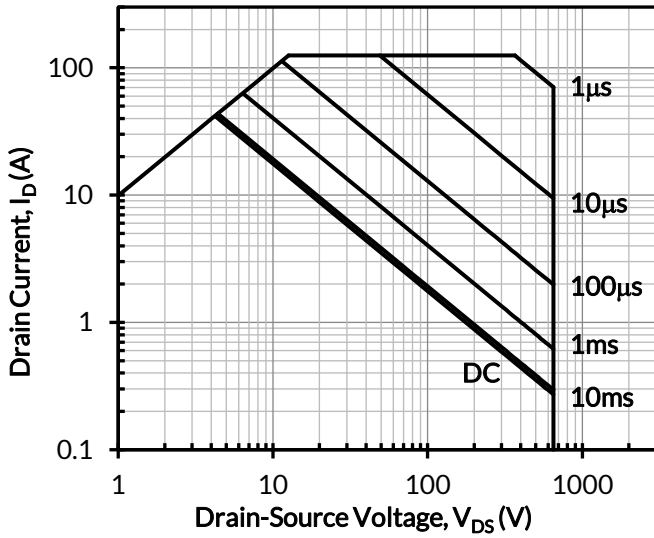


Figure 17. Safe operation area at  $T_C = 25^\circ\text{C}$ ,  $D = 0$ , Parameter  $t_p$



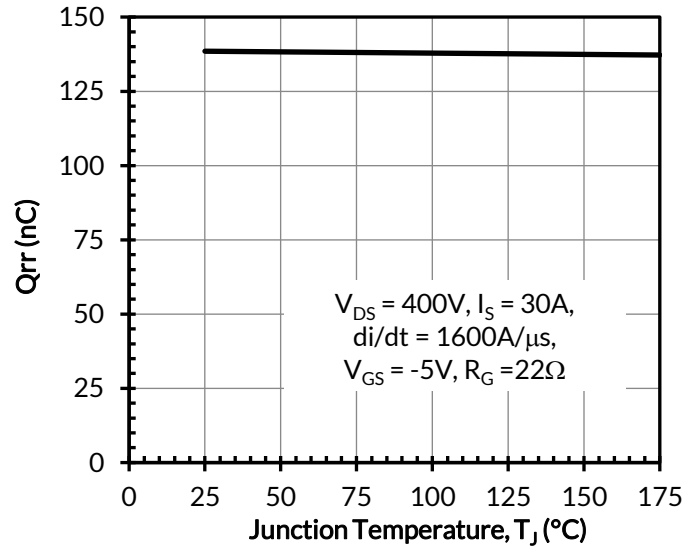


Figure 18. Reverse recovery charge  $Q_{rr}$  vs. junction temperature

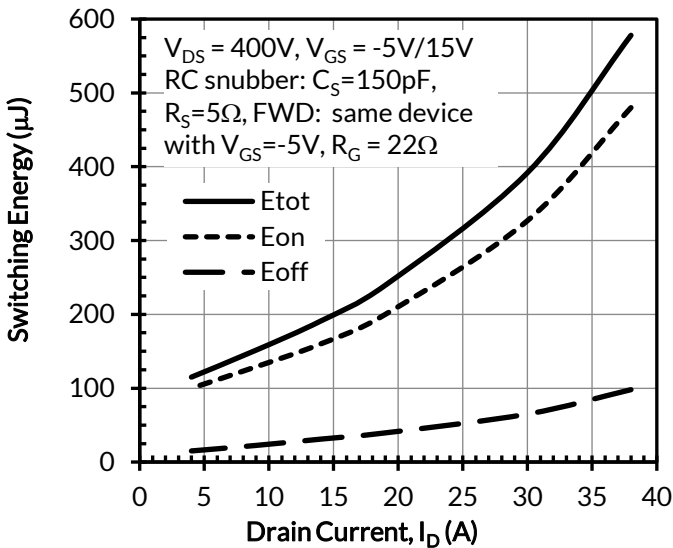


(a)

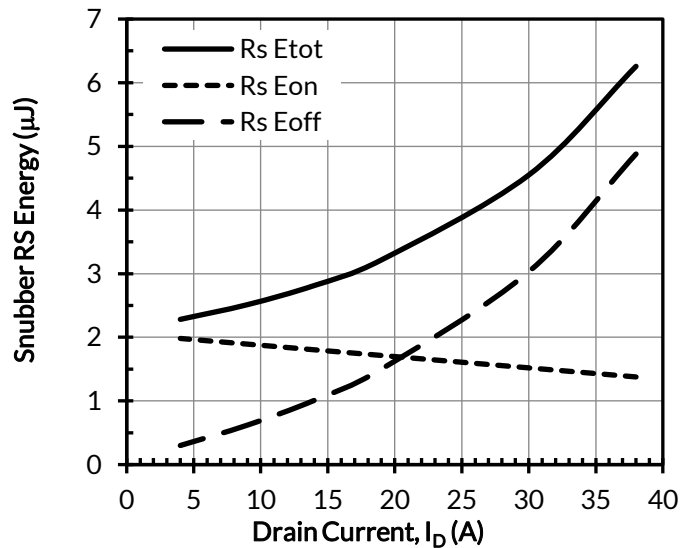


(b)

Figure 19. Clamped inductive switching energy (a) and RC snubber energy loss (b) vs. drain current at  $T_J = 25^\circ\text{C}$ , turn-on  $R_{G\_EXT} = 1.8\Omega$ , and turn-off  $R_{G\_EXT} = 22\Omega$

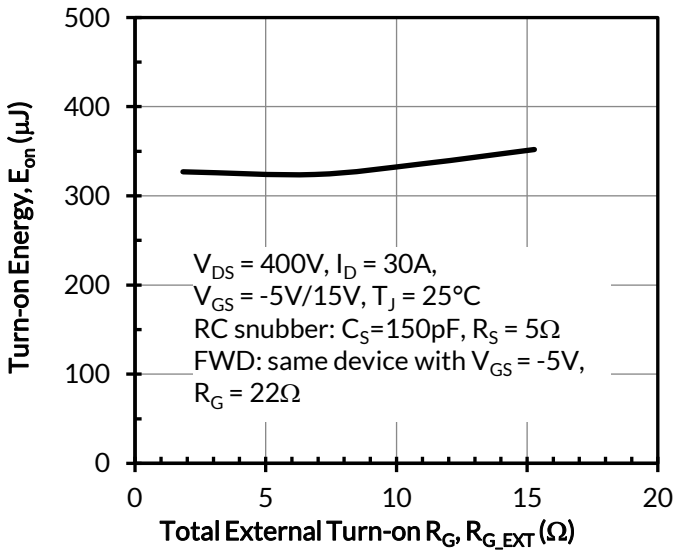


(a)

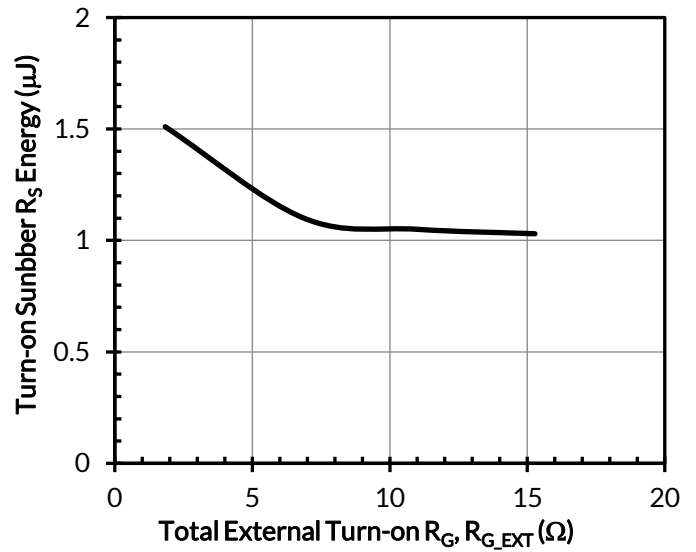


(b)

Figure 20. Clamped inductive switching turn-on energy including RC snubber energy loss (a) and RC snubber energy loss (b) as a function of total external turn-on gate resistor  $R_{G\_EXT}$

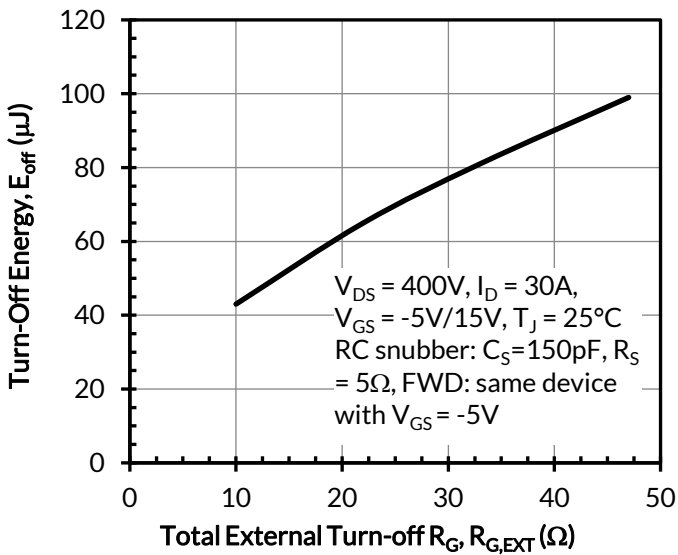


(a)

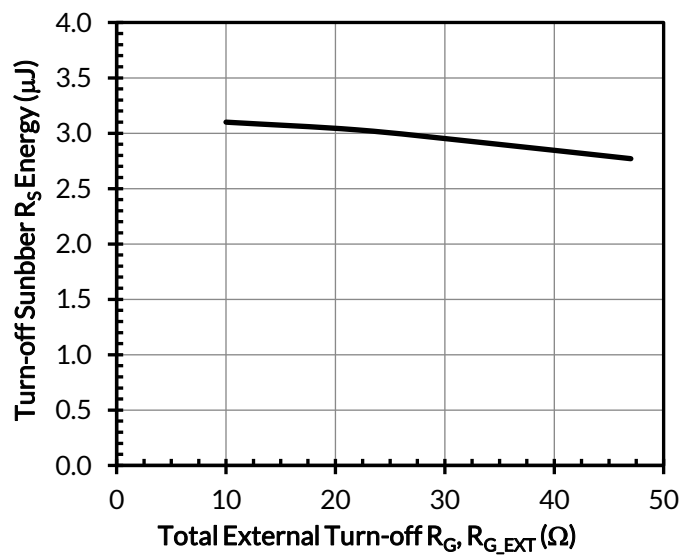


(b)

Figure 21. Clamped inductive switching turn-off energy including RC snubber energy loss (a) and RC snubber energy loss (b) as a function of total external turn-off gate resistor  $R_{G\_EXT}$

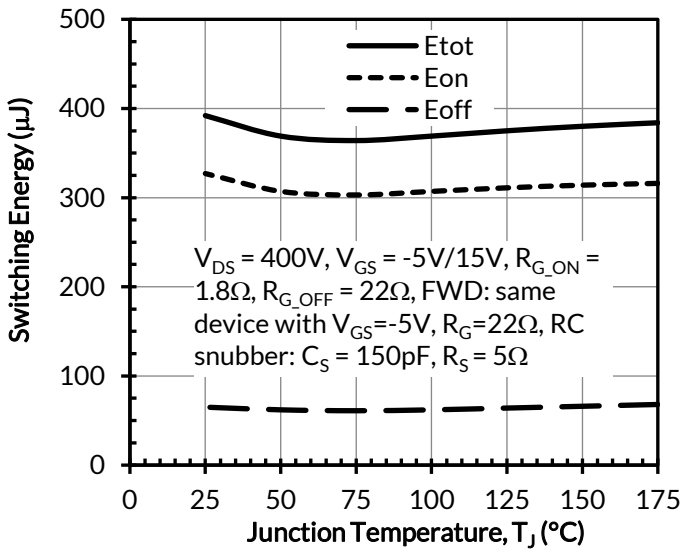


(a)

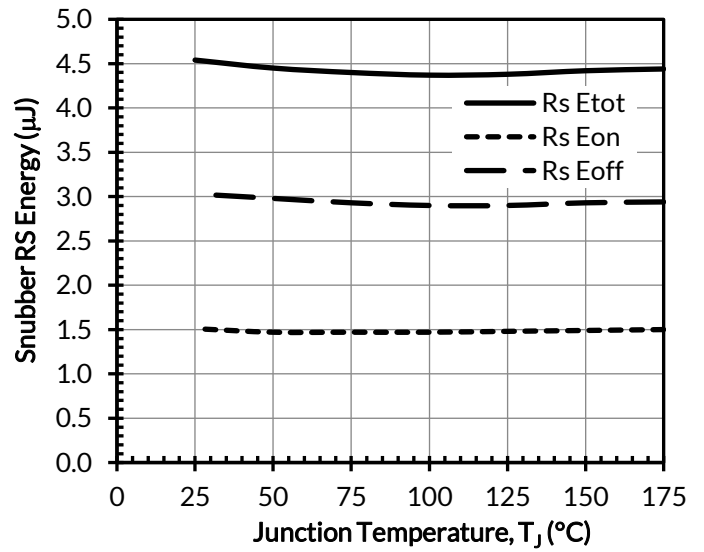


(b)

Figure 22. Clamped inductive switching energy including RC snubber energy loss (a) and RC snubber energy loss (b) as a function of junction temperature at  $I_D = 30A$

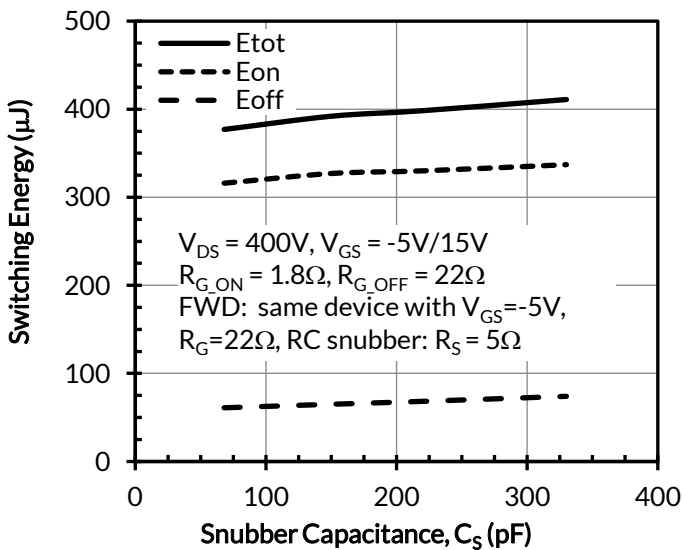

(a)

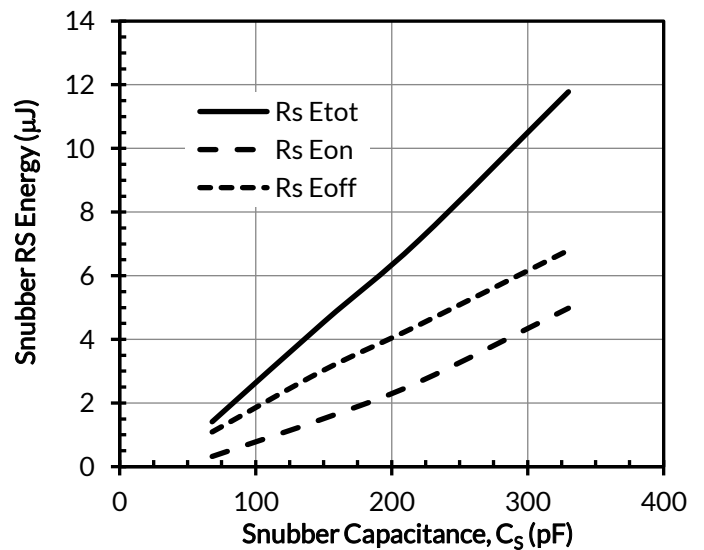

(b)

Figure 23. Clamped inductive switching energy including RC snubber energy loss (a) and RC snubber energy loss (b) as a function of snubber capacitance at  $I_D = 30A$  and  $T_J = 25^\circ C$

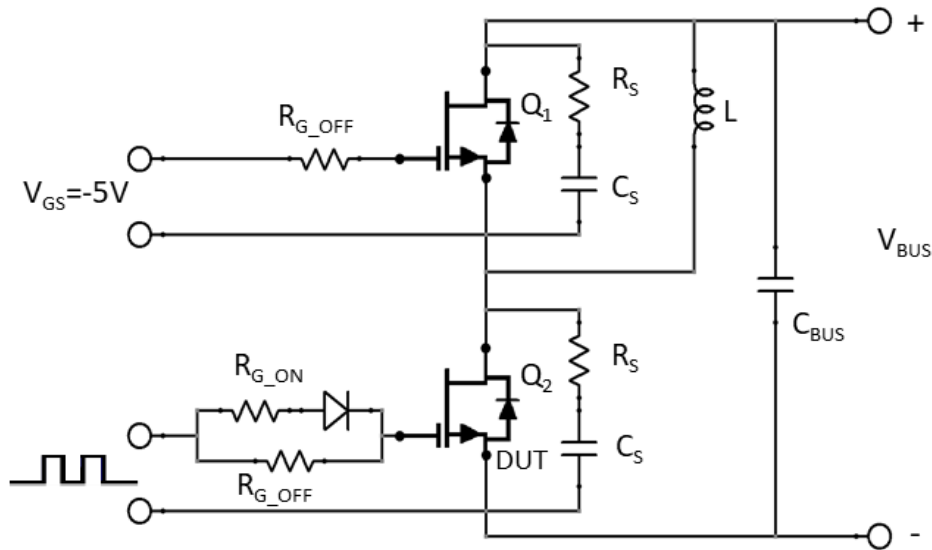


Figure 24. Clamped inductive load switching test circuit  
 An RC snubber ( $R_S = 5\Omega$  and  $C_S = 150\text{pF}$ ) is required to improve the turn-off waveforms.

## Applications Information

SiC FETs are enhancement-mode power switches formed by a high-voltage SiC depletion-mode JFET and a low-voltage silicon MOSFET connected in series. The silicon MOSFET serves as the control unit while the SiC JFET provides high voltage blocking in the off state. This combination of devices in a single package provides compatibility with standard gate drivers and offers superior performance in terms of low on-resistance ( $R_{DS(on)}$ ), output capacitance ( $C_{oss}$ ), gate charge ( $Q_G$ ), and reverse recovery charge ( $Q_{rr}$ ) leading to low conduction and switching losses. The SiC FETs also provide excellent reverse conduction capability eliminating the need for an external anti-parallel diode.

Like other high performance power switches, proper PCB layout design to minimize circuit parasitics is strongly recommended due to the high  $dv/dt$  and  $di/dt$  rates. An external gate resistor is recommended when the FET is working in the diode mode in order to achieve the optimum reverse recovery performance. For more information on SiC FET operation, see [www.unitedsic.com](http://www.unitedsic.com).

## Disclaimer

UnitedSiC reserves the right to change or modify any of the products and their inherent physical and technical specifications without prior notice. UnitedSiC assumes no responsibility or liability for any errors or inaccuracies within.

Information on all products and contained herein is intended for description only. No license, express or implied, to any intellectual property rights is granted within this document.

UnitedSiC assumes no liability whatsoever relating to the choice, selection or use of the UnitedSiC products and services described herein.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Qorvo:](#)

[UF3C065040B3](#)