



AF09 ... AF38 3-pole Contactors up to 18.5 kW / 20 hp



Overview	2
Ordering Details	
– AF09 ... AF38 3-pole Contactors	4
– AF09Z ... AF38Z 3-pole Contactors - Low Consumption	5
– AF09 ... AF38 2-stack 3-pole Contactors.....	6
– AF09Z ... AF38Z 2-stack 3-pole Contactors - Low Consumption.....	7
Technical Data	8
Main Accessory Fitting Details	13
Accessory Ordering Details and Technical Data	14
Terminal Marking and Positioning	20
Dimensions	22
Index	26




AF09 ... AF16
3-pole contactors



AF26 ... AF38
3-pole contactors


for Contactors

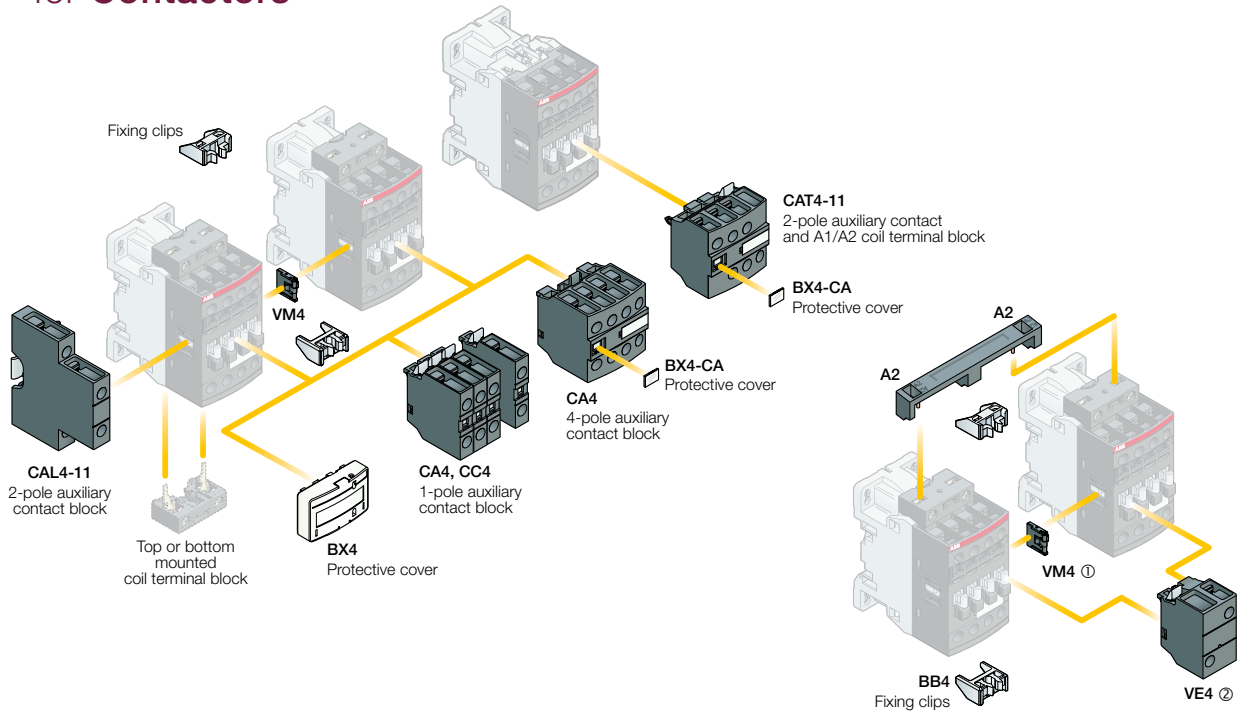


VEM4 mechanical and electrical interlock set including:
 ① **VM4** mechanical interlock unit including 2 fixing clips (**BB4**)
 ② **VE4** electrical interlock block with A2-A2 connection

for Starting Solutions


Direct-On-Line Starter

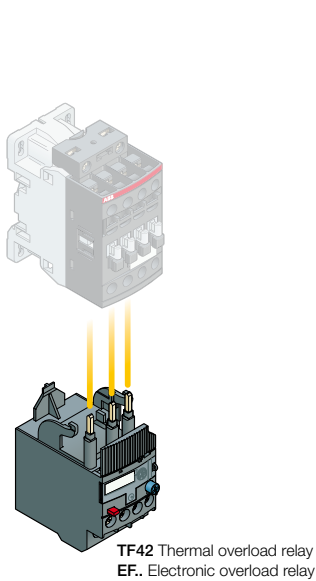

Reversing Starter

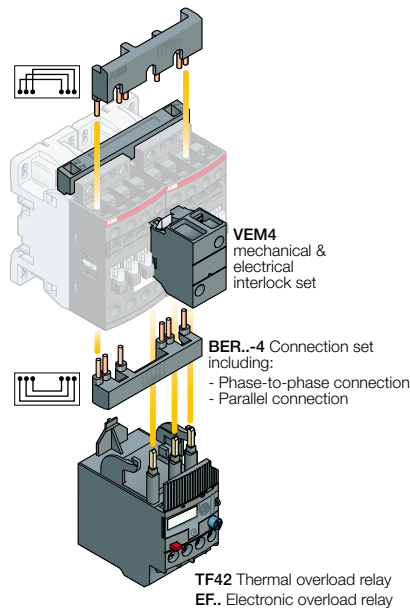

Star-Delta Starter

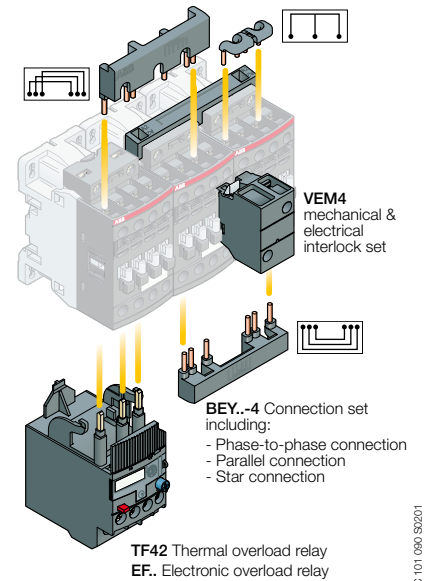

3-pole Contactors



AC / DC control voltage

AF09	AF12	AF16
AF09-30-10	AF12-30-10	AF16-30-10
AF09-30-01	AF12-30-01	AF16-30-01

AF26	AF30	AF38
AF26-30-00	AF30-30-00	AF38-30-00

Switching of 3-phase Cage Motors

	IEC	AC-3	Rated power	400 V
			Rated operational current	$\theta \leq 60^\circ\text{C}$ 400 V $\theta \leq 60^\circ\text{C}$ 415 V $\theta \leq 60^\circ\text{C}$ 690 V
UL/CSA	Motor rating		480 V	
NEMA size				

4 kW	5.5 kW	7.5 kW
9 A	12 A	18 A
9 A	12 A	18 A
7 A	9 A	10.5 A
5 hp	7.5 hp	10 hp
00	0	-


11 kW	15 kW	18.5 kW
26 A	32 A	38 A
26 A	32 A	38 A
17 A	21 A	24 A
15 hp	20 hp	20 hp
1	-	-

Protection of 3-phase motors

Thermal overload relays



Electronic overload relays

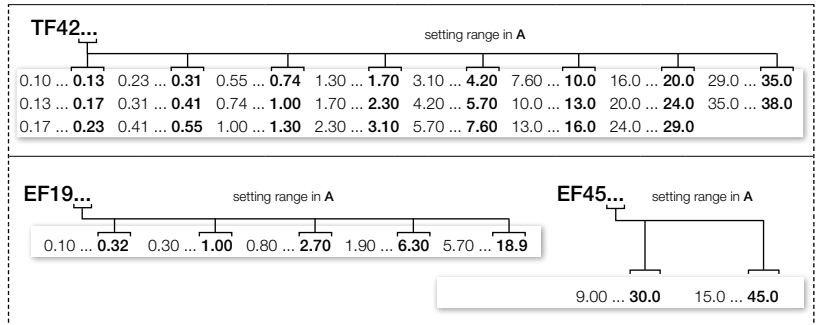

Switching of Resistive Circuits

	IEC	AC-1	Rated operational current	$\theta \leq 40^\circ\text{C}$ 690 V $\theta \leq 60^\circ\text{C}$ 690 V $\theta \leq 70^\circ\text{C}$ 690 V
			With conductor cross-sectional area	
UL/CSA	General use rating		600 V AC	
With conductor cross-sectional area				

25 A	28 A	30 A
25 A	28 A	30 A
22 A	24 A	26 A
4 mm ²	6 mm ²	6 mm ²
25 A	28 A	30 A
AWG 10	AWG 10	AWG 10

45 A	50 A	50 A
40 A	42 A	42 A
32 A	37 A	37 A
10 mm ²	10 mm ²	10 mm ²
45 A	50 A	50 A
AWG 8	AWG 8	AWG 8

Main Accessories

Auxiliary contact blocks	Front mounting	
	Side mounting	
Interlocks	Mechanical / electrical	
	Mechanical	
Connection sets	Reversing Starters	
	Star-Delta Starters	

1-pole CA4-10 or CA4-01, CC4-10 or CC4-01	
4-pole CA4	
2-pole CAT4-11 (with coil front connection)	
2-pole CAL4-11	
VEM4 including VM4 mechanical interlock unit and VE4 electrical interlock block with A2-A2 connection	
VM4 including 2 fixing clips	
BER16-4	BER38-4
BEY16-4	BEY38-4

1S5C 101 090 S201

AF09 ... AF38 3-pole Contactors

AC / DC Operated - with Screw Terminals

Catalogue Page 1SBC 101 254 S0201



AF09-30-10



AF26-30-00

Application

AF09 ... AF38 contactors are used for controlling power circuits up to 690 V AC and 220 V DC. They are mainly used for controlling 3-phase motors, non-inductive or slightly inductive loads.

Description

- **AF09 ... AF38** contactors include an electronic coil interface accepting a wide control voltage U_c min. ... U_c max. Only four coils cover control voltages between 24...500 V 50/60 Hz or 20...500 V DC
- **AF** contactors can manage large control voltage variations. One coil (e.g. 100...250 V 50/60 Hz - DC) can be used for different control voltages used worldwide without any coil change
- **AF** contactors have built-in surge protection and do not require additional surge suppressors.
- The built-in N.C. auxiliary contact is a mirror contact in compliance with annex F of IEC 60947-4-1.

Note: - **AF..-30-...-11** not suitable for a direct control by PLC-output.


- **AF..-30-...-11** contactor type available in some countries: please consult your ABB representative.

Ordering Details


IEC Rated power 400 V AC-3 kW	UL/CSA 3-phase motor rating 480 V hp	Control voltage U_c min. ... U_c max.		Auxiliary contacts fitted		Type	Order code	Weight Pack ⁽ⁱⁿ⁾ 1 piece kg	
		V 50/60 Hz	V DC						
4	5	24...60	20...60	1	0	AF09-30-10-11	1SBL 137 001 R1110	0.270	
		24...60	20...60	0	1	AF09-30-01-11	1SBL 137 001 R1101	0.270	
		48...130	48...130	1	0	AF09-30-10-12	1SBL 137 001 R1210	0.270	
		48...130	48...130	0	1	AF09-30-01-12	1SBL 137 001 R1201	0.270	
		100...250	100...250	1	0	AF09-30-10-13	1SBL 137 001 R1310	0.270	
		100...250	100...250	0	1	AF09-30-01-13	1SBL 137 001 R1301	0.270	
	5.5	7.5	250...500	250...500	1	0	AF09-30-10-14	1SBL 137 001 R1410	0.310
			250...500	250...500	0	1	AF09-30-01-14	1SBL 137 001 R1401	0.310
			24...60	20...60	1	0	AF12-30-10-11	1SBL 157 001 R1110	0.270
			24...60	20...60	0	1	AF12-30-01-11	1SBL 157 001 R1101	0.270
			48...130	48...130	1	0	AF12-30-10-12	1SBL 157 001 R1210	0.270
			48...130	48...130	0	1	AF12-30-01-12	1SBL 157 001 R1201	0.270
7.5	10	100...250	100...250	1	0	AF12-30-10-13	1SBL 157 001 R1310	0.270	
		100...250	100...250	0	1	AF12-30-01-13	1SBL 157 001 R1301	0.270	
		250...500	250...500	1	0	AF12-30-10-14	1SBL 157 001 R1410	0.310	
		250...500	250...500	0	1	AF12-30-01-14	1SBL 157 001 R1401	0.310	
		24...60	20...60	1	0	AF16-30-10-11	1SBL 177 001 R1110	0.270	
		24...60	20...60	0	1	AF16-30-01-11	1SBL 177 001 R1101	0.270	
11	15	48...130	48...130	1	0	AF16-30-10-12	1SBL 177 001 R1210	0.270	
		48...130	48...130	0	1	AF16-30-01-12	1SBL 177 001 R1201	0.270	
		100...250	100...250	1	0	AF16-30-10-13	1SBL 177 001 R1310	0.270	
		100...250	100...250	0	1	AF16-30-01-13	1SBL 177 001 R1301	0.270	
		250...500	250...500	1	0	AF16-30-10-14	1SBL 177 001 R1410	0.310	
		250...500	250...500	0	1	AF16-30-01-14	1SBL 177 001 R1401	0.310	
15	20	24...60	20...60	0	0	AF26-30-00-11	1SBL 237 001 R1100	0.310	
		48...130	48...130	0	0	AF26-30-00-12	1SBL 237 001 R1200	0.310	
		100...250	100...250	0	0	AF26-30-00-13	1SBL 237 001 R1300	0.310	
		250...500	250...500	0	0	AF26-30-00-14	1SBL 237 001 R1400	0.350	
18.5	20	24...60	20...60	0	0	AF30-30-00-11	1SBL 277 001 R1100	0.310	
		48...130	48...130	0	0	AF30-30-00-12	1SBL 277 001 R1200	0.310	
		100...250	100...250	0	0	AF30-30-00-13	1SBL 277 001 R1300	0.310	
		250...500	250...500	0	0	AF30-30-00-14	1SBL 277 001 R1400	0.350	
	20	24...60	20...60	0	0	AF38-30-00-11	1SBL 297 001 R1100	0.310	
		48...130	48...130	0	0	AF38-30-00-12	1SBL 297 001 R1200	0.310	
		100...250	100...250	0	0	AF38-30-00-13	1SBL 297 001 R1300	0.310	
		250...500	250...500	0	0	AF38-30-00-14	1SBL 297 001 R1400	0.350	

Main Dimensions mm, inches

AF09, AF12, AF16

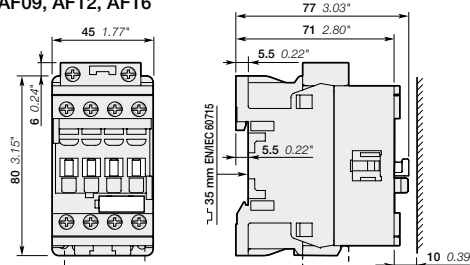

AF26, AF30, AF38

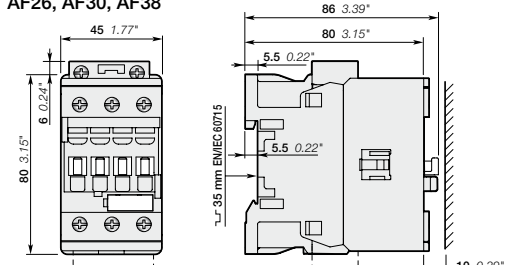

AF09Z ... AF38Z 3-pole Contactors - Low Consumption

Catalogue Page 1SBC 101 072 S0201

AC / DC Operated - with Screw Terminals



AF09Z-30-10



AF26Z-30-00

Application

AF09Z ... AF38Z contactors are used for controlling power circuits up to 690 V AC and 220 V DC. They are mainly used for controlling 3-phase motors, non-inductive or slightly inductive loads.

Description


- **AF09Z ... AF38Z** contactors include an electronic coil interface accepting a wide control voltage U_c min. ... U_c max and managing large control voltage variations.
- **AF..Z** contactors cover control voltages comprised between 24...250 V 50/60 Hz or 12...250 V DC
- **AF..Z** contactors allow direct control by PLC-output ≥ 24 V DC 500 mA and obtain a reduced holding coil consumption.
- **AF..Z** contactors withstand short voltage dips and voltage sags (SEMI F47-0706 compliance)
- **AF..Z** contactors have built-in surge protection and do not require additional surge suppressors
- The built-in N.C. auxiliary contact is a mirror contact in compliance with annex F of IEC 60947-4-1.

Ordering Details

IEC	UL/CSA	Control voltage		Auxiliary contacts fitted	Type	Order code	Weight	
		U_c min. ... U_c max.						
Rated power 400 V AC-3 kW	3-phase motor rating 480 V hp	V 50/60 Hz	V DC				Pack ^(ing) 1 piece kg	
4	5	-	12...20	1 0	AF09Z-30-10-20	1SBL 136 001 R2010	0.310	
		-	12...20	0 1	AF09Z-30-01-20	1SBL 136 001 R2001	0.310	
		24...60	20...60	1 0	AF09Z-30-10-21	1SBL 136 001 R2110	0.310	
		24...60	20...60	0 1	AF09Z-30-01-21	1SBL 136 001 R2101	0.310	
		48...130	48...130	1 0	AF09Z-30-10-22	1SBL 136 001 R2210	0.310	
		48...130	48...130	0 1	AF09Z-30-01-22	1SBL 136 001 R2201	0.310	
	5.5	7.5	100...250	100...250	1 0	AF09Z-30-10-23	1SBL 136 001 R2310	0.310
			100...250	100...250	0 1	AF09Z-30-01-23	1SBL 136 001 R2301	0.310
			-	12...20	1 0	AF12Z-30-10-20	1SBL 156 001 R2010	0.310
			-	12...20	0 1	AF12Z-30-01-20	1SBL 156 001 R2001	0.310
			24...60	20...60	1 0	AF12Z-30-10-21	1SBL 156 001 R2110	0.310
			24...60	20...60	0 1	AF12Z-30-01-21	1SBL 156 001 R2101	0.310
7.5	10	48...130	48...130	1 0	AF12Z-30-10-22	1SBL 156 001 R2210	0.310	
		48...130	48...130	0 1	AF12Z-30-01-22	1SBL 156 001 R2201	0.310	
		100...250	100...250	1 0	AF12Z-30-10-23	1SBL 156 001 R2310	0.310	
		100...250	100...250	0 1	AF12Z-30-01-23	1SBL 156 001 R2301	0.310	
		-	12...20	1 0	AF16Z-30-10-20	1SBL 176 001 R2010	0.310	
		-	12...20	0 1	AF16Z-30-01-20	1SBL 176 001 R2001	0.310	
		24...60	20...60	1 0	AF16Z-30-10-21	1SBL 176 001 R2110	0.310	
		24...60	20...60	0 1	AF16Z-30-01-21	1SBL 176 001 R2101	0.310	
		48...130	48...130	1 0	AF16Z-30-10-22	1SBL 176 001 R2210	0.310	
		48...130	48...130	0 1	AF16Z-30-01-22	1SBL 176 001 R2201	0.310	
		100...250	100...250	1 0	AF16Z-30-10-23	1SBL 176 001 R2310	0.310	
		100...250	100...250	0 1	AF16Z-30-01-23	1SBL 176 001 R2301	0.310	
11	15	-	12...20	0 0	AF26Z-30-00-20	1SBL 236 001 R2000	0.350	
		24...60	20...60	0 0	AF26Z-30-00-21	1SBL 236 001 R2100	0.350	
		48...130	48...130	0 0	AF26Z-30-00-22	1SBL 236 001 R2200	0.350	
		100...250	100...250	0 0	AF26Z-30-00-23	1SBL 236 001 R2300	0.350	
15	20	-	12...20	0 0	AF30Z-30-00-20	1SBL 276 001 R2000	0.350	
		24...60	20...60	0 0	AF30Z-30-00-21	1SBL 276 001 R2100	0.350	
		48...130	48...130	0 0	AF30Z-30-00-22	1SBL 276 001 R2200	0.350	
		100...250	100...250	0 0	AF30Z-30-00-23	1SBL 276 001 R2300	0.350	
18.5	20	-	12...20	0 0	AF38Z-30-00-20	1SBL 296 001 R2000	0.350	
		24...60	20...60	0 0	AF38Z-30-00-21	1SBL 296 001 R2100	0.350	
		48...130	48...130	0 0	AF38Z-30-00-22	1SBL 296 001 R2200	0.350	
		100...250	100...250	0 0	AF38Z-30-00-23	1SBL 296 001 R2300	0.350	

Note: Only AF..Z contactors with DC control voltage 12...20 V DC need to respect the connection polarities indicated close to the coil terminals: A1+ for the positive pole and A2- for the negative pole

Main Dimensions mm, inches

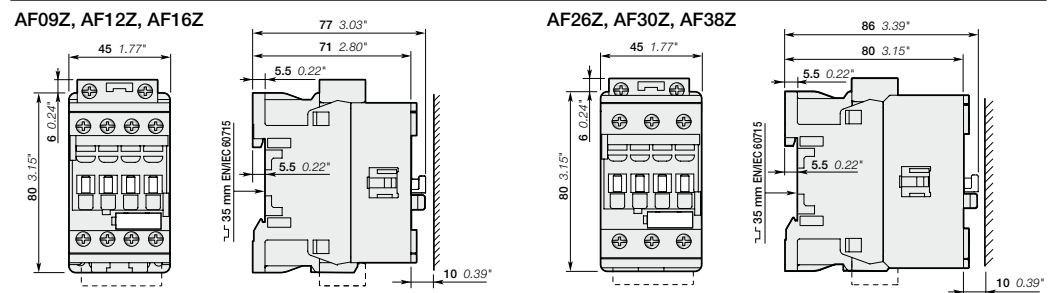

AF09 ... AF38 2-stack 3-pole Contactors

AC / DC Operated - with Screw Terminals

Catalogue Page 1SBC 101 255 S0201



AF09-30-22



AF26-30-11



AF26-30-22

Application

AF09 ... AF38 contactors are used for controlling power circuits up to 690 V AC and 220 V DC. They are mainly used for controlling 3-phase motors, non-inductive or slightly inductive loads.

Description


- **AF09 ... AF16** 2-stack contactors are mounted with a non-removable 2 N.O. + 2 N.C. auxiliary contact block
- **AF26 ... AF38** 2-stack contactors are mounted with a non-removable 1 N.O. + 1 N.C. or 2 N.O. + 2 N.C. auxiliary contact block
- The contactors have mechanically-linked auxiliary contacts compliant with Annex L of IEC 60947-5-1 and include the "Mechanically Linked" symbol on their side
- N.C. auxiliary contact are mirror contacts in compliance with Annex F of IEC 60947-4-1.

Note: - 2-stack contactors available in some countries: please consult your ABB representative.
- **AF..-30-..-11** not suitable for a direct control by PLC-output.

Ordering Details

IEC Rated power 400 V AC-3 kW	UL/CSA 3-phase motor rating 480 V hp	Control voltage U _c min. ... U _c max.		Auxiliary contacts fitted	Type	Order code	Weight Pack ^(ing) 1 piece kg
		V 50/60 Hz	V DC				
4	5	24...60	20...60	2 2	AF09-30-22-11	1SBL 137 001 R1122	0.320
		48...130	48...130	2 2	AF09-30-22-12	1SBL 137 001 R1222	0.320
		100...250	100...250	2 2	AF09-30-22-13	1SBL 137 001 R1322	0.320
		250...500	250...500	2 2	AF09-30-22-14	1SBL 137 001 R1422	0.360
5.5	7.5	24...60	20...60	2 2	AF12-30-22-11	1SBL 157 001 R1122	0.320
		48...130	48...130	2 2	AF12-30-22-12	1SBL 157 001 R1222	0.320
		100...250	100...250	2 2	AF12-30-22-13	1SBL 157 001 R1322	0.320
7.5	10	24...60	20...60	2 2	AF16-30-22-11	1SBL 177 001 R1122	0.320
		48...130	48...130	2 2	AF16-30-22-12	1SBL 177 001 R1222	0.320
		100...250	100...250	2 2	AF16-30-22-13	1SBL 177 001 R1322	0.320
11	15	250...500	250...500	2 2	AF16-30-22-14	1SBL 177 001 R1422	0.360
		24...60	20...60	1 1	AF26-30-11-11	1SBL 237 001 R1111	0.350
		24...60	20...60	2 2	AF26-30-22-11	1SBL 237 001 R1122	0.360
		48...130	48...130	1 1	AF26-30-11-12	1SBL 237 001 R1211	0.350
		48...130	48...130	2 2	AF26-30-22-12	1SBL 237 001 R1222	0.360
		100...250	100...250	1 1	AF26-30-11-13	1SBL 237 001 R1311	0.350
		100...250	100...250	2 2	AF26-30-22-13	1SBL 237 001 R1322	0.360
15	20	250...500	250...500	1 1	AF26-30-11-14	1SBL 237 001 R1411	0.390
		250...500	250...500	2 2	AF26-30-22-14	1SBL 237 001 R1422	0.400
		24...60	20...60	1 1	AF30-30-11-11	1SBL 277 001 R1111	0.350
		24...60	20...60	2 2	AF30-30-22-11	1SBL 277 001 R1122	0.360
		48...130	48...130	1 1	AF30-30-11-12	1SBL 277 001 R1211	0.350
		48...130	48...130	2 2	AF30-30-22-12	1SBL 277 001 R1222	0.360
		100...250	100...250	1 1	AF30-30-11-13	1SBL 277 001 R1311	0.350
18.5	20	100...250	100...250	2 2	AF30-30-22-13	1SBL 277 001 R1322	0.360
		250...500	250...500	1 1	AF30-30-11-14	1SBL 277 001 R1411	0.390
		250...500	250...500	2 2	AF30-30-22-14	1SBL 277 001 R1422	0.400
		24...60	20...60	1 1	AF38-30-11-11	1SBL 297 001 R1111	0.350
		24...60	20...60	2 2	AF38-30-22-11	1SBL 297 001 R1122	0.360
		48...130	48...130	1 1	AF38-30-11-12	1SBL 297 001 R1211	0.350
		48...130	48...130	2 2	AF38-30-22-12	1SBL 297 001 R1222	0.360
100...250	100...250	100...250	100...250	1 1	AF38-30-11-13	1SBL 297 001 R1311	0.350
		100...250	100...250	2 2	AF38-30-22-13	1SBL 297 001 R1322	0.360
		250...500	250...500	1 1	AF38-30-11-14	1SBL 297 001 R1411	0.390
		250...500	250...500	2 2	AF38-30-22-14	1SBL 297 001 R1422	0.400

Main Dimensions mm, inches

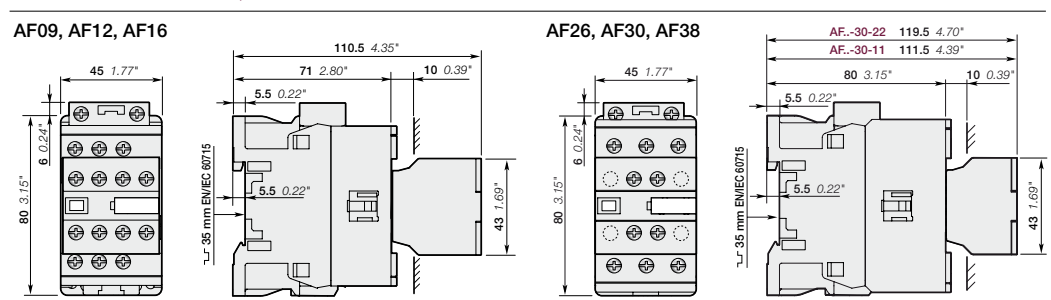

AF09Z ... AF38Z 2-stack 3-pole Contactors - Low Consumption

Catalogue Page 1SBC 101 075 S0201

AC / DC Operated - with Screw Terminals



4 to 18.5 kW

5 to 20 hp



AF09Z-30-22



AF26Z-30-11



AF26Z-30-22

Application

AF09Z ... AF38Z contactors are used for controlling power circuits up to 690 V AC and 220 V DC. They are mainly used for controlling 3-phase motors, non-inductive or slightly inductive loads.

Description

- **AF09Z ... AF16Z** 2-stack contactors are mounted with a non-removable 2 N.O. + 2 N.C. auxiliary contact block
- **AF26Z ... AF38Z** 2-stack contactors are mounted with a non-removable 1 N.O. + 1 N.C. or 2 N.O. + 2 N.C. auxiliary contact block
- The contactors have mechanically-linked auxiliary contacts compliant with Annex L of IEC 60947-5-1 and include the "Mechanically Linked" symbol on their side
- N.C. auxiliary contact are mirror contacts in compliance with Annex F of IEC 60947-4-1.

Note: 2-stack contactors available in some countries: please consult your ABB representative.


Ordering Details

IEC Rated power 400 V AC-3 kW	UL/CSA 3-phase motor rating 480 V hp	Control voltage U _c min. ... U _c max.		Auxiliary contacts fitted		Type	Order code	Weight		
		V 50/60 Hz	V DC	1	2				Pack ^(mg) 1 piece kg	
4	5	-	12...20	2	2	AF09Z-30-22-20	1SBL 136 001 R2022	0.360		
		24...60	20...60	2	2	AF09Z-30-22-21	1SBL 136 001 R2122	0.360		
		48...130	48...130	2	2	AF09Z-30-22-22	1SBL 136 001 R2222	0.360		
		100...250	100...250	2	2	AF09Z-30-22-23	1SBL 136 001 R2322	0.360		
5.5	7.5	-	12...20	2	2	AF12Z-30-22-20	1SBL 156 001 R2022	0.360		
		24...60	20...60	2	2	AF12Z-30-22-21	1SBL 156 001 R2122	0.360		
		48...130	48...130	2	2	AF12Z-30-22-22	1SBL 156 001 R2222	0.360		
		100...250	100...250	2	2	AF12Z-30-22-23	1SBL 156 001 R2322	0.360		
7.5	10	-	12...20	2	2	AF16Z-30-22-20	1SBL 176 001 R2022	0.360		
		24...60	20...60	2	2	AF16Z-30-22-21	1SBL 176 001 R2122	0.360		
		48...130	48...130	2	2	AF16Z-30-22-22	1SBL 176 001 R2222	0.360		
		100...250	100...250	2	2	AF16Z-30-22-23	1SBL 176 001 R2322	0.360		
11	15	-	12...20	1	1	AF26Z-30-11-20	1SBL 236 001 R2011	0.390		
		-	12...20	2	2	AF26Z-30-22-20	1SBL 236 001 R2022	0.400		
		24...60	20...60	1	1	AF26Z-30-11-21	1SBL 236 001 R2111	0.390		
		24...60	20...60	2	2	AF26Z-30-22-21	1SBL 236 001 R2122	0.400		
		48...130	48...130	1	1	AF26Z-30-11-22	1SBL 236 001 R2211	0.390		
		48...130	48...130	2	2	AF26Z-30-22-22	1SBL 236 001 R2222	0.400		
		100...250	100...250	1	1	AF26Z-30-11-23	1SBL 236 001 R2311	0.390		
		100...250	100...250	2	2	AF26Z-30-22-23	1SBL 236 001 R2322	0.400		
		15	20	-	12...20	1	1	AF30Z-30-11-20	1SBL 276 001 R2011	0.390
				-	12...20	2	2	AF30Z-30-22-20	1SBL 276 001 R2022	0.400
24...60	20...60			1	1	AF30Z-30-11-21	1SBL 276 001 R2111	0.390		
24...60	20...60			2	2	AF30Z-30-22-21	1SBL 276 001 R2122	0.400		
48...130	48...130			1	1	AF30Z-30-11-22	1SBL 276 001 R2211	0.390		
48...130	48...130			2	2	AF30Z-30-22-22	1SBL 276 001 R2222	0.400		
100...250	100...250			1	1	AF30Z-30-11-23	1SBL 276 001 R2311	0.390		
100...250	100...250			2	2	AF30Z-30-22-23	1SBL 276 001 R2322	0.400		
18.5	20			-	12...20	1	1	AF38Z-30-11-20	1SBL 296 001 R2011	0.390
				-	12...20	2	2	AF38Z-30-22-20	1SBL 296 001 R2022	0.400
		24...60	20...60	1	1	AF38Z-30-11-21	1SBL 296 001 R2111	0.390		
		24...60	20...60	2	2	AF38Z-30-22-21	1SBL 296 001 R2122	0.400		
		48...130	48...130	1	1	AF38Z-30-11-22	1SBL 296 001 R2211	0.390		
		48...130	48...130	2	2	AF38Z-30-22-22	1SBL 296 001 R2222	0.400		
		100...250	100...250	1	1	AF38Z-30-11-23	1SBL 296 001 R2311	0.390		
		100...250	100...250	2	2	AF38Z-30-22-23	1SBL 296 001 R2322	0.400		


Note: Only AF.Z contactors with DC control voltage 12...20 V DC need to respect the connection polarities indicated close to the coil terminals: A1+ for the positive pole and A2- for the negative pole

Main Dimensions mm, inches

AF09Z, AF12Z, AF16Z

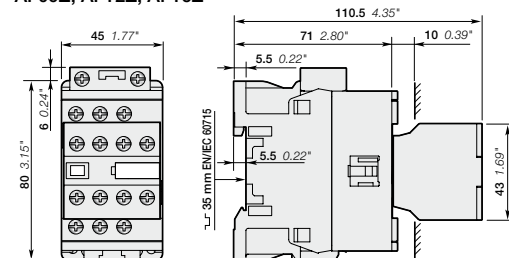



AF26Z, AF30Z, AF38Z

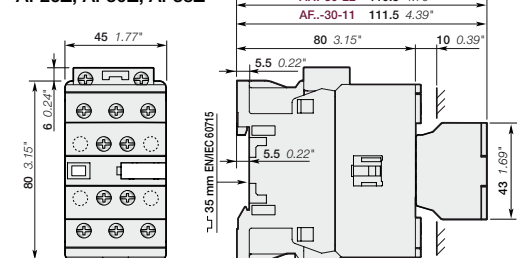




Main Pole - Utilization Characteristics according to IEC

Contactor types	AF09	AF12	AF16	AF26	AF30	AF38	
Standards	IEC 60947-1 / 60947-4-1 and EN 60947-1 / 60947-4-1						
Rated operational voltage U_e max.	690 V						
Rated frequency limits	25 ... 400 Hz						
Conventional free-air thermal current I_{th} acc. to IEC 60947-4-1, open contactors, $\theta \leq 40^\circ\text{C}$ with conductor cross-sectional area	35 A 6 mm ²	35 A 6 mm ²	35 A 6 mm ²	50 A 10 mm ²	50 A 10 mm ²	50 A 10 mm ²	
AC-1 Utilization category for air temperature close to contactor							
I_e / AC-1 rated operational current U_e max. $\leq 690\text{ V}$, 50/60 Hz							
$\theta \leq 40^\circ\text{C}$	25 A	28 A	30 A	45 A	50 A	50 A	
$\theta \leq 60^\circ\text{C}$	25 A	28 A	30 A	40 A	42 A	42 A	
$\theta \leq 70^\circ\text{C}$	22 A	24 A	26 A	32 A	37 A	37 A	
with conductor cross-sectional area	4 mm ²	6 mm ²	6 mm ²	10 mm ²	10 mm ²	10 mm ²	
AC-3 Utilization category for air temperature close to contactor $\theta \leq 60^\circ\text{C}$ (for 1500 r.p.m., 50 Hz or 1800 r.p.m., 60 Hz, 3-phase motors)							
I_e / AC-3 max. rated operational current							
 3-phase motors	220-230-240 V	9 A	12 A	18 A	26 A	33 A	40 A
	380-400 V	9 A	12 A	18 A	26 A	32 A	38 A
	415 V	9 A	12 A	18 A	26 A	32 A	38 A
	440 V	9 A	12 A	18 A	26 A	32 A	38 A
	500 V	9.5 A	12.5 A	15 A	23 A	28 A	33 A
	690 V	7 A	9 A	10.5 A	17 A	21 A	24 A
 1500 r.p.m. 50 Hz 1800 r.p.m. 60 Hz 3-phase motors	220-230-240 V	2.2 kW	3 kW	4 kW	6.5 kW	9 kW	11 kW
	380-400 V	4 kW	5.5 kW	7.5 kW	11 kW	15 kW	18.5 kW
	415 V	4 kW	5.5 kW	9 kW	11 kW	15 kW	18.5 kW
	440 V	4 kW	5.5 kW	9 kW	15 kW	18.5 kW	22 kW
	500 V	5.5 kW	7.5 kW	9 kW	15 kW	18.5 kW	22 kW
	690 V	5.5 kW	7.5 kW	9 kW	15 kW	18.5 kW	22 kW
Rated making capacity AC-3	10 x I_e AC-3 acc. to IEC 60947-4-1						
Rated breaking capacity AC-3	8 x I_e AC-3 acc. to IEC 60947-4-1						
AC-8a Utilization category (without thermal overload relay - U_e 400 V - $\theta \leq 40^\circ\text{C}$)							
I_e / AC-8a rated operational current							
AC-8a rated operational power							
	12 A	16 A	22 A	30 A	40 A	50 A	
	5.5 kW	7.5 kW	11 kW	15 kW	20 kW	25 kW	
Short-circuit protection for contactors without thermal O/L relay - Motor protection excluded $U_e \leq 500\text{ V AC}$ - gG type fuse							
	25 A	32 A	32 A	50 A	63 A	63 A	
Rated short-time withstand current I_{cw} at 40 °C ambient temperature, in free air from a cold state							
1 s	300 A	300 A	300 A	700 A	700 A	700 A	
10 s	150 A	150 A	150 A	350 A	350 A	350 A	
30 s	80 A	80 A	80 A	225 A	225 A	225 A	
1 min	60 A	60 A	60 A	150 A	150 A	150 A	
15 min	35 A	35 A	35 A	50 A	50 A	50 A	
Maximum breaking capacity $\cos \varphi = 0.45$							
at 440 V	250 A	250 A	250 A	500 A	500 A	500 A	
at 690 V	106 A	106 A	106 A	200 A	200 A	200 A	
Heat dissipation per pole							
I_e / AC-1	0.8 W	1 W	1.2 W	1.8 W	2.4 W	2.4 W	
I_e / AC-3	0.1 W	0.2 W	0.35 W	0.6 W	0.9 W	1.3 W	
Max. electrical switching frequency							
AC-1	600 cycles/h						
AC-3	1200 cycles/h						
AC-2, AC-4	300 cycles/h			150 cycles/h			

AF09 ... AF38 3-pole Contactors

Technical Data




Built-in Auxiliary Contacts according to IEC

Contactor types	AF09	AF12	AF16	AF26	AF30	AF38
Rated operational voltage U_e max.	690 V					
Conventional free air thermal current $I_{th} - \theta \leq 40$ °C	16 A					
Rated frequency limits	25 ... 400 Hz					
Rated operational current I_e / AC-15						
acc. to IEC 60947-5-1	24-127 V 50/60 Hz	6 A				
	220-240 V 50/60 Hz	4 A				
	400-440 V 50/60 Hz	3 A				
	500 V 50/60 Hz	2 A				
	690 V 50/60 Hz	2 A				
Making capacity AC-15	10 x I_e AC-15 acc. to IEC 60947-5-1					
Breaking capacity AC-15	10 x I_e AC-15 acc. to IEC 60947-5-1					
Rated operational current I_e / DC-13						
acc. to IEC 60947-5-1	24 V DC	6 A / 144 W				
	48 V DC	2.8 A / 134 W				
	72 V DC	1 A / 72 W				
	110 V DC	0.55 A / 60 W				
	125 V DC	0.55 A / 69 W				
	220 V DC	0.27 A / 60 W				
	250 V DC	0.27 A / 68 W				
	400 V DC	0.15 A / 60 W				
	500 V DC	0.13 A / 65 W				
	600 V DC	0.1 A / 60 W				
Short-circuit protection gG type fuse	10 A					
Rated short-time withstand current I_{cw}	for 1.0 s	100 A				
	for 0.1 s	140 A				
Minimum switching capacity	12 V / 3 mA					
with failure rate acc. to IEC 60947-5-4	10^{-7}					
Non-overlapping time between N.O. and N.C. contacts	≥ 2 ms					
Heat dissipation per pole at 6 A	0.1 W					
Max. electrical switching frequency	AC-15	1200 cycles/h				
	DC-13	900 cycles/h				

AF09 ... AF38 3-pole Contactors

Technical Data



Main Pole - Utilization Characteristics according to UL / NEMA / CSA

Contactor types		AF09	AF12	AF16	AF26	AF30	AF38
Standards		UL 508, CSA C22.2 N°14					
Rated operational voltage U _e max.		600 V					
NEMA size		00	0	-	1	-	-
NEMA continuous amp rating	thermal current	9 A	18 A		27 A		
NEMA maximum H.P. ratings 1-phase, 60 Hz	115 V AC	1/3 hp	1 hp		2 hp		
	230 V AC	1 hp	2 hp		3 hp		
NEMA maximum H.P. ratings 3-phase, 60 Hz	200 V AC	1-1/2 hp	3 hp		7-1/2 hp		
	230 V AC	1-1/2 hp	3 hp		7-1/2 hp		
	460 V AC	2 hp	5 hp		10 hp		
	575 V AC	2 hp	5 hp		10 hp		
UL General use rating							
600 V AC		25 A	28 A	30 A	45 A	50 A	50 A
With conductor cross-sectional area		AWG 10	AWG 10	AWG 10	AWG 8	AWG 8	AWG 8
80 V DC - 1-pole		25 A	28 A	30 A	45 A	50 A	50 A
With conductor cross-sectional area		AWG 10	AWG 10	AWG 10	AWG 8	AWG 8	AWG 8
UL maximum 1-phase motor rating							
Amp-rating	120 V AC	13.8 A	16 A	20 A	24 A	24 A	24 A
	240 V AC	10 A	12 A	17 A	17 A	28 A	28 A
Motor power	120 V AC	3/4 hp	1 hp	1-1/2 hp	2 hp	2 hp	2 hp
	240 V AC	1-1/2 hp	2 hp	3 hp	3 hp	5 hp	5 hp
UL maximum 3-phase motor rating							
Amp-rating	200-208 V AC	7.8 A	11 A	17.5 A	25.3 A	32.2 A	32.2 A
	220-240 V AC	6.8 A	9.6 A	15.2 A	22 A	28 A	28 A
	440-480 V AC	7.6 A	11 A	14 A	21 A	27 A	27 A
	550-600 V AC	9 A	11 A	17 A	22 A	(1)	(1)
	Motor power	200-208 V AC	2 hp	3 hp	5 hp	7.5 hp	10 hp
(for 1500 r.p.m., 50 Hz or 1800 r.p.m., 60 Hz 3-phase motors)	220-240 V AC	2 hp	3 hp	5 hp	7.5 hp	10 hp	10 hp
440-480 V AC	5 hp	7.5 hp	10 hp	15 hp	20 hp	20 hp	
550-600 V AC	7.5 hp	10 hp	15 hp	20 hp	(1)	(1)	
Short-circuit protection							
for contactors without thermal O/L relay - Motor protection excluded							
Fuse rating		60 A	60 A	60 A	150 A	150 A	150 A
Fuse type, 600 V		NTD					
Max. electrical switching frequency							
for general use		600 cycles/h					
for motor use		1200 cycles/h					

(1) On request

Built-in Auxiliary Contacts according to UL / CSA

Contactor types		AF09	AF12	AF16	AF26	AF30	AF38
Max. rated operational voltage U _e max.		600 V AC, 600 V DC					
Pilot duty		A600, Q600					
AC thermal rated current		10 A					
AC maximum volt-ampere making		7200 VA					
AC maximum volt-ampere breaking		720 VA					
DC thermal rated current		2.5 A					
DC maximum volt-ampere making-breaking		69 VA					

AF09 ... AF38 3-pole Contactors

Technical Data



General Technical Data

Contactor types	AF09	AF12	AF16	AF26	AF30	AF38
Rated insulation voltage U_i acc. to IEC 60947-4-1	690 V					
acc. to UL / CSA	600 V					
Rated impulse withstand voltage U_{imp}	6 kV					
Electromagnetic compatibility	Devices complying with IEC 60947-1 / EN 60947-1 - Environment A					
Ambient air temperature close to contactor						
Operation fitted with thermal overload relay	-25 ... +60 °C					
without thermal overload relay	-40 ... +70 °C					
Storage	-60 ... +80 °C					
Climatic withstand	Category B according to IEC 60947-1 Annex Q					
Operating altitude	≤ 3000 m					
Mechanical durability						
Number of operating cycles	10 millions operating cycles					
Max. switching frequency	3600 cycles/h					
Shock withstand acc. IEC 60068-2-27 and EN 60068-2-27						
Mounting position 1						
	Shock direction	1/2 sinusoidal shock for 11 ms: no change in contact position				
	A	30 g				
	B1	25 g Closed position / 5 g Open position				
	B2	15 g				
	C1	25 g				
	C2	25 g				
Vibration withstand acc. to IEC 60068-2-6	5 ... 300 Hz 4 g Closed position / 2 g Open position					

Magnet System Characteristics

Contactor types	AF09	AF12	AF16	AF26	AF30	AF38
Coil operating limits acc. to IEC 60947-4-1						
AC supply	at $\theta \leq 60$ °C $0.85 \times U_c$ min ... $1.1 \times U_c$ max at $\theta \leq 70$ °C $0.85 \times U_c$ min ... U_c max					
DC supply	at $\theta \leq 60$ °C $0.85 \times U_c$ min ... $1.1 \times U_c$ max at $\theta \leq 70$ °C (AF) $0.85 \times U_c$ min ... U_c max - (AF..Z) $0.85 \times U_c$ min ... $1.1 \times U_c$ max					
AC control voltage Rated control circuit voltage U_c	24 ... 500 V AC					
50/60 Hz	Coil consumption					
	Average pull-in value (AF) 50 VA - (AF..Z) 16 VA					
	Average holding value (AF) 2.2 VA / 2 W - (AF..Z) 1.7 VA / 1.5 W					
DC control voltage Rated control circuit voltage U_c	12 ... 500 V DC					
	Coil consumption					
	Average pull-in value (AF) 50 W - (AF..Z) 12 ... 16 W					
	Average holding value (AF) 2 W - (AF..Z) 1.7 W					
PLC-Output control	(AF..Z) ≥ 500 mA 24 V DC					
Drop-out voltage in % of U_c min.	≤ 60 % U_c min					
Voltage sag immunity according to SEMI F47-0706	(AF..Z) conditions of use on request					
Dips withstand (level 0% according to IEC 61000-4-11) -20 °C ≤ θ ≤ +60 °C	(AF..Z) 22 ms average for $U_c = 24$... 250 V 50/60Hz					
Operating time						
between coil energization and:	N.O. contact closing 40 ... 95 ms					
	N.C. contact opening 38 ... 90 ms					
between coil de-energization and:	N.O. contact opening 11 ... 95 ms					
	N.C. contact closing 13 ... 98 ms					
















Mounting Characteristics

Contactor types	AF09	AF12	AF16	AF26	AF30	AF38
Mounting positions						
	Max. N.C. built-in and add-on N.C. auxiliary contacts: see accessory fitting details for a 3-pole contactor AF09 ... AF38					
Mounting distances	The contactors can be assembled side by side.					
Fixing						
on rail according to IEC 60715, EN 60715	35 x 7.5 mm or 35 x 15 mm					
by screws (not supplied)	2 x M4 screws placed diagonally					

Technical Data




Connecting Characteristics

Contactor types	AF09	AF12	AF16	AF26	AF30	AF38
Main terminals						
	Screw terminals with cable clamp					
Connecting capacity (min. ... max.)						
Main conductors (poles)						
 Rigid	solid ($\leq 4 \text{ mm}^2$)		1 x	1 ... 6 mm ²	2.5 ... 10 mm ²	
 Rigid	stranded ($\geq 6 \text{ mm}^2$)		2 x	1 ... 6 mm ²	2.5 ... 10 mm ²	
 Flexible with non insulated ferrule			1 x	0.75 ... 6 mm ²	1.5 ... 10 mm ²	
 Flexible with non insulated ferrule			2 x	0.75 ... 6 mm ²	1.5 ... 10 mm ²	
 Flexible with insulated ferrule			1 x	0.75 ... 4 mm ²	1.5 ... 10 mm ²	
 Flexible with insulated ferrule			2 x	0.75 ... 2.5 mm ²	1.5 ... 4 mm ²	
 Bars or lugs			L <	9.6 mm	12.5 mm	
Capacity according to UL/CSA			1 or 2 x	AWG 16 ... 10	AWG 14 ... 8	
Stripping length			10 mm		14 mm	
Auxiliary conductors						
(built-in auxiliary terminals + coil terminals)						
 Rigid solid			1 x	1 ... 2.5 mm ²		
 Rigid solid			2 x	1 ... 2.5 mm ²		
 Flexible with non insulated ferrule			1 x	0.75 ... 2.5 mm ²		
 Flexible with non insulated ferrule			2 x	0.75 ... 2.5 mm ²		
 Flexible with insulated ferrule			1 x	0.75 ... 2.5 mm ²		
 Flexible with insulated ferrule			2 x	0.75 ... 1.5 mm ²		
 Bars or lugs			L <	8 mm		
Capacity according to UL/CSA			1 or 2 x	AWG 18 ... 14		
Stripping length			10 mm			
Degree of protection						
acc. to IEC 60947-1 / EN 60947-1 and IEC 60529 / EN 60529						
Main terminals			IP20			
Coil terminals			IP20			
Built-in auxiliary terminals			IP20			
Screw terminals						
(delivered in open position, screws of unused terminals must be tightened)						
Main terminals			M3.5		M4	
Coil terminals			M3.5			
Built-in auxiliary terminals			M3.5			
Screwdriver type						
Flat Ø5.5 / Pozidriv 2						
Tightening torque						
Main pole terminals			1.5 Nm / 13 lb.in		2.5 Nm / 22 lb.in	
Coil terminals			1.2 Nm / 11 lb.in			
Built-in auxiliary terminals			1.2 Nm / 11 lb.in			

AF09 ... AF38 3-pole Contactors

Main Accessories



Accessory fitting details for a 3-pole contactor AF09 ... AF38

Many configurations of accessories are possible depending on whether these are front-mounted or side-mounted.

Contactor types	Main poles	Built-in auxiliary contacts	Front-mounted accessories				Side-mounted accessories	
			Auxiliary contact blocks			Electrical and mechanical interlock set (between 2 contactors)	Auxiliary contact blocks	
			1-pole CA4	2-pole CAT4-11	4-pole CA4	VEM4	Left side 2-pole CAL4-11	Right side 2-pole CAL4-11
Max. N.C. built-in and add-on N.C. auxiliary contacts: 4 N.C. max. on positions 1, 2, 3, 4 and 3 N.C. max. on positions 1 ±30°, 5								
AF09 ... AF16	3	0 0 1	4 max.	or 1	or 1	-	+ 1	-
			2 max.	-	-	-	+ 1	+ 1
			3 max.	-	-	+ 1	+ 1	or 1
AF09 ... AF16 AF26 ... AF38	3	0 1 0	4 max.	or 1	or 1	-	+ 1	-
			2 max.	or 1	-	-	+ 1	+ 1
			3 max.	-	-	+ 1	+ 1	or 1
AF26 ... AF38	3	0 1 1	-	-	-	-	1	+ 1
AF09 ... AF38	3	0 2 2	-	-	-	-	1	-

Mounting positions




Protection against overloads with thermal or electronic overload relays

The addition of an overload relay on the contactor does not prevent fitting of many other accessories as shown below.

Contactor types	Overload relays - direct mounting - no kit required
AF09 ... AF38	TF42 thermal overload relay
AF09 ... AF38	EF19 electronic overload relay
AF26 ... AF38	EF45 electronic overload relay

Contactors and main accessories (other accessories available)

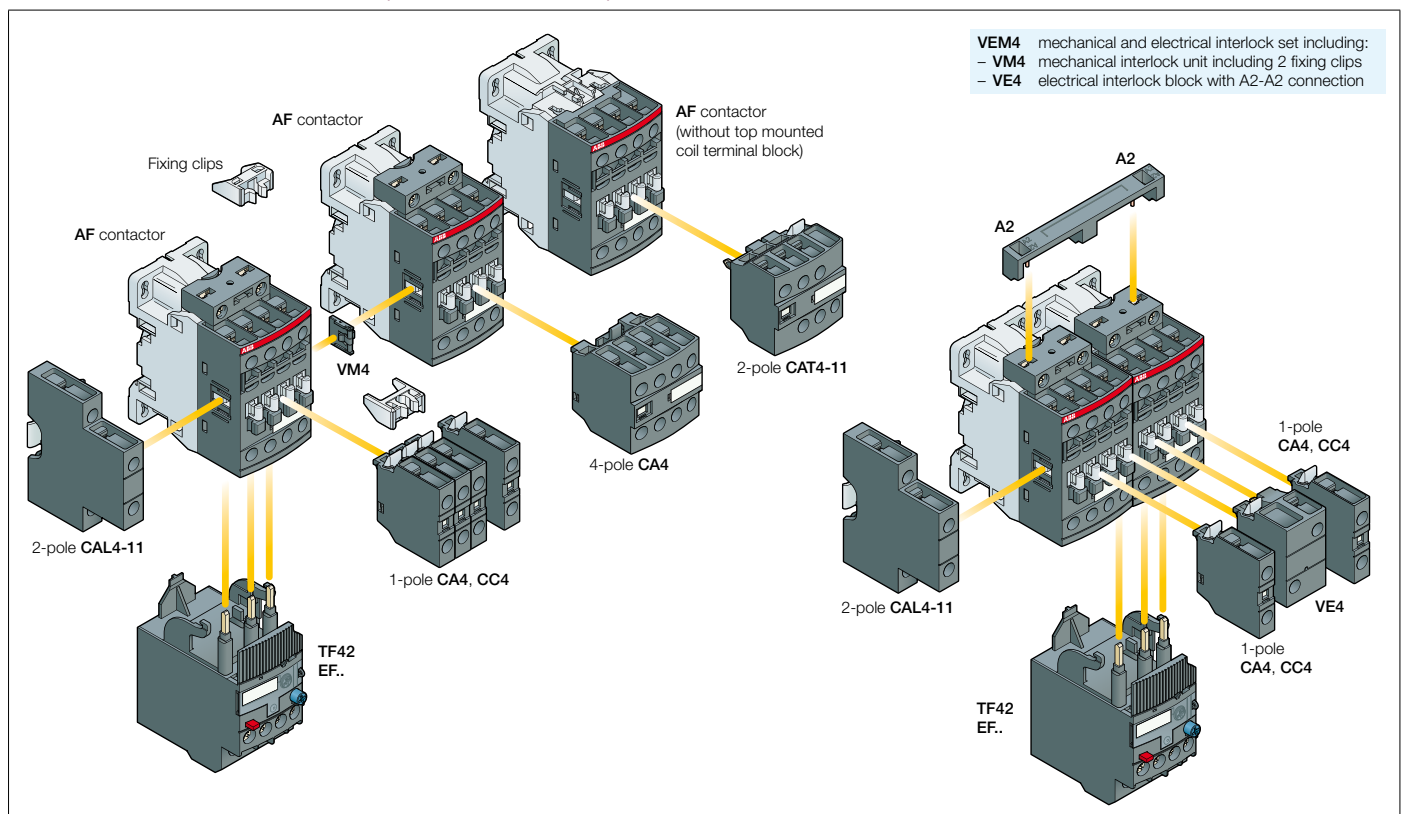

Accessories for AF09 ... AF38 3-pole Contactors



CA4-10



CA4-22M



CAL4-11



CAT4-11E

Application

The auxiliary contact blocks are used for the operation of auxiliary circuits and control circuits.

Description

Types of auxiliary contact blocks for standard industrial environments:

- **CA4** 1 or 4-pole block, front-mounted, instantaneous with N.O., N.C. contacts
- **CC4** 1-pole block, front-mounted, with N.O. leading contact or N.C. lagging contact
- **CAT4** 2-pole block, front-mounted, instantaneous N.O. + N.C. contacts with A1 / A2 coil terminal connection on front face
- **CAL4** 2-pole block instantaneous N.O. + N.C. contacts clipped onto the right and/or left side of the contactors.

Select the type of 2 or 4-pole auxiliary contact blocks CAT4 or CA4-..E, CA 4-..M or CA 4-..U, according to the contactor type for compliance with the standard requirements (see terminal and marking positioning).

The auxiliary contact blocks are equipped with screw type connecting terminals delivered open, protected against accidental direct contact and bear the corresponding function marking.

Fitting Details - For each contactor refer to "Accessory Fitting Details" table.

Ordering Details

For contactors	Auxiliary contacts  	Type	Order code	Pack ^(ing) pieces	Weight kg (1 pce)
----------------	---	------	------------	---------------------------------	----------------------

Front-mounted instantaneous auxiliary contact blocks

AF09 ... AF38	1 0 - -	CA4-10	1SBN 010 110 R1010	1	0.014
	1 0 - -	CA4-10-T	1SBN 010 110 T1010	10	0.014
	0 1 - -	CA4-01	1SBN 010 110 R1001	1	0.014
	0 1 - -	CA4-01-T	1SBN 010 110 T1001	10	0.014
AF09 ... AF16...-30-10	2 2 - -	CA4-22M	1SBN 010 140 R1122	1	0.055
	3 1 - -	CA4-31M	1SBN 010 140 R1131	1	0.055
	1 3 - -	CA4-13M	1SBN 010 140 R1113	1	0.055
	0 4 - -	CA4-04M	1SBN 010 140 R1104	1	0.055
AF26 ... AF38...-30-00	2 2 - -	CA4-22E	1SBN 010 140 R1022	1	0.055
	3 1 - -	CA4-31E	1SBN 010 140 R1031	1	0.055
	4 0 - -	CA4-40E	1SBN 010 140 R1040	1	0.055
	0 4 - -	CA4-04E	1SBN 010 140 R1004	1	0.055
AF09 ... AF16...-30-01	2 2 - -	CA4-22U	1SBN 010 140 R1322	1	0.055
	3 1 - -	CA4-31U	1SBN 010 140 R1331	1	0.055
	4 0 - -	CA4-40U	1SBN 010 140 R1340	1	0.055

Front-mounted auxiliary contact blocks with N.O. leading contact and N.C. lagging contact

AF09 ... AF38	- - 1 0	CC4-10	1SBN 010 111 R1010	1	0.014
	- - 0 1	CC4-01	1SBN 010 111 R1001	1	0.014

Side-mounted instantaneous auxiliary contact blocks

AF09 ... AF38	1 1 - -	CAL4-11	1SBN 010 120 R1011	1	0.040
	1 1 - -	CAL4-11-T	1SBN 010 120 T1011	10	0.040

Front-mounted instantaneous auxiliary contact and A1/A2 coil terminal blocks

AF09 ... AF16...-30-10	1 1 - -	CAT4-11M	1SBN 010 151 R1111	1	0.040
AF26 ... AF38...-30-00	1 1 - -	CAT4-11E	1SBN 010 151 R1011	1	0.040
AF09 ... AF16...-30-01	1 1 - -	CAT4-11U	1SBN 010 151 R1311	1	0.040

Note: CAT4 not fittable on AF.Z contactors with DC control voltage 12...20 V DC.



Technical Data

Types	1-pole CA4, 1-pole CC4, 4-pole CA4, 2-pole CAT4, 2-pole CAL4
-------	--

Contact Utilization Characteristics according to IEC

Standards	IEC 60947-5-1 and EN 60947-5-1	
Rated insulation voltage U_i acc. to IEC 60947-5-1	690 V	
Rated impulse withstand voltage U_{imp}	6 kV	
Rated operational voltage U_o max.	24 ... 690 V	
Conventional thermal current $I_{th} - \theta \leq 40^\circ\text{C}$	16 A	
Rated frequency limits	25 ... 400 Hz	
Rated operational current I_o / AC-15 acc. to IEC 60947-5-1	24-127 V 50/60 Hz	6 A
	220-240 V 50/60 Hz	4 A
	400-440 V 50/60 Hz	3 A
	500 V 50/60 Hz	2 A
	690 V 50/60 Hz	2 A
Making capacity acc. to IEC 60947-5-1	10 x I_o AC-15 acc. to IEC 60947-5-1	
Breaking capacity acc. to IEC 60947-5-1	10 x I_o AC-15 acc. to IEC 60947-5-1	
Rated operational current I_o / DC-13 acc. to IEC 60947-5-1	24 V DC	6 A / 144 W
	48 V DC	2.8 A / 134 W
	72 V DC	1 A / 72 W
	110 V DC	0.55 A / 60 W
	125 V DC	0.55 A / 69 W
	220 V DC	0.27 A / 60 W
	250 V DC	0.27 A / 68 W
	400 V DC	0.15 A / 60 W
	500 V DC	0.13 A / 65 W
600 V DC	0.1 A / 60 W	
Short-circuit protection gG type fuse	10 A	
Rated short-time withstand current I_{cw} $\theta = 40^\circ\text{C}$	for 1.0 s	100 A
	for 0.1 s	140 A
Minimum switching capacity with failure rate acc. to IEC 60947-5-4	12 V / 3 mA 10^{-7}	
Heat dissipation per pole at 6 A	0.1 W	
Mechanical durability	Number of operating cycles	10 millions operating cycles
	Max. switching frequency	3600 cycles/h
Max. electrical switching frequency	for AC-15	1200 cycles/h
	for DC-13	900 cycles/h

Contact Utilization Characteristics according to UL / CSA



Standards	UL 508, CSA C22.2 N°14
Rated insulation voltage U_i	600 V
Max. rated voltage	600 V AC, 600 V DC
Pilot duty	A600, Q600
AC thermal rated current	10 A
AC maximum volt-ampere making	7200 VA
AC maximum volt-ampere breaking	720 VA
DC thermal rated current	2.5 A
DC maximum volt-ampere making-breaking	69 VA

Connecting Characteristics



Screw terminals	(delivered in open position, screws of unused terminals must be tightened)	
All terminals	M3.5	
Connecting capacity (min. ... max.)		
Rigid solid	1 x	1 ... 2.5 mm ²
Flexible with non insulated ferrule	2 x	1 ... 2.5 mm ²
Flexible with insulated ferrule	1 x	0.75 ... 2.5 mm ²
Flexible with insulated ferrule	2 x	0.75 ... 2.5 mm ²
Flexible with insulated ferrule	1 x	0.75 ... 2.5 mm ²
Flexible with insulated ferrule	2 x	0.75 ... 1.5 mm ²
Bars or lugs	L <	8 mm
Capacity acc. to UL/CSA	1 or 2 x	AWG 18 ... 14
Stripping length	10 mm	
Degree of protection acc. to IEC 60947-1 / EN 60947-1 and IEC 60529 / EN 60529	IP20	
Screwdriver type	Flat Ø5.5 / Pozidriv 2	
Tightening torque	1.2 Nm / 11 lb.in	



BEA16-4



BER16-4



BEY16-4

Connecting links with manual motor starters

Description

The **BEA...-4** connecting links are used to connect AF09 ... AF38 contactors with the MS116 or MS132 manual motor starters.

The **BEA...-4** insulated 3-pole connecting links ensure the electrical and mechanical connection between the contactor and the associated manual motor starter.

Ordering Details

For contactors	Type	Order code	Pack ^(ing) pieces	Weight kg (1 pce)
AF09 ... AF16 with MS116 and MS132	BEA16-4	1SBN 081 306 T1000	10	0.025
AF26 ... AF38 with MS116 and MS132-0.16 ... MS132-10	BEA26-4	1SBN 082 306 T1000	10	0.025
AF26 ... AF38 with MS132-12 ... MS132-32	BEA38-4	1SBN 082 306 T2000	10	0.030

Connection sets for reversing contactors

Description

BER16-4 and **BER38-4** connection sets between the main poles of two 3-pole contactors mounted side by side. The connection sets are made up of 1 upstream and 1 downstream connections: insulated, solid copper bars.

Ordering Details

For contactors	Type	Order code	Pack ^(ing) pieces	Weight kg (1 pce)
AF09 ... AF16	BER16-4	1SBN 081 311 R1000	1	0.045
AF26 ... AF38	BER38-4	1SBN 082 311 R1000	1	0.100

Connection sets for Star-Delta starting

Description

BEY16-4 and **BEY38-4** connection sets between the main poles of the Line, Delta and Star contactors of a Star-Delta starter.

The connection sets are made up of:

- Line contactor / Delta contactor: upstream phase-to-phase connection
- Delta contactor / Star contactor: downstream connection in parallel
- Star contactor: Star point upstream.

Ordering Details

For Line, Delta or Star contactors	interlock unit between Delta & Star contactors	Type	Order code	Pack ^(ing) pieces	Weight kg (1 pce)
AF09 ... AF16	With or without	BEY16-4	1SBN 081 313 R2000	1	0.050
AF26 ... AF38	VM4 or VEM4	BEY38-4	1SBN 082 713 R2000	1	0.110

Accessories for AF09 ... AF38 3-pole Contactors



VM4


Mechanical interlock unit

Description

VM4 mechanical interlock unit for the interlocking of two AF contactors. When mounted between two contactors without additional width, the VM4 mechanical interlock unit prevents one of the contactors from closing as long as the other contactor is closed. The mechanical interlock unit includes 2 fixing clips (BB4).

Ordering Details

For contactors	Type	Order code	Pack ^(ing) pieces	Weight kg (1 pce)
AF09 ... AF38	VM4	1SBN 030 105 T1000	10	0.005



VEM4

Mechanical and electrical interlock set


Description

VEM4 mechanical and electrical interlock set for the interlocking of two AF contactors. **VEM4** set includes a mechanical interlock unit VM4 with 2 fixing clips (BB4) and a VE4 electrical interlock block with A2-A2 connection. Fixing the electrical interlock block to the contactor front face connects the 2 built-in N.C. interlocking contacts with the two coils. VE4 block must be used with A2-A2 connection to respect the electrical connection diagram.

Ordering Details

For contactors	Auxiliary contacts	Type	Order code	Pack ^(ing) pieces	Weight kg (1 pce)
AF09 .. AF16 AF26 .. AF38	1 1 	VEM4	1SBN 030 111 R1000	1	0.035

Note: VEM4 not fittable on AF..Z contactors with DC control voltage 12...20 V DC.



Fixing clips

Ordering Details

For contactors	Type	Order code	Pack ^(ing) pieces	Weight kg (1 pce)
AF09 ... AF38	BB4	1SBN 110 120 W1000	50	0.002



BB4

Accessories for AF09 ... AF38 3-pole Contactors



Technical Data

Interlock types	VM4
Mechanical durability	
Number of operating cycles	5 millions operating cycles
Max. switching frequency	1800 cycles/h

Interlock types	VEM4
------------------------	-------------








Contact Utilization Characteristics according to IEC

Standards	IEC 60947-5-1 and EN 60947-5-1
Rated insulation voltage U_i acc. to IEC 60947-5-1	690 V
Rated impulse withstand voltage U_{imp}	6 kV
Rated control circuit voltage U_c	
AC 50/60 Hz control voltage	24 ... 500 V AC
DC control voltage	20 ... 500 V DC
Conventional thermal current $I_{th} - \theta \leq 40 \text{ °C}$	16 A
Mechanical and electrical durability	
Number of operating cycles	5 millions operating cycles
Max. mechanical switching frequency	1800 cycles/h
Max. electrical switching frequency	1200 cycles/h

Contact Utilization Characteristics according to UL / CSA

Standards	UL 508, CSA C22.2 N°14
Max. rated voltage	500 V AC, 500 V DC

Connecting Characteristics

Screw terminals	
All terminals	M3.5
Connecting capacity (min. ... max.)	
 Rigid Solid	1 x ; 1 ... 2.5 mm ²
 Rigid Solid	2 x ; 1 ... 2.5 mm ²
 Flexible with non insulated ferrule	1 x ; 0.75 ... 2.5 mm ²
 Flexible with non insulated ferrule	2 x ; 0.75 ... 2.5 mm ²
 Flexible with insulated ferrule	1 x ; 0.75 ... 2.5 mm ²
 Flexible with insulated ferrule	2 x ; 0.75 ... 1.5 mm ²
 Bars or lugs	L < ; 8 mm
Capacity according to UL/CSA	1 or 2 x ; AWG 18 ... 14
Stripping length	10 mm
Degree of protection	
acc. to IEC 60947-1 / EN 60947-1 and IEC 60529 / EN 60529	IP20
Screwdriver type	Flat Ø5.5 / Pozidriv 2
Tightening torque	1.2 Nm / 11 lb.in

Accessories for AF09 ... AF38 3-pole Contactors



LDC4

Additional coil terminal block

Description

Additional coil terminal block for a bottom access to the coil terminals of contactors or contactor relays.

Ordering Details

For contactors	Type	Order code	Pack ^(ing) pieces	Weight kg (1 pce)
AF09 ... AF38	LDC4	1SBN 070 156 T1000	10	0.010



BX4



BX4-CA

Protective covers

Description

Sealable and transparent protective covers BX4 and non-removable BX4-CA to protect the devices against accidental contact.

Ordering Details

For contactors	Type	Order code	Pack ^(ing) pieces	Weight kg (1 pce)
All 1-stack contactors	BX4	1SBN 110 108 T1000	10	0.006
For 4-pole CA4 and 2-pole CAT4 auxiliary contact blocks	BX4-CA	1SBN 110 109 W1000	50	0.001

Function markers

Description

Box of 16 blank cards (16 markers by card) printable on HTP500 thermal transfer printer and AMS 500 marking table to identify your contactors, overload relays or manual motor starters.

Marker dimensions: 7 x 20 mm (.276" x .787")




BA4

Ordering Details

For contactors	Type	Order code	Pack ^(ing) pieces	Weight kg (1 pce)
Marker card	BA4	1SNA 235 156 R2700	16	0.011
AMS 500 support plate for 8 BA4	SPRC 1	1SNA 360 010 R1500	1	0.220
HTP500 support plate	HTP500-BA4	1SNA 235 712 R2400	1	0.290

Main Dimensions mm, inches

BX4






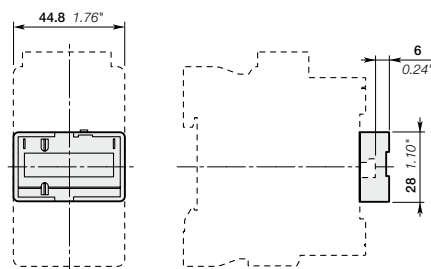


AF09 ... AF38 1 and 2-stack 3-pole Contactors










Terminal Marking and Positioning



Standard devices without addition of auxiliary contacts

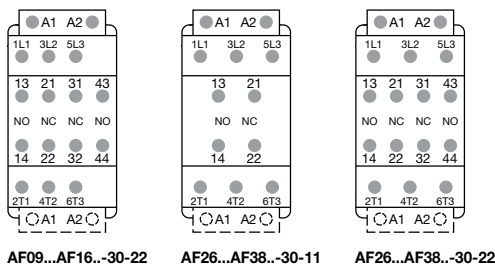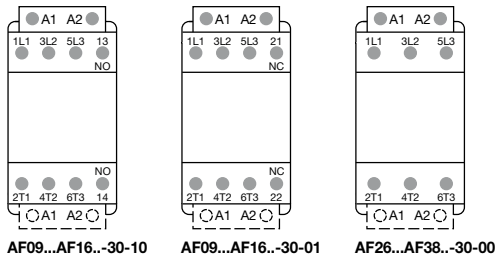

Other possible contact combinations with auxiliary contacts added by the user

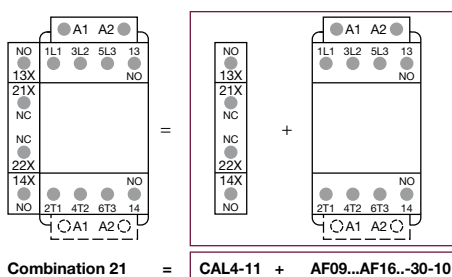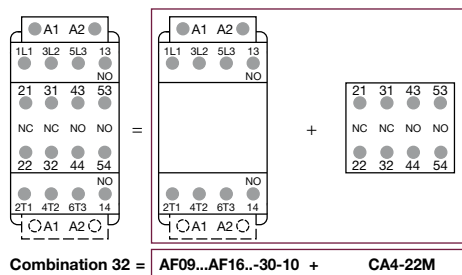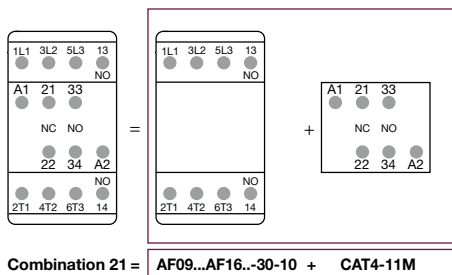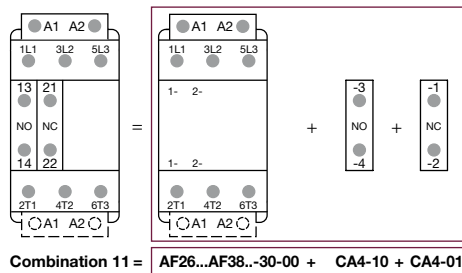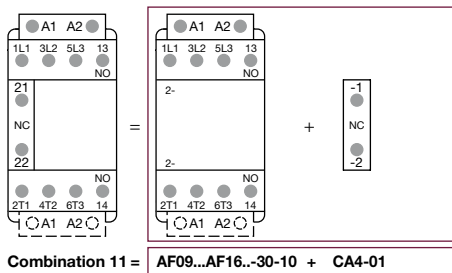


Note: Only AF.Z contactor with DC control voltage 12...20 V DC need to respect the connection polarities indicated close to the coil terminals: A1+ for the positive pole and A2- for the negative pole

Add-on Auxiliary Contacts


Terminal Marking and Positioning




1-pole auxiliary contacts

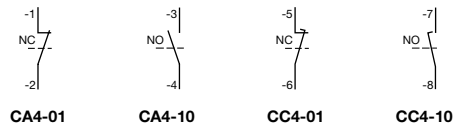

2-pole auxiliary contacts

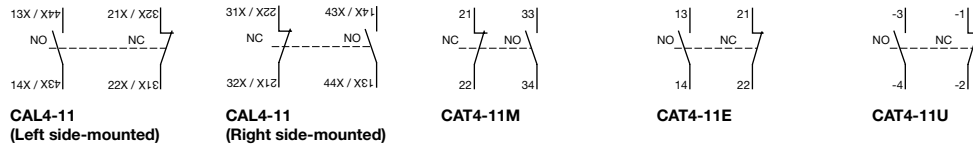

4-pole auxiliary contacts

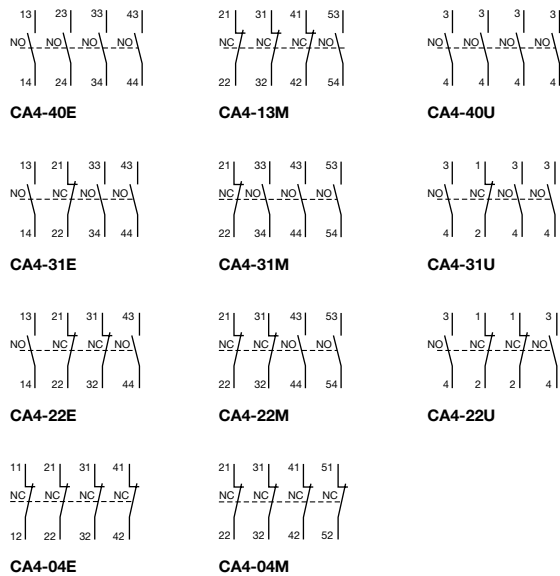


AF09 ... AF16 3-pole Contactors


AC / DC Operated - with Screw Terminals




Dimensions mm, inches

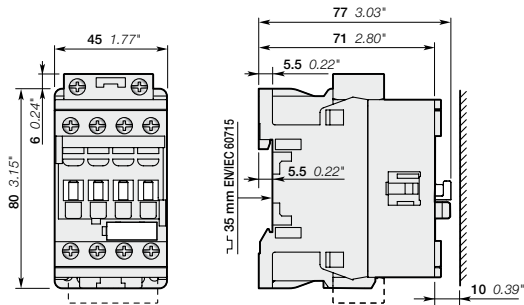


AF09, AF12, AF16




AF09, AF12, AF16

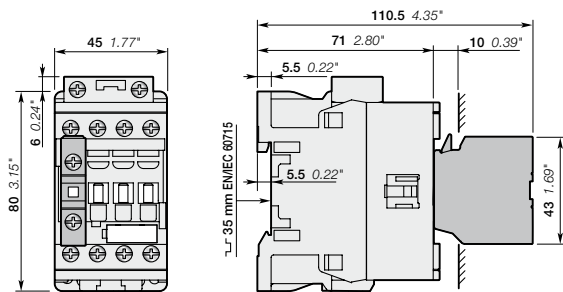


AF09, AF12, AF16
+ CA4, CC4 1-pole auxiliary contact block

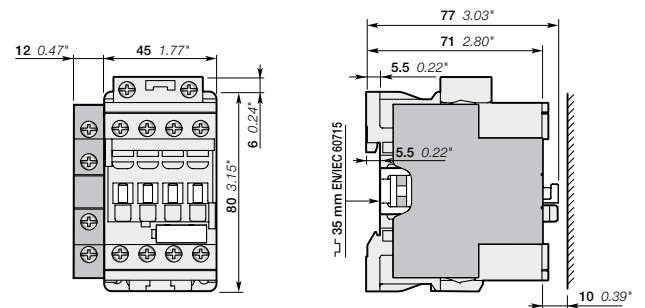


AF09, AF12, AF16
+ CAL4-11 2-pole auxiliary contact block

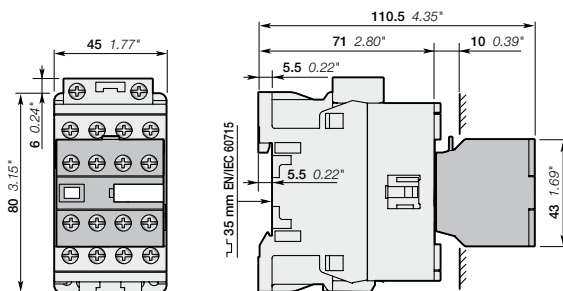


AF09, AF12, AF16
+ CA4 4-pole auxiliary contact block

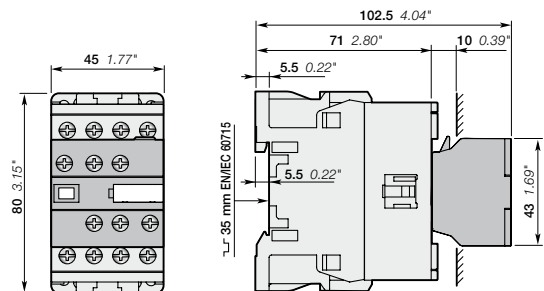

AF09, AF12, AF16
+ CAT4 2-pole auxiliary contact and coil terminal block

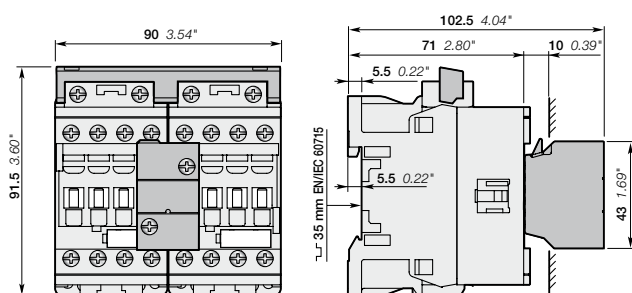

AF09, AF12, AF16
+ VEM4 mechanical and electrical interlock set

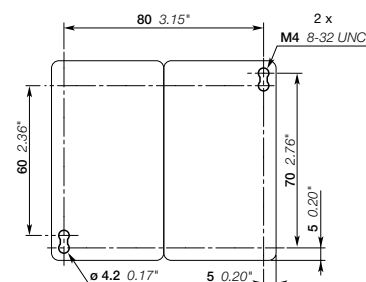

AF09, AF12, AF16
+ VEM4 mechanical and electrical interlock set


Note: contactor lateral distance to grounded component 2 mm 0.08" min.

AF26 ... AF38 3-pole Contactors


AC / DC Operated - with Screw Terminals




Dimensions mm, inches

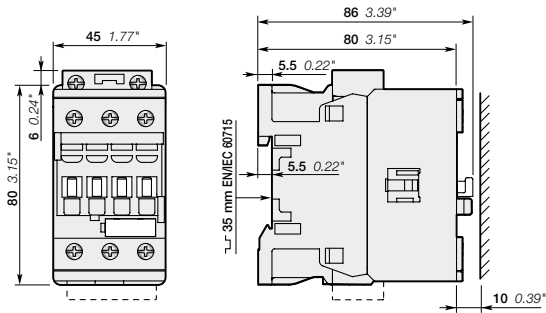


AF26, AF30, AF38




AF26, AF30, AF38

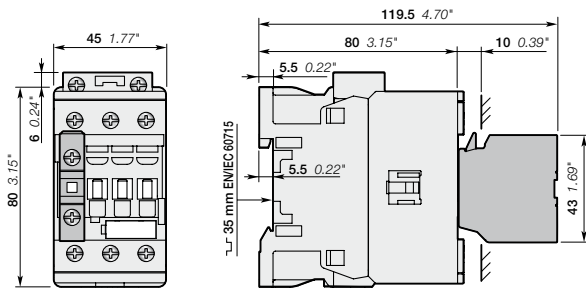


AF26, AF30, AF38
+ CA4, CC4 1-pole auxiliary contact block

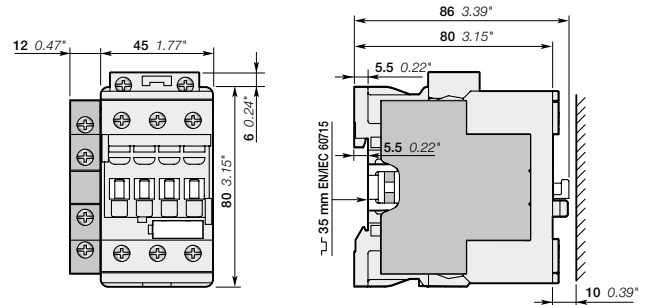


AF26, AF30, AF38
+ CAL4-11 2-pole auxiliary contact block

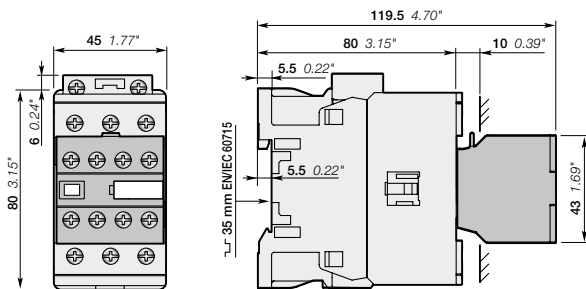


AF26, AF30, AF38
+ CA4 4-pole auxiliary contact block

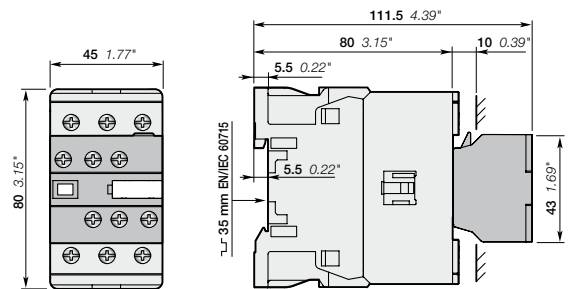

AF26, AF30, AF38
+ CAT4 2-pole auxiliary contact and coil terminal block

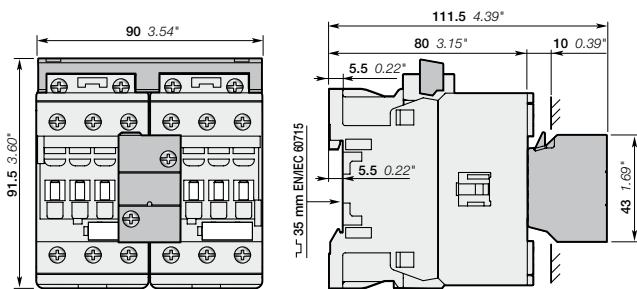

AF26, AF30, AF38
+ VEM4 mechanical and electrical interlock set

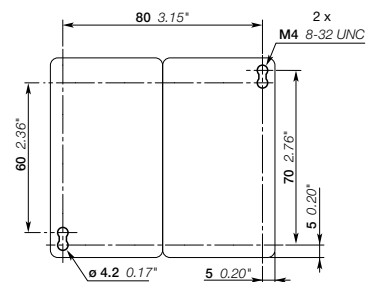

AF26, AF30, AF38
+ VEM4 mechanical and electrical interlock set


Note: contactor lateral distance to grounded component 2 mm 0.08" min.

AF09 ... AF38 2-stack 3-pole Contactors


AC / DC Operated - with Screw Terminals




Dimensions mm, inches

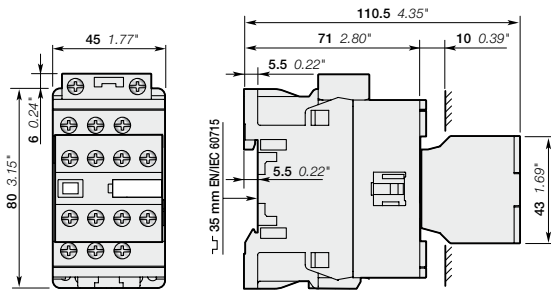


AF09, AF12, AF16...-30-22



AF09 ... AF38

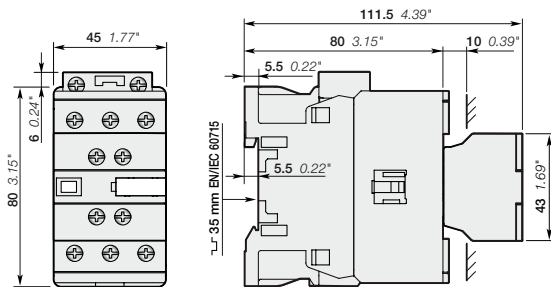


AF26, AF30, AF38...-30-11

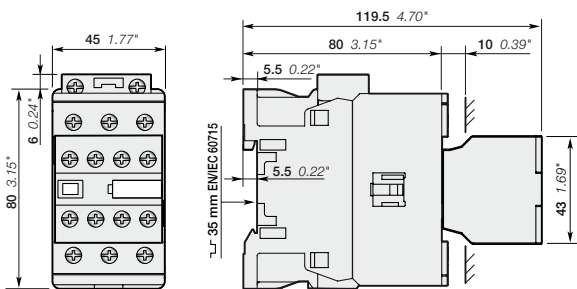

AF26, AF30, AF38...-30-22

Note: contactor lateral distance to grounded component 2 mm 0.08 inches min.

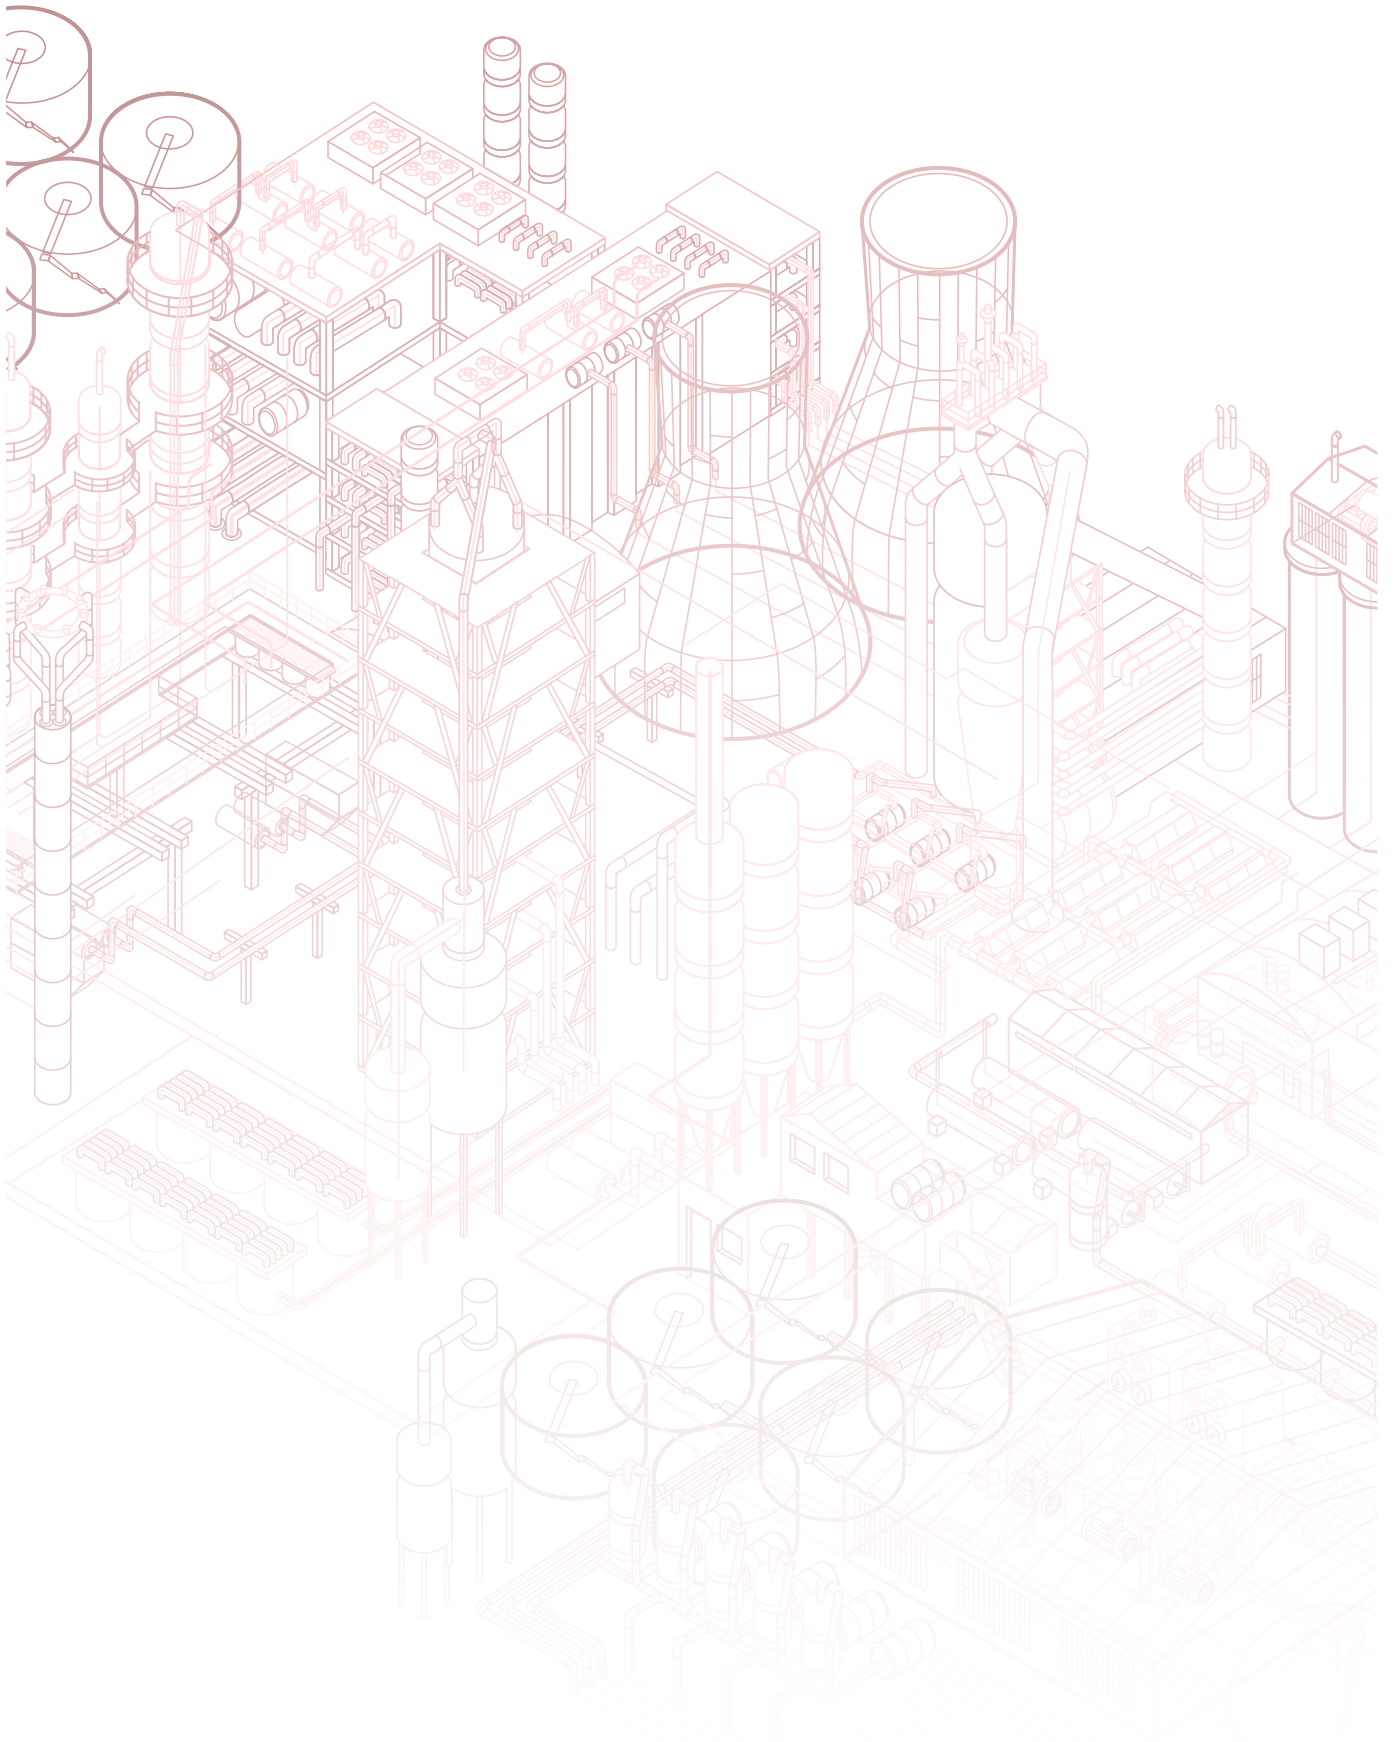

Index

Order Code Classification

Order code	Type	Page	Order code	Type	Page	Order code	Type	Page	Order code	Type	Page
1SBL 136 001 R2001	AF09Z-30-01-20	5	1SBL 177 001 R1301	AF16-30-01-13	4	1SBL 297 001 R1100	AF38-30-00-11	4			
1SBL 136 001 R2010	AF09Z-30-10-20	5	1SBL 177 001 R1310	AF16-30-10-13	4	1SBL 297 001 R1111	AF38-30-11-11	6			
1SBL 136 001 R2022	AF09Z-30-22-20	7	1SBL 177 001 R1322	AF16-30-22-13	6	1SBL 297 001 R1122	AF38-30-22-11	6			
1SBL 136 001 R2101	AF09Z-30-01-21	5	1SBL 177 001 R1401	AF16-30-01-14	4	1SBL 297 001 R1200	AF38-30-00-12	4			
1SBL 136 001 R2110	AF09Z-30-10-21	5	1SBL 177 001 R1410	AF16-30-10-14	4	1SBL 297 001 R1211	AF38-30-11-12	6			
1SBL 136 001 R2122	AF09Z-30-22-21	7	1SBL 177 001 R1422	AF16-30-22-14	6	1SBL 297 001 R1222	AF38-30-22-12	6			
1SBL 136 001 R2201	AF09Z-30-01-22	5	1SBL 236 001 R2000	AF26Z-30-00-20	5	1SBL 297 001 R1300	AF38-30-00-13	4			
1SBL 136 001 R2210	AF09Z-30-10-22	5	1SBL 236 001 R2011	AF26Z-30-11-20	7	1SBL 297 001 R1311	AF38-30-11-13	6			
1SBL 136 001 R2222	AF09Z-30-22-22	7	1SBL 236 001 R2022	AF26Z-30-22-20	7	1SBL 297 001 R1322	AF38-30-22-13	6			
1SBL 136 001 R2301	AF09Z-30-01-23	5	1SBL 236 001 R2100	AF26Z-30-00-21	5	1SBL 297 001 R1400	AF38-30-00-14	4			
1SBL 136 001 R2310	AF09Z-30-10-23	5	1SBL 236 001 R2111	AF26Z-30-11-21	7	1SBL 297 001 R1411	AF38-30-11-14	6			
1SBL 136 001 R2322	AF09Z-30-22-23	7	1SBL 236 001 R2122	AF26Z-30-22-21	7	1SBL 297 001 R1422	AF38-30-22-14	6			
1SBL 137 001 R1101	AF09-30-01-11	4	1SBL 236 001 R2200	AF26Z-30-00-22	5	1SBN 010 110 R1001	CA4-01	14			
1SBL 137 001 R1110	AF09-30-10-11	4	1SBL 236 001 R2211	AF26Z-30-11-22	7	1SBN 010 110 R1010	CA4-10	14			
1SBL 137 001 R1122	AF09-30-22-11	6	1SBL 236 001 R2222	AF26Z-30-22-22	7	1SBN 010 110 T1001	CA4-01-T	14			
1SBL 137 001 R1201	AF09-30-01-12	4	1SBL 236 001 R2300	AF26Z-30-00-23	5	1SBN 010 110 T1010	CA4-10-T	14			
1SBL 137 001 R1210	AF09-30-10-12	4	1SBL 236 001 R2311	AF26Z-30-11-23	7	1SBN 010 111 R1001	CC4-01	14			
1SBL 137 001 R1222	AF09-30-22-12	6	1SBL 236 001 R2322	AF26Z-30-22-23	7	1SBN 010 111 R1010	CC4-10	14			
1SBL 137 001 R1301	AF09-30-01-13	4	1SBL 237 001 R1100	AF26-30-00-11	4	1SBN 010 120 R1011	CAL4-11	14			
1SBL 137 001 R1310	AF09-30-10-13	4	1SBL 237 001 R1111	AF26-30-11-11	6	1SBN 010 120 T1011	CAL4-11-T	14			
1SBL 137 001 R1322	AF09-30-22-13	6	1SBL 237 001 R1122	AF26-30-22-11	6	1SBN 010 140 R1004	CA4-04E	14			
1SBL 137 001 R1401	AF09-30-01-14	4	1SBL 237 001 R1200	AF26-30-00-12	4	1SBN 010 140 R1022	CA4-22E	14			
1SBL 137 001 R1410	AF09-30-10-14	4	1SBL 237 001 R1211	AF26-30-11-12	6	1SBN 010 140 R1031	CA4-31E	14			
1SBL 137 001 R1422	AF09-30-22-14	6	1SBL 237 001 R1222	AF26-30-22-12	6	1SBN 010 140 R1040	CA4-40E	14			
1SBL 156 001 R2001	AF12Z-30-01-20	5	1SBL 237 001 R1300	AF26-30-00-13	4	1SBN 010 140 R1104	CA4-04M	14			
1SBL 156 001 R2010	AF12Z-30-10-20	5	1SBL 237 001 R1311	AF26-30-11-13	6	1SBN 010 140 R1113	CA4-13M	14			
1SBL 156 001 R2022	AF12Z-30-22-20	7	1SBL 237 001 R1322	AF26-30-22-13	6	1SBN 010 140 R1122	CA4-22M	14			
1SBL 156 001 R2101	AF12Z-30-01-21	5	1SBL 237 001 R1400	AF26-30-00-14	4	1SBN 010 140 R1131	CA4-31M	14			
1SBL 156 001 R2110	AF12Z-30-10-21	5	1SBL 237 001 R1411	AF26-30-11-14	6	1SBN 010 140 R1322	CA4-22U	14			
1SBL 156 001 R2122	AF12Z-30-22-21	7	1SBL 237 001 R1422	AF26-30-22-14	6	1SBN 010 140 R1331	CA4-31U	14			
1SBL 156 001 R2201	AF12Z-30-01-22	5	1SBL 276 001 R2000	AF30Z-30-00-20	5	1SBN 010 140 R1340	CA4-40U	14			
1SBL 156 001 R2210	AF12Z-30-10-22	5	1SBL 276 001 R2011	AF30Z-30-11-20	7	1SBN 010 151 R1011	CAT4-11E	14			
1SBL 156 001 R2222	AF12Z-30-22-22	7	1SBL 276 001 R2022	AF30Z-30-22-20	7	1SBN 010 151 R1111	CAT4-11M	14			
1SBL 156 001 R2301	AF12Z-30-01-23	5	1SBL 276 001 R2100	AF30Z-30-00-21	5	1SBN 010 151 R1311	CAT4-11U	14			
1SBL 156 001 R2310	AF12Z-30-10-23	5	1SBL 276 001 R2111	AF30Z-30-11-21	7	1SBN 030 105 T1000	VM4	17			
1SBL 156 001 R2322	AF12Z-30-22-23	7	1SBL 276 001 R2122	AF30Z-30-22-21	7	1SBN 030 111 R1000	VEM4	17			
1SBL 157 001 R1101	AF12-30-01-11	4	1SBL 276 001 R2200	AF30Z-30-00-22	5	1SBN 070 156 T1000	LDC4	19			
1SBL 157 001 R1110	AF12-30-10-11	4	1SBL 276 001 R2211	AF30Z-30-11-22	7	1SBN 081 306 T1000	BEA16-4	16			
1SBL 157 001 R1122	AF12-30-22-11	6	1SBL 276 001 R2222	AF30Z-30-22-22	7	1SBN 081 311 R1000	BER16-4	16			
1SBL 157 001 R1201	AF12-30-01-12	4	1SBL 276 001 R2300	AF30Z-30-00-23	5	1SBN 081 313 R2000	BEY16-4	16			
1SBL 157 001 R1210	AF12-30-10-12	4	1SBL 276 001 R2311	AF30Z-30-11-23	7	1SBN 082 306 T1000	BEA26-4	16			
1SBL 157 001 R1222	AF12-30-22-12	6	1SBL 276 001 R2322	AF30Z-30-22-23	7	1SBN 082 306 T2000	BEA38-4	16			
1SBL 157 001 R1301	AF12-30-01-13	4	1SBL 277 001 R1100	AF30-30-00-11	4	1SBN 082 311 R1000	BER38-4	16			
1SBL 157 001 R1310	AF12-30-10-13	4	1SBL 277 001 R1111	AF30-30-11-11	6	1SBN 082 713 R2000	BEY38-4	16			
1SBL 157 001 R1322	AF12-30-22-13	6	1SBL 277 001 R1122	AF30-30-22-11	6	1SBN 110 108 T1000	EX4	19			
1SBL 157 001 R1401	AF12-30-01-14	4	1SBL 277 001 R1200	AF30-30-00-12	4	1SBN 110 109 W1000	BX4-CA	19			
1SBL 157 001 R1410	AF12-30-10-14	4	1SBL 277 001 R1211	AF30-30-11-12	6	1SBN 110 120 W1000	BB4	17			
1SBL 157 001 R1422	AF12-30-22-14	6	1SBL 277 001 R1222	AF30-30-22-12	6	1SNA 235 156 R2700	BA4	19			
1SBL 176 001 R2001	AF16Z-30-01-20	5	1SBL 277 001 R1300	AF30-30-00-13	4	1SNA 235 712 R2400	HTP500-BA4	19			
1SBL 176 001 R2010	AF16Z-30-10-20	5	1SBL 277 001 R1311	AF30-30-11-13	6	1SNA 360 010 R1500	SPRC 1	19			
1SBL 176 001 R2022	AF16Z-30-22-20	7	1SBL 277 001 R1322	AF30-30-22-13	6						
1SBL 176 001 R2101	AF16Z-30-01-21	5	1SBL 277 001 R1400	AF30-30-00-14	4						
1SBL 176 001 R2110	AF16Z-30-10-21	5	1SBL 277 001 R1411	AF30-30-11-14	6						
1SBL 176 001 R2122	AF16Z-30-22-21	7	1SBL 277 001 R1422	AF30-30-22-14	6						
1SBL 176 001 R2201	AF16Z-30-01-22	5	1SBL 296 001 R2000	AF38Z-30-00-20	5						
1SBL 176 001 R2210	AF16Z-30-10-22	5	1SBL 296 001 R2011	AF38Z-30-11-20	7						
1SBL 176 001 R2222	AF16Z-30-22-22	7	1SBL 296 001 R2022	AF38Z-30-22-20	7						
1SBL 176 001 R2301	AF16Z-30-01-23	5	1SBL 296 001 R2100	AF38Z-30-00-21	5						
1SBL 176 001 R2310	AF16Z-30-10-23	5	1SBL 296 001 R2111	AF38Z-30-11-21	7						
1SBL 176 001 R2322	AF16Z-30-22-23	7	1SBL 296 001 R2122	AF38Z-30-22-21	7						
1SBL 177 001 R1101	AF16-30-01-11	4	1SBL 296 001 R2200	AF38Z-30-00-22	5						
1SBL 177 001 R1110	AF16-30-10-11	4	1SBL 296 001 R2211	AF38Z-30-11-22	7						
1SBL 177 001 R1122	AF16-30-22-11	6	1SBL 296 001 R2222	AF38Z-30-22-22	7						
1SBL 177 001 R1201	AF16-30-01-12	4	1SBL 296 001 R2300	AF38Z-30-00-23	5						
1SBL 177 001 R1210	AF16-30-10-12	4	1SBL 296 001 R2311	AF38Z-30-11-23	7						
1SBL 177 001 R1222	AF16-30-22-12	6	1SBL 296 001 R2322	AF38Z-30-22-23	7						

Index

Type Classification

Type	Order code	Page	Type	Order code	Page	Type	Order code	Page	Type	Order code	Page
AF09-30-01-11	1SBL 137 001 R1101	4	AF16Z-30-10-22	1SBL 176 001 R2210	5	AF38Z-30-00-20	1SBL 296 001 R2000	5			
AF09-30-01-12	1SBL 137 001 R1201	4	AF16Z-30-10-23	1SBL 176 001 R2310	5	AF38Z-30-00-21	1SBL 296 001 R2100	5			
AF09-30-01-13	1SBL 137 001 R1301	4	AF16Z-30-22-20	1SBL 176 001 R2022	7	AF38Z-30-00-22	1SBL 296 001 R2200	5			
AF09-30-01-14	1SBL 137 001 R1401	4	AF16Z-30-22-21	1SBL 176 001 R2122	7	AF38Z-30-00-23	1SBL 296 001 R2300	5			
AF09-30-10-11	1SBL 137 001 R1110	4	AF16Z-30-22-22	1SBL 176 001 R2222	7	AF38Z-30-11-20	1SBL 296 001 R2011	7			
AF09-30-10-12	1SBL 137 001 R1210	4	AF16Z-30-22-23	1SBL 176 001 R2322	7	AF38Z-30-11-21	1SBL 296 001 R2111	7			
AF09-30-10-13	1SBL 137 001 R1310	4	AF26-30-00-11	1SBL 237 001 R1100	4	AF38Z-30-11-22	1SBL 296 001 R2211	7			
AF09-30-10-14	1SBL 137 001 R1410	4	AF26-30-00-12	1SBL 237 001 R1200	4	AF38Z-30-11-23	1SBL 296 001 R2311	7			
AF09-30-22-11	1SBL 137 001 R1122	6	AF26-30-00-13	1SBL 237 001 R1300	4	AF38Z-30-22-20	1SBL 296 001 R2022	7			
AF09-30-22-12	1SBL 137 001 R1222	6	AF26-30-00-14	1SBL 237 001 R1400	4	AF38Z-30-22-21	1SBL 296 001 R2122	7			
AF09-30-22-13	1SBL 137 001 R1322	6	AF26-30-11-11	1SBL 237 001 R1111	6	AF38Z-30-22-22	1SBL 296 001 R2222	7			
AF09-30-22-14	1SBL 137 001 R1422	6	AF26-30-11-12	1SBL 237 001 R1211	6	AF38Z-30-22-23	1SBL 296 001 R2322	7			
AF09Z-30-01-20	1SBL 136 001 R2001	5	AF26-30-11-13	1SBL 237 001 R1311	6	BA4	1SNA 235 156 R2700	19			
AF09Z-30-01-21	1SBL 136 001 R2101	5	AF26-30-11-14	1SBL 237 001 R1411	6	BB4	1SBN 110 120 W1000	17			
AF09Z-30-01-22	1SBL 136 001 R2201	5	AF26-30-22-11	1SBL 237 001 R1122	6	BEA16-4	1SBN 081 306 T1000	16			
AF09Z-30-01-23	1SBL 136 001 R2301	5	AF26-30-22-12	1SBL 237 001 R1222	6	BEA26-4	1SBN 082 306 T1000	16			
AF09Z-30-10-20	1SBL 136 001 R2010	5	AF26-30-22-13	1SBL 237 001 R1322	6	BEA38-4	1SBN 082 306 T2000	16			
AF09Z-30-10-21	1SBL 136 001 R2110	5	AF26-30-22-14	1SBL 237 001 R1422	6	BER16-4	1SBN 081 311 R1000	16			
AF09Z-30-10-22	1SBL 136 001 R2210	5	AF26Z-30-00-20	1SBL 236 001 R2000	5	BER38-4	1SBN 082 311 R1000	16			
AF09Z-30-10-23	1SBL 136 001 R2310	5	AF26Z-30-00-21	1SBL 236 001 R2100	5	BEY16-4	1SBN 081 313 R2000	16			
AF09Z-30-22-20	1SBL 136 001 R2022	7	AF26Z-30-00-22	1SBL 236 001 R2200	5	BEY38-4	1SBN 082 713 R2000	16			
AF09Z-30-22-21	1SBL 136 001 R2122	7	AF26Z-30-00-23	1SBL 236 001 R2300	5	BX4	1SBN 110 108 T1000	19			
AF09Z-30-22-22	1SBL 136 001 R2222	7	AF26Z-30-11-20	1SBL 236 001 R2011	7	BX4-CA	1SBN 110 109 W1000	19			
AF09Z-30-22-23	1SBL 136 001 R2322	7	AF26Z-30-11-21	1SBL 236 001 R2111	7	CA4-01	1SBN 010 110 R1001	14			
AF12-30-01-11	1SBL 157 001 R1101	4	AF26Z-30-11-22	1SBL 236 001 R2211	7	CA4-01-T	1SBN 010 110 T1001	14			
AF12-30-01-12	1SBL 157 001 R1201	4	AF26Z-30-11-23	1SBL 236 001 R2311	7	CA4-04E	1SBN 010 140 R1004	14			
AF12-30-01-13	1SBL 157 001 R1301	4	AF26Z-30-22-20	1SBL 236 001 R2022	7	CA4-04M	1SBN 010 140 R1104	14			
AF12-30-01-14	1SBL 157 001 R1401	4	AF26Z-30-22-21	1SBL 236 001 R2122	7	CA4-10	1SBN 010 110 R1010	14			
AF12-30-10-11	1SBL 157 001 R1110	4	AF26Z-30-22-22	1SBL 236 001 R2222	7	CA4-10-T	1SBN 010 110 T1010	14			
AF12-30-10-12	1SBL 157 001 R1210	4	AF26Z-30-22-23	1SBL 236 001 R2322	7	CA4-13M	1SBN 010 140 R1113	14			
AF12-30-10-13	1SBL 157 001 R1310	4	AF30-30-00-11	1SBL 277 001 R1100	4	CA4-22E	1SBN 010 140 R1022	14			
AF12-30-10-14	1SBL 157 001 R1410	4	AF30-30-00-12	1SBL 277 001 R1200	4	CA4-22M	1SBN 010 140 R1122	14			
AF12-30-22-11	1SBL 157 001 R1122	6	AF30-30-00-13	1SBL 277 001 R1300	4	CA4-22U	1SBN 010 140 R1322	14			
AF12-30-22-12	1SBL 157 001 R1222	6	AF30-30-00-14	1SBL 277 001 R1400	4	CA4-31E	1SBN 010 140 R1031	14			
AF12-30-22-13	1SBL 157 001 R1322	6	AF30-30-11-11	1SBL 277 001 R1111	6	CA4-31M	1SBN 010 140 R1131	14			
AF12-30-22-14	1SBL 157 001 R1422	6	AF30-30-11-12	1SBL 277 001 R1211	6	CA4-31U	1SBN 010 140 R1331	14			
AF12Z-30-01-20	1SBL 156 001 R2001	5	AF30-30-11-13	1SBL 277 001 R1311	6	CA4-40E	1SBN 010 140 R1040	14			
AF12Z-30-01-21	1SBL 156 001 R2101	5	AF30-30-11-14	1SBL 277 001 R1411	6	CA4-40U	1SBN 010 140 R1340	14			
AF12Z-30-01-22	1SBL 156 001 R2201	5	AF30-30-22-11	1SBL 277 001 R1122	6	CAL4-11	1SBN 010 120 R1011	14			
AF12Z-30-01-23	1SBL 156 001 R2301	5	AF30-30-22-12	1SBL 277 001 R1222	6	CAL4-11-T	1SBN 010 120 T1011	14			
AF12Z-30-10-20	1SBL 156 001 R2010	5	AF30-30-22-13	1SBL 277 001 R1322	6	CAT4-11E	1SBN 010 151 R1011	14			
AF12Z-30-10-21	1SBL 156 001 R2110	5	AF30-30-22-14	1SBL 277 001 R1422	6	CAT4-11M	1SBN 010 151 R1111	14			
AF12Z-30-10-22	1SBL 156 001 R2210	5	AF30Z-30-00-20	1SBL 276 001 R2000	5	CAT4-11U	1SBN 010 151 R1311	14			
AF12Z-30-10-23	1SBL 156 001 R2310	5	AF30Z-30-00-21	1SBL 276 001 R2100	5	CC4-01	1SBN 010 111 R1001	14			
AF12Z-30-22-20	1SBL 156 001 R2022	7	AF30Z-30-00-22	1SBL 276 001 R2200	5	CC4-10	1SBN 010 111 R1010	14			
AF12Z-30-22-21	1SBL 156 001 R2122	7	AF30Z-30-00-23	1SBL 276 001 R2300	5	HTP500-BA4	1SNA 235 712 R2400	19			
AF12Z-30-22-22	1SBL 156 001 R2222	7	AF30Z-30-11-20	1SBL 276 001 R2011	7	LDC4	1SBN 070 156 T1000	19			
AF12Z-30-22-23	1SBL 156 001 R2322	7	AF30Z-30-11-21	1SBL 276 001 R2111	7	SPRC 1	1SNA 360 010 R1500	19			
AF16-30-01-11	1SBL 177 001 R1101	4	AF30Z-30-11-22	1SBL 276 001 R2211	7	VEM4	1SBN 030 111 R1000	17			
AF16-30-01-12	1SBL 177 001 R1201	4	AF30Z-30-11-23	1SBL 276 001 R2311	7	VM4	1SBN 030 105 T1000	17			
AF16-30-01-13	1SBL 177 001 R1301	4	AF30Z-30-22-20	1SBL 276 001 R2022	7						
AF16-30-01-14	1SBL 177 001 R1401	4	AF30Z-30-22-21	1SBL 276 001 R2122	7						
AF16-30-10-11	1SBL 177 001 R1110	4	AF30Z-30-22-22	1SBL 276 001 R2222	7						
AF16-30-10-12	1SBL 177 001 R1210	4	AF30Z-30-22-23	1SBL 276 001 R2322	7						
AF16-30-10-13	1SBL 177 001 R1310	4	AF38-30-00-11	1SBL 297 001 R1100	4						
AF16-30-10-14	1SBL 177 001 R1410	4	AF38-30-00-12	1SBL 297 001 R1200	4						
AF16-30-22-11	1SBL 177 001 R1122	6	AF38-30-00-13	1SBL 297 001 R1300	4						
AF16-30-22-12	1SBL 177 001 R1222	6	AF38-30-00-14	1SBL 297 001 R1400	4						
AF16-30-22-13	1SBL 177 001 R1322	6	AF38-30-11-11	1SBL 297 001 R1111	6						
AF16-30-22-14	1SBL 177 001 R1422	6	AF38-30-11-12	1SBL 297 001 R1211	6						
AF16Z-30-01-20	1SBL 176 001 R2001	5	AF38-30-11-13	1SBL 297 001 R1311	6						
AF16Z-30-01-21	1SBL 176 001 R2101	5	AF38-30-11-14	1SBL 297 001 R1411	6						
AF16Z-30-01-22	1SBL 176 001 R2201	5	AF38-30-22-11	1SBL 297 001 R1122	6						
AF16Z-30-01-23	1SBL 176 001 R2301	5	AF38-30-22-12	1SBL 297 001 R1222	6						
AF16Z-30-10-20	1SBL 176 001 R2010	5	AF38-30-22-13	1SBL 297 001 R1322	6						
AF16Z-30-10-21	1SBL 176 001 R2110	5	AF38-30-22-14	1SBL 297 001 R1422	6						

Contact us

ABB France

Low Voltage Products Division

10, rue Ampère Z.I. - B.P. 114
F-69685 Chassieu cedex / France

ABB STOTZ-KONTAKT GmbH

Eppelheimer Straße 82
D-69123 Heidelberg / Germany

ABB AB/ Cewe-Control

Motorgränd 20
S-721 61 Västerås / Sweden

You can find the address of your local sales organisation
on the ABB home page

<http://www.abb.com/contacts> -> Low Voltage products

Note

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB.

Copyright© 2010 ABB
All rights reserved