



Applications	Commercial Grade	_
Feature	Shield Magnetic Shield Multilayer Ferrite Core Ferrite Core	
Series   Type	MLP	
Status	Production	
Brand	TDK	

Size		
Length(L)	2.50mm ±0.15mm	
Width(W)	2.00mm ±0.15mm	
Thickness   Height	1.10mm ±0.10mm	
Recommended Land Pattern (A)	0.70mm Nom.	
Recommended Land Pattern (B)	1.40mm Nom.	
Recommended Land Pattern (C)	2.00mm Nom.	

Electrical Characteristics				
Inductance	4.7µH ±20% at 2MHz			
Rated Current (L Change) [Typ.]				
Rated Current (L Change) [Max.]				
Rated Current (Temperature Rise) [Typ.]				
Rated Current (Temperature Rise) [Max.]	1A (40°C Rise)			
DC Resistance [Typ.]	110mΩ			
DC Resistance [Max.]	143mΩ			
Self Resonant Frequency [Min.]				
Self Resonant Frequency [Typ.]				
Q [Min.]				
Q [Typ.]				

Other		
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 125°C	
Coldening Mathead	Reflow	
Soldering Method	Iron Soldering	
AEC-Q200	No	
Packing	Blister (Plastic)Taping [180mm Reel]	
Package Quantity	3000pcs	
Weight	0.025g	

I images are for reference only and show exemplary products.


! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.



## MLP2520S4R7ST0S1



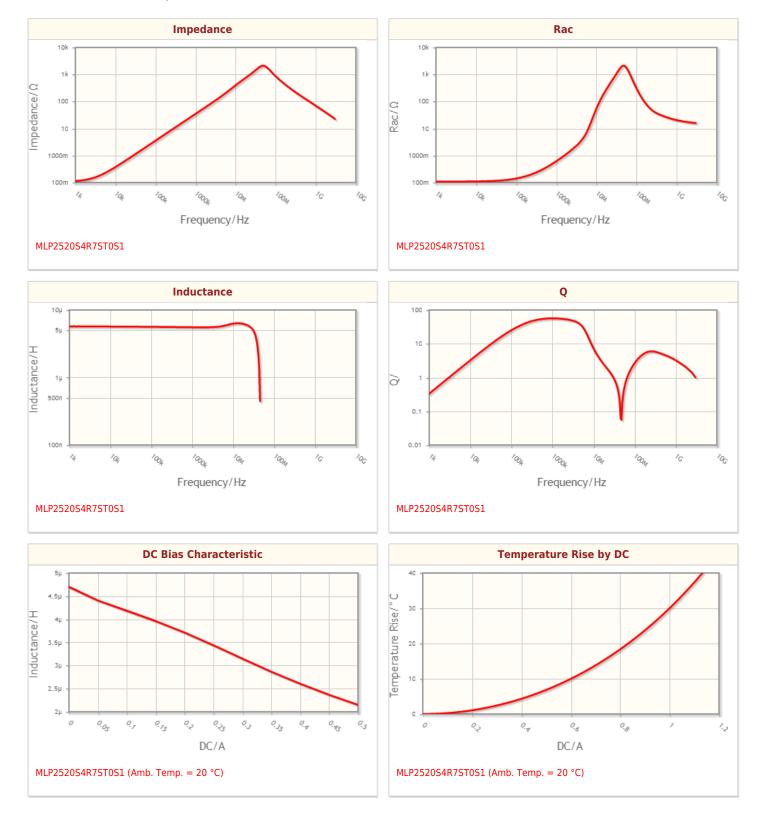

## Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

! Images are for reference only and show exemplary products.


! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.





## Associated Images

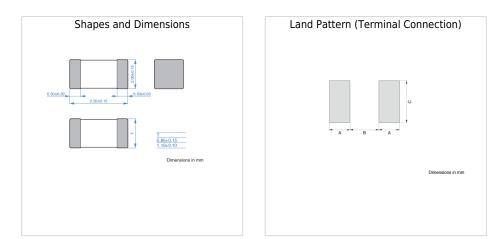

! Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.