





# MLZ2012N1R0LT000

Applications		Commercial Grade
Feature		Multilayer
		Magnetic Shield
		Ferrite Core
Series	MLZ Series / MLZ2012 Type	
Status	Production	



Size	
Length(L)	2.00mm +/-0.20mm
Width(W)	1.25mm +/-0.20mm
Thickness(T)	0.85mm +/-0.20mm
Recommended Land Pattern (A)	0.80mm Nom.
Recommended Land Pattern (B)	1.00mm Nom.
Recommended Land Pattern (C)	1.20mm Nom.


Electrical Characteristics	
Inductance	1uH +/-20% at 2MHz
Rated Current (L Change) [Max.]	220mA (50% Down)
Rated Current (Temperature Rise) [Typ.]	1.15A (20degC Rise)
Self-Resonant Frequency [Min.]	
DC Resistance [Nom.]	60mΩ
DC Resistance [Max.]	78mΩ

Other	
Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125degC
Soldering Method	Flow, Reflow, Iron Soldering
AEC Q200	No
Packing	Punched (Paper)Taping [180mm Reel]
Package Quantity	4000Pcs Min.
Weight	0.01g


•This PDF document was created based on the data listed on the TDK Corporation website.  
 •All specifications are subject to change without notice.

# MLZ2012N1R0LT000


**Characteristic Graphs** (This is reference data, and does not guarantee the product's characteristics.)

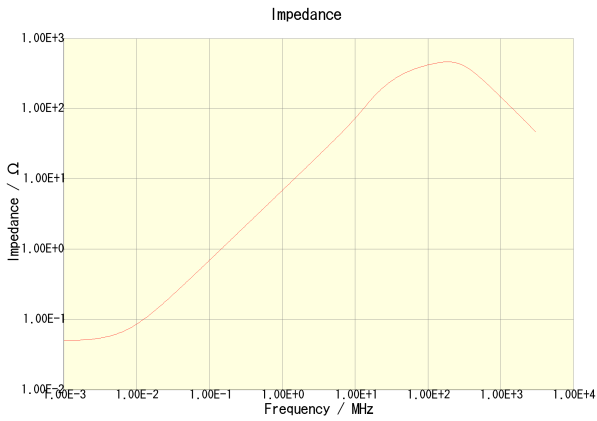


**MLZ2012N1R0LT000**

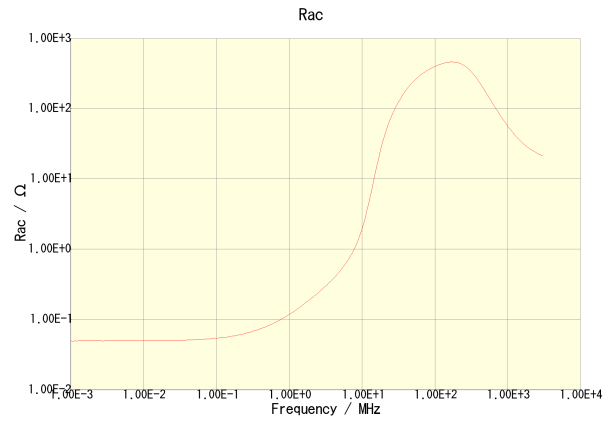

**MLZ2012N1R0LT000**

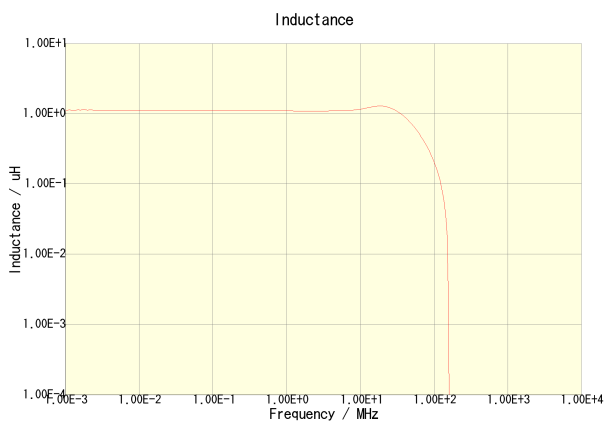

**MLZ2012N1R0LT000**



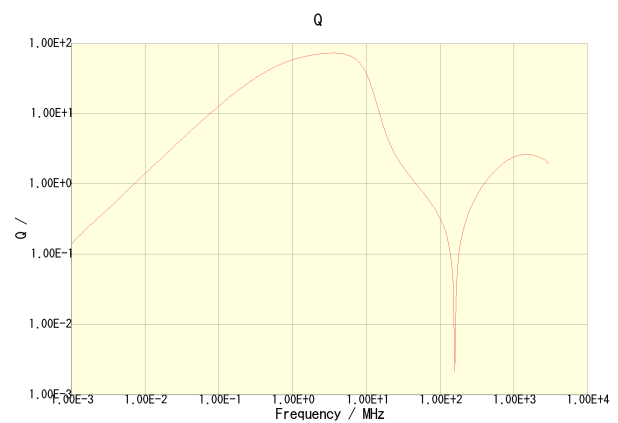


**MLZ2012N1R0LT000**

•This PDF document was created based on the data listed on the TDK Corporation website.  
 •All specifications are subject to change without notice.

# MLZ2012N1R0LT000

**Characteristic Graphs** (This is reference data, and does not guarantee the product's characteristics.)

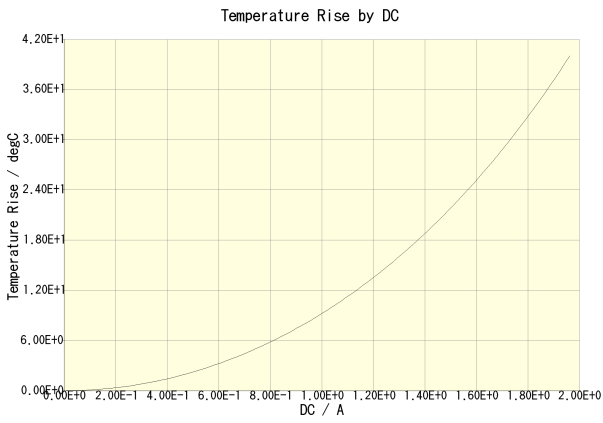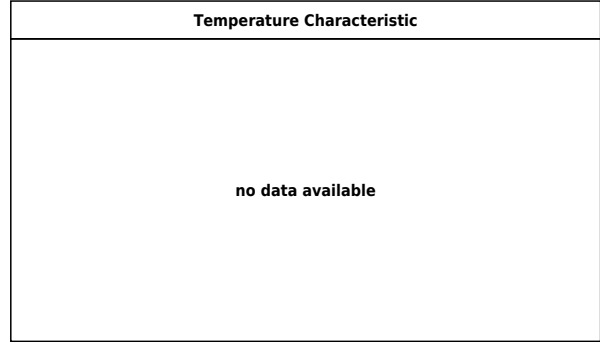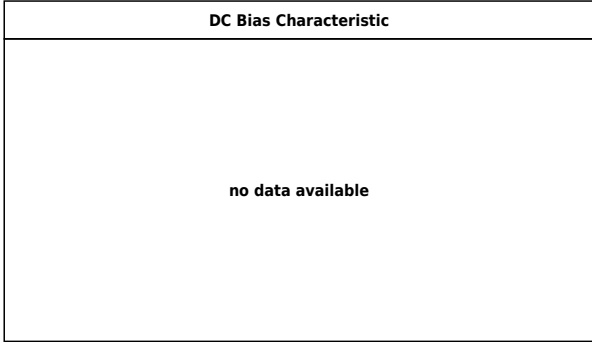

MLZ2012N1R0LT000(Amb. Temp. = 20degc)

- This PDF document was created based on the data listed on the TDK Corporation website.
- All specifications are subject to change without notice.