




# MPZ1608S300ATAH0

Applications	 Commercial Grade
Feature	 Power Line
Series	MPZ Series / MPZ1608 Type
Status	Production



Size	
Length(L)	1.60mm +/-0.15mm
Width(W)	0.80mm +/-0.15mm
Thickness(T)	0.60mm +/-0.15mm
Recommended Land Pattern (A)	0.60mm Nom.
Recommended Land Pattern (B)	0.80mm Nom.
Recommended Land Pattern (C)	0.80mm Nom.

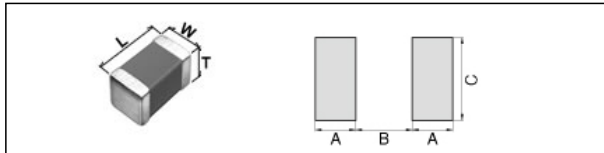
Electrical Characteristics	
Impedance at 100MHz	30Ω +/-10Ω
Rated Current	5A
DC Resistance [Max.]	10mΩ

Other	
Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125degC
Soldering Method	Reflow, Iron Soldering
AEC Q200	No
Packing	Punched (Paper)Taping [180mm Reel]
Package Quantity	4000Pcs Min.
Weight	0.003g


•This PDF document was created based on the data listed on the TDK Corporation website.  
 •All specifications are subject to change without notice.

# MPZ1608S300ATAH0

Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

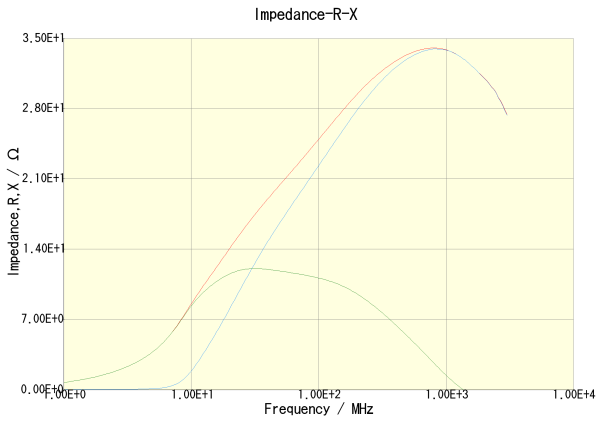


MPZ1608S300ATAH0(J)MPZ1608S300ATAH0(R)MPZ1608S300ATAH0(X)

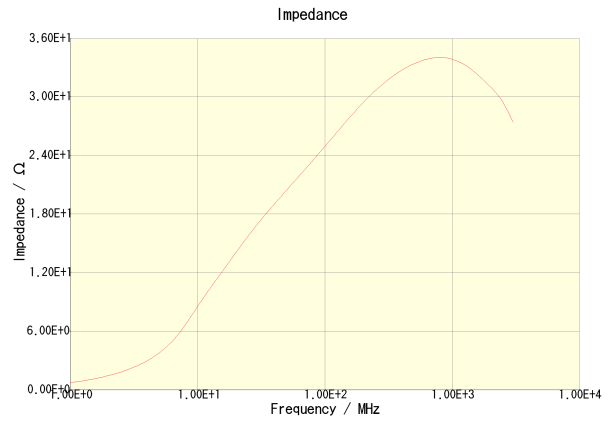

MPZ1608S300ATAH0

Temperature Rise by DC
no data available

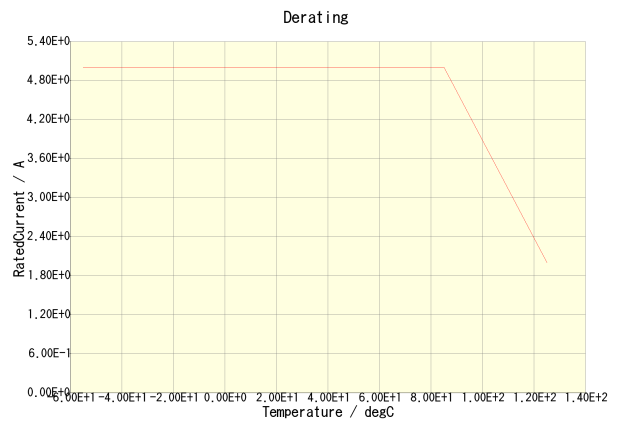

MPZ1608S300ATAH0

•This PDF document was created based on the data listed on the TDK Corporation website.  
 •All specifications are subject to change without notice.