
MODEL **BPC SERIES**

Non-Inductive Planar

Thick Film

Power Resistor Network

NEW PRODUCT



STANDARD TYPES

BPC 3	3 Watts, Nominal
BPC 5	5 Watts, Nominal
BPC 7	7.5 Watts, Nominal
BPC 10	10 Watts, Nominal

ELECTRICAL

Resistance Range, Ohms	BPC 3, BPC 5, BPC 7:1 to 200K, BPC 10: 3 to 200K
Standard Tolerances	±1%, ±2%, ±5%, ±10% (<100hms = ±2%, ±5%, ±10%)
Operating Temperature Range	-55°C to +125°C
Temperature Coefficient of Resistance, Maximum	±100ppm/°C
Power Ratings, Watts	3W, 5W, 7.5W, 10W
Operating Voltage, Maximum	300 V ac, 500V dc
Peak Current	20 X Rated Current up to 8 ms ($\Delta R \pm 0.5\%$)

ENVIRONMENTAL (PER MIL-R-83401)

Thermal Shock	AB 0.50%
Terminal Strength	ΔR 0.25%
Moisture Resistance	AR 0.25%
Mechanical Shock	30G's , ΔR 0.25%
Vibration	10G's, 10 to 500 Hz ∆R 0.25%
Low Temperature Storage	ΔR 0.25%
High Temperature Exposure	ΔR 0.25%
Load Life, 1,000 Hours	ΔR 1.00%
Resistance to Solder Heat	ΔR 0.25%
Dielectric Withstanding Voltage, Minimun	5.000 Vdc
Marking Permanency	MIL-STD-202, Method 215
Lead Solderability	MIL-STD-202, Method 208
Flammability	UL 94V-0 Rated
Storage	-55°C to +155°C
Specifications subject to change without notice.	

5 - 11

Specifications subject to change without notice.

D



02F 📰 1336610 0003516 991 📰

Model BPC Series

MECHANICAL

Lead Material Substrate Material

Resistor Material

Solder Tinned Copper Alloy

96% Alumina

Ruthenium Oxide

FEATURES

- · High power density
- · Power is dissipated above circuit board
- · Low temperature solder
- · Board layout flexibility

ORDERING INFORMATION

APPLICATIONS

- . In rush current limiters
- · Power supply preloads
- Snubber circuits
- UPS systems

5 = 5 Watts K = 10% 7 = 7.5 Watts Resistance Code 10 = 10 Watts First 2 digits are significant. Last digit denotes number of trailing zeros. For F Tol. First 3 digits are significant. Last digit denotes number of trailing zeros.	Powe 3 = 3 5 = 5 7 = 7	5 Watts 10 Watts The First 2 digits are significant. Last digit denotes number of trailing zeros. For F Tol. first 3 digits are significant. Last digit denotes number
--	---------------------------------	--

STANDARD RESISTANCE VALUES (OHMS)															
Value	1	2	5	10	20	50	100	200	500	1K	2K	5K	10K	20K	50K
Code	1R0	2R0	5R0	100	200	500	101	201	501	102	202	502	103	203	503

PACKAGING

D

Bi technologies

Standard:


BPC 3, BPC 5, BPC 7 = 200 per box BPC 10 = 100 per box

02F 🎟 1336610 0003517 828 🖿


5-12

Model BPC Series

OUTLINE DIMENSIONS (Inch/mm)

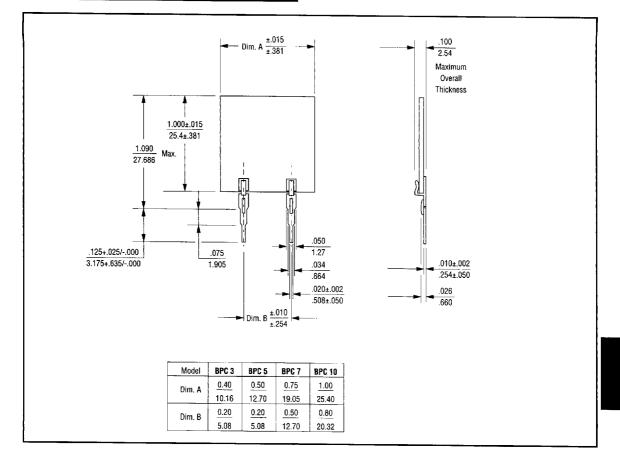

POWER DERATING CURVE

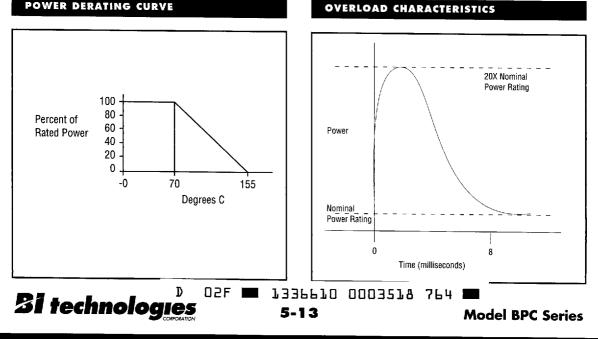

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TT Electronics: BPC55R0J BPC5500J BPC5502J