**MOS FET Relays** SOP 4-pin, General-purpose Type

## **General-purpose MOS FET Relays** in SOP 4-pin packages for a wide range of applications

- Contact form: 1a (SPST-NO) or 1b (SPST-NC)
- Load voltage: 350 V or 400 V

RoHS Compliant

## Application Examples

- Semiconductor test equipment
- Various battery-driven devices
- Security equipment
- Industrial equipment

'AL

Note: The actual product is marked differently from the image shown here.

Communication equipment

- Test & Measurement equipment

VM-35\_G\_/351VY/401G\_/401VY

- Amusement equipment

Power circuit

Package

## (Unit:mm, Average)

Special SOP 4-pin

## Model Number Legend

#### G3VM-0000 1 2 3 4 5

1. Load Voltage	2. Contact form
35 : 350 V	1 : 1a (SPST-NO)
40 : 400 V	3 : 1b (SPST-NC)

#### 4. Additional functions

None:Dielectric strength between I/O 1500 V Dielectric strength between I/O 3750 V Y:

#### 3. Package

G : SOP 4-pin

V : Special SOP 4-pin

#### 5. Other informations

When specifications overlap, serial code is added in the recorded order.

## from the image shown here.

## Ordering Information

			Load voltage	Continuous	Stick p	backaging	Tape packaging														
Package	Contact form	Terminals	(peak value) *	load current (peak value) <b>*</b>	Model	Minimum package quantity	Model	Minimum package quantity													
SOP4				100 mA	G3VM-351G1	- 100 pcs.	G3VM-351G1(TR)	2,500 pcs.													
30F4	1a				G3VM-351G	100 pcs.	G3VM-351G(TR)	2,500 pcs.													
Special SOP	(SPST-NO)		350 V	110 mA G3VM-351VY	C2VM 251VV	125 pcs.	G3VM-351VY(TR05)	500 pcs.													
4-PIN		Surface-			125 pcs.	G3VM-351VY(TR)	3,000 pcs.														
	1b (SPST-NC)	mounting			120 mA	G3VM-353G		G3VM-353G(TR)													
SOP4		Terminals	Terminals	Terminals	Terminals	Terminals	Terminals	Terminals	Terminals	Terminals	Terminals	Terminals	Terminals	Terminals		100 mA	G3VM-401G1	100 pcs.	G3VM-401G1(TR)	2,500 pcs.	
	1a		400 V	120 mA	G3VM-401G		G3VM-401G(TR)														
Special SOP 4-PIN	(SPST-NO)		100 V	110mA	G3VM-401VY	125 pcs.	G3VM-401VY(TR05)	500 pcs.													

\* The AC peak and DC value are given for the load voltage and continuous load current.

Note: To order tape packaging for Relays with surface-mounting terminals, add "(TR)", "(TR05)" to the end of the model number.

SO



Note: The actual product is marked differently

## **MOS FET Relays**

### ■Absolute Maximum Ratings (Ta = 25°C)

	Item	Symbol	G3VM- 351G1	G3VM-351G	G3VM- 351VY	G3VM-353G	G3VM- 401G1	G3VM-401G	G3VM- 401VY	Unit	Measurement conditions
	LED forward current	lF	5	50	30	50	30	50	30	mA	
Input	LED forward current reduction rate	∆IF/°C	-0	).5	-0.3	-0.5	-0.3	-0.5	-0.3	mA/°C	Ta≥25°C
dul	LED reverse voltage	VR		5	6		5		6	V	
	Connection temperature	TJ				125				°C	
	Load voltage (AC peak/DC)	Voff		350 400					V		
ıt	Continuous load current (AC peak/DC)	lo	100	11	0	120	100	120	110	mA	
Dutput	ON current reduction rate	∆lo/°C	-1.0	-1	.1	-1.2	-1.0	-1.2	-1.1	mA/°C	Ta≥25°C
Ō	Pulse ON current	lop	300	33	80	360	300	360	330	mA	t=100 ms, Duty=1/10
	Connection temperature	TJ		•		125				°C	
Di	electric strength between I/O *	VI-0	15	500	3750		1500		3750	Vrms	AC for 1 min
Ar	nbient operating temperature	Та	-40 to +85		-40 to +110	-40 to +85			-40 to +110	°C	With no icing or
Ar	nbient storage temperature	Tstg	-55 to +125				°C	condensation			
Sc	oldering temperature	-				260				°C	10 s

\* The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.


## ■Electrical Characteristics (Ta = 25°C)


	Item	Symbo	I	G3VM- 351G1	G3VM- 351G	G3VM- 351VY	G3VM- 353G	G3VM- 401G1	G3VM- 401G	G3VM- 401VY	Unit	Measurement conditions	
			Minimum	1	.0	1.1	1.0	1.1	1.0	1.1			
	LED forward voltage	VF	Typical	1.	15	1.27	1.15	1.27	1.15	1.27	v	IF=10 mA	
	voltage		Maximum	1	.3	1.4	1.3	1.4	1.3	1.4	1		
	Reverse current	IR	Maximum				10				μΑ	Vr=5 V	
Ŧ	Capacitance between terminals	Ст	Typical				30				pF	V=0, f=1 MHz	
Input	Trigger LED	IFT (IFC)	Typical	0.4	1	0.8	1	-	1	0.8	mA	G3VM-351G1/351G/401G1 : lo=100 mA G3VM-351VY/401VY : lo=110 mA	
	forward current	(IFC) <b>*2</b>	Maximum	1		3		0.2		3		G3VM-353G : Ιοϝ=10 μA G3VM-401G : Ιο=120 mA	
	Release LED	IFC (IFT)	Minimum		0	.1		-	C	0.1	mA	G3VM-351G1/351VY/351G/401G1/ 401G/401VY:Ιοϝϝ=100 μΑ	
	forward current	*2	Typical		-	0.4	_	0.001	-	0.5		G3VM-353G : lo=120 mÅ	
			Typical	35	(25)	35 (22)	15	18	17	40 (30)		G3VM-351G1 : $IF=2$ mA, $Io=100$ mA Values in parentheses are for t < 1 s. G3VM-351G : $IF=5$ mA, $Io=110$ mA	
Output	Maximum resistance with output ON	Ron	Maximum		50 (35)		25	3	5	65 (45)	Ω	Values in parentheses are for $t < 1 \ s.$ G3VM-351VY/401VY: I=5 mA, Io=110 mA Values in parentheses are for $t < 1 \ s.$ G3VM-353G : Io=120 mA G3VM-401G1 : IF=0.5 mA, Io=100 mA, $t < 1 \ s.$ G3VM-401G : IF=5 mA, Io=120 mA	
Ŭ	Current leakage when the relay is	ILEAK	Typical	1	-	1	-	1	-	1	nA	G3VM-351G1/351VY/351G : Voff=350 V G3VM-353G : Voff=350 V, If=5 mA	
	open	ILEAK	Maximum				1,000				114	G3VM-401G1/401G/401VY : Voff=400 V	
	Capacitance between terminals	COFF	Typical	35	30	30	65	7	0	30	pF	G3VM-351G1/351VY/351G/401G1/ 401G/401VY : V=0, f=1 MHz G3VM-353G : V=0, f=1 MHz, IF=5 mA	
	apacitance between D terminals	Сі-о	Typical		0.8				pF	f=1 MHz, Vs=0 V			
In	Insulation resistance RI-0		Minimum	1000						MΩ	V⊦o=500 VDC, RoH≤60%		
be	etween I/O terminals		Typical	Typical 10 <sup>8</sup>			10122	VI-0=300 VDC, R0H≤00%					
т.	urn-ON time	tou	Typical	1	0.3	0.5	-	2	0.3	0.5		G3VM-351G1 :	
Π		ton	Maximum	5		1 10 1				IF=2 mA, RL=200 Ω, VDD=20 V			
			Typical	1	0	.1	_	1	C	.1	ms	G3VM-401G1 : IF=0.5 mA, RL=200 Ω, VDD=20 V	
	urn-OFF time	toff	Maximum	3	1	0.5	3	5	1	0.5		Others : IF=5 mA, RL=200 $\Omega$ , VDD=20 V <b>*1</b>	


\*1. Turn-ON and Turn-OFF Times











G3VM-35□G□/351VY/401G□/401VY

SOP

### ■Recommended Operating Conditions

For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.

Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.


Item	Symbol		G3VM-351G1	G3VM-351G	G3VM-351VY	G3VM-353G	G3VM-401G1	G3VM-401G	G3VM-401VY	Unit
Load voltage (AC peak/DC)	Vdd	Maximum		28	30			320		V
		Minimum	-		5		-	Į	5	
Operating LED forward current	IF	Typical	2	7	.5	-	0.5	7	.5	
		Maximum	25						mA	
Continuous load current (AC peak/DC)	lo	Maximum	80	100	110	120	80	120	110	
Ambient operating temperature	Та	Minimum				-20				°C
Ambient operating temperature	ia	Maximum	6	5	100	6	5		100	0

### Spacing and Insulation

ltem	G3VM-35□G□/401G□ G3VM-351VY/401VY					
nem	Mini	Unit				
Creepage distances	4.0	5.0				
Clearance distances	4.0	5.0	mm			
Internal isolation thickness	0.1	0.2				

## ■Engineering Data


#### • LED forward current vs. Ambient temperature




Continuous load current vs.
On-state voltage
G3VM-351G/351G1/353G

Io - Von (Average value) 150 (mA) G3VM-351G : Ta=25°C, IF=5mA G3VM-351G1 G3VM-351G1 : Ta=25°C, I=2mA Continuous load current lo ( 100 G3VM-353G Ta=25°C 50 G3VM-351G 0 -50 -100 G3VM-353G -150 2 -3 -2 -1 0 1 3 On-state voltage Von (V)


### On-state resistance vs. Ambient temperature G3VM-351G/351G1/353G



#### • Turn ON, Turn OFF time vs. LED forward current G3VM-351G/351G1/353G




• Continuous load current vs. Ambient temperature




#### G3VM-351VY/401G/401G1/401VY

#### IO - VON (Average value) 150 (mA) G3VM-351VY G3VM-401G 0 100 G3VM-401G1 Continuous load current 50 G3VM-401VY 0 G3VM-401G/351VY : Ta=25°C, IF=5mA G3VM-401G1 : Ta=25°C, IF=1mA, t<1s G3VM-401VY : Ta=25°C, IF=5mA, t<1s -50 -100 -150 -3.5 -3 -2.5 -2 -1.5 -1 -0.5 0 0.5 1 1.5 2 2.5 3 3.5 On-state voltage Von (V)


#### G3VM-351VY/401G/401G1/401VY




#### G3VM-351VY/401G/401G1/401VY



#### • LED forward current vs. LED forward voltage



 Trigger LED forward current vs. Ambient temperature






### **MOS FET Relays**

400

### Engineering Data

• Turn ON, Turn OFF time vs.

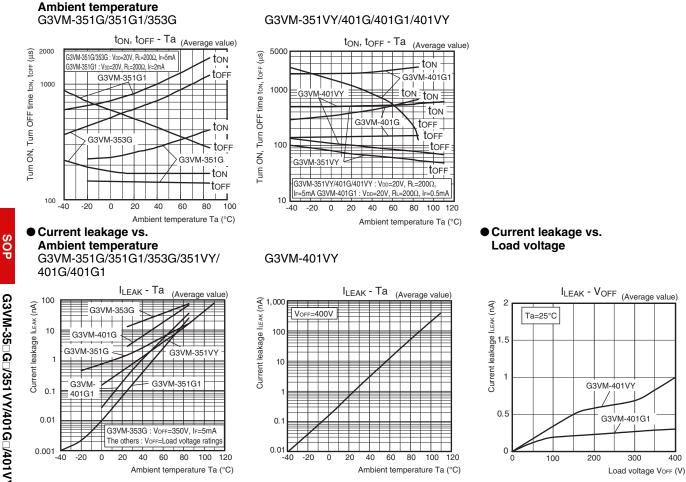

SOP

G3VM-350G0/351VY/401G0/401VY

Terminal Arrangement/Internal Connections

(Top View)


G3VM-351G1/G/VY

G3VM-401G1/G/VY

G3VM-353G

## ■Appearance / Terminal Arrangement / Internal Connections

#### Appearance

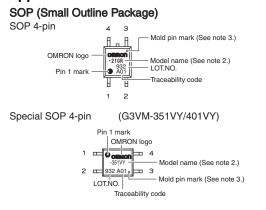



Note: 1. The actual product is marked differently from the image shown here. Note: 2. "G3VM" does not appear in the model number on the Relay. Note: 3. The indentation in the corner diagonally opposite from the pin 1


mark is from a pin on the mold.

### Dimensions (Unit: mm)

SOP (Small Outline Package) SOP 4-pin

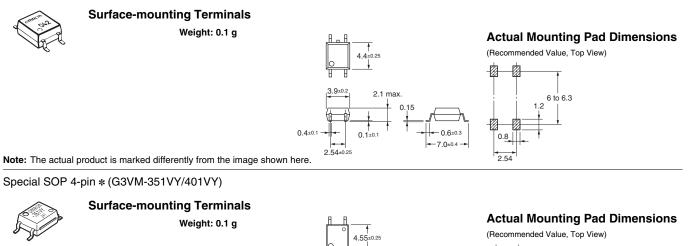





\* The external dimensions are different from those of the standard SOP 4-pin, but the mounting pad dimensions are the same. Note: The actual product is marked differently from the image shown here.

## ■Approved Standards

UL recognized	91		
Model	Approved Standards	Contact form	File No.
G3VM-351G1 G3VM-351G G3VM-401G G3VM-351VY G3VM-401VY	UL (recognized)	1a (SPST-NO)	E80555
G3VM-353G		1b (SPST-NC)	

#### Models Certified by BSI for EN/IEC Standards

Model	Approved Standards	Contact form	File No.
G3VM-401G	EN62368-1 (BSI certified)	1a (SPST-NO)	VC669262

### ■Safety Precautions

• Refer to the Common Precautions for All MOS FET Relays for precautions that apply to all MOS FET Relays.

Please check each region's Terms & Conditions by region website.

#### OMRON Corporation Electronic and Mechanical Components Company

Regional Contact Americas https://www.components.omron.com/ Asia-Pacific https://ecb.omron.com.sg/ Korea https://www.omron-ecb.co.kr/

Europe http://components.omron.eu/ China https://www.ecb.omron.com.cn/ Japan https://www.omron.co.jp/ecb/

© OMRON Corporation 2016-2018 All Rights Reserved.

In the interest of product improvement, specifications are subject to change without notice.

Cat. No. K286-E1-05 0518(0816)(O)

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Omron: <u>G3VM-401VY(TR05)</u> <u>G3VM-401VY</u>