


# Thyristor

$V_{RRM}$  = 1600 V  
 $I_{TAV}$  = 80 A  
 $V_T$  = 1,43 V


## Single Thyristor

### Part number

**CMA80E1600HB**

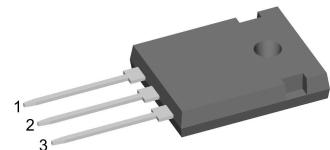

Backside: anode



### Features / Advantages:

- Thyristor for line frequency
- Planar passivated chip
- Long-term stability

### Applications:

- Line rectifying 50/60 Hz
- Softstart AC motor control
- DC Motor control
- Power converter
- AC power control
- Lighting and temperature control

### Package: TO-247

- Industry standard outline
- RoHS compliant
- Epoxy meets UL 94V-0

### Disclaimer Notice


Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).

**Thyristor**

Symbol	Definition	Conditions	Ratings			
			min.	typ.	max.	
$V_{RSM/DSM}$	max. non-repetitive reverse/forward blocking voltage	$T_{VJ} = 25^\circ\text{C}$			1700	V
$V_{RRM/DRM}$	max. repetitive reverse/forward blocking voltage	$T_{VJ} = 25^\circ\text{C}$			1600	V
$I_{R/D}$	reverse current, drain current	$V_{R/D} = 1600 \text{ V}$ $V_{R/D} = 1600 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$		10 3	$\mu\text{A}$ mA
$V_T$	forward voltage drop	$I_T = 80 \text{ A}$ $I_T = 160 \text{ A}$ $I_T = 80 \text{ A}$ $I_T = 160 \text{ A}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$		1,47 1,90 1,43 1,93	V V V V
$I_{TAV}$	average forward current	$T_C = 115^\circ\text{C}$	$T_{VJ} = 150^\circ\text{C}$		80	A
$I_{T(RMS)}$	RMS forward current	180° sine			126	A
$V_{TO}$	threshold voltage	$r_T$ slope resistance } for power loss calculation only	$T_{VJ} = 150^\circ\text{C}$		0,90	V
	slope resistance				6,4	$\text{m}\Omega$
$R_{thJC}$	thermal resistance junction to case				0,2	K/W
$R_{thCH}$	thermal resistance case to heatsink			0,25		K/W
$P_{tot}$	total power dissipation		$T_C = 25^\circ\text{C}$		620	W
$I_{TSM}$	max. forward surge current	$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$ $t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$T_{VJ} = 45^\circ\text{C}$ $V_R = 0 \text{ V}$ $T_{VJ} = 150^\circ\text{C}$ $V_R = 0 \text{ V}$		850 920 725 780	A A A A
$I^2t$	value for fusing	$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$ $t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$T_{VJ} = 45^\circ\text{C}$ $V_R = 0 \text{ V}$ $T_{VJ} = 150^\circ\text{C}$ $V_R = 0 \text{ V}$		3,62 3,52 2,63 2,53	$\text{kA}^2\text{s}$ $\text{kA}^2\text{s}$ $\text{kA}^2\text{s}$ $\text{kA}^2\text{s}$
$C_J$	junction capacitance	$V_R = 400 \text{ V}$ $f = 1 \text{ MHz}$	$T_{VJ} = 25^\circ\text{C}$	32		pF
$P_{GM}$	max. gate power dissipation	$t_p = 30 \mu\text{s}$ $t_p = 300 \mu\text{s}$	$T_C = 150^\circ\text{C}$		10 5 0,5	W W W
$P_{GAV}$	average gate power dissipation					
$(di/dt)_{cr}$	critical rate of rise of current	$T_{VJ} = 125^\circ\text{C}; f = 50 \text{ Hz}$ repetitive, $I_T = 240 \text{ A}$ $t_p = 200 \mu\text{s}; di_G/dt = 0,3 \text{ A}/\mu\text{s};$ $I_G = 0,45 \text{ A}; V_D = \frac{2}{3} V_{DRM}$ non-repet., $I_T = 80 \text{ A}$			150	$\text{A}/\mu\text{s}$
$(dv/dt)_{cr}$	critical rate of rise of voltage	$V_D = \frac{2}{3} V_{DRM}$ $R_{GK} = \infty$ ; method 1 (linear voltage rise)	$T_{VJ} = 125^\circ\text{C}$		1000	$\text{V}/\mu\text{s}$
$V_{GT}$	gate trigger voltage	$V_D = 6 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = -40^\circ\text{C}$		1,4 1,6	V V
$I_{GT}$	gate trigger current	$V_D = 6 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = -40^\circ\text{C}$		80 200	mA mA
$V_{GD}$	gate non-trigger voltage	$V_D = \frac{2}{3} V_{DRM}$	$T_{VJ} = 150^\circ\text{C}$		0,2	V
$I_{GD}$	gate non-trigger current				5	mA
$I_L$	latching current	$t_p = 10 \mu\text{s}$ $I_G = 0,3 \text{ A}; di_G/dt = 0,3 \text{ A}/\mu\text{s}$	$T_{VJ} = 25^\circ\text{C}$		450	mA
$I_H$	holding current	$V_D = 6 \text{ V}$ $R_{GK} = \infty$	$T_{VJ} = 25^\circ\text{C}$		100	mA
$t_{gd}$	gate controlled delay time	$V_D = \frac{1}{2} V_{DRM}$ $I_G = 0,5 \text{ A}; di_G/dt = 0,5 \text{ A}/\mu\text{s}$	$T_{VJ} = 25^\circ\text{C}$		2	$\mu\text{s}$
$t_q$	turn-off time	$V_R = 100 \text{ V}; I_T = 80 \text{ A}; V_D = \frac{2}{3} V_{DRM}$ $T_{VJ} = 125^\circ\text{C}$ $di/dt = 15 \text{ A}/\mu\text{s}; dv/dt = 20 \text{ V}/\mu\text{s}; t_p = 200 \mu\text{s}$		150		$\mu\text{s}$

**Package TO-247**


Symbol	Definition	Conditions	min.	typ.	max.	Unit
$I_{RMS}$	RMS current	per terminal			70	A
$T_{VJ}$	virtual junction temperature		-40		150	°C
$T_{op}$	operation temperature		-40		125	°C
$T_{stg}$	storage temperature		-40		150	°C
<b>Weight</b>				6		g
$M_D$	mounting torque		0,8		1,2	Nm
$F_c$	mounting force with clip		20		120	N

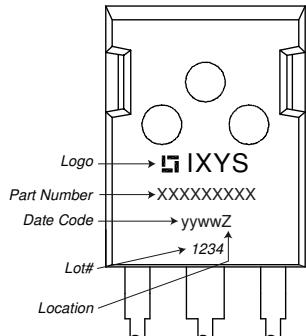
**Product Marking**

**Part description**

C = Thyristor (SCR)  
 M = Thyristor  
 A = (up to 1800V)  
 80 = Current Rating [A]  
 E = Single Thyristor  
 1600 = Reverse Voltage [V]  
 HB = TO-247AD (3)


Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	CMA80E1600HB	CMA80E1600HB	Tube	30	513206

**Equivalent Circuits for Simulation**
*\* on die level*
 $T_{VJ} = 150^\circ\text{C}$ 

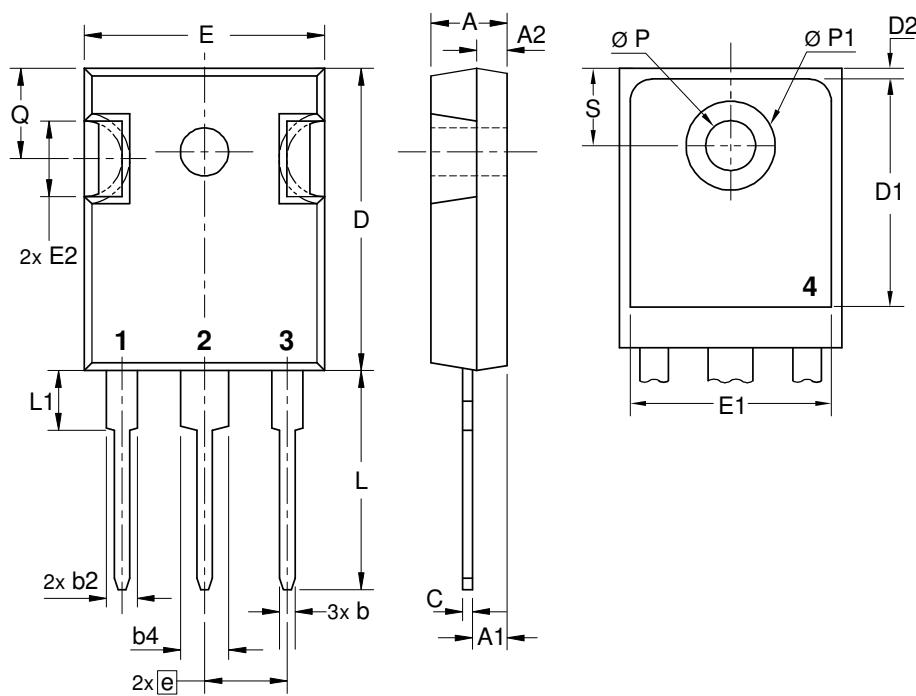	<b>Thyristor</b>	
$V_{0\ max}$	threshold voltage	0,9 V
$R_{0\ max}$	slope resistance *	3,9 mΩ

**Outlines TO-247**


Sym.	Inches min. max.	Millimeter min. max.
A	0.185 0.209	4.70 5.30
A1	0.087 0.102	2.21 2.59
A2	0.059 0.098	1.50 2.49
D	0.819 0.845	20.79 21.45
E	0.610 0.640	15.48 16.24
E2	0.170 0.216	4.31 5.48
e	0.215 BSC	5.46 BSC
L	0.780 0.800	19.80 20.30
L1	- 0.177	- 4.49
Ø P	0.140 0.144	3.55 3.65
Q	0.212 0.244	5.38 6.19
S	0.242 BSC	6.14 BSC
b	0.039 0.055	0.99 1.40
b2	0.065 0.094	1.65 2.39
b4	0.102 0.135	2.59 3.43
c	0.015 0.035	0.38 0.89
D1	0.515 -	13.07 -
D2	0.020 0.053	0.51 1.35
E1	0.530 -	13.45 -
Ø P1	- 0.29	- 7.39

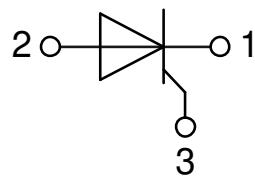

## Thyristor

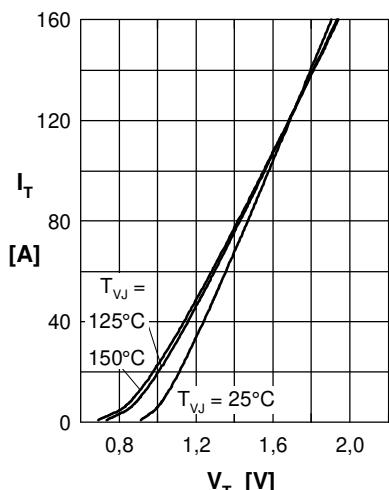


Fig. 1 Forward characteristics

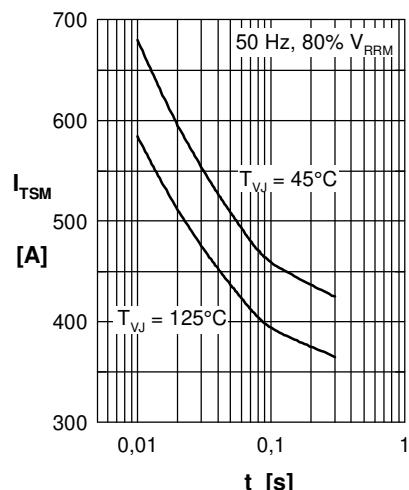


Fig. 2 Surge overload current  
 $I_{TSM}$ : crest value,  $t$ : duration

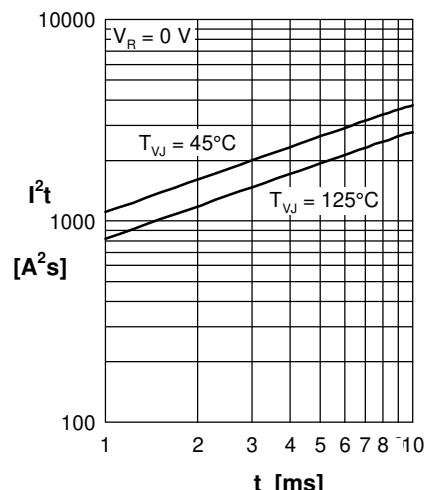


Fig. 3  $I^2t$  versus time (1-10 s)

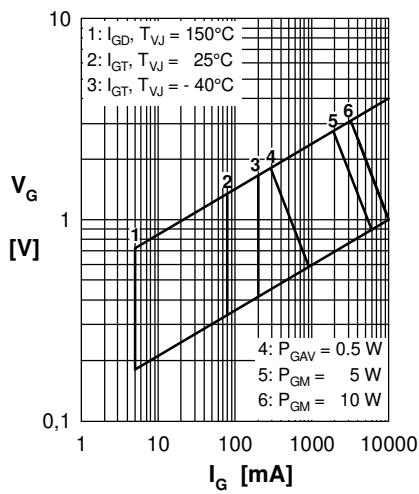


Fig. 4 Gate voltage & gate current

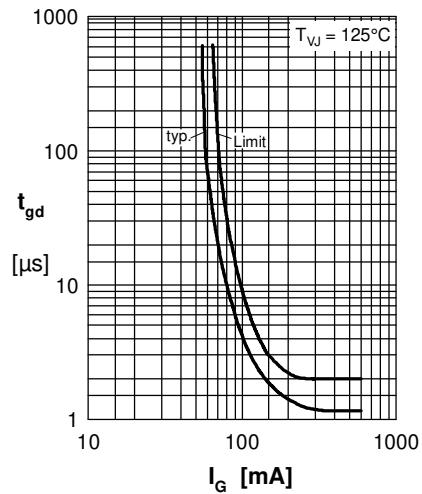


Fig. 5 Gate controlled delay time  $t_{gd}$

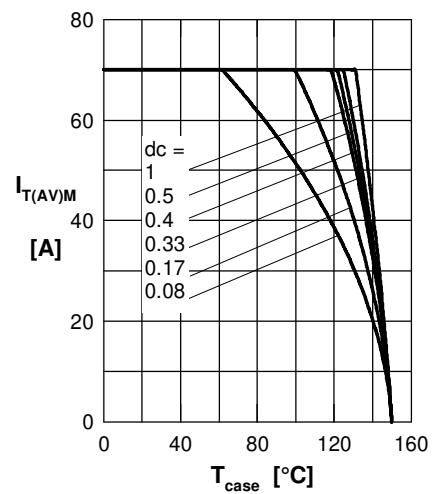


Fig. 6 Max. forward current at case temperature

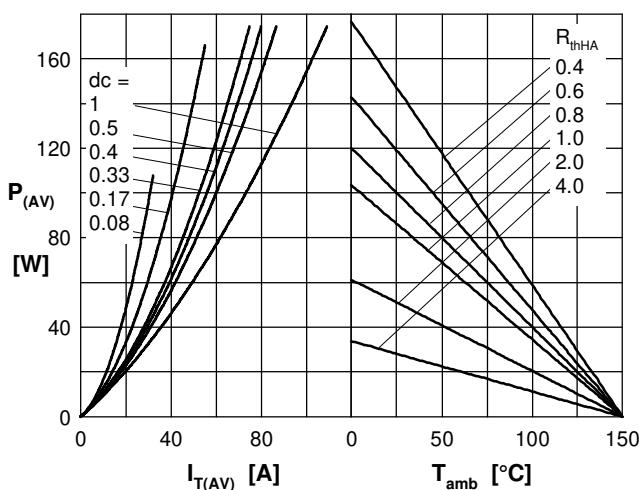


Fig. 7a Power dissipation versus direct output current  
Fig. 7b and ambient temperature

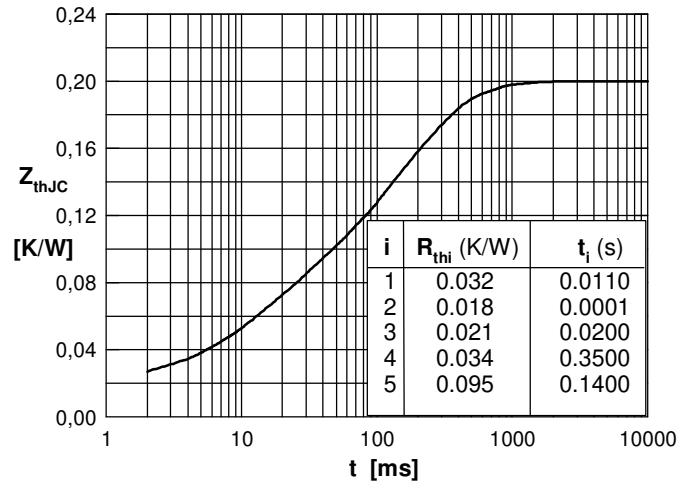


Fig. 7 Transient thermal impedance junction to case

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

IXYS:

[CMA80E1600HB](#)