



DUAL-IN-LINE SOCKETS

SERIES 614 • CARRIER TYPE, ULTRA LOW PROFILE • OPEN FRAME

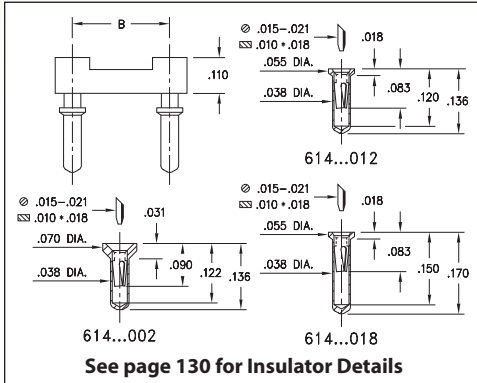

- Ultra low profile receptacles sit only .018" to .031" high above the board
- Removable plastic carriers can be returned for reloading
- Hi-Rel, 3-finger BeCu #11 contact is rated at 3 amps. See page 251 for details
- Series 614 uses MM #0552-1, #0442-0, #0552-2 pins. See pages 157 and 158 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations
- For Electrical, Mechanical and Environmental Data, see page 264 for details

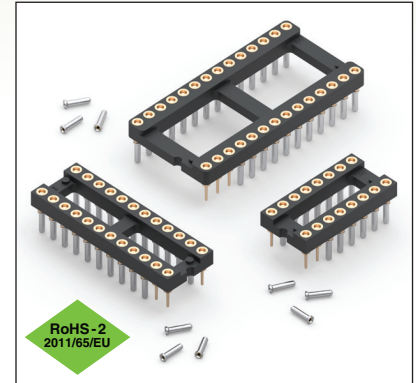

Total number of pins				Quantity per tube	ORDERING INFORMATION			
	A	B	C		Length = .136	Length = .136	Length = .170	
					(.039 Min. Mounting Hole)	(.039 Min. Mounting Hole)	(.039 Min. Mounting Hole)	
10	0.5	0.2	0.3	40	614-XX-210-31-012000	614-XX-210-31-002000	614-XX-210-31-018000	
4	0.2	0.3	0.4	102	614-XX-304-31-012000	614-XX-304-31-002000	614-XX-304-31-018000	
6	0.3	0.3	0.4	67	614-XX-306-31-012000	614-XX-306-31-002000	614-XX-306-31-018000	
8	0.4	0.3	0.4	50	614-XX-308-31-012000	614-XX-308-31-002000	614-XX-308-31-018000	
10	0.5	0.3	0.4	40	614-XX-310-31-012000	614-XX-310-31-002000	614-XX-310-31-018000	
14	0.7	0.3	0.4	28	614-XX-314-31-012000	614-XX-314-31-002000	614-XX-314-31-018000	
16	0.8	0.3	0.4	25	614-XX-316-31-012000	614-XX-316-31-002000	614-XX-316-31-018000	
18	0.9	0.3	0.4	22	614-XX-318-31-012000	614-XX-318-31-002000	614-XX-318-31-018000	
20	1.0	0.3	0.4	20	614-XX-320-31-012000	614-XX-320-31-002000	614-XX-320-31-018000	
22	1.1	0.3	0.4	18	614-XX-322-31-012000	614-XX-322-31-002000	614-XX-322-31-018000	
24	1.2	0.3	0.4	16	614-XX-324-31-012000	614-XX-324-31-002000	614-XX-324-31-018000	
28	1.4	0.3	0.4	14	614-XX-328-31-012000	614-XX-328-31-002000	614-XX-328-31-018000	
20	1.0	0.4	0.5	20	614-XX-420-31-012000	614-XX-420-31-002000	614-XX-420-31-018000	
22	1.1	0.4	0.5	18	614-XX-422-31-012000	614-XX-422-31-002000	614-XX-422-31-018000	
24	1.2	0.4	0.5	16	614-XX-424-31-012000	614-XX-424-31-002000	614-XX-424-31-018000	
28	1.4	0.4	0.5	14	614-XX-428-31-012000	614-XX-428-31-002000	614-XX-428-31-018000	
32	1.6	0.4	0.5	12	614-XX-432-31-012000	614-XX-432-31-002000	614-XX-432-31-018000	
24	1.2	0.6	0.7	16	614-XX-624-31-012000	614-XX-624-31-002000	614-XX-624-31-018000	
28	1.4	0.6	0.7	14	614-XX-628-31-012000	614-XX-628-31-002000	614-XX-628-31-018000	
32	1.6	0.6	0.7	12	614-XX-632-31-012000	614-XX-632-31-002000	614-XX-632-31-018000	
36	1.8	0.6	0.7	11	614-XX-636-31-012000	614-XX-636-31-002000	614-XX-636-31-018000	
40	2.0	0.6	0.7	10	614-XX-640-31-012000	614-XX-640-31-002000	614-XX-640-31-018000	
42	2.1	0.6	0.7	9	614-XX-642-31-012000	614-XX-642-31-002000	614-XX-642-31-018000	
48	2.4	0.6	0.7	8	614-XX-648-31-012000	614-XX-648-31-002000	614-XX-648-31-018000	
50	2.5	0.6	0.7	8	614-XX-650-31-012000	614-XX-650-31-002000	614-XX-650-31-018000	
52	2.6	0.6	0.7	7	614-XX-652-31-012000	614-XX-652-31-002000	614-XX-652-31-018000	
50	2.5	0.9	1.0	8	614-XX-950-31-012000	614-XX-950-31-002000	614-XX-950-31-018000	
52	2.6	0.9	1.0	7	614-XX-952-31-012000	614-XX-952-31-002000	614-XX-952-31-018000	
64	3.2	0.9	1.0	6	614-XX-964-31-012000	614-XX-964-31-002000	614-XX-964-31-018000	
SPECIFY PLATING CODE XX =					91	93	41 ◆	43 ◆
Sleeve (Pin)					200 μ" Sn/Pb	200 μ" Sn/Pb	200 μ" Sn	200 μ" Sn
Contact (Clip)					10 μ" Au	30 μ" Au	10 μ" Au	30 μ" Au
					XX=Plating Code See to Left			



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mill-Max:

[614-93-964-31-018000](#) [614-93-964-31-012000](#) [614-93-952-31-018000](#) [614-93-952-31-012000](#) [614-93-950-31-018000](#) [614-93-950-31-012000](#) [614-93-652-31-018000](#) [614-93-652-31-012000](#) [614-93-650-31-018000](#) [614-93-650-31-012000](#) [614-93-648-31-018000](#) [614-93-648-31-012000](#) [614-93-642-31-018000](#) [614-93-642-31-012000](#) [614-93-640-31-018000](#) [614-93-636-31-018000](#) [614-93-636-31-012000](#) [614-93-632-31-018000](#) [614-93-624-31-018000](#) [614-93-432-31-018000](#) [614-93-432-31-012000](#) [614-93-428-31-018000](#) [614-93-428-31-012000](#) [614-93-424-31-018000](#) [614-93-424-31-012000](#) [614-93-422-31-018000](#) [614-93-422-31-012000](#) [614-93-420-31-018000](#) [614-93-420-31-012000](#) [614-93-328-31-018000](#) [614-93-324-31-018000](#) [614-93-322-31-018000](#) [614-93-322-31-012000](#) [614-93-320-31-018000](#) [614-93-318-31-018000](#) [614-93-316-31-018000](#) [614-93-314-31-018000](#) [614-93-310-31-018000](#) [614-93-310-31-012000](#) [614-93-308-31-018000](#) [614-93-306-31-018000](#) [614-93-304-31-018000](#) [614-93-304-31-012000](#) [614-93-210-31-018000](#) [614-93-210-31-012000](#) [614-93-628-31-018000](#) [614-43-640-31-012000](#) [614-43-632-31-012000](#) [614-43-628-31-012000](#) [614-43-624-31-012000](#) [614-43-328-31-012000](#) [614-43-324-31-012000](#) [614-43-320-31-012000](#) [614-43-318-31-012000](#) [614-43-316-31-012000](#) [614-43-314-31-012000](#) [614-43-308-31-012000](#) [614-93-624-31-012000](#) [614-93-632-31-012000](#) [614-93-628-31-012000](#) [614-93-640-31-012000](#) [614-93-306-31-012000](#) [614-93-314-31-012000](#) [614-93-308-31-012000](#) [614-93-320-31-012000](#) [614-93-328-31-012000](#) [614-93-318-31-012000](#) [614-93-316-31-012000](#) [614-93-324-31-012000](#) [614-43-964-31-018000](#) [614-43-964-31-012000](#) [614-43-952-31-018000](#) [614-43-952-31-012000](#) [614-43-950-31-018000](#) [614-43-950-31-012000](#) [614-43-652-31-018000](#) [614-43-652-31-012000](#) [614-43-650-31-018000](#) [614-43-650-31-012000](#) [614-43-648-31-018000](#) [614-43-648-31-012000](#) [614-43-642-31-018000](#) [614-43-642-31-012000](#) [614-43-640-31-018000](#) [614-43-636-31-018000](#) [614-43-636-31-012000](#) [614-43-632-31-018000](#) [614-43-628-31-018000](#) [614-43-624-31-018000](#) [614-43-432-31-018000](#) [614-43-432-31-012000](#) [614-43-428-31-018000](#) [614-43-428-31-012000](#) [614-43-424-31-018000](#) [614-43-424-31-012000](#) [614-43-422-31-018000](#) [614-43-422-31-012000](#) [614-43-420-31-018000](#) [614-43-420-31-012000](#) [614-43-328-31-018000](#)