Installation / LED/Buzzer 150 LED Buzzer EM Contin. tone 24VDC RD



ļ

Part No.:	150.100.55

CE Roms	cULus	UK CA
---------	-------	----------

MECHANICAL DATA

MECHANICAL DATA		
Height	74 mm	
Diameter	50 mm	
Materials	PC PC/ABS	
Dome colour	Green Red Yellow	
Housing colour	Black	
Protection category	IP65	
Connection	Screw terminals	
cross-sectional area maximum	1,50mm² / 16AWG	
Type of fixing	Built-in mounting	
Working temperature minimum	-20°C	
Working temperature maximum	+50°C	
Weight with packaging	48 g	
Product weight	36 g	
ELECTRICAL DATA		
Operating voltage	24V	
Operating voltage type	DC	
Operating voltage tolerance	+/- 10%	
Rated operational voltage	24 VDC	
Rated operational current	50 mA	
Rated inrush current	500 mA	
Protection class	Protection class 2	
Pollution degree	3 In the connection area: 2	
OPTICAL DATA		
Light source	LED	
Light colour	Red	
Optical signal image	Permanent	
Service life optical	50,000 h maximum	
ACUSTICAL DATA		
Volume (max) at 1m distance	80,0 dB (A)	
Acoustic signal image	Continuous tone	
Audio frequency	2800 Hz	
Acoustic service life	5,000 h minimum	

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

ļ


Installation / LED/Buzzer 150 LED Buzzer EM Contin. tone 24VDC RD

APPROVAL DATA		
Conforms with CE	Yes	
WEEE	Yes	
Conform with ATEX-directive	No	
Conforms with CCC	No	
Conforms with UL	cULus	
UL Type Rating	Type 12	
Conforms with FCC	No	
Conforms with IC	No	
EAC certificate available	Yes	
Conforms with UKCA	WERMA	
Conforms with AS-I	No	
ICAO Certification	No	
Conforms with GL	No	
Conforms with RoHS CN	No	
Conforms with VdS	No	

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

i

Installation / LED/Buzzer 150 LED Buzzer EM Contin. tone 24VDC RD

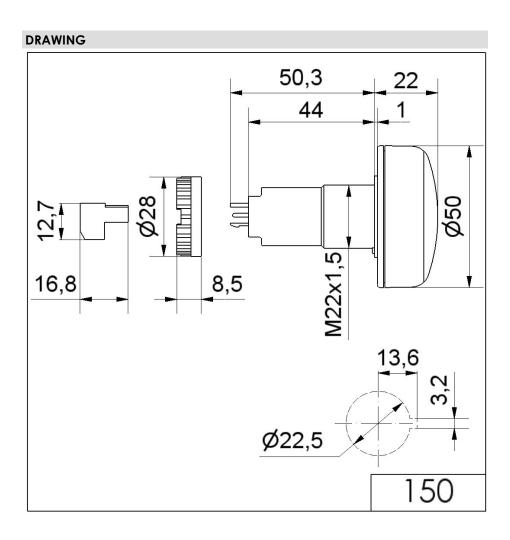

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.