

Anti-Pulse Thick Film Chip Resistors



Type: **ERJ T06, T08, T14**
ERJ T14L


Features

- Anti-Pulse characteristics
High pulse characteristics achieved by the optimized trimming specifications (ERJT06, T08, T14)
- Further high pulse characteristics achieved by trimming-less specifications (ERJT14L)
- High reliability
Metal glaze thick film resistive element and three layers of electrodes
- Suitable for both reflow and flow soldering
- High power ... 0.25W : 0805 inch / 2012 mm size (ERJT06)
0.33W : 1206 inch / 3216 mm size (ERJT08)
0.50W : 1210 inch / 3225 mm size (ERJT14, ERJT14L)
- Reference Standards...IEC 60115-8, JIS C 5201-8, EIAJ RC-2134B
- AEC-Q200 qualified
- RoHS compliant


■ **As for Packaging Methods, Land Pattern, Soldering Conditions and Safety Precautions,**
Please see Data Files

Explanation of Part Numbers

- ERJT06, T08, T14 Type

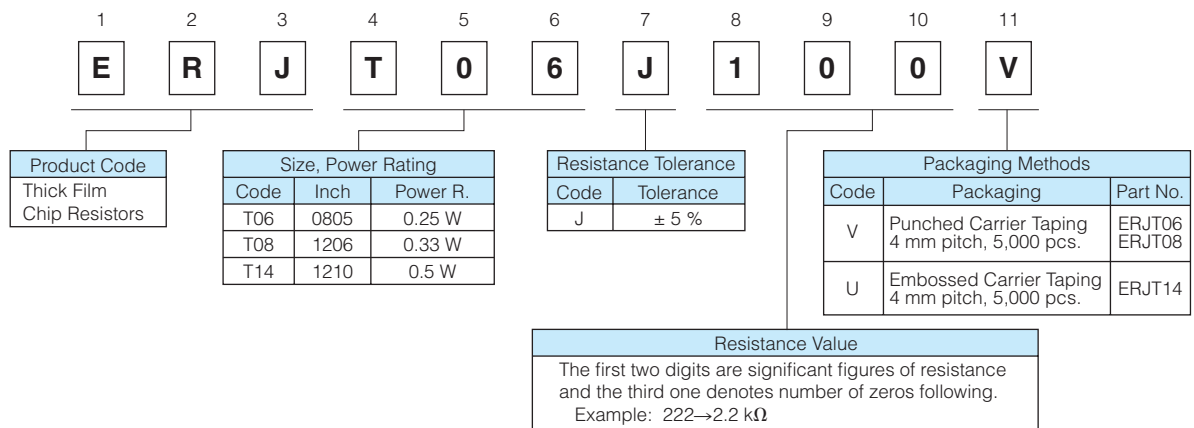


- ERJT14L Type

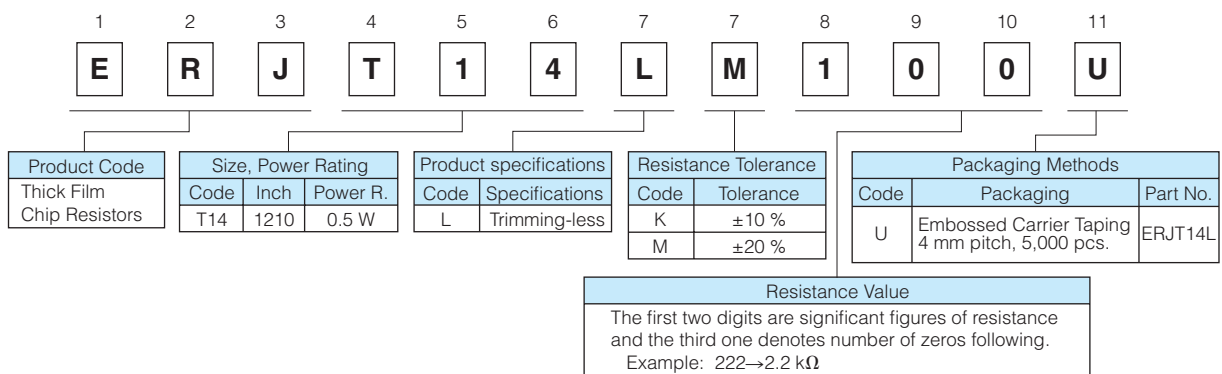


* Please contact us for 2012 (mm) and 3216 (mm) size trimming-less types.

Construction

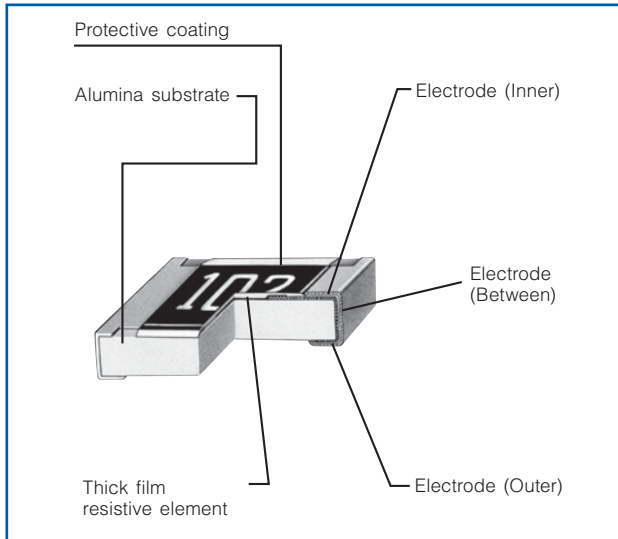

Dimensions in mm (not to scale)

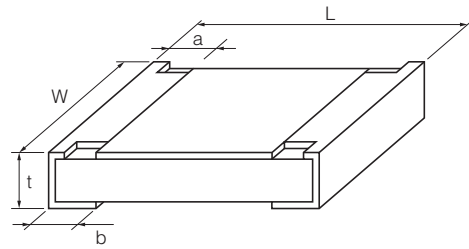

Part No. (inch size)	Dimensions (mm)					Mass (Weight) [g/1000 pcs.]
	L	W	a	b	t	
ERJT06 (0805)	2.00 ^{±0.20}	1.25 ^{±0.10}	0.25 ^{±0.20}	0.40 ^{±0.20}	0.60 ^{±0.10}	4
ERJT08 (1206)	3.20 ^{+0.05/-0.20}	1.60 ^{+0.05/-0.15}	0.40 ^{±0.20}	0.50 ^{±0.20}	0.60 ^{±0.10}	10
ERJT14 ERJT14L (1210)	3.20 ^{±0.20}	2.50 ^{±0.20}	0.35 ^{±0.20}	0.50 ^{±0.20}	0.60 ^{±0.10}	16

Ratings


Part No. (inch size)	Power Rating at 70 °C (W)	Limiting Element Voltage ⁽¹⁾ (V)	Maximum Overload Voltage ⁽²⁾ (V)	Resistance Tolerance (%)	Resistance Range (Ω)	T.C.R. (×10 ⁻⁶ /°C)	Category Temperature Range (°C)
ERJT06 (0805)	0.25	150	200	±5	1 to 1 M (E24)	Less than 10 Ω : -100 to +600 Less than 33 Ω : ±300 More than 33 Ω : ±200	-55 to +155
ERJT08 (1206)	0.33	200	400	±5	1 to 1 M (E24)	Less than 10 Ω : -100 to +600 More than 10 Ω : ±200	-55 to +155
ERJT14 (1210)	0.50	200	400	±5	1 to 1 M (E24)	Less than 10 Ω : -100 to +600 More than 10 Ω : ±200	-55 to +155
ERJT14L (1210)	0.50	200	400	±10 ±20	1 to 1 M (E12)	Less than 10 Ω : -100 to +600 More than 10 Ω : ±200	-55 to +155

(1) Rated Continuous Working Voltage (RCWV) shall be determined from $RCWV = \sqrt{\text{Power Rating} \times \text{Resistance Values}}$, or Limiting Element Voltage listed above, whichever less.

(2) Overload (Short-time Overload) Test Voltage (SOTV) shall be determined from $SOTV = 2.5 \times RCWV$ or max. Overload Voltage listed above whichever less.


Power Derating Curve

For resistors operated in ambient temperatures above 70 °C, power rating shall be derated in accordance with the figure on the right.

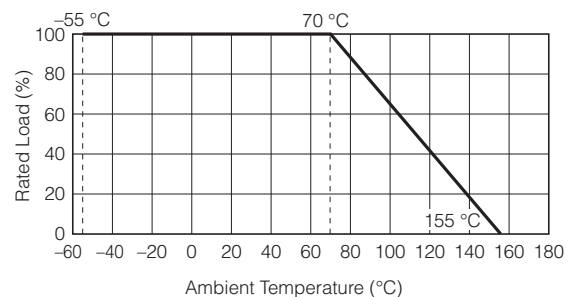

Limiting Power Curve


- In rush pulse Characteristic




Test cycle : 1000 cycles
Spec : Resistance value = within $\pm 5\%$

- ▲ : Anti-Pulse Thick Film Chip Resistors (ERJT14L Type)
- : Anti-Pulse Thick Film Chip Resistors (ERJT Type)
- : Thick Film Chip Resistors (ERJ Type)


- ERJT06 (0805 inch/2012 mm size)

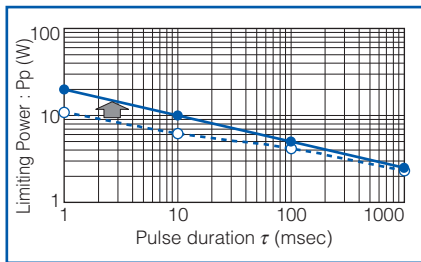

- ERJT08 (1206 inch/3216 mm size)

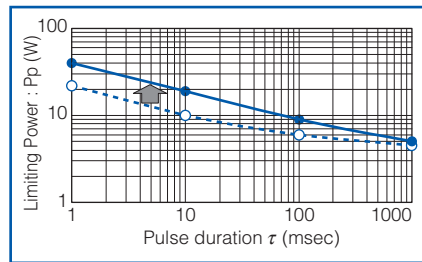

- ERJT14,ERJT14L (1210 inch/3225 mm size)

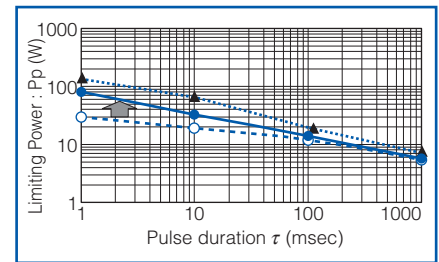

* Please contact us for 2012 (mm) and 3216 (mm) size trimming-less types.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic:

[ERJ-T06J100V](#) [ERJ-T06J101V](#) [ERJ-T06J102V](#) [ERJ-T06J103V](#) [ERJ-T06J104V](#) [ERJ-T06J105V](#) [ERJ-T06J110V](#)
[ERJ-T06J111V](#) [ERJ-T06J112V](#) [ERJ-T06J113V](#) [ERJ-T06J114V](#) [ERJ-T06J120V](#) [ERJ-T06J121V](#) [ERJ-T06J122V](#)
[ERJ-T06J123V](#) [ERJ-T06J124V](#) [ERJ-T06J130V](#) [ERJ-T06J131V](#) [ERJ-T06J132V](#) [ERJ-T06J133V](#) [ERJ-T06J134V](#)
[ERJ-T06J150V](#) [ERJ-T06J151V](#) [ERJ-T06J152V](#) [ERJ-T06J153V](#) [ERJ-T06J154V](#) [ERJ-T06J160V](#) [ERJ-T06J161V](#)
[ERJ-T06J162V](#) [ERJ-T06J163V](#) [ERJ-T06J164V](#) [ERJ-T06J180V](#) [ERJ-T06J181V](#) [ERJ-T06J182V](#) [ERJ-T06J183V](#)
[ERJ-T06J184V](#) [ERJ-T06J1R0V](#) [ERJ-T06J1R1V](#) [ERJ-T06J1R2V](#) [ERJ-T06J1R3V](#) [ERJ-T06J1R5V](#) [ERJ-T06J1R6V](#)
[ERJ-T06J1R8V](#) [ERJ-T06J200V](#) [ERJ-T06J201V](#) [ERJ-T06J202V](#) [ERJ-T06J203V](#) [ERJ-T06J204V](#) [ERJ-T06J220V](#)
[ERJ-T06J221V](#) [ERJ-T06J222V](#) [ERJ-T06J223V](#) [ERJ-T06J224V](#) [ERJ-T06J240V](#) [ERJ-T06J241V](#) [ERJ-T06J242V](#)
[ERJ-T06J243V](#) [ERJ-T06J244V](#) [ERJ-T06J270V](#) [ERJ-T06J271V](#) [ERJ-T06J272V](#) [ERJ-T06J273V](#) [ERJ-T06J274V](#)
[ERJ-T06J2R0V](#) [ERJ-T06J2R2V](#) [ERJ-T06J2R4V](#) [ERJ-T06J2R7V](#) [ERJ-T06J300V](#) [ERJ-T06J301V](#) [ERJ-T06J302V](#)
[ERJ-T06J303V](#) [ERJ-T06J304V](#) [ERJ-T06J330V](#) [ERJ-T06J331V](#) [ERJ-T06J332V](#) [ERJ-T06J333V](#) [ERJ-T06J334V](#)
[ERJ-T06J360V](#) [ERJ-T06J361V](#) [ERJ-T06J362V](#) [ERJ-T06J363V](#) [ERJ-T06J364V](#) [ERJ-T06J390V](#) [ERJ-T06J391V](#)
[ERJ-T06J392V](#) [ERJ-T06J393V](#) [ERJ-T06J394V](#) [ERJ-T06J3R0V](#) [ERJ-T06J3R3V](#) [ERJ-T06J3R6V](#) [ERJ-T06J3R9V](#)
[ERJ-T06J430V](#) [ERJ-T06J431V](#) [ERJ-T06J432V](#) [ERJ-T06J433V](#) [ERJ-T06J434V](#) [ERJ-T06J470V](#) [ERJ-T06J471V](#)
[ERJ-T06J472V](#) [ERJ-T06J473V](#)