

LPS-RK — 600 Vac/300 Vdc, 1/10-60A, dual element, time-delay fuses



Catalog symbols:

- LPS-RK_SP (non-indicating)
- LPS-RK_SPI (indicating)

Description:

Ultimate protection Class RK1 dual element, current-limiting, time-delay fuses available with optional open fuse indication on select ratings. Time-delay – 10 seconds (minimum) at 500% of rated current.

Rating

- Volts
 - 600 Vac
 - 300 Vdc*
- Amps 1/10-60 A
- IR
 - 300 kA Vac RMS Sym.
 - 100 kA DC

* DC rating does not apply all indicating versions (LPS-RK_SPI) and the LPS-RK-60SP, non-indicating fuse.

Agency information

- UL Listed, Guide JDDZ, File E4273
- CSA Certified, Class 1422-02, File 53787, Class RK1 per CSA C22.2, No. 248.12
- CE

Catalog no.

| | | | |
|----------------|----------------|----------------|-----------------|
| LPS-RK-1/10SP | LPS-RK-11/2SP | LPS-RK-41/2SP | LPS-RK-171/2SP* |
| LPS-RK-2/10SP | LPS-RK-16/10SP | LPS-RK-5SP | LPS-RK-20SP* |
| LPS-RK-3/10SP | LPS-RK-18/10SP | LPS-RK-56/10SP | LPS-RK-25SP* |
| LPS-RK-4/10SP | LPS-RK-2SP | LPS-RK-6SP* | LPS-RK-30SP* |
| LPS-RK-1/2SP | LPS-RK-21/4SP | LPS-RK-61/4SP* | LPS-RK-35SP* |
| LPS-RK-6/10SP | LPS-RK-21/2SP | LPS-RK-7SP* | LPS-RK-40SP* |
| LPS-RK-8/10SP | LPS-RK-28/10SP | LPS-RK-8SP* | LPS-RK-45SP* |
| LPS-RK-1SP | LPS-RK-3SP | LPS-RK-9SP* | LPS-RK-50SP* |
| LPS-RK-11/8SP | LPS-RK-32/10SP | LPS-RK-10SP* | LPS-RK-60SP* |
| LPS-RK-11/4SP | LPS-RK-31/2SP | LPS-RK-12SP* | |
| LPS-RK-14/10SP | LPS-RK-4SP | LPS-RK-15SP* | |

* Open fuse indication available by inserting the suffix "I," e.g., LPS-RK-15SPI. Requires 75Vac minimum voltage. Indicating fuses and the LPS-RK-60SP non-indicating fuse are not Vdc rated.

Carton quantity

- 10

Applications

- Feeder and branch circuits
- Motors
- Transformers
- Solenoids
- General purpose circuits

Features and benefits

- Industry's only UL Listed and CSA Certified fuse with a 300kA interrupting rating that allows for simple, worry-free installation in virtually any application.
- Fast short-circuit protection and dual-element, time-delay performance provide ultimate protection.
- Reduces existing fuse inventory by up to 33% when upgrading to Low-Peak fuses.
- Consistent 2:1 ampacity ratios for all Low-Peak fuses make selective coordination easy.
- Time-delay permits 130% FLA sizing for back-up motor protection.
- Current-limitation protects downstream components against damaging thermal and magnetic effects of short-circuit currents.
- Protects against single-phase motor damage.
- Proper sizing can provide "no damage" Type 2 coordinated protection for NEMA and IEC motor controllers.



Powering Business Worldwide

Recommended fuse blocks

| Amps | Catalog no. | | |
|------|-------------|-----------|-----------|
| | 1-Pole | 2-Pole | 3-Pole |
| 30 | RM60030-1 | RM60030-2 | RM60030-3 |
| 60 | RM60060-1 | RM60060-2 | RM60060-3 |


For additional information on the RM600 600 volt fuse blocks, see data sheet no. 10289.

Fuse reducers for Class R fuses


| Equipment fuse clips | Desired fuse (case) size | Catalog no. |
|----------------------|--------------------------|-------------|
| 60 A | 30 A | NO.663-R |
| | 30 A | NO.216-R |
| 100A | 60 A | NO.616-R |
| 200 A | 60 A | NO.626-R |

For additional information on Class R fuse reducers, see data sheet no. 1118.

Dimensions — in

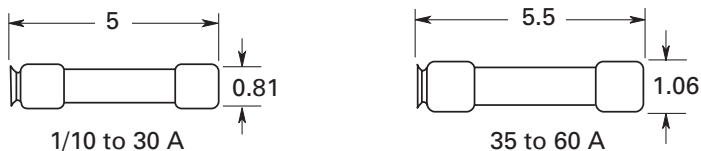


**Time-Current Characteristic Curves—Average Melt
 1/10 to 10 Amps**

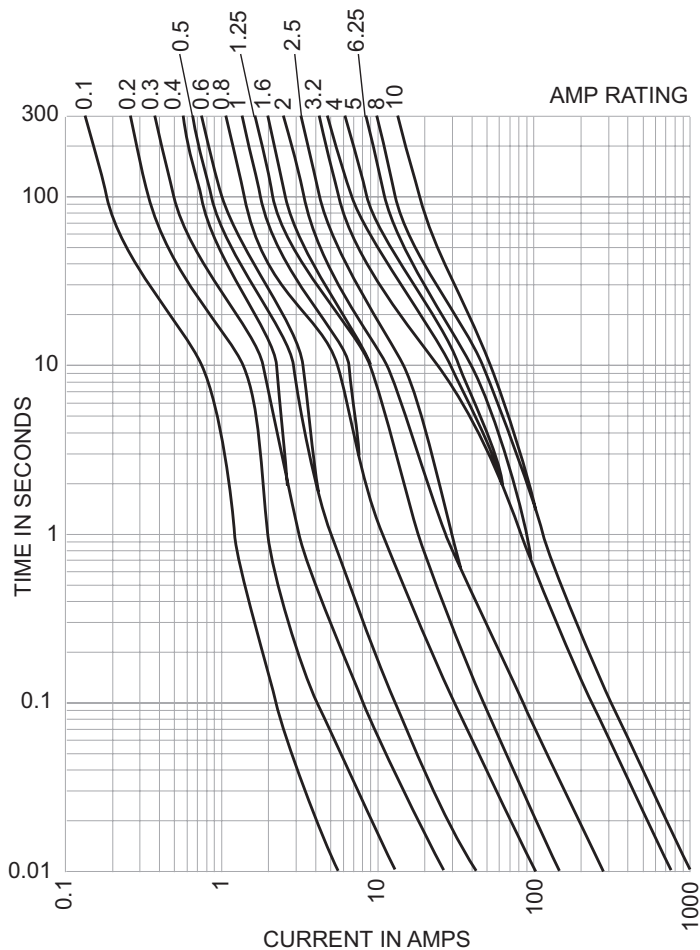


Time-Current Characteristic Curves—Average Melt

12 to 60 Amps

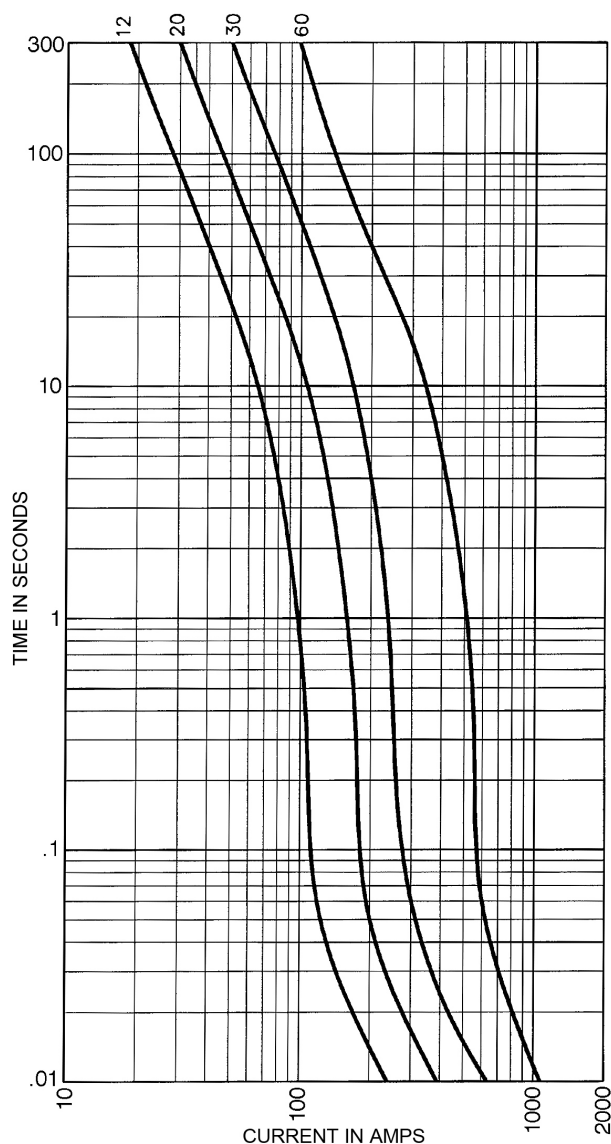

Current-I Limitation curves

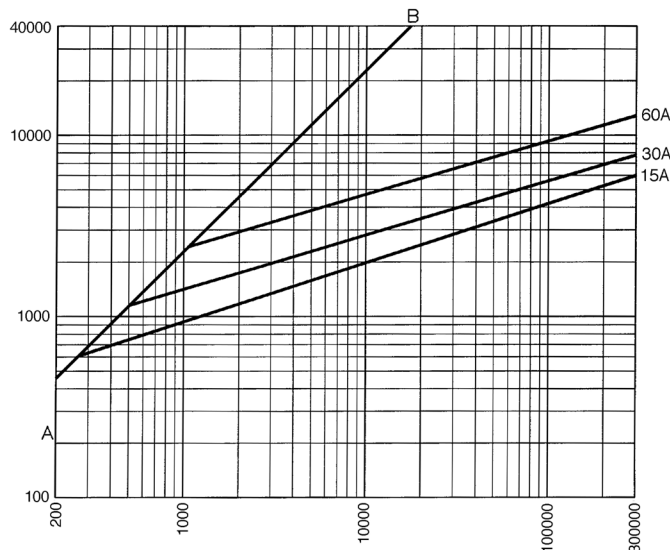

Current-limiting effects

| Pros. S.C.C. | Let-through current (apparent RMS Sym. vs. fuse rating) | |
|--------------|---|------|
| | 30A | 60A |
| — | 30A | 60A |
| 1000 | 1000 | 1000 |
| 2000 | 1000 | 1000 |
| 3000 | 1000 | 1000 |
| 5000 | 1000 | 2000 |
| 10,000 | 1000 | 2000 |
| 15,000 | 1000 | 2000 |
| 20,000 | 2000 | 3000 |
| 25,000 | 2000 | 3000 |
| 30,000 | 2000 | 3000 |
| 35,000 | 2000 | 3000 |
| 40,000 | 2000 | 3000 |
| 50,000 | 2000 | 3000 |
| 60,000 | 2000 | 4000 |
| 70,000 | 2000 | 4000 |
| 80,000 | 2000 | 4000 |
| 90,000 | 2000 | 4000 |
| 100,000 | 2000 | 4000 |
| 150,000 | 3000 | 5000 |
| 200,000 | 3000 | 5000 |
| 250,000 | 3000 | 6000 |
| 300,000 | 3000 | 6000 |

The only controlled copy of this data sheet is the electronic read-only version located on the Eaton network drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Eaton
1000 Eaton Boulevard
Cleveland, OH 44122
Eaton.com

Bussmann Division
114 Old State Road
Ellisville, MO 63021
United States
Eaton.com/bussmannseries

© 2018 Eaton
All Rights Reserved
Printed in USA
Publication No. 1001 — BU-SB13684
August 2018

Eaton, Bussmann and Low-Peak are valuable trademarks of Eaton in the U.S. and other countries. You are not permitted to use the Eaton trademarks without prior written consent of Eaton.

CSA is a registered trademark of the Canadian Standards Group.
UL is a registered trademark of the Underwriters Laboratories, Inc.

For Eaton's Bussmann series
product information,
call **1-855-287-7626** or visit:
Eaton.com/bussmannseries

Follow us on social media to get the
latest product and support information.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Eaton:

[LPS-RK-25SPI](#) [LPS-RK-12SPI](#) [LPS-RK-1SP](#) [LPS-RK-1-1/4SP](#) [LPS-RK-6SP](#) [LPS-RK-4/10SP](#) [LPS-RK-9SPI](#) [LPS-RK-40SPI](#) [LPS-RK-7SPI](#) [LPS-RK-2SP](#) [LPS-RK-5SP](#) [LPS-RK-1-1/2SP](#) [LPS-RK-8SPI](#) [LPS-RK-8SP](#) [LPS-RK-3-2/10SP](#) [LPS-RK-30SPI](#) [LPS-RK-35SP](#) [LPS-RK-1-6/10SP](#) [LPS-RK-2-1/2SP](#) [LPS-RK-7SP](#) [LPS-RK-35SPI](#) [LPS-RK-50SPI](#) [LPS-RK-9SP](#) [LPS-RK-30SP](#) [LPS-RK-3SP](#) [LPS-RK-25SP](#) [LPS-RK-6/10SP](#) [LPS-RK-6-1/4SP](#) [LPS-RK-6SPI](#) [LPS-RK-45SP](#) [LPS-RK-6-1/4SPI](#) [LPS-RK-4-1/2SP](#) [LPS-RK-15SP](#) [LPS-RK-1/2SP](#) [LPS-RK-10SP](#) [LPS-RK-1-4/10SP](#) [LPS-RK-5-6/10SP](#) [LPS-RK-20SPI](#) [LPS-RK-60SP](#) [LPS-RK-4SP](#) [LPS-RK-17-1/2SP](#) [LPS-RK-1-8/10SP](#) [LPN-RK-15/100SP](#) [LPS-RK-45SPI](#) [LPS-RK-2-8/10SP](#) [LPS-RK-10SPI](#) [LPS-RK-12SP](#) [LPS-RK-8/10SP](#) [LPS-RK17-1/2SPI](#) [LPS-RK-40SP](#) [LPS-RK-20SP](#) [LPS-RK-3/10SP](#) [LPS-RK-1-1/8SP](#) [LPS-RK-2/10SP](#) [LPS-RK-50SP](#) [LPS-RK-1/10SP](#) [LPS-RK-3-1/2SP](#) [LPS-RK-2-1/4SP](#) [LPS-RK-15SPI](#) [LPSRK35SPNP](#) [LPSRK40SPNP](#) [LPSRK50SPNP](#) [LPSRK60SPNP](#) [LPSRK45SPNP](#)