

# PCMFxHDMI2BA-C series

Common-mode EMI filter for differential channels with integrated bidirectional ESD protection

Rev. 3 — 20 May 2020

Product data sheet

## 1. General description

Common-mode ElectroMagnetic Interference (EMI) filters with integrated bidirectional ElectroStatic Discharge (ESD) protection for one, two and three differential channels. The devices are designed to provide low insertion loss for differential high-speed signals on each channel while unwanted common-mode signals are attenuated.

Each differential channel incorporates two signal lines that are coupled by integrated coils. Diodes provide protection to downstream components from ESD voltages up to  $\pm 15$  kV on each signal line.

**Table 1. Product overview**

Type number	Number of channels	Package Name
PCMF1HDMI2BA-C	1	WLCSP5
PCMF2HDMI2BA-C	2	WLCSP10
PCMF3HDMI2BA-C	3	WLCSP15

## 2. Features and benefits

- One, two and three differential channels common-mode EMI filters with integrated ESD protection
- ESD protection up to  $\pm 15$  kV contact discharge according to IEC 61000-4-2
- Superior common-mode suppression over a wide frequency range
- Superior RF performance compared to other integrated filters or discrete filters with external ESD protection
- Extremely high symmetry between line pairs
- Industry-standard Wafer-Level Chip-Scale Packages: WLCSP5, 10 and 15 for smaller footprint

## 3. Applications

- Smartphone, cellular and cordless phone
- HDMI2.1, HDMI2.0, HDMI1.4
- General-purpose downstream ESD protection for differential data lines
- Tablet PC and Mobile Internet Device (MID)
- MIPI M-PHY and D-PHY as used in Camera Serial Interface (CSI) and Display Serial Interface (DSI)

### 4. Pinning information

Table 2. Pinning

Pin	Symbol	Description	Simplified outline	Graphic symbol
<b>PCMF1HDMI2BA-C (WLCSP5_2-1-2)</b>				
A1	CH1_IN+	channel 1+, external	<p>Transparent top view <b>WLCSP5_2-1-2</b></p>	<p>aaa-028492</p>
A2	CH1_IN-	channel 1-, external		
B1	GND_CH1	ground channel 1		
C1	CH1_OUT+	channel 1+, internal		
C2	CH1_OUT-	channel 1-, internal		
<b>PCMF2HDMI2BA-C (WLCSP10_4-2-4)</b>				
A1	CH1_IN+	channel 1+, external	<p>Transparent top view <b>WLCSP10_4-2-4</b></p>	<p>B1, B2 - no internal connection aaa-028493</p>
A2	CH1_IN-	channel 1-, external		
A3	CH2_IN+	channel 2+, external		
A4	CH2_IN-	channel 2-, external		
B1	GND_CH1	ground channel 1		
B2	GND_CH2	ground channel 2		
C1	CH1_OUT+	channel 1+, internal		
C2	CH1_OUT-	channel 1-, internal		
C3	CH2_OUT+	channel 2+, internal		
C4	CH2_OUT-	channel 2-, internal		
<b>PCMF3HDMI2BA-C (WLCSP15_6-3-6)</b>				
A1	CH1_IN+	channel 1+, external	<p>Transparent top view <b>WLCSP15_6-3-6</b></p>	<p>B1, B2, B3 - no internal connection aaa-028494</p>
A2	CH1_IN-	channel 1-, external		
A3	CH2_IN+	channel 2+, external		
A4	CH2_IN-	channel 2-, external		
A5	CH3_IN+	channel 3+, external		
A6	CH3_IN-	channel 3-, external		
B1	GND_CH1	ground channel 1		
B2	GND_CH2	ground channel 2		
B3	GND_CH3	ground channel 3		
C1	CH1_OUT+	channel 1+, internal		
C2	CH1_OUT-	channel 1-, internal		
C3	CH2_OUT+	channel 2+, internal		
C4	CH2_OUT-	channel 2-, internal		
C5	CH3_OUT+	channel 3+, internal		
C6	CH3_OUT-	channel 3-, internal		

## 5. Ordering information

Table 3. Ordering information

Type number	Package	
	Name	Description
PCMF1HDMI2BA-C	WLCSP5	wafer level chip-size package; 5 bumps (2-1-2)
PCMF2HDMI2BA-C	WLCSP10	wafer level chip-size package; 10 bumps (4-2-4)
PCMF3HDMI2BA-C	WLCSP15	wafer level chip-size package; 15 bumps (6-3-6)

## 6. Marking

Table 4. Marking codes

Type number	Marking code
PCMF1HDMI2BA-C	PF1A
PCMF2HDMI2BA-C	PF2A
PCMF3HDMI2BA-C	PF3A

## 7. Limiting values

Table 5. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions	Min	Max	Unit
$V_I$	input voltage		-4	4	V
$V_{ESD}$	electrostatic discharge voltage	IEC 61000-4-2, level 4; all input pins to ground			
		• contact discharge	-15	15	kV
		• air discharge	-15	15	kV
		IEC 61000-4-2, level 4; all output pins to ground			
		• contact discharge	-2	2	kV
		• air discharge	-2	2	kV
$I_{PPM}$	rated peak-pulse current	$t_p = 8/20 \mu s$	-7.5	7.5	A
$T_{stg}$	storage temperature		-40	+125	°C
$T_{amb}$	ambient temperature		-40	+125	°C

## 8. Characteristics

### 8.1. Channel characteristics

**Table 6. Channel characteristics**

$T_{amb} = 25\text{ °C}$  unless otherwise specified.

Symbol	parameter	Conditions		Min	Typ	Max	Unit
$R_{S(ch)}$	channel series resistance	single line; input to output		-	2.2	-	$\Omega$
$C_d$	diode capacitance	$f = 1\text{ MHz}$ ; $V_I = 2.5\text{ V}$	[1]	-	0.3	-	pF
$I_{RM}$	reverse leakage current	per line; $V_I = 4\text{ V}$		-	1	100	nA
$V_{BR}$	breakdown voltage	$I_R = 1\text{ mA}$		6	9	-	V
$R_{dyn}$	dynamic resistance	TLP; positive transient	[2]	-	0.29	-	$\Omega$
		TLP; negative transient	[2]	-	0.29	-	$\Omega$

[1] This parameter is guaranteed by design

[2] 100 ns Transmission Line Pulse (TLP); 50  $\Omega$ ; pulser at 70 ns to 90 ns.

### 8.2. Frequency characteristics

**Table 7. Frequency characteristics**

$T_{amb} = 25\text{ °C}$  unless otherwise specified.

Symbol	Parameter	Conditions		Min	Typ	Max	Unit
<b>Differential mode: <math>S_{dd21}</math></b>							
$f_{-3dB}$	cut-off frequency		[1]	-	10	-	GHz

[1] Normalized to attenuation at 1 MHz.

Common-mode EMI filter for differential channels with integrated bidirectional ESD protection

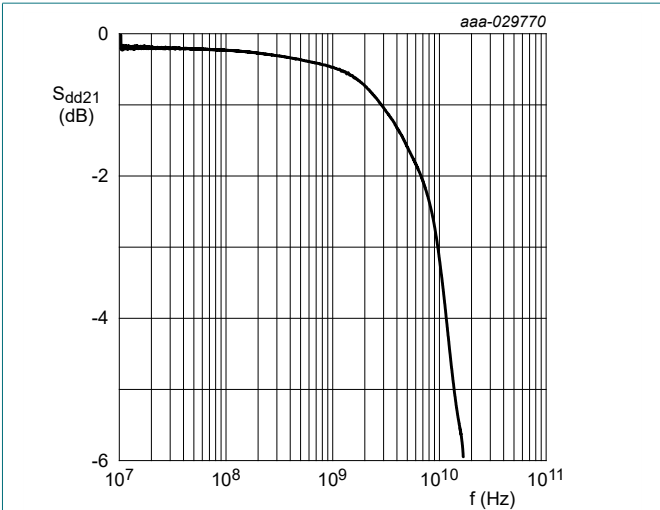


Fig. 1. Differential mode insertion loss; typical values



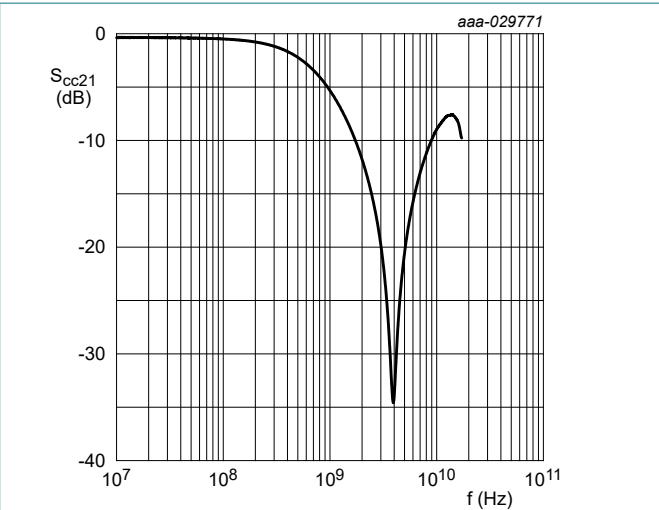


Fig. 2. Common-mode insertion loss; typical values

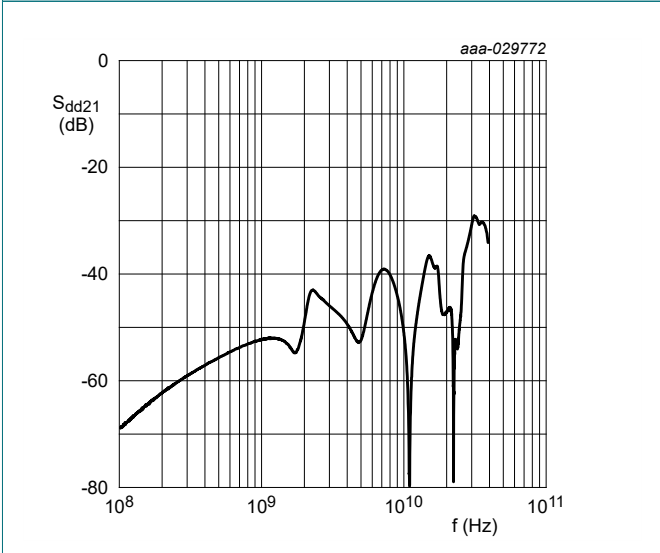


CH1 to CH2  
Fig. 3. Differential crosstalk; typical values

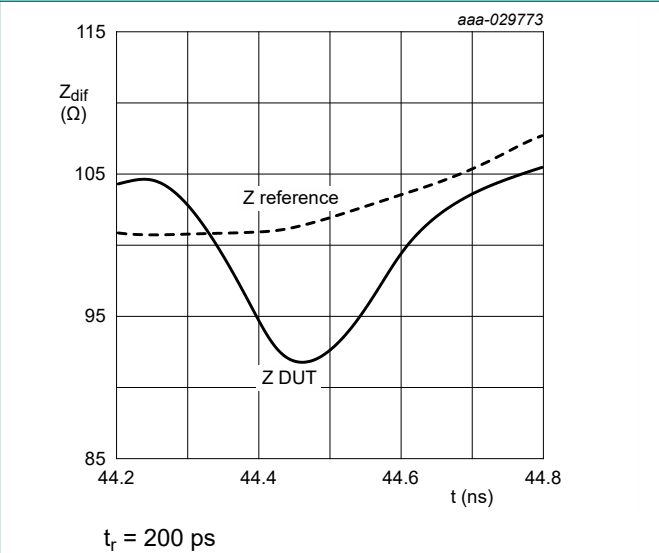

$t_r = 200$  ps  
Fig. 4. Differential Time Domain Reflectometer (TDR) plot; typical values


Common-mode EMI filter for differential channels with integrated bidirectional ESD protection

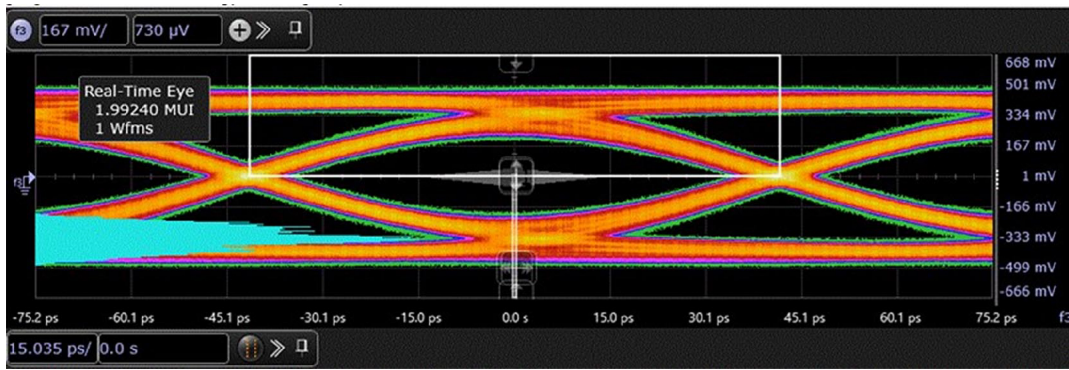

aaa-031492

Short cable model (SCM), no equalizer

Fig. 5. HDMI 2.1 12G FRL eye diagram, PCB with device; typical values

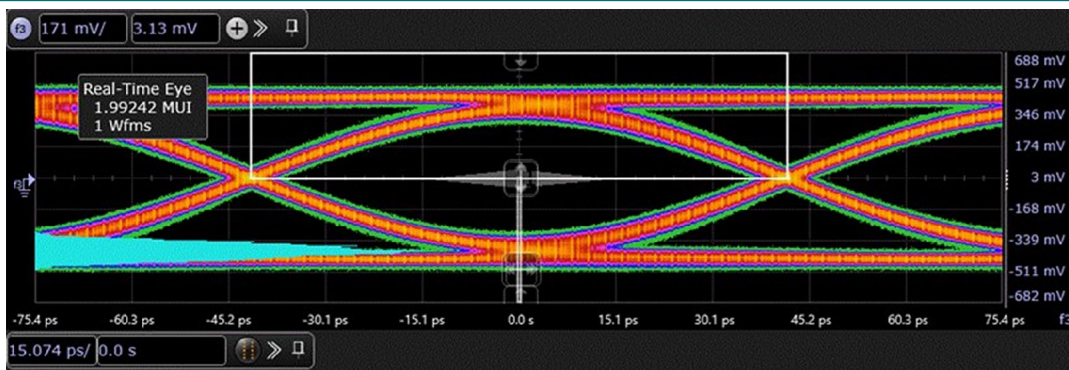


aaa-031493

Short cable model (SCM), no equalizer


Fig. 6. HDMI 2.1 12G FRL eye diagram, PCB without device; typical values

Common-mode EMI filter for differential channels with integrated bidirectional ESD protection

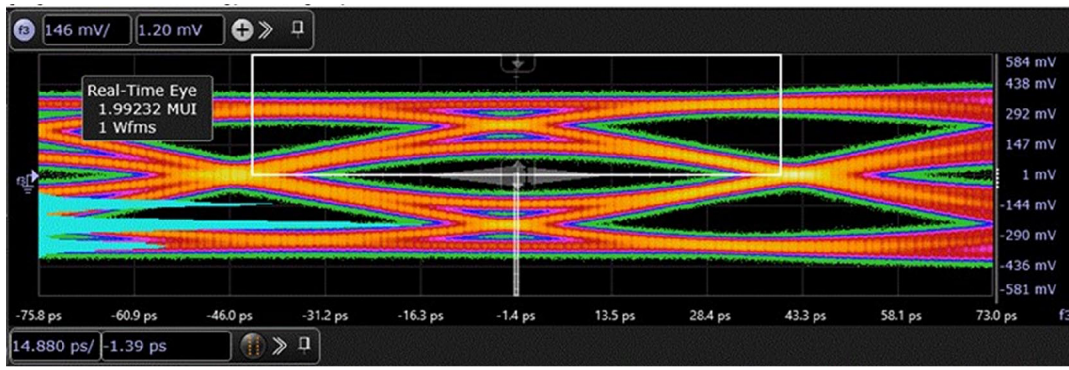

Worst cable model, 8dB

Fig. 7. HDMI 2.1 12G FRL eye diagram, PCB with device; typical values

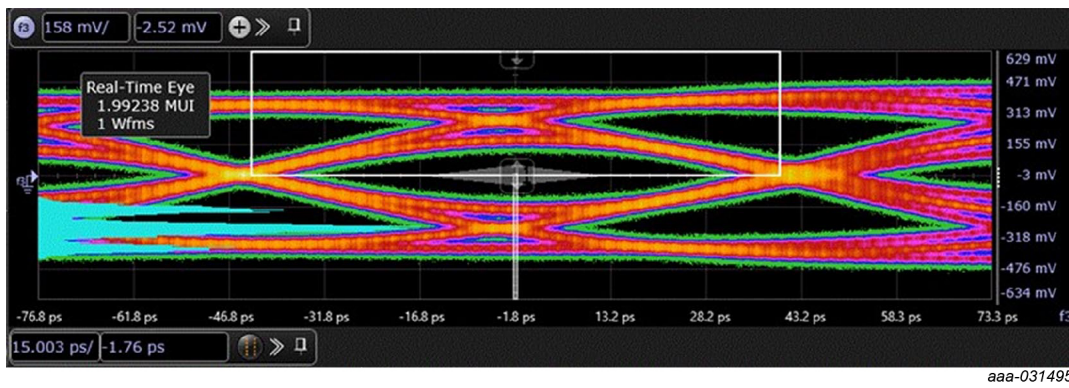

Worst cable model, 8dB

Fig. 8. HDMI 2.1 12G FRL eye diagram, PCB without device; typical values

Common-mode EMI filter for differential channels with integrated bidirectional ESD protection



aaa-031496

Worst cable model, no equalizer

Fig. 9. HDMI 2.1 6 Gbps TMDS eye diagram, PCB with device; typical values




aaa-031497

Worst cable model, no equalizer

Fig. 10. HDMI 2.1 6 Gbps TMDS eye diagram, PCB without device; typical values




Common-mode EMI filter for differential channels with integrated bidirectional ESD protection

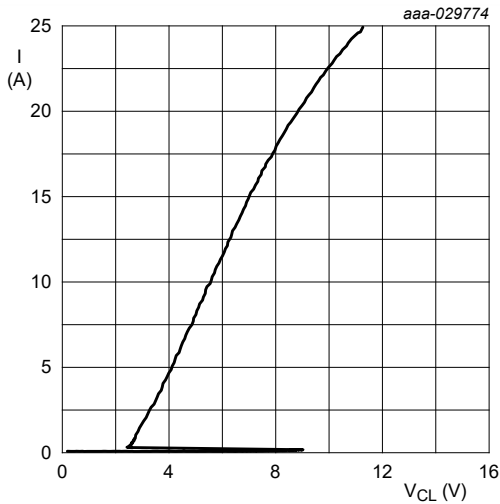


Transmission Line Pulse (TLP) = 100 ns;  
measured CH\_IN to GND

**Fig. 11. Dynamic resistance with positive clamping; typical values**

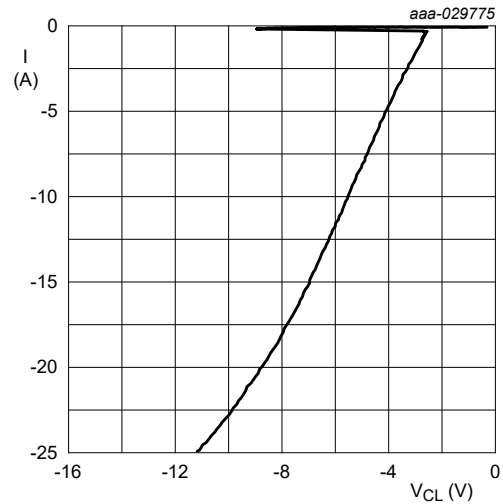


Transmission Line Pulse (TLP) = 100 ns;  
measured CH\_IN to GND

**Fig. 12. Dynamic resistance with negative clamping; typical values**

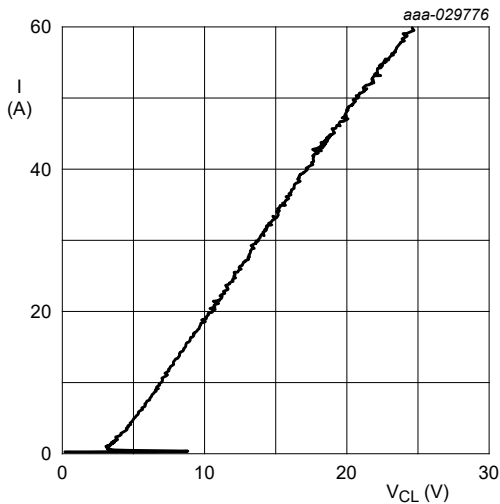

Very-Fast Transmission Line Pulse  
(VF-TLP) = 5 ns;  
measured CH\_IN to GND

**Fig. 13. Dynamic resistance with positive clamping; typical values**


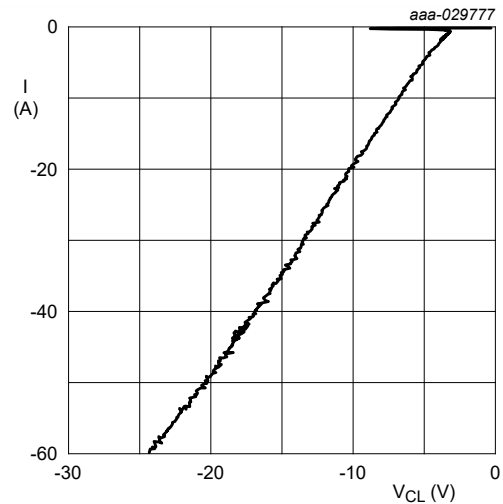


Very-Fast Transmission Line Pulse  
(VF-TLP) = 5 ns;  
measured CH\_IN to GND

**Fig. 14. Dynamic resistance with negative clamping; typical values**

The device uses an advanced clamping structure showing a negative dynamic resistance. This snap-back behavior strongly reduces the clamping voltage to the system behind the ESD protection during an ESD event. Do not connect unlimited DC current sources to the data lines to avoid keeping the ESD protection device in snap-back state after exceeding breakdown voltage (due to an ESD pulse for instance).

## Common-mode EMI filter for differential channels with integrated bidirectional ESD protection

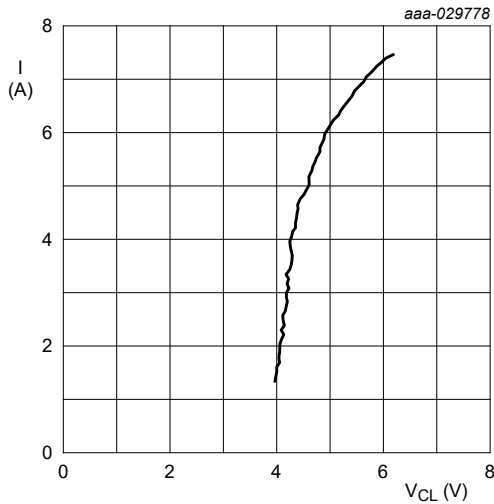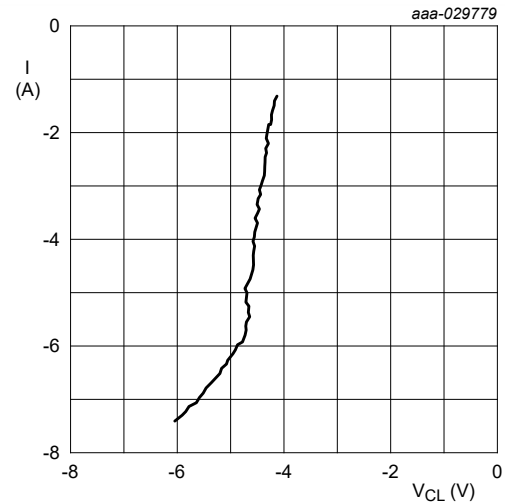IEC61000-4-5;  $t_p = 8/20 \mu\text{s}$ ; positive pulse**Fig. 15. Dynamic resistance with positive clamping; typical values**IEC61000-4-5;  $t_p = 8/20 \mu\text{s}$ ; negative pulse**Fig. 16. Dynamic resistance with negative clamping; typical values**

## 9. Application information

The device is designed to provide high-level ESD protection for differential high-speed data line pairs such as HDMI2.1, HDMI2.0 and HDMI1.4.

When designing the Printed-Circuit Board (PCB), give careful consideration to impedance matching and signal coupling. Do not connect the protected signal lines to unlimited current sources like, for example, a battery.

10. Package outline

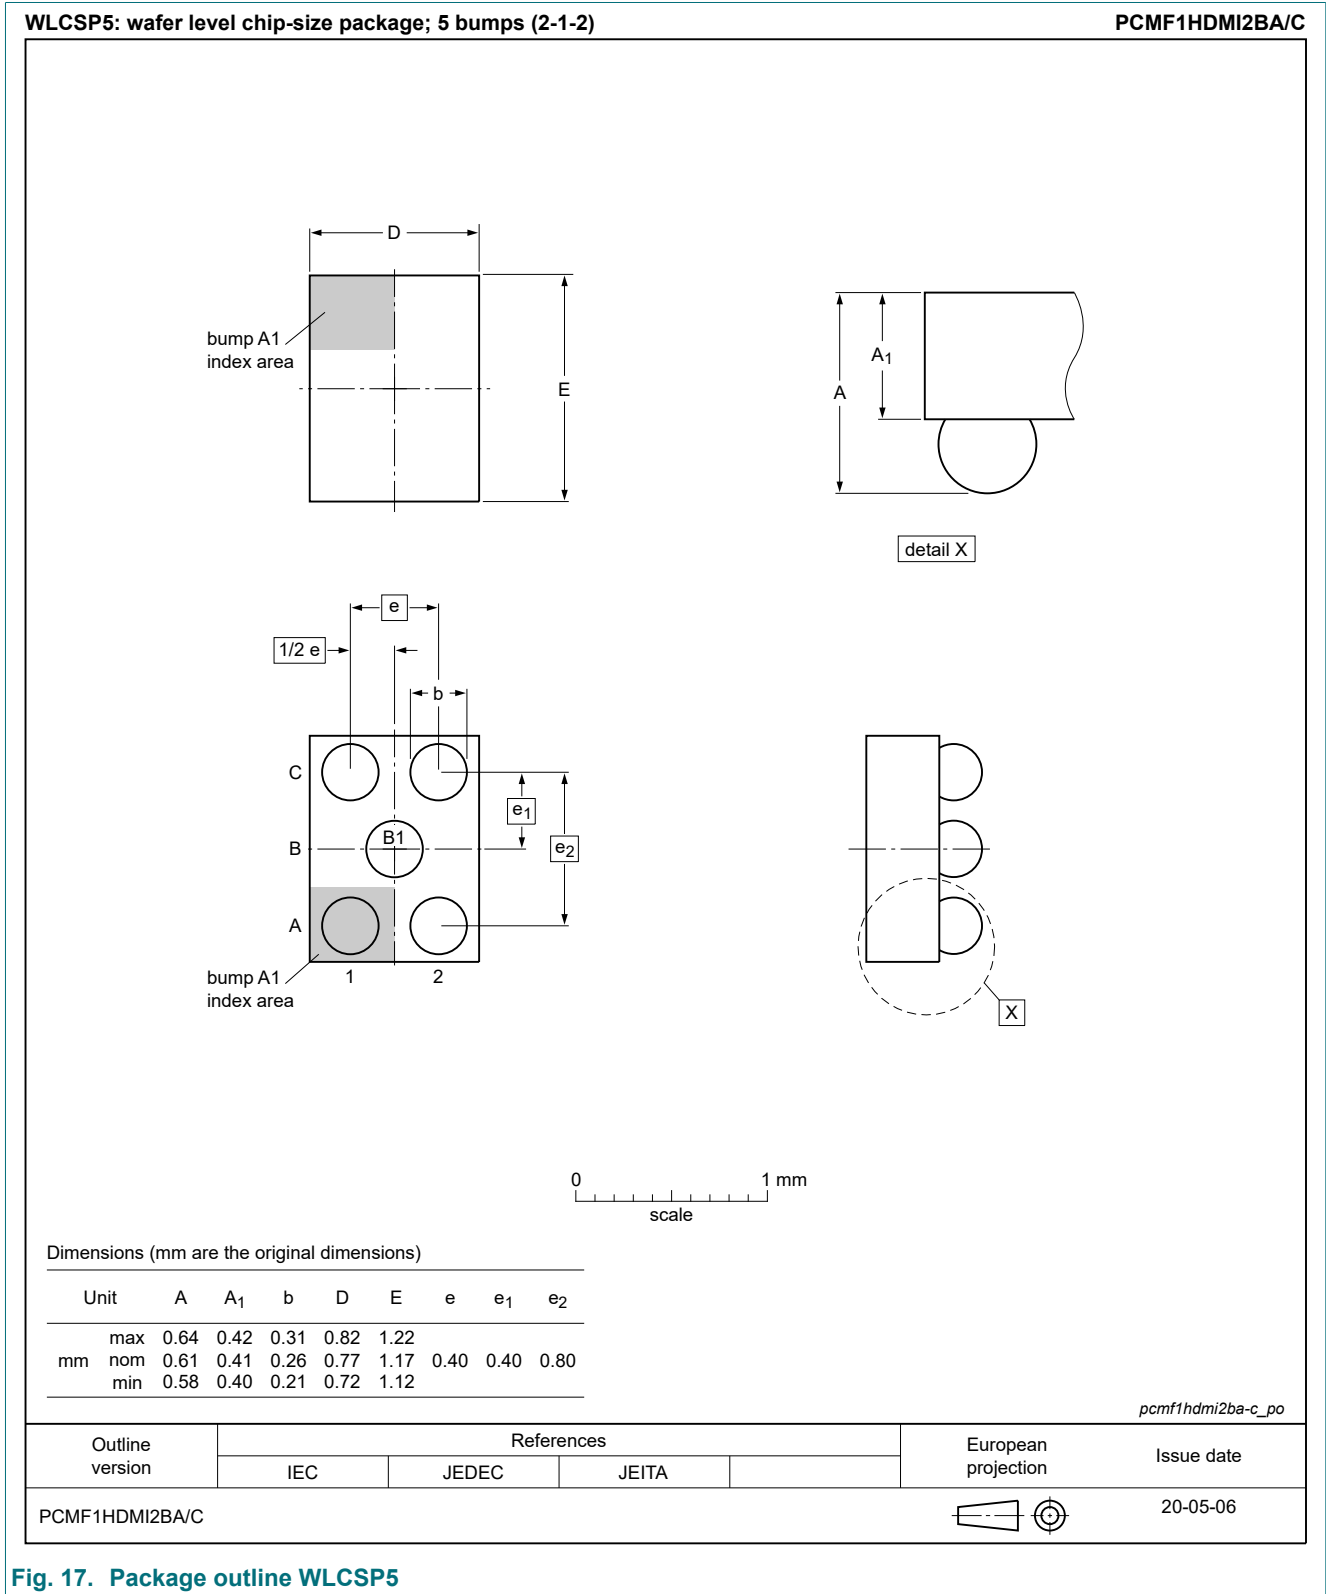
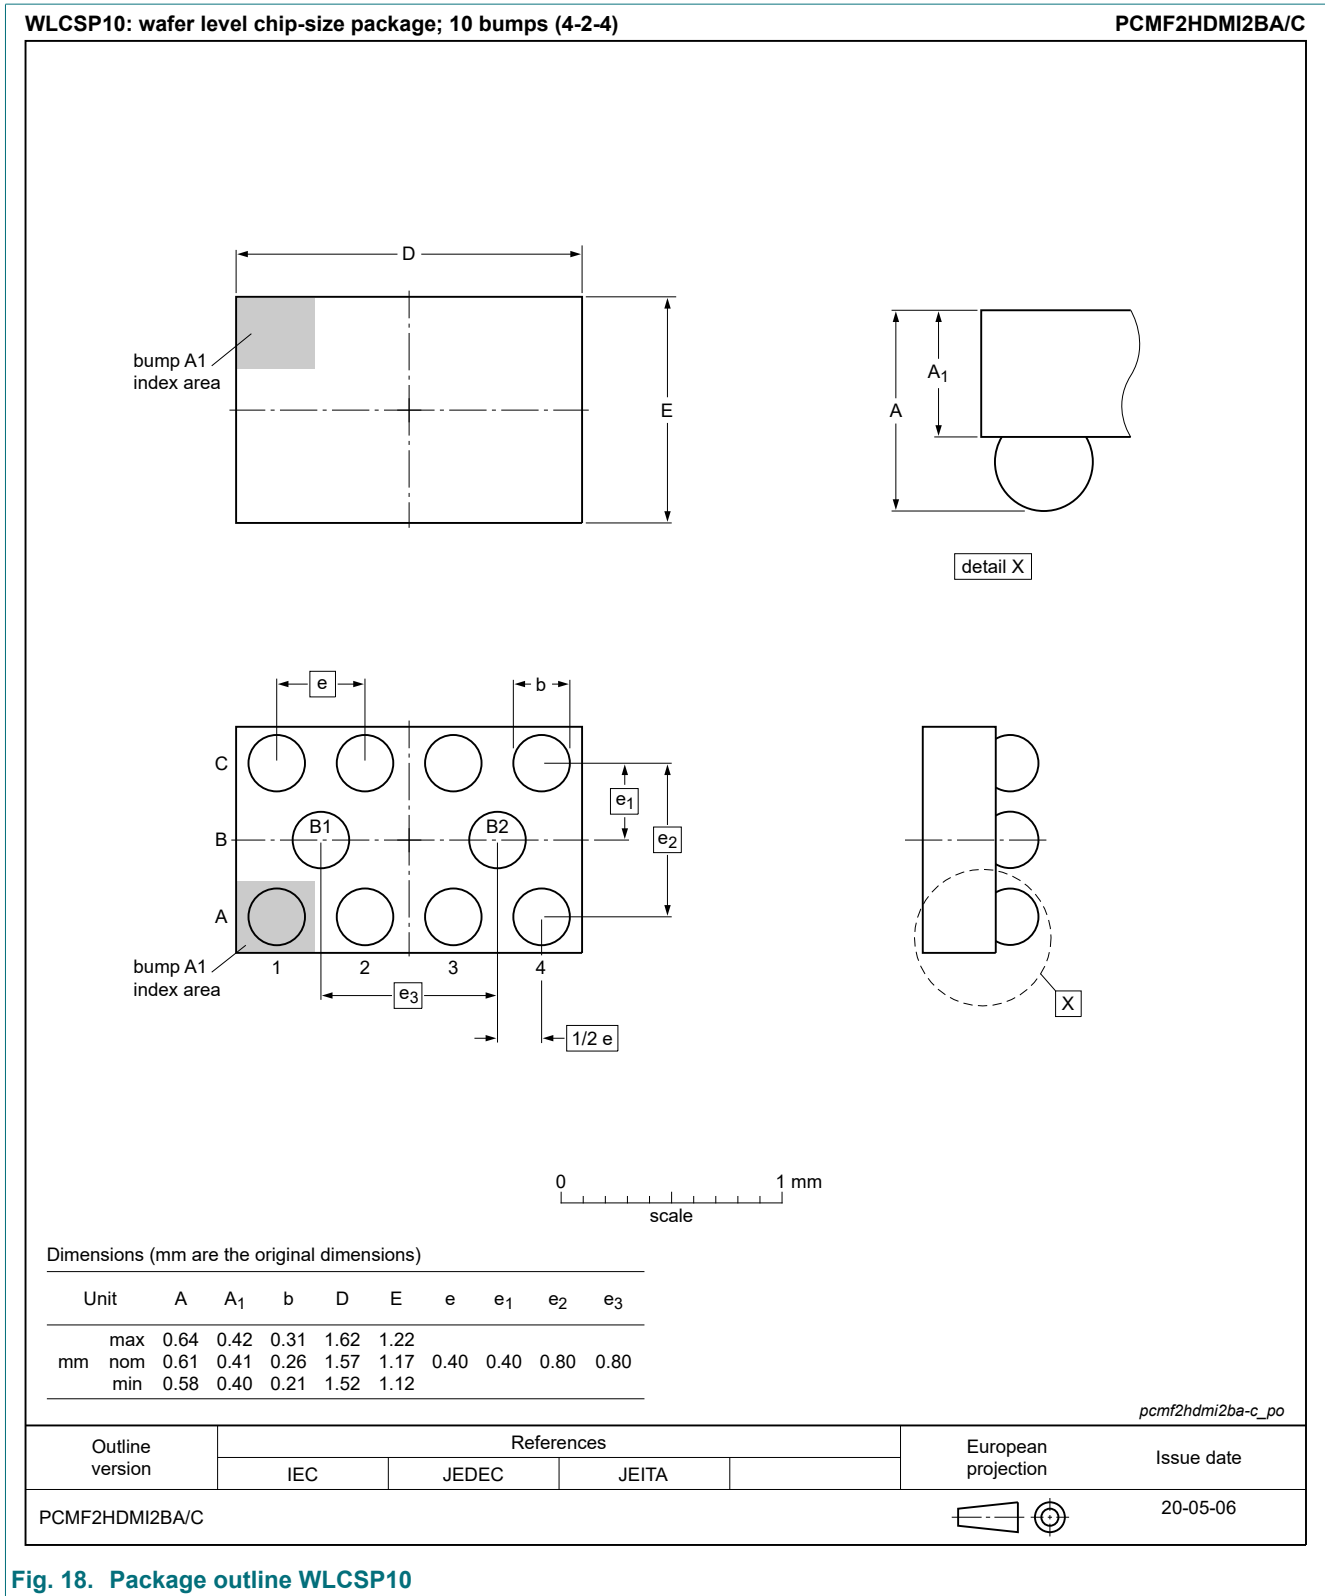
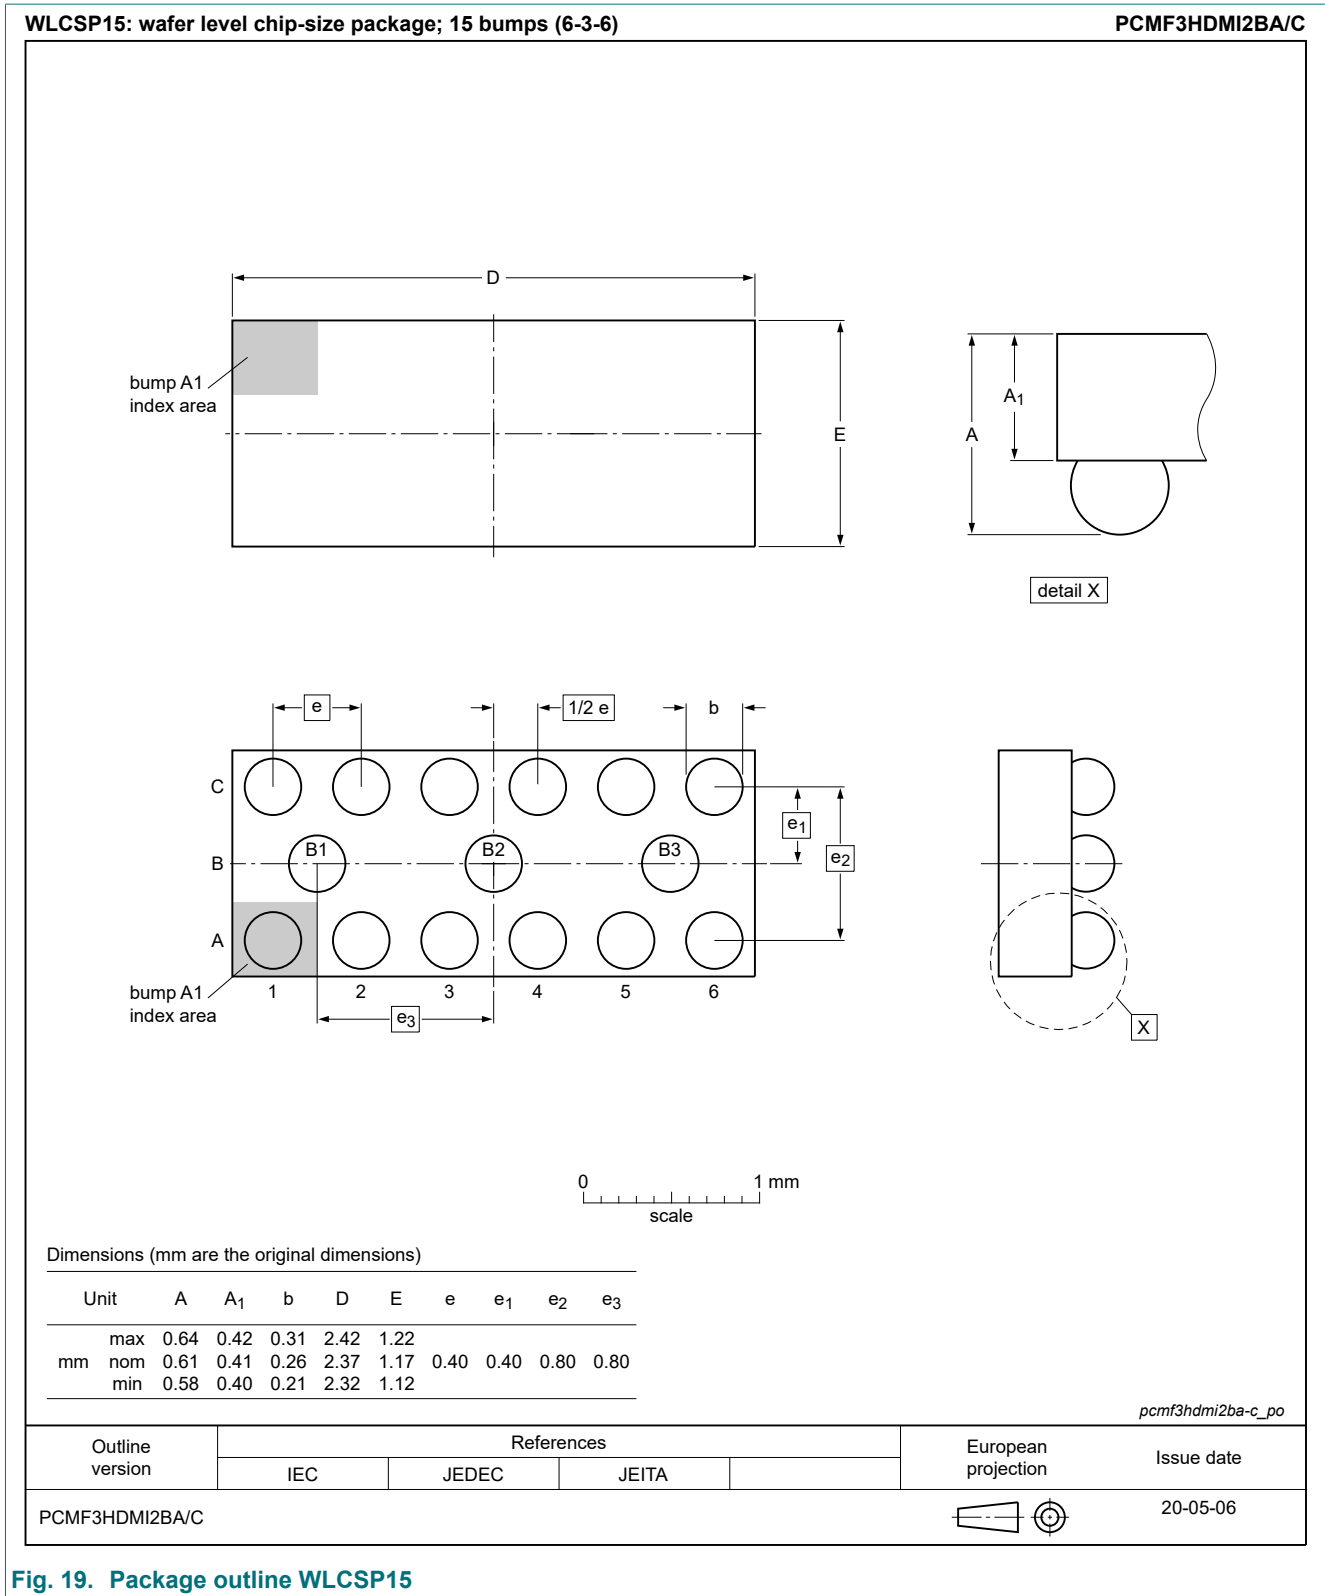


Fig. 17. Package outline WLCSP5



**Fig. 18. Package outline WLCSP10**



**Fig. 19. Package outline WLCSP15**

11. Soldering

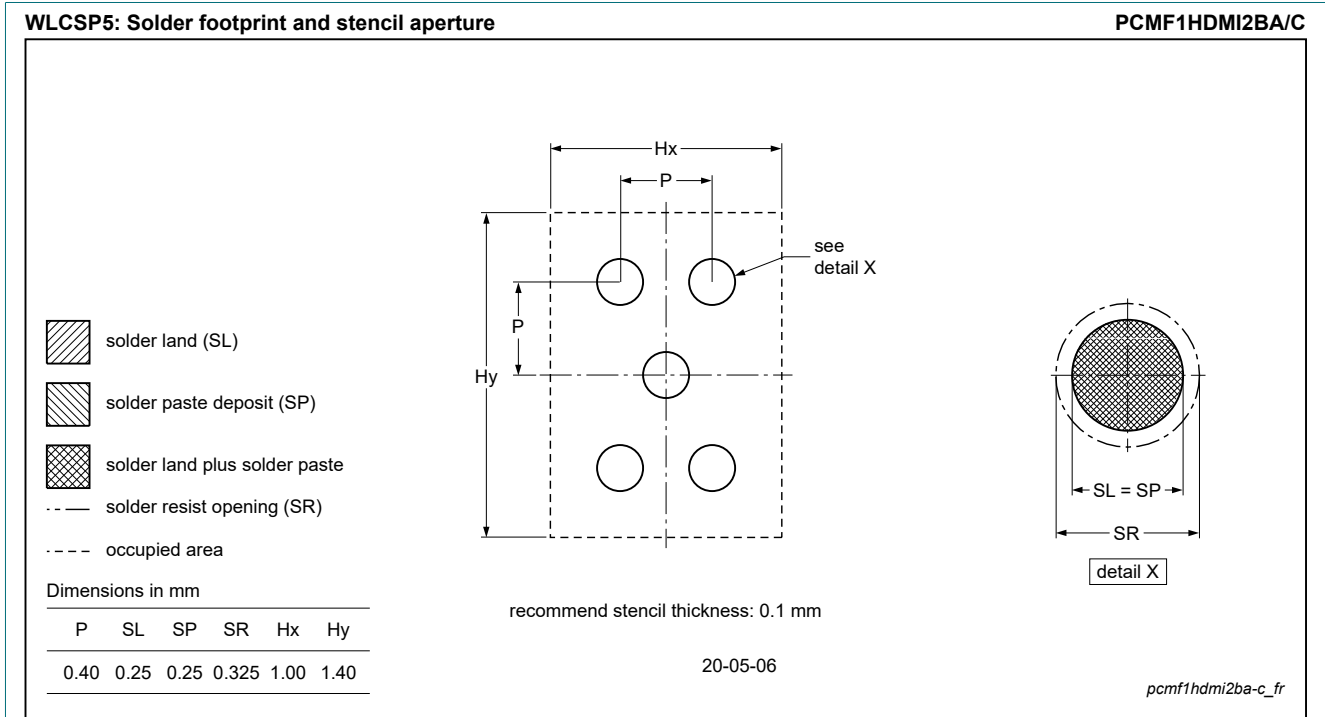


Fig. 20. Soldering footprint WLCSP5 (PCMF1HDMI2BA/C)

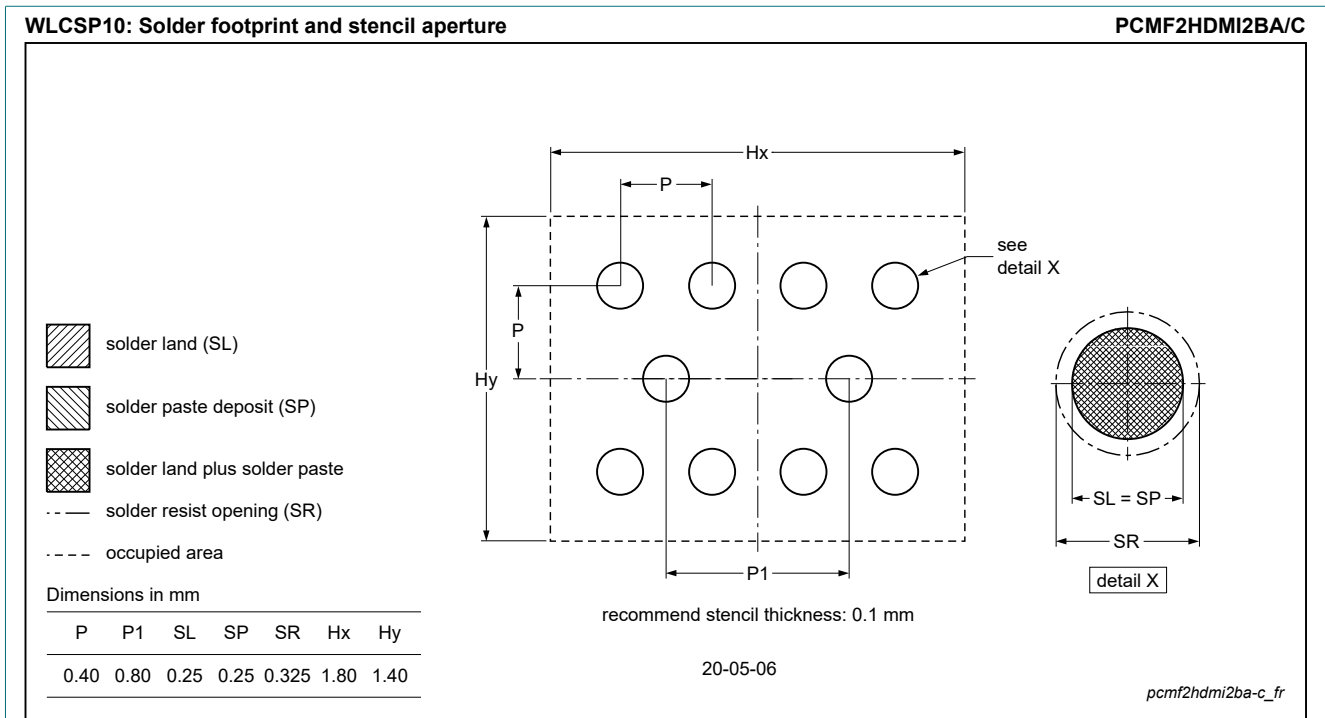
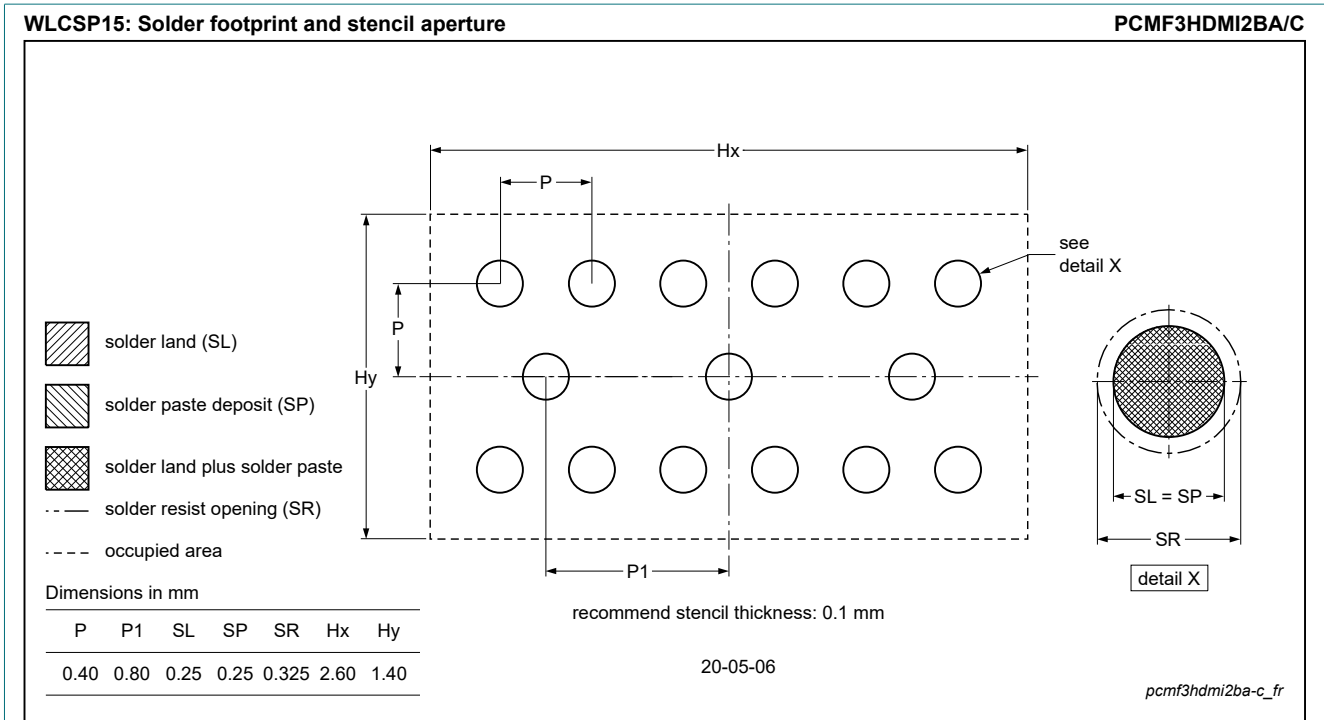


Fig. 21. Soldering footprint WLCSP10 (PCMF2HDMI2BA/C)



**Fig. 22. Soldering footprint WLCSP15 (PCMF3HDMI2BA/C)**

## 12. Revision history

Table 8. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes
PCMFxHDMI2BA_C_SER v.1	20200520	Product data sheet	-	-



## Contents

---

<b>1. General description</b> .....	<b>1</b>
<b>2. Features and benefits</b> .....	<b>1</b>
<b>3. Applications</b> .....	<b>1</b>
<b>4. Pinning information</b> .....	<b>2</b>
<b>5. Ordering information</b> .....	<b>3</b>
<b>6. Marking</b> .....	<b>3</b>
<b>7. Limiting values</b> .....	<b>3</b>
<b>8. Characteristics</b> .....	<b>4</b>
8.1. Channel characteristics.....	4
8.2. Frequency characteristics.....	4
<b>9. Application information</b> .....	<b>10</b>
<b>10. Package outline</b> .....	<b>11</b>
<b>11. Soldering</b> .....	<b>14</b>
<b>12. Revision history</b> .....	<b>16</b>

---

© Nexperia B.V. 2020. All rights reserved

For more information, please visit: <http://www.nexperia.com>

For sales office addresses, please send an email to: [salesaddresses@nexperia.com](mailto:salesaddresses@nexperia.com)

Date of release: 20 May 2020

---

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Nexperia:](#)

[PCMF2HDMI2BA-CZ](#)