



Part No. P822601 / P822602

Universal Broadband FR4 Embedded LTE / LPWA Antenna

700 / 750 / 850 / 900 / 1800 / 1900 / 2100 / 2700 MHz

Supports: Broadband LTE (OCTA-BAND), LTE CAT-M, NB-IoT, SigFox, LoRa, Cellular LPWA, RPMA



*Mirrored version offered as P822602

Universal Broadband FR4 Embedded LTE Antenna

Low Band 700 – 1000 MHz High Band 1700 - 2700 MHz

KEY BENEFITS

Reduced Costs and Time-to-Market

Standard antenna eliminates design fees and cycle time associated with a custom solution; getting products to market faster.

Greater Flexibility with Unique Form Factors

Ethertronics' technology helps you deliver more advanced ergonomic designs without adverse impact on product performance.

Reliability

Comply with latest RoHS requirements

APPLICATIONS

Firstnet

Medical Automotive applications • Healthcare Point of Sale Home automation • Tracking Smart NB-IoT Sigfox metering LoRa M2M, Industrial Cellular devices **LPWA RPMA** IoT

LTE CAT-M

Ethertronics' Universal Broadband Embedded LTE/LPWA antenna utilizes Isolated Magnetic Dipole™ (IMD) technology which address the challenges facing today's product designers. IMD's high performance and isolation characteristics offer better connectivity and minimal interference. Mirrored version variant offered as P822602.

Stays in Tune

Ethertronics antennas use patented IMD technology in many antenna configurations to provide high performance. IMD antennas requires a smaller design keep-out area, carry lower program development risk which yields a quicker time-to-market, without sacrificing RF performance.

Electrical Specifications

Typical P822601/P822602 performance 140 x 50 mm PCB

Frequency (MHz)	698-960	1710-2200	2500-2700
Peak Gain	2.6 dBi	4.4 dBi	3.4 dBi
Average Efficiency	68%	76%	52%
VSWR Match		< 2.5:1	
Polarization		Linear	
Power Handling		2 Watt CW	
Feed Point Impedance		50 Ω unbalanced	

Mechanical Specifications & Ordering Part Number


	_		
Ordering Part #	P822601	P822602	
Dimensions (mm)	49.6 x 8.0 x 3.2	49.6 x 8.0 x 3.2	
Mounting Type	SMT (P&P)		
Variant	P822602 : Mirrored v	version of P822601	
Weight (grams)	2.63		
Packaging	Tape and Reel		
Storage Temperature/ Humidity (Sealed shipping package)	+5°C to +35°C 45~75%		
Operating Temperature	-40 to -	⊦85 C	
Demo Board	P822601-01 P822602-01	,	



Antenna Dimensions (P822601)

Typical antenna dimensions (mm)


Part Number	A (mm)	B (mm)	C (mm)	
P822601	49.6 ± 0.3	8.0 ± 0.2	3.2 ± 0.3	

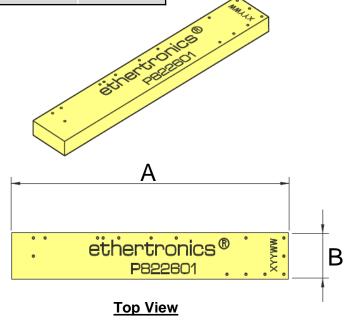

Pin#	Description
1	Feed
2	Ground
3	Dummy Pad
4	Low Band Tuning
5	High Band Tuning
6	Dummy Pad
7	Dummy Pad



Front View/Height

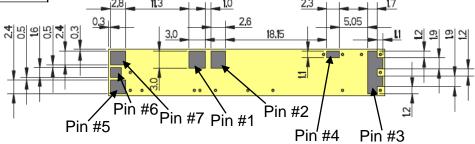


Bottom View




Antenna Dimensions (P822602)

Typical antenna dimensions (mm)


Part Number	A (mm)	B (mm)	C (mm)	
P822602	49.6 ± 0.3	8.0 ± 0.2	3.2 ± 0.3	

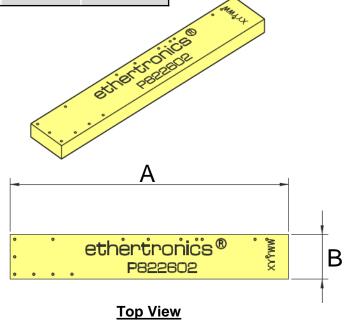

Pin#	Description
1	Feed
2	Ground
3	Dummy Pad
4	Low Band Tuning
5	High Band Tuning
6	Dummy Pad
7	Dummy Pad



Front View/Height

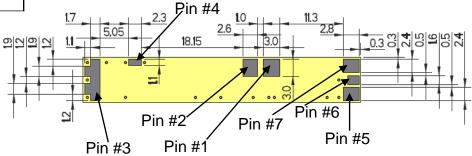



Bottom View





VSWR and Efficiency Plots


Typical P822601/P822602 performance 140 x 50 mm PCB

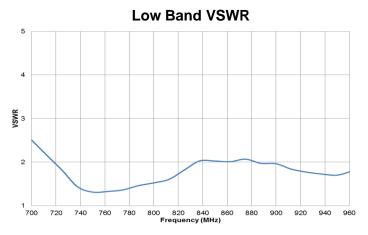


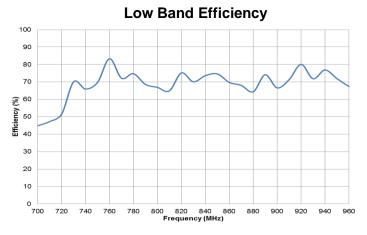

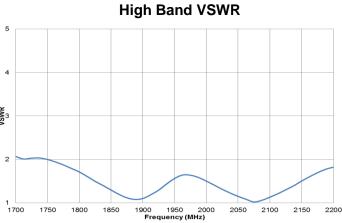

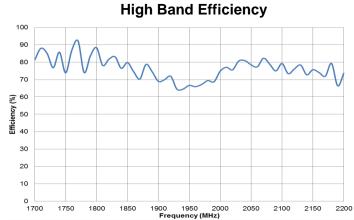

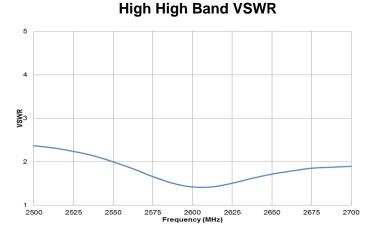


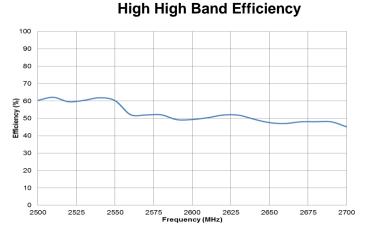




Antenna Radiation Patterns - Low / High Band

Typical P822601/P822602 performance 140 x 50 mm PCB

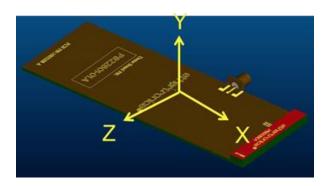


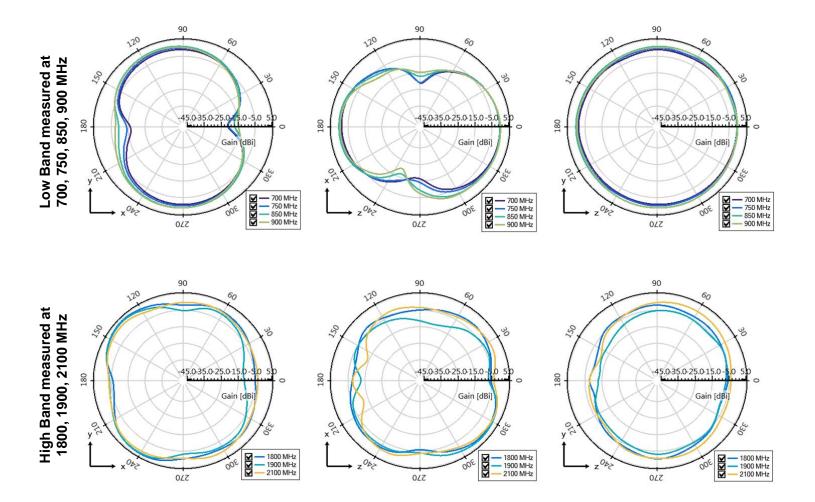





Antenna Radiation Patterns – High High Band


Typical P822601/P822602 performance 140 x 50 mm PCB

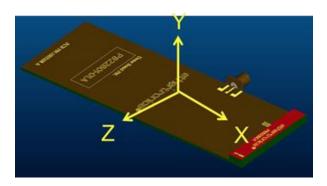

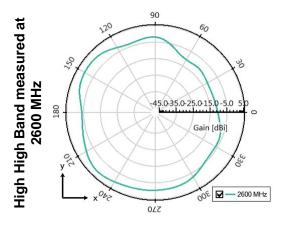




90





Antenna Layout (P822601)

Typical layout dimensions (mm)

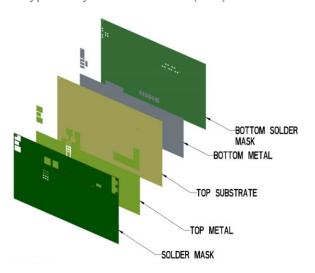


- Additional VIAS: Diam. 0.2mm to be placed around antenna, (no vias on transmission lines).
- Via holes must be covered by solder mask

Pin Descriptions

Pin#	Description
1	Feed
2	Ground
3	Dummy Pad
4	Low Band Tuning
5	High Band Tuning
6	Dummy Pad
7	Dummy Pad

^{*}P822602 uses the same layout but mirrored.

Default Pi Matching Network values with instructions can be found under Antenna Matching Network.

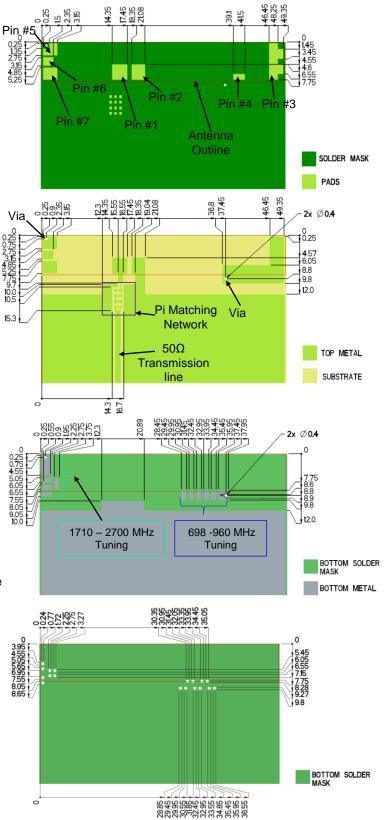




0

7.75 8.6 8.8 8.9 9.8

Antenna Layout (P822602)

Typical layout dimensions (mm)

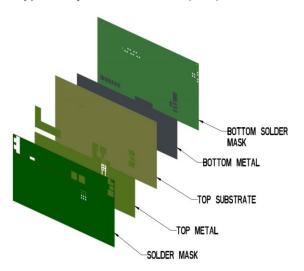


- Additional VIAS: Diam. 0.2mm to be placed around antenna, (no vias on transmission lines).
- Via holes must be covered by solder mask


Pin Descriptions

Pin#	Description
1	Feed
2	Ground
3	Dummy Pad
4	Low Band Tuning
5	High Band Tuning
6	Dummy Pad
7	Dummy Pad

^{*}P822601 uses the same layout but mirrored.

Default Pi Matching Network values with instructions can be found under Antenna Matching Structure.

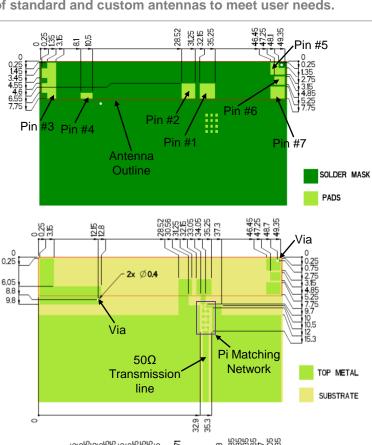

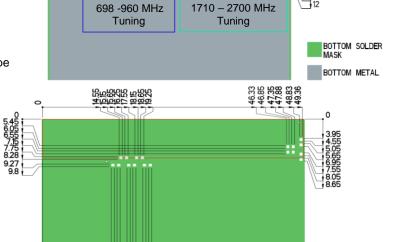


13.05 13.65 16.05 17.15 19.05 19.05 19.05 19.05 19.05 19.05 19.05 19.05 19.05

BOTTOM SOLDER MASK




Antenna Matching Structure (P822601)

Typical matching values on 140 x 50 mm PCB

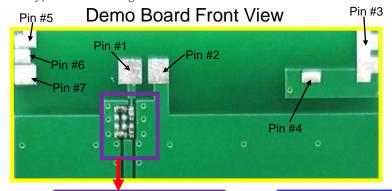


Demo Board Back View

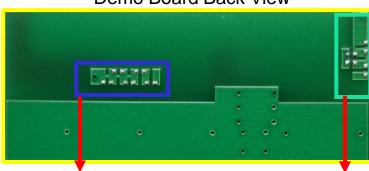


Antenna Matching


698-960 MHz Tuning

1710-2700 MHz Tuning




(Antenna Matching): pads are directly inline with the antenna feed trace.

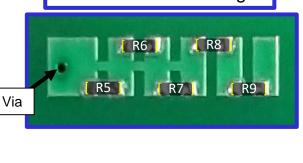



Pin Descriptions

Pin#	Description
1	Feed
2	Ground
3	Dummy Pad
4	Low Band Tuning
5	High Band Tuning
6	Dummy Pad
7	Dummy Pad

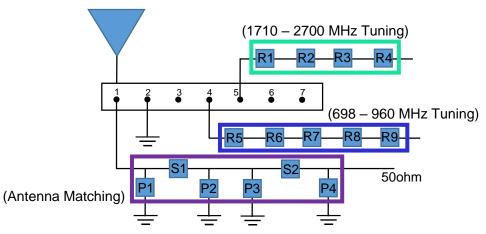


*P822602 uses same matching values

						_		
	P1	S1	P2	Р3	S2	P4	R1-R4	R5-R9
Default Matching	24nH	2.4pF	DNI	DNI	1.0nH	0.3pF	DNI	DNI
Tolerance	± 20%	± 0.25pF	N/A	N/A	± 0.3nH	± 0.1pF	N/A	N/A



Antenna Matching Structure (P822601)


Typical matching values on 140 x 50 mm PCB

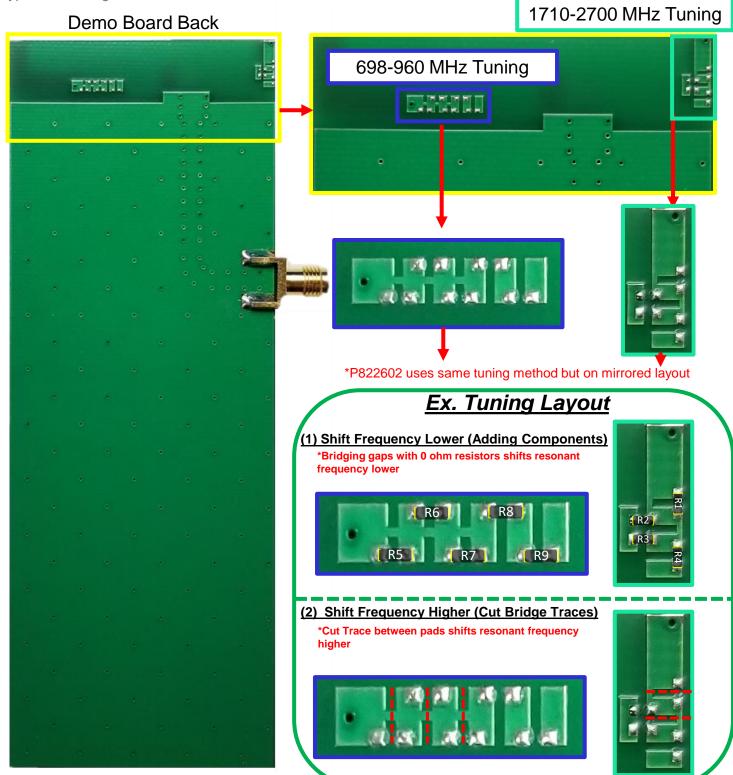



Antenna Demo Board (P822601/P822602)

Demo Board Front View

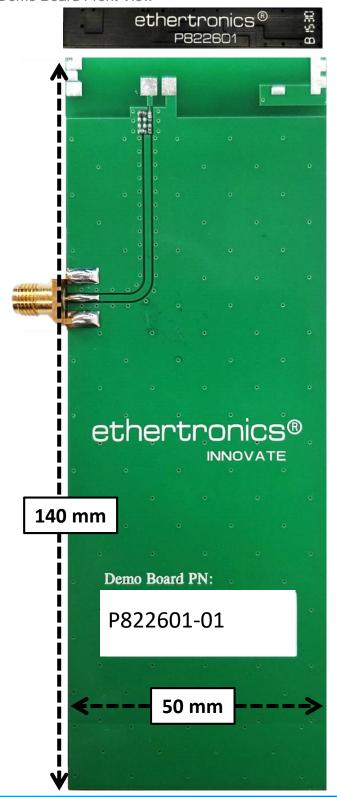






Antenna Demo Board (P822601/P822602)

Demo Board Back View (mm)

P822601-01


P822602-01

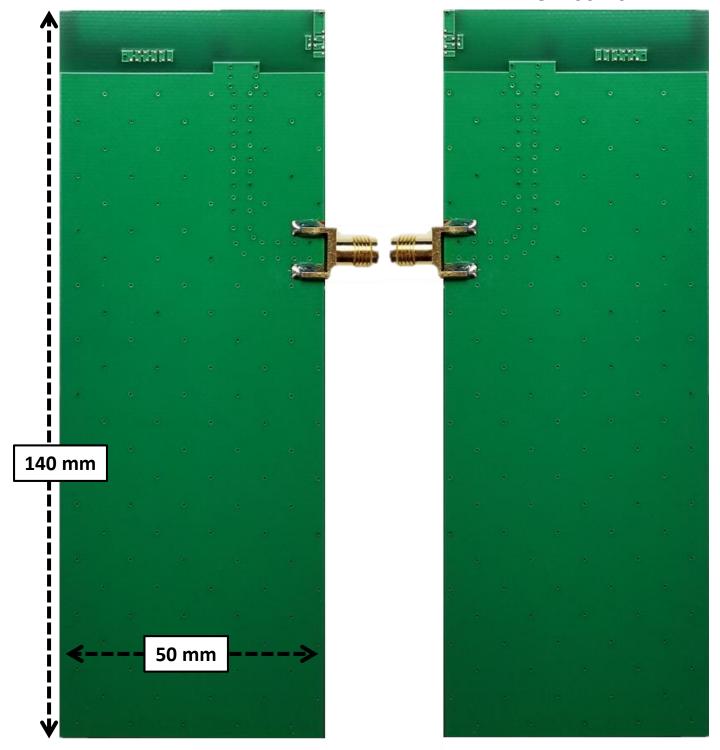



Recommended Reflow Soldering Profile

The recommended method for soldering the antenna to the board is forced convection reflow soldering. The following suggestions provide information on how to optimize the reflow process for the FR4 antenna:

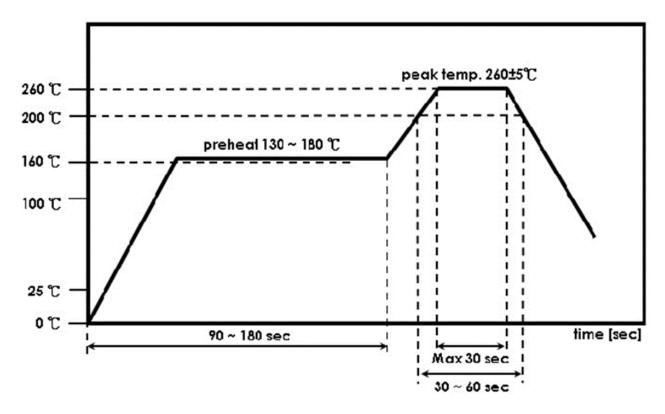

^{*}Adjust the reflow duration to create good solder joints without raising the antenna temperature beyond the allowed maximum of 260° C.