

# Features

# Regulated Converter

- 12:1 ultra wide input voltage range
- 3kVAC/1 minute reinforced insulation
- High efficiency over entire input voltage range
- -40°C to +85°C temperature range without cooling or derating
- Output voltage sense and trim
- CE marked

# RECOM

## DC/DC Converter

## RP40Q-RUW

40 Watt  
Quarter  
Brick  
Single Output



**UL**  
E 196683

IEC/EN62368-1 certified  
UL62368-1 certified  
CAN/CSA-C22.2 No. 62368-1 certified  
EN50155 certified  
EN55032 compliant  
EN55024 compliant  
CE marked

## Description

The quarter brick RP40Q series DC/DC converter is designed for railway rolling stock and high voltage battery applications. It has a 12:1 input voltage range to cover all input voltages from nominal 24VDC up to 110VDC in a single product (including EN50155 transients) and offers isolated and regulated 5V, 12V, 15V, 24V or 48VDC outputs with sense and trim pins. The converter has a consistently high efficiency over the entire input voltage range and has an operating temperature range from -40°C to +85°C without forced air cooling or derating. The case is fitted with threaded inserts for secure mounting in high shock and vibration environments. The converter is CE marked and comes with a three year warranty.

## Selection Guide

| Part Number            | Nom. Input Voltage Range [VDC] | Output Voltage [VDC] | Output Current [A] | Efficiency typ. (1) [%] | Max. Capacitive Load (2) [µF] |
|------------------------|--------------------------------|----------------------|--------------------|-------------------------|-------------------------------|
| RP40Q-11005SRUW/N(3,4) | 16-160                         | 5                    | 8                  | 91                      | 16000                         |
| RP40Q-11012SRUW/N(3,4) | 16-160                         | 12                   | 3.33               | 90                      | 2800                          |
| RP40Q-11015SRUW/N(3,4) | 16-160                         | 15                   | 2.67               | 90                      | 1800                          |
| RP40Q-11024SRUW/N(3,4) | 16-160                         | 24                   | 1.67               | 90                      | 720                           |
| RP40Q-11048SRUW/N(3,4) | 16-160                         | 48                   | 0.83               | 89                      | 180                           |

### Notes:

- Note1: Efficiency is tested at 48Vin and full load at +25°C ambient  
Note2: Max. Cap Load is tested at nominal input and full resistive load

## Model Numbering



### Notes:

- Note3: standard part is with suffix "/N" for negative logic (0=ON, 1=OFF) or add suffix "/P" for positive logic (1=ON, 0=OFF) for more details refer to "ON/OFF CTRL (5)"  
Note4: add suffix "-HC" for screwed Heat-sink (refer to "Dimension Drawing Heat-sink (mm)")

### Ordering Examples

- RP40Q-11005SRUW/N = 110V Input Voltage, 5V Output Voltage, Single, negative logic  
RP40Q-11048SRUW/P = 110V Input Voltage, 48V Output Voltage, Single, positive logic  
RP40Q-11024SRUW/N-HC = 110V Input Voltage, 24V Output Voltage, Single, negative logic and fitted Heat-sink  
RP40Q-11015SRUW/P-HC = 110V Input Voltage, 15V Output Voltage, Single, positive logic and fitted Heat-sink



<https://recom-power.com/rec-s-R-REF04-RIA12.html>



<https://recom-power.com/rec-s-RSPxxx-168.html>

**Specifications** (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

**BASIC CHARACTERISTICS**

| Parameter  | Condition                                   |                       | Min.   | Typ.  | Max.           |
|--|---|-----------------------|--|---|----------------|
| Internal Input Filter                                |   |                       | Pi-Type  |   |                |
| Input Voltage Range                                  |   |                       | 16VDC  | 110VDC                                      | 160VDC         |
| Input Surge Voltage                                  | < 1s  | nom. Vin = 110VDC     |  |   | 185VDC         |
| Under Voltage Lockout (ULVO)                         | nom. Vin = 110VDC                           | DC-DC ON<br>DC-DC OFF | 10VDC  | 11VDC                                       | 14VDC<br>12VDC |
| Input Current Range                                  | Vin = 16VDC<br>Vin = 110VDC<br>Vin = 160VDC |                       |  | 2.75A<br>0.4A<br>0.27A                      | 3.5A           |
| Quiescent Current                                    | nom. Vin = 110VDC                           |                       |  | 10mA  |                |
| Output Voltage Trimming                              | refer to "OUTPUT VOLTAGE TRIMMING"          |                       | -20%   |   | +10%           |
| Minimum Load   |   |                       | 0%   |   |                |
| Start-up Time  | constant resistive load                     |                       |  | 75ms  | 100ms          |
| Rise Time  |   |                       |  | 40ms  |                |
| ON/OFF CTRL <sup>(5)</sup><br>refer to "ON/OFF CTRL" | Positive Logic                              | DC-DC ON<br>DC-DC OFF | Open or 3VDC < V <sub>CTRL</sub> < 12VDC<br>Short or 0VDC < V <sub>CTRL</sub> < 1.2VDC |   |                |
|  | Negative Logic                              | DC-DC ON<br>DC-DC OFF | Short or 0VDC < V <sub>CTRL</sub> < 1.2VDC<br>Open or 3VDC < V <sub>CTRL</sub> < 12VDC |   |                |
| Input Current of CTRL pin                            | drive current                               | I <sub>CTRL</sub>     | -0.5mA   |   | 1mA            |
| Standby Current                                      | DC-DC OFF                                   | I <sub>in</sub>       |  | 1mA   |                |
| Internal Operating Frequency                         |   |                       |  | 180kHz                                      |                |
| Output Ripple and Noise <sup>(6)</sup>               | measured at 20MHz BW                        |                       | 5Vout<br>12, 15Vout<br>24Vout<br>48Vout  | 75mVp-p<br>100mVp-p<br>200mVp-p<br>300mVp-p |                |
| Remote Sense <sup>(7)</sup>                          | refer to "REMOTE SENSE"                     |                       |  |   | 10%            |

**Notes:**


Note5: The ON/OFF control function can be positive or negative logic. The pin voltage is referenced to -Vin

Note6: Measurements are made for 5Vout with a 1µF/25V X7R MLCC and a 22µF/25V E-Cap; for 15Vout with a 22µF/25V X7R MLCC, for 24Vout with a 4.7µF/50V X7R MLCC and for 48Vout with a 2.2µF/100V X7R MLCC


Note7: If not used connect Remote Sense pins to corresponding output pins

**RP40Q-11005SRW**

**Efficiency vs. Output Load**

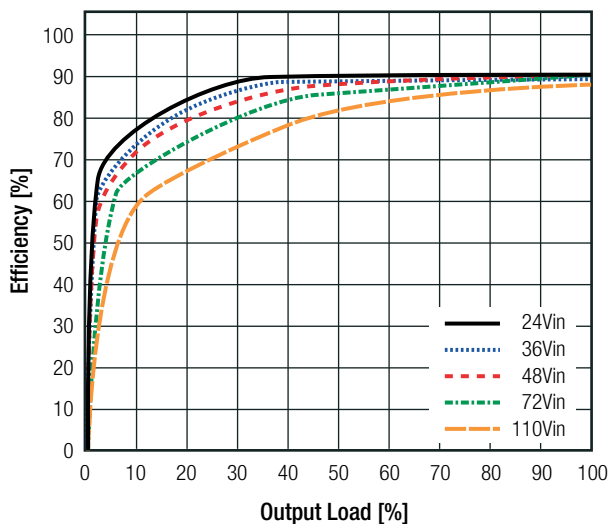





**Efficiency vs. Input Voltage**

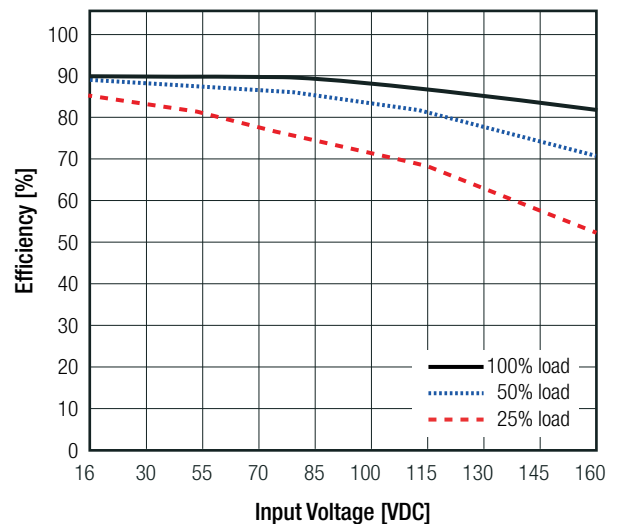


continued on next page

**Specifications** (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

### RP40Q-11005SRW

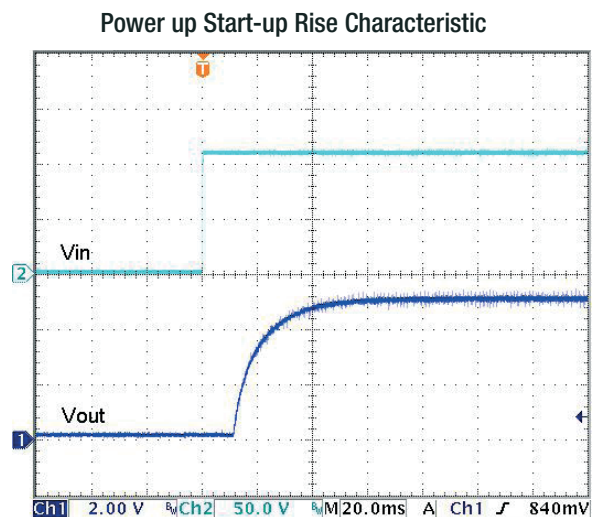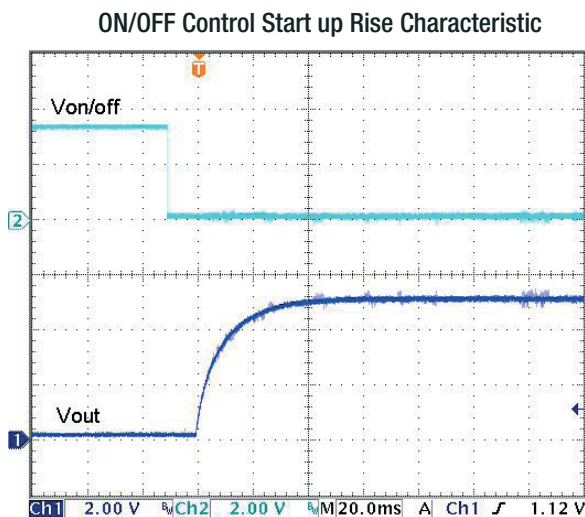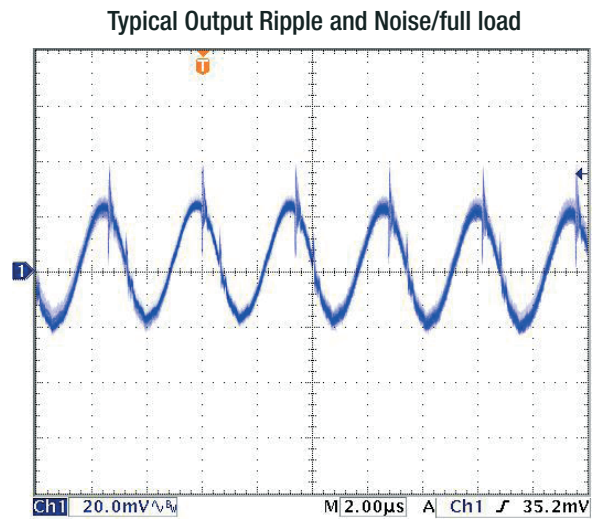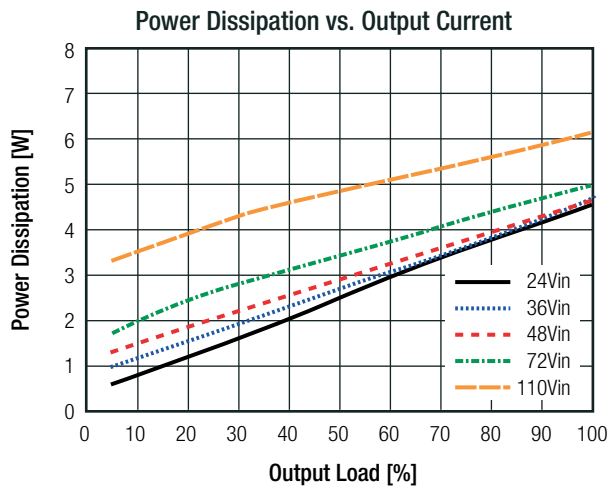

### Input Voltage Range

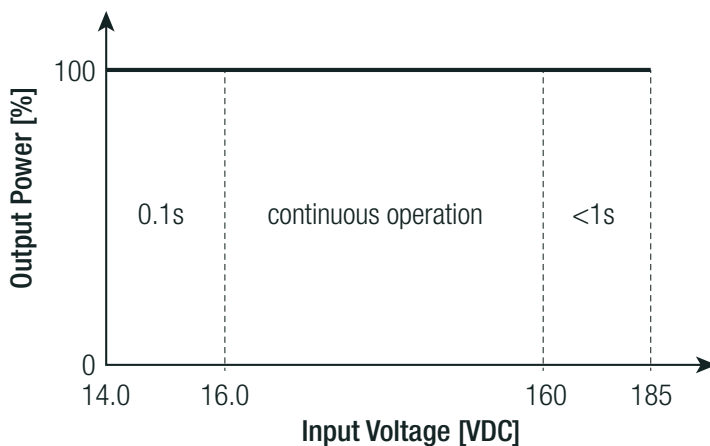


Continuous full power operation is rated between 16V and 160V, including full load start-up.

Once running, the converter will operate for short periods of time over an extended input voltage range down to 14V and up to 185V, thus covering all EN50155 under-voltage and over-voltage transient conditions.


Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

### ON/OFF CTRL

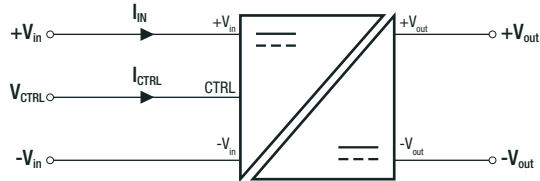

|                |           |   |
|----------------|-----------|---|
| Positive Logic | DC-DC ON  | Open or $3.0\text{VDC} < V_{CTRL} < 12\text{VDC}$ |
|                | DC-DC OFF | Short or $0\text{VDC} < V_{CTRL} < 1.2\text{VDC}$ |
| Negativ Logic  | DC-DC ON  | Short or $0\text{VDC} < V_{CTRL} < 1.2\text{VDC}$ |
|                | DC-DC OFF | Open or $3.0\text{VDC} < V_{CTRL} < 12\text{VDC}$ |

### REMOTE SENSE

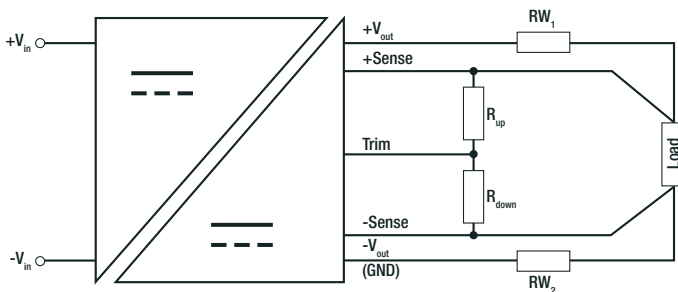


The output voltage can be adjusted by both trim and remote sense. The maximum combined adjustment range is  $\pm 10\%$ . Derate the maximum output power if using the trim or sense function to increase the output voltage.

- $RW_1$  ... wire losses +
- $RW_2$  ... wire losses -
- $R_{up}$  ... trim up resistor
- $R_{down}$  ... trim down resistor

### OUTPUT VOLTAGE TRIMMING

#### Output Voltage Trimming

It allows the user to increase or decrease the output voltage of the module. This is accomplished by connecting an external resistor between the Trim pin and either the +Sense or -Sense pins. With an external resistor between the Trim and +Sense pin, the output voltage increases. With an external resistor between the Trim and -Sense pin, the output voltage decreases. The external Trim resistor needs to be at least  $1/8W$  of rated. The values for trim resistors shown in trim tables below are according to standard E96 values; therefore, the specified voltage may slightly vary.

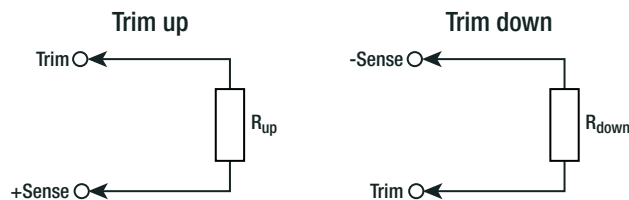

- $V_{out_{nom}}$  = nominal output voltage [VDC]
- $\Delta V_{out}$  = output voltage change [%]
- $V_{ref}$  = reference voltage [VDC]
- $R_{up}$  = trim up resistor [ $\Omega$ ]
- $R_{down}$  = trim down resistor [ $\Omega$ ]
- $R_1, R_2, R_3$  = internal resistors [ $\Omega$ ]

| $V_{out_{nom}}$ | $R_1$        | $R_2$         | $R_3$ | $V_{ref}$ |
|-----------------|--------------|---------------|-------|-----------|
| 5VDC            | 10k $\Omega$ | 511k $\Omega$ | 5k11  | 1.225VDC  |
| 12VDC           |              |               |       |           |
| 15VDC           |              |               |       |           |
| 24VDC           |              |               |       |           |
| 48VDC           |              |               |       |           |

continued on next page

**Specifications** (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

**Calculation:**

$$R_{up} = \left[ \frac{R_3 \times V_{out_{nom}} \times (100 + \Delta V_{out})}{V_{ref} \times \Delta V_{out}} \right] - \left[ \frac{(R_1 \times \Delta V_{out}) + R_2}{\Delta V_{out}} \right]$$

$$R_{down} = \left[ \frac{R_2}{\Delta V_{out}} \right] - R_1$$

**Practical Example RP60Q-xx05SRW +10% / -10%**

$$R_{up} = \left[ \frac{5k11 \times 5 \times (100 + 10)}{1.225 \times 10} \right] - \left[ \frac{(10k2 \times 10) + 511k}{10} \right] = 168k\Omega$$

$$R_{down} = \left[ \frac{511k}{10} \right] - 10k2 = 40k9\Omega$$

R<sub>up</sub> according to E96 ≈ 169kΩ

R<sub>down</sub> according to E96 ≈ 41k2Ω

**RP40Q-xx05SRW**

|                                  |      |      |      |      |      |      |      |      |      |      |       |
|----------------------------------|------|------|------|------|------|------|------|------|------|------|-------|
| Trim up                          | 1    | 2    | 3    | 4    | 5    | 6    | 7    | 8    | 9    | 10   | [%]   |
| V <sub>out<sub>set</sub></sub> = | 5.05 | 5.10 | 5.15 | 5.20 | 5.25 | 5.30 | 5.35 | 5.4  | 5.45 | 5.50 | [VDC] |
| R <sub>up</sub> (E96) ≈          | 1M58 | 806k | 536k | 402k | 324k | 247k | 237k | 205k | 187k | 169k | [Ω]   |

**RP40Q-xx12SRW**

|                                  |       |       |       |       |       |       |       |       |       |       |       |
|----------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Trim up                          | 1     | 2     | 3     | 4     | 5     | 6     | 7     | 8     | 9     | 10    | [%]   |
| V <sub>out<sub>set</sub></sub> = | 12.12 | 12.24 | 12.36 | 12.48 | 12.60 | 12.72 | 12.84 | 12.96 | 13.08 | 13.20 | [VDC] |
| R <sub>up</sub> (E96) ≈          | 4M53  | 2M26  | 1M54  | 1M15  | 931k  | 787k  | 681k  | 604k  | 536k  | 487k  | [Ω]   |

**RP40Q-xx15SRW**

|                                  |       |       |       |       |       |       |       |       |       |       |       |
|----------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Trim up                          | 1     | 2     | 3     | 4     | 5     | 6     | 7     | 8     | 9     | 10    | [%]   |
| V <sub>out<sub>set</sub></sub> = | 15.15 | 15.30 | 15.45 | 15.60 | 15.75 | 15.90 | 16.05 | 16.20 | 16.35 | 16.50 | [VDC] |
| R <sub>up</sub> (E96) ≈          | 5M76  | 2M94  | 1M96  | 1M47  | 1M21  | 1M02  | 866k  | 768k  | 698k  | 619k  | [Ω]   |

**RP40Q-xx24SRW**

|                                  |       |       |       |       |       |       |       |       |       |       |       |
|----------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Trim up                          | 1     | 2     | 3     | 4     | 5     | 6     | 7     | 8     | 9     | 10    | [%]   |
| V <sub>out<sub>set</sub></sub> = | 24.24 | 24.48 | 24.72 | 24.96 | 25.20 | 25.44 | 25.68 | 25.92 | 26.16 | 26.40 | [VDC] |
| R <sub>up</sub> (E96) ≈          | 9M53  | 4M7   | 3M24  | 2M94  | 2M    | 1M69  | 1M47  | 1M27  | 1M15  | 1M05  | [Ω]   |

**RP40Q-xx48SRW**

|                                  |       |       |       |       |       |       |       |       |       |       |       |
|----------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Trim up                          | 1     | 2     | 3     | 4     | 5     | 6     | 7     | 8     | 9     | 10    | [%]   |
| V <sub>out<sub>set</sub></sub> = | 48.48 | 48.96 | 49.44 | 49.92 | 50.40 | 50.88 | 51.36 | 51.84 | 52.32 | 52.80 | [VDC] |
| R <sub>up</sub> (E96) ≈          | 19M6  | 9M94  | 6M65  | 5M11  | 4M12  | 3M4   | 3M01  | 2M61  | 2M37  | 2M15  | [Ω]   |

**Trim Down all Vout's**

|                           |      |      |      |      |      |     |      |      |      |      |     |
|---------------------------|------|------|------|------|------|-----|------|------|------|------|-----|
| Trim down                 | 1    | 2    | 3    | 4    | 5    | 6   | 7    | 8    | 9    | 10   | [%] |
| R <sub>down</sub> (E96) ≈ | 499k | 243k | 162k | 118k | 90k9 | 75k | 63k4 | 53k6 | 46k4 | 41k2 | [Ω] |


|                           |      |      |      |      |      |      |      |      |      |      |     |
|---------------------------|------|------|------|------|------|------|------|------|------|------|-----|
| Trim down                 | 11   | 12   | 13   | 14   | 15   | 16   | 17   | 18   | 19   | 20   | [%] |
| R <sub>down</sub> (E96) ≈ | 36k5 | 32k4 | 28k7 | 26k1 | 23k7 | 21k5 | 19k6 | 18k2 | 16k5 | 15k4 | [Ω] |

**Specifications** (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

| REGULATIONS        |                       |            |
|--------------------|-----------------------|------------|
| Parameter          | Condition             | Value      |
| Output Accuracy    |                       | ±1.0% max. |
| Line Regulation    | low line to high line | ±0.1% max. |
| Load Regulation    | 0% load to 100% load  | 0.1% max.  |
| Transient Response | 25% load step change  | 250µs typ. |

Transient Response to Dynamic Load change from 100% to 75% to 100% of Full Load at nom. Vin

RP40Q-11005SRUW

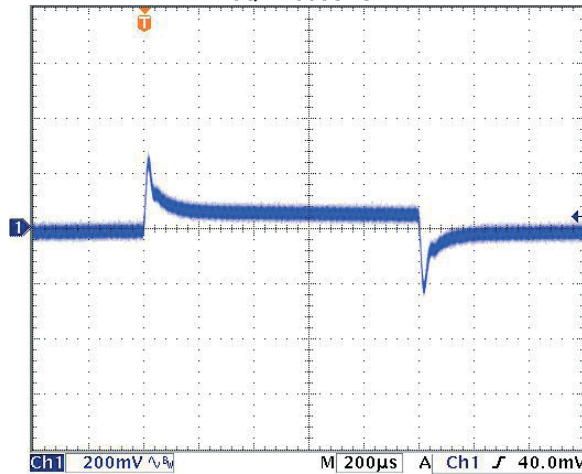

| PROTECTION                        |                              |                                     |  |
|-----------------------------------|------------------------------|-------------------------------------|--|
| Parameter                         | Condition                    |                                     | Value  |
| Short Circuit Protection (SCP)    | below 100mΩ                  |                                     | continuous, hiccup mode, automatic recovery                          |
| Over Voltage Protection (OVP)     |                              |                                     | 120-135%, hiccup mode  |
| Over Current Protection (OCP)     |                              |                                     | 120-140%, hiccup mode  |
| Over Temperature Protection (OTP) |                              |                                     | +115°C ±5°C  |
| Isolation Voltage <sup>(8)</sup>  | nom. Vin = 110Vin            | I/P to O/P<br>I/P, O/P to Baseplate | rated for 1 minute<br>rated for 1 minute<br>3kVAC<br>1.5kVAC         |
| Isolation Resistance              | tested with 500VDC           |                                     | 1GΩ min.   |
| Isolation Capacitance             |                              |                                     | 1000pF max.  |
| Leakage Current                   |                              |                                     | 2250µA   |
| Insulation Grade                  | <2000m<br>>2000m up to 5000m |                                     | reinforced (based on Electric Strength Test)<br>functional isolation |

**Notes:**

Note8: For repeat Hi-Pot testing, reduce the time and/or the test voltage

Note9: Refer to local safety regulations if input over-current protection is also required. Recommended fuse: T5A slow blow type

**Specifications** (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

| ENVIRONMENTAL                       |   |                                     |  |
|-------------------------------------|---|-------------------------------------|--|
| Parameter                           | Condition   |                                     | Value  |
| Operating Temperature Range         | refer to <i>"Thermal Calculation"</i>             |                                     | -40°C to +105°C  |
| Maximum Baseplate Temperature       |   |                                     | +110°C   |
| Temperature Coefficient             |   |                                     | ±0.02%/K   |
| Thermal Impedance                   | vertical direction by natural convection (0.1m/s) | without Heat-sink<br>with Heat-sink | 6.3K/W<br>5.0K/W   |
| Operating Humidity                  |   |                                     | 5%-95% RH  |
| Thermal Shock                       |   |                                     | according to EN61373 standard                              |
| Vibration                           |   |                                     | according to EN61373 standard                              |
| Fire Protection on Railway Vehicles |   |                                     | according to EN45545 standard                              |
| MTBF                                | according to MIL-HDBK-217F standard, G.B.         | +25°C<br>+85°C                      | 880 x 10 <sup>3</sup> hours<br>150 x 10 <sup>3</sup> hours |

**Thermal Calculation**

$$R_{th} = \left[ \frac{T_{baseplate\ max} - T_{amb}}{P_{diss}} \right]$$

$$P_{diss} = \left[ \frac{P_{out\ set}}{\eta} \right] - P_{out\ set}$$

- T<sub>baseplate max.</sub> = baseplate temperature [°C]
- T<sub>amb</sub> = ambient temperature [°C]
- P<sub>out nom.</sub> = nom. output power [W]
- P<sub>out set</sub> = output power set [W]
- P<sub>diss</sub> = internal losses [W]
- R<sub>th</sub> = thermal impedance [K/W]
- η = efficiency under given operating conditions [%]


**Practical Example:**

Take the **RP40Q-11005SRUW** with 48V Input Voltage and 50% load, natural convection 0.1m/s, in vertical application. What is the maximum ambient operating temperature?

$$\begin{aligned}
 T_{baseplate\ max.} &= 110^{\circ}C \\
 P_{out\ nom.} &= 40W \\
 P_{out\ set} &= 40 \times 0.5 = 20W \\
 R_{th} &= 6.3K/W \text{ (vertical)} \\
 \eta &= 91\% \text{ (Graph)}
 \end{aligned}
 \quad
 \begin{aligned}
 P_{diss} &= \left[ \frac{20}{0.91} \right] - 20 = 1.98W \\
 6.3 &= \frac{110 - T_{amb}}{1.98}
 \end{aligned}
 \quad
 \begin{aligned}
 R_{th} &= \left[ \frac{T_{baseplate\ max} - T_{amb}}{P_{diss}} \right] \\
 T_{amb} &= \underline{97.5^{\circ}C}
 \end{aligned}$$

**Derating Graph**

(@ Chamber - tested with double layer PCB: 160x100mm 105µm Eurocard)

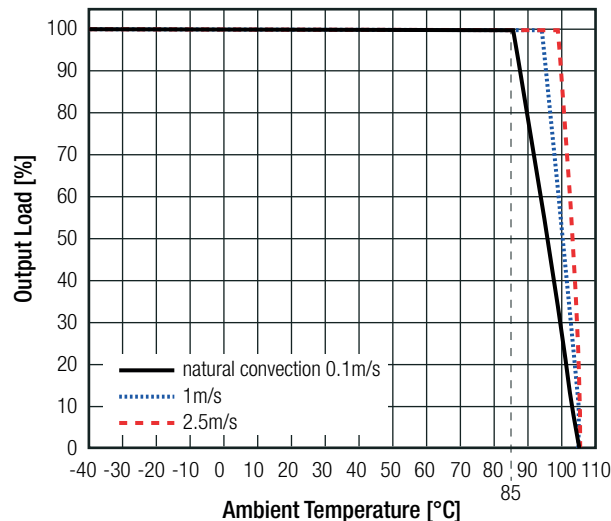

continued on next page

**Specifications** (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

Take the **RP40Q-11005SRUW-HC** with 48V Input Voltage, 50% load, natural convection 0.1m/s, in vertical application and Heat-sink.  
 What is the maximum ambient operating temperature?

$$T_{\text{baseplate max.}} = 110^{\circ}\text{C}$$

$$P_{\text{out nom.}} = 40\text{W}$$

$$P_{\text{out set}} = 40 \times 0.5 = 20\text{W}$$

$$R_{\text{th}} = 5.0\text{K/W (vertical)}$$

$$\eta = 91\% \text{ (Graph)}$$

$$P_{\text{diss}} = \left[ \frac{20}{0.91} \right] - 20 = 1.98\text{W}$$


$$R_{\text{th}} = \left[ \frac{T_{\text{baseplate max.}} - T_{\text{amb}}}{P_{\text{diss}}} \right]$$

$$5.0 = \frac{110 - T_{\text{amb}}}{1.98}$$

$$T_{\text{amb}} = \underline{100^{\circ}\text{C}}$$

**Derating Graph**

(@ Chamber - tested with double layer PCB: 160x100mm 105µm Eurocard)

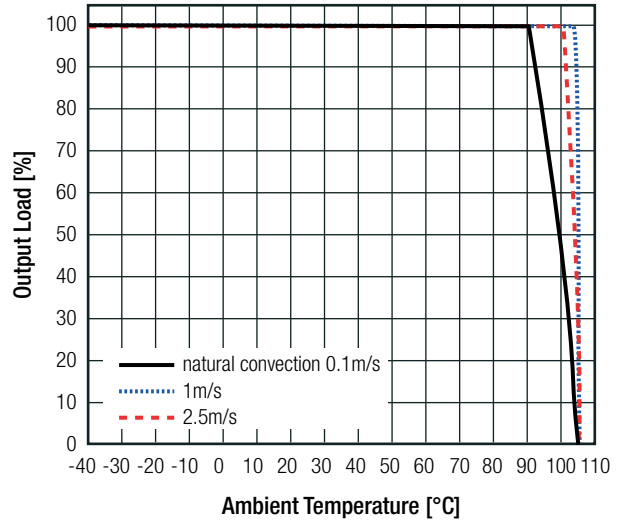

**SAFETY AND CERTIFICATIONS**

| Certificate Type (Safety)  | Report / File Number           | Standard  |
|--|--------------------------------|---|
| Audio/video, information and communication technology equipment. Safety requirements       | LVD1809046-1 + LVD1903037-1-M1 | EN62368-1:2014 + A11:2017<br>IEC62368-1:2014, 2nd Edition |
| Railway applications - Electrical equipment used on rolling stock                          | T181022L06-RL                  | EN50155:2017  |
| Environmental testing Part 2-1: Tests – Test A: Cold                                       |                                | DIN EN60068-2-1:2008-01                                   |
| Environmental testing Part 2-2: Tests – Test B: Dry heat                                   |                                | DIN EN60068-2-2:2008-05                                   |
| Environmental testing Part 2-30: Tests - Test Db: Damp heat, cyclic                        |                                | DIN EN60068-2-30:2006-06                                  |
| Railway applications – Rolling stock equipment – Shock and vibration tests                 |                                | EN61373:2010  |
| Audio/video, information and communication technology equipment-Part1: Safety requirements |                                | UL62368-1:2014<br>CAN/CSA-C22.2 No. 62368-1:2014          |
| Certificate Type (Safety)  | Report / File Number           | Standard  |
| RoHS2+   |                                | RoHS 2011/65/EU + AM2015/863                              |

| EMC Compliance (Railway)   | Condition  | Standard / Criterion                   |
|--|--|--|
| Railway applications - Electromagnetic compatibility   |  | EN50121-3-2:2016                       |
| Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement |  | EN55032:2010                           |
| ESD Electrostatic discharge immunity test  | Air: ±2, 4, 8kV,<br>Contact: ±2, 4, 6kV  | EN61000-4-2:2009, Criteria A           |
| Radiated, radio-frequency, electromagnetic field immunity test   | 20V/m (80-1000MHz)<br>10V/m (1400-2000MHz)<br>5V/m (2000-2700MHz)<br>3V/m (5100-6000MHz) | EN61000-4-3:2006 + A2:2010, Criteria A |
| Fast Transient and Burst Immunity  | DC Power Port: ±2kV  | EN61000-4-4:2012, Criteria A           |
| Surge Immunity   | DC Power Port: ±2kV  | EN61000-4-5:2014, Criteria A           |
| Immunity to conducted disturbances, induced by radio-frequency fields                                    | DC Power Port: 10V   | EN61000-4-6:2014, Criteria A           |
| Power Magnetic Field Immunity  | 50Hz, 100A/m, 1000A/m  | EN61000-4-8:2009, Criteria A           |
| Electromagnetic compatibility of multimedia equipment - Emission requirements                            | with external filter<br>( see filter suggestion below)                                   | EN55032:2015 + AC:2016-07, Class A     |

continued on next page




### Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

| EMC Compliance (Multimedia)   | Condition   | Standard / Criterion                    |
|---|---|---|
| Information technology equipment - Immunity characteristics - Limits and methods of measurement |   | EN55024:2010 + A1:2015                  |
| ESD Electrostatic discharge immunity test   | Air: ±2, 4, 8kV,<br>Contact: ±2, 4, 6kV   | IEC61000-4-2:2008, Criteria A           |
| Radiated, radio-frequency, electromagnetic field immunity test                                  | 3V/m (80-1000MHz)<br>20V/m (80-1000MHz)<br>10V/m (1400-2000MHz)<br>5V/m (2000-2700MHz)<br>3V/m (5100-6000MHz) | IEC61000-4-3:2006 + A2:2010, Criteria A |
| Fast Transient and Burst Immunity   | DC Power Port: ±0.5, 2kV  | IEC61000-4-4:2012, Criteria A           |
| Surge Immunity  | DC Power Port: L-N ±0.5, 1kV  | IEC61000-4-5:2014, Criteria A           |
| Immunity to conducted disturbances, induced by radio-frequency fields                           | DC Power Port: 3V, 10V  | IEC61000-4-6:2013, Criteria A           |
| Power Magnetic Field Immunity   | 50, 60Hz, 1, 100, 1000A/m   | IEC61000-4-8:2009, Criteria A           |

#### Notes:

Note10: An external input filter capacitor is required if the module has to meet EN61000-4-4 and EN61000-4-5  
Recom suggests: 2 pcs. 150µF/200V connected in parallel


#### EMC Filtering according to EN55032 Class A

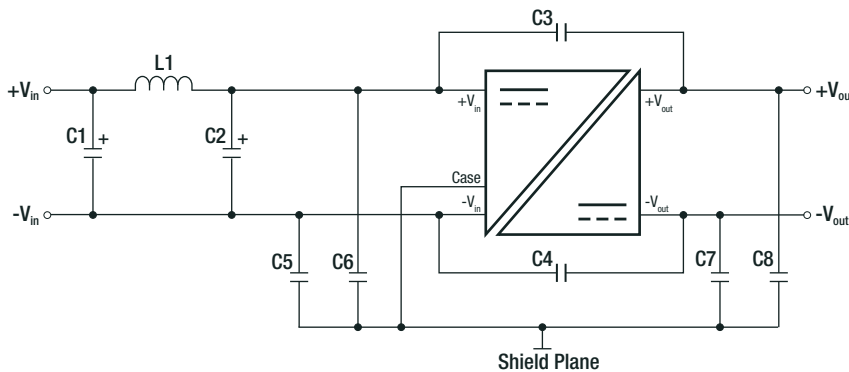

#### Component List Class A

| C1         | L1    | C2         | C3, C4         | C5, C6, C7, C8              |
|------------|-------|------------|----------------|-----------------------------|
| 47µF, 200V | 8.2µH | 47µF, 200V | 1000pF, 400VAC | 1000pF, 250VAC<br>1808 MLCC |

#### EMC Filtering according to EN55032 Class B

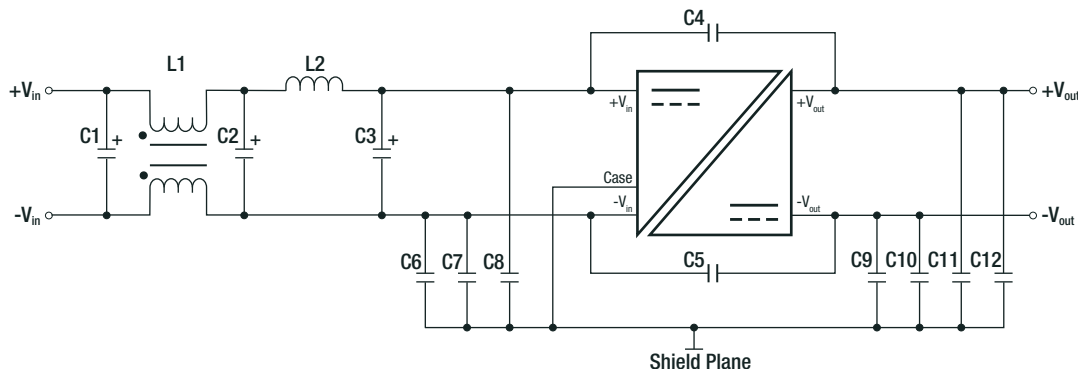

#### Component List Class B





| MODEL           | C1         | L1           | C2         | L2    | C3         | C4, C5         | C6, C7, C8, C9, C10, C11, C12 |
|-----------------|------------|--------------|------------|-------|------------|----------------|-------------------------------|
| RP40Q-110xxSRUW | 47µF, 200V | 500µH<br>CMC | 47µF, 200V | 8.2µH | 47µF, 200V | 1000pF, 400VAC | 1000pF, 250VAC<br>1808 MLCC   |

**Specifications** (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

### DIMENSIONS and PHYSICAL CHARACTERISTICS

| Parameter          | Type              | Value                         |
|--------------------|-------------------|-------------------------------|
| Material           | baseplate         | aluminum                      |
|                    | case              | plastic, (UL94V-0)            |
|                    | potting           | low smoke silicone, (UL94V-0) |
|                    | PCB               | FR4, (UL94V-1)                |
| Dimensions (LxWxH) | without Heat-sink | 57.9 x 36.8 x 12.7mm          |
|                    | with Heat-sink    | 57.9 x 36.8 x 25.4mm          |
| Weight             | without Heat-sink | 64.0g typ.                    |
|                    | with Heat-sink    | 88.0g typ.                    |



### Dimension Drawing (mm)

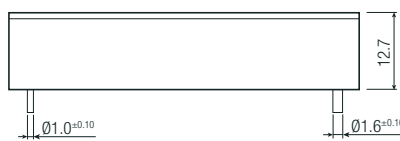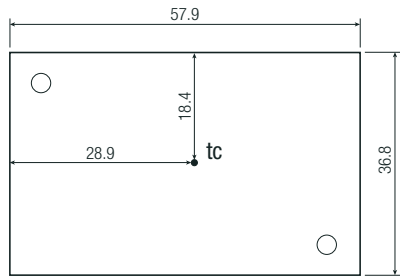




### Pin Informations

| Pin # | Single |
|-------|--------|
| 1     | +Vin   |
| 2     | CTRL   |
| 3     | -Vin   |
| 4     | -Vout  |
| 5     | -Sense |
| 6     | Trim   |
| 7     | +Sense |
| 8     | +Vout  |

recommended tightening torque: 0.34Nm  
 FC= Fixing Centers for Heat-sink  
 xx.x ± 0.5mm  
 xx.xx ± 0.25mm

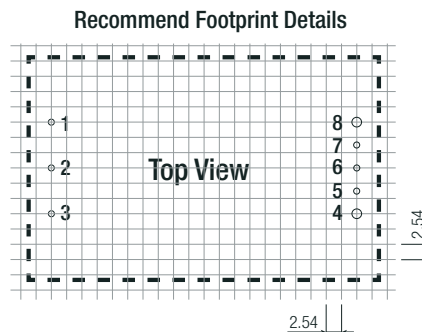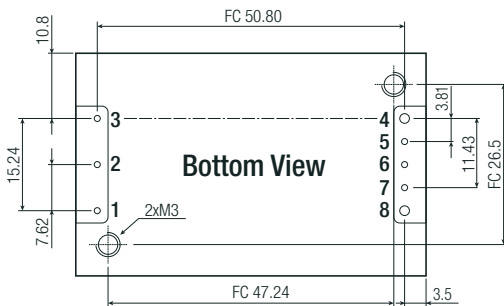


### Dimension Drawing Heat-sink (mm)

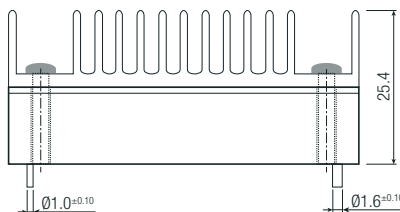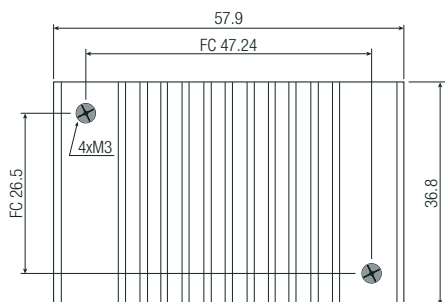

**Specifications** (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

### BLOCK DIAGRAM

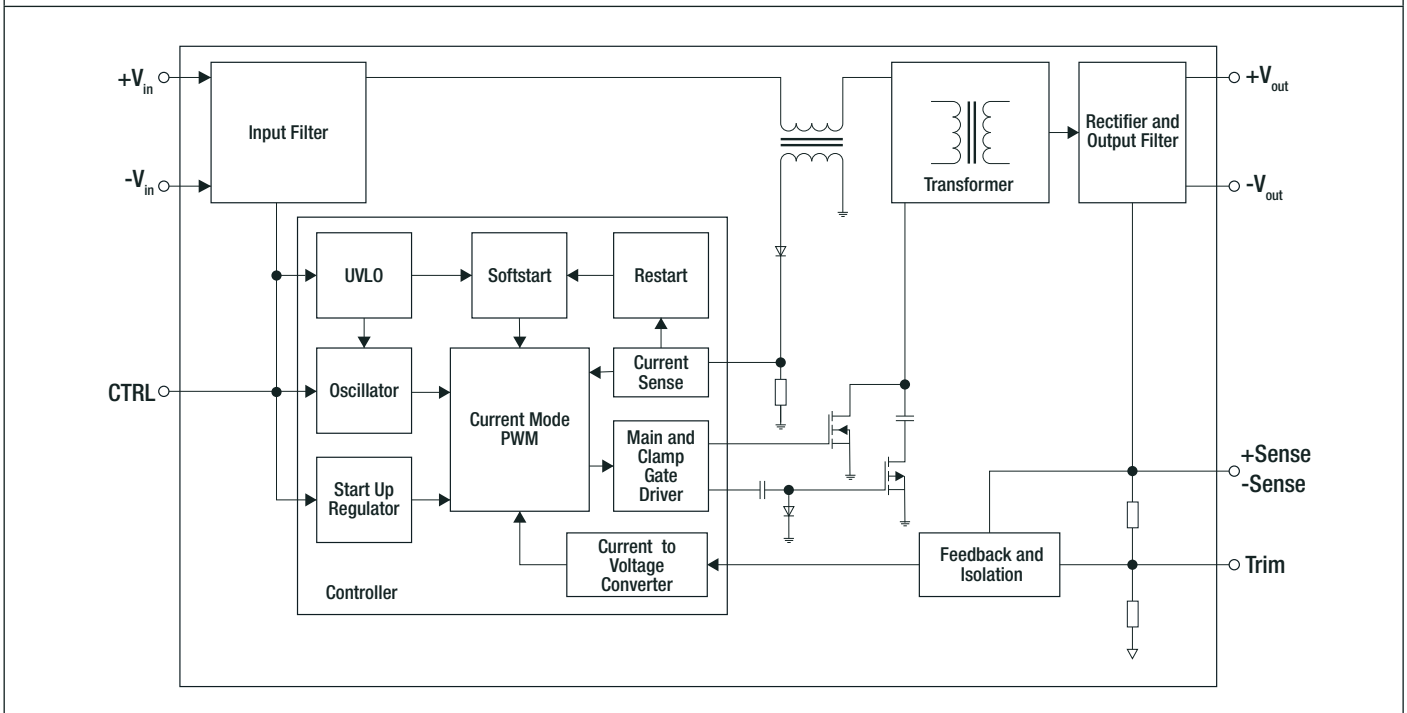

### PACKAGING INFORMATION

| Parameter                 | Type |                                     | Value  |
|---------------------------|------|-------------------------------------|--|
| Packaging Dimension       | tray | without Heat-sink<br>with Heat-sink | 157.0 x 88.0 x 23.0mm<br>157.0 x 88.0 x 35.0mm |
| Packaging Quantity        |      |                                     | 2pcs   |
| Storage Temperature Range |      |                                     | -55°C to +125°C                                |
| Storage Humidity          |      | non-condensing                      | 5% - 95% RH                                    |

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## RECOM:

[RP40Q-11012SRUW/N-HC](#) [RP40Q-11005SRUW/N-HC](#) [RP40Q-11015SRUW/N-HC](#) [RP40Q-11005SRUW/P](#)  
[RP40Q-11024SRUW/N](#) [RP40Q-11048SRUW/N](#) [RP40Q-11012SRUW/P-HC](#) [RP40Q-11015SRUW/P](#) [RP40Q-](#)  
[11048SRUW/P](#) [RP40Q-11024SRUW/P](#) [RP40Q-11005SRUW/P-HC](#) [RP40Q-11048SRUW/N-HC](#) [RP40Q-](#)  
[11024SRUW/N-HC](#) [RP40Q-11012SRUW/P](#) [RP40Q-11005SRUW/N](#) [RP40Q-11015SRUW/N](#) [RP40Q-11024SRUW/P-](#)  
[HC](#) [RP40Q-11012SRUW/N](#) [RP40Q-11015SRUW/P-HC](#) [RP40Q-11048SRUW/P-HC](#)