

FEATURES

Single-axis (**ADXL195**) and dual-axis (**ADXL295**) configurations
 $\pm 120\text{ g}$ baseband acceleration channel
 12-bit resolution at 62.5 mg/LSB
 512 kHz data interpolation rate
 40 g_{AVG} high frequency signal processing channel
 10-bit resolution at 83.3 mg avg/LSB
 128 kHz data interpolation rate
 Sensor frequency response down to dc
 On-demand electromechanical self-test
 On-demand HF signal injection self-test
 Fully differential circuitry for high resistance to EMI/RFI
 Independent x- and y-axis sense structures for robust
 FMEA performance
 Independent x- and y-axis arming thresholds
 Low noise
 1 LSB rms (12-bit baseband acceleration channel)
 2 LSB rms (10-bit high frequency acceleration channel)
 Qualified for automotive applications
 Temperature range: -40°C to $+105^{\circ}\text{C}$
 3.3 V and 5 V operation

APPLICATIONS

Enhanced crash sensing
 Shock detection

GENERAL DESCRIPTION

The **ADXL195/ADXL295** are dual spectrum accelerometers that measure baseband acceleration in up to two axes (XL-X and XL-Y), as well as high frequency (HF) acceleration energy. Identical, independent X and Y sense structures are implemented to achieve the best possible fail-safe performance.

The XL-X and XL-Y channels output baseband acceleration information with a nominal full-scale range of $\pm 120\text{ g}$ and a bandwidth of 408 Hz. The acceleration data is provided as a 12-bit, two's complement word with a resolution of 62.5 mg/LSB.

HF acceleration within the frequency band of 15.5 kHz to 23 kHz is rectified and filtered to generate an average g (g_{AVG}) energy measurement. The HF channel has a nominal full-scale range of 40 g_{AVG} and a bandwidth of 393 Hz. When combined with the XL-X and XL-Y information, HF acceleration information allows for enhanced vehicle impact detection and discrimination.

The **ADXL195/ADXL295** are available in a 16-lead, narrow-body SOIC package with an exposed pad. The **ADXL195/ADXL295** can operate at 3.3 V and 5 V and are specified for operation from -40°C to $+105^{\circ}\text{C}$.

FUNCTIONAL BLOCK DIAGRAM

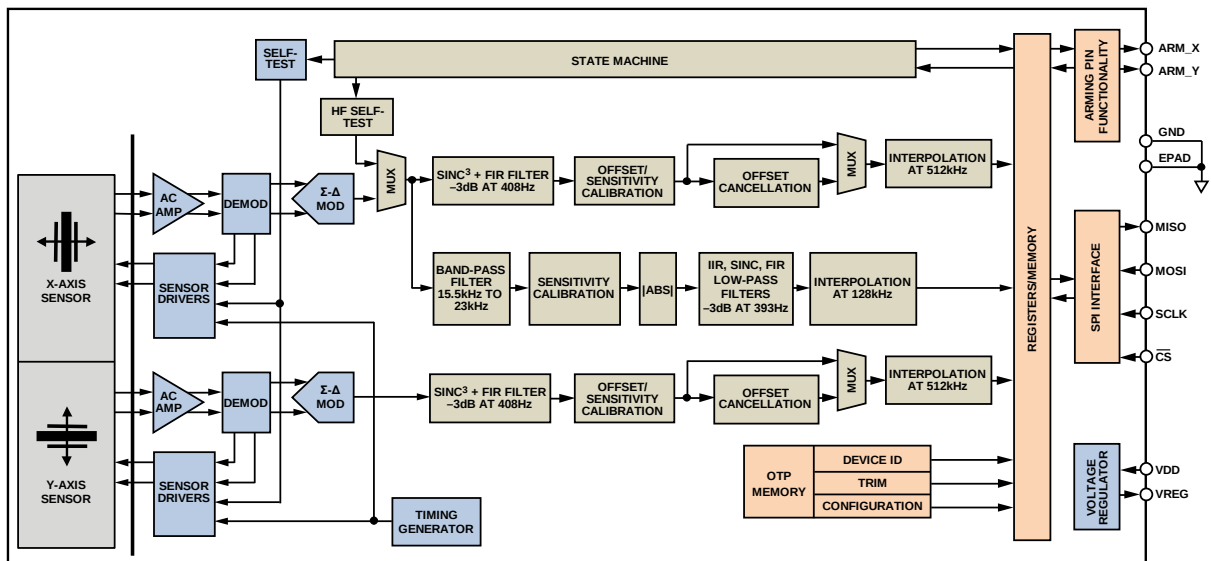


Figure 1.

For more information about the **ADXL195/ADXL295**, please contact the Analog Devices, Inc., [Customer Interaction Center](http://www.analog.com/en/content/technical_support_page/fca.html) at http://www.analog.com/en/content/technical_support_page/fca.html to connect with a technical support specialist.

Rev. SpA

Document Feedback

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.
 Tel: 781.329.4700 ©2012–2013 Analog Devices, Inc. All rights reserved.
 Technical Support www.analog.com

NOTES

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Analog Devices Inc.:](#)

[ADXL295WBRDZ-RL](#)