

DESCRIPTION

Demonstration circuit 1216 is a low jitter, low noise clock source for demonstrating high speed ADCs. Each assembly includes a LDO regulator and a high precision VCXO.

Functionally, this circuit uses a linear regulator to provide a clean 5V to a VCXO at a fixed frequency. This VCXO is capable of providing a signal which is clean enough to produce data sheet performance from high speed ADCs. It is designed to have 50 Ω output impedance, but has provision for other termination resistors if needed.

This circuit also is a model for the clock source of ADCs. It shows how to properly implement a VCXO correctly to drive the clock of an ADC. It can be used with a DC1075 to produce lower clock frequencies.

Design files for this circuit board are available at <http://www.linear.com/demo>

LT, LT, LTC, LTM, Linear Technology and the Linear logo are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

Table 1. DC1216A Variants


DC1216A VARIANTS	VCXO PART NUMBER	OUTPUT FREQUENCY
DC1216A-A	Crystek 601964	100MHz
DC1216A-B	Crystek 602017	122.88MHz
DC1216A-C	Crystek 602019	80MHz
DC1216A-D	Crystek 601964	100MHz

Note: DC1216A-A, DC1216A-B and DC1216A-C are optimized to be used with the data converter demo boards. The DC1216A-D is optimized to drive the synthesizer demo boards.

QUICK START PROCEDURE

SETUP

The DC1216 requires an external voltage of 5V. This voltage can be as high as 9V. The SMA connector should be connected to the ADC directly, or through a clock divider circuit such as the DC1075A. No external filter is required.

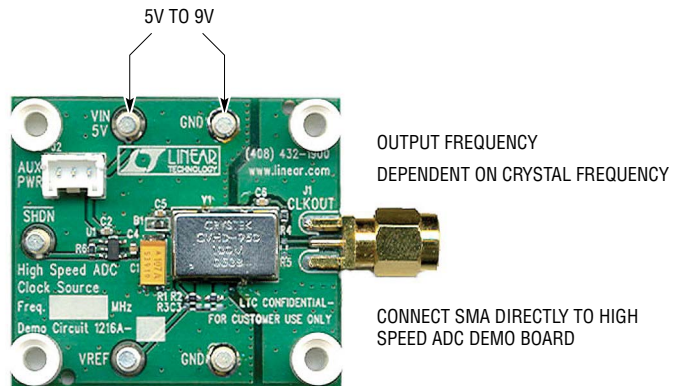

PARTS LIST

DEMO BOARD 1216A

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
1	1	B1	BEAD, 47Ω IMPEDANCE 0603	MURATA, BLM18BB470SN1D
2	1	C1	CAP, TANT, 100μF, 10V, 20% 6032	AVX, TPSC107M010R0200
3	1	C2	CAP, X5R, 1μF, 10V, 10% 0603	AVX, 0603ZD105KAT2A
4	1	C4	CAP, X7R, 0.1μF, 25V, 10% 0603	AVX, 06033C104KAT2A
5	2	C6, C5	CAP, X7R, 0.01μF, 50V, 10% 0603	AVX, 06035C103KAT2A
6	2	E3, E5	TESTPOINT, TURRET, 0.094"	MILL-MAX, 2501-2-00-80-00-00-07-0
7	0	E1, E2, E4 (OPT)	TESTPOINT, TURRET, 0.094"	
8	1	J1	CON, SMA-EDGE, 50Ω, PLUG	AMPHENOL, 901-9895-RFX
9	1	J2	AUX POWER CONNECTOR, B03B-PASK	JST, B03B-PASK (LF)(SN)
10	2	R1, R2	RES, CHIP, 4.99k, 1/10W, 1% 0603	VISHAY, CRCW06034K99FKEA
11	0	R3, R5 (OPT)	RES, 0603	
12	1	R6	RES, CHIP, 1k, 1/10W, 5% 0603	VISHAY, CRCW06031K00JNEA
13	1	U1	IC LT1761ES5-3.3, SOT23-S5	LINEAR TECHNOLOGY, LT1761ES5-3.3#PBF
14	4	(STAND-OFF)	STAND-OFF, NYLON 0.25"	KEYSTONE, 8831(SNAP ON)
15	1		STENCIL	STENCIL 1216A

DEMO MANUAL DC1216

PARTS LIST

DEMO BOARD 1216-A

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
1	1	DC1216A	DC1216A GENERAL BOM	GENERAL BOM
2	1	Y1	CRYSTAL 601964	CRYSTEK, 601964
3	1	R4	RES, CHIP, 5.1Ω, 1/10W, 5% 0603	VISHAY, CRCW06035R10JNEA
4	0	C3	OPT	
5	1		FAB, PRINTED CIRCUIT BOARD	DEMO CIRCUIT 1216A

DEMO BOARD 1216-B

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
1	1	DC1216A	DC1216A GENERAL BOM	GENERAL BOM
2	1	Y1	CRYSTAL 602017	CRYSTEK, 602017
3	1	R4	RES, CHIP, 5.1Ω, 1/10W, 5% 0603	VISHAY, CRCW06035R10JNEA
4	0	C3	OPT	
5	1		FAB, PRINTED CIRCUIT BOARD	DEMO CIRCUIT 1216A

DEMO BOARD 1216-C

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
1	1	DC1216A	DC1216A GENERAL BOM	GENERAL BOM
2	1	Y1	CRYSTAL, 602019	CRYSTEK, 602019
3	1	R4	RES, CHIP, 5.1Ω, 1/10W, 5% 0603	VISHAY, CRCW06035R10JNEA
4	0	C3	OPT	
5	1		FAB, PRINTED CIRCUIT BOARD	DEMO CIRCUIT 1216A

DEMO BOARD 1216-D

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
1	1	DC1216A	DC1216A GENERAL BOM	GENERAL BOM
2	1	C3	CAP, X5R, 4.7μF, 10V, 10% 0603	TDK, C1608X5R1A475K
3	1	R4	RES, CHIP, 100Ω, 1/10W, 5% 0603	VISHAY, CRCW0603100RJNEA
4	1	Y1	CRYSTAL, 601964	CRYSTEK, 601964
5	1		FAB, PRINTED CIRCUIT BOARD	DEMO CIRCUIT 1216A

SCHEMATIC DIAGRAM

REVISION HISTORY			
ECO	REV	DESCRIPTION	DATE
—	A1	ADD "D"-VERSION	10-03-12
		APPROVED MICHEL A.	

* VERSION TABLE			
ASSEMBLY TYPE	Y1	CLKOUT Freq. (MHz)	C3
DC1216A-A	Crystek, 601964	100MHz	OPT
DC1216A-B	Crystek, 602017	122.88MHz	OPT
DC1216A-C	Crystek, 602019	80MHz	OPT
DC1216A-D	Crystek, 601964	100MHz, PLL Reference	4.7µF

CONTRACT NO.		APPROVALS		DATE
CUSTOMER NOTICE LINEAR TECHNOLOGY HAS MADE A BEST EFFORT TO DESIGN A CIRCUIT THAT MEETS CUSTOMER-SUPPLIED SPECIFICATIONS; HOWEVER, IT REMAINS THE CUSTOMER'S RESPONSIBILITY TO VERIFY PROPER AND RELIABLE OPERATION IN THE ACTUAL APPLICATION. COMPONENT SUBSTITUTION AND PRINTED CIRCUIT BOARD LAYOUT MAY SIGNIFICANTLY AFFECT CIRCUIT PERFORMANCE OR RELIABILITY. CONTACT LINEAR TECHNOLOGY APPLICATIONS ENGINEERING FOR ASSISTANCE.		DRAWN	June Wu	1/17/07
		ENGINEER	Clarence Mayott	1/17/07
		CHECKED		
		APPROVED		
THIS CIRCUIT IS PROPRIETARY TO LINEAR TECHNOLOGY AND SUPPLIED FOR USE WITH LINEAR TECHNOLOGY PARTS.				

LINEAR TECHNOLOGY	1680 McCarthy Blvd. Milpitas, CA 95035 Phone: (408)943-8000 Fax: (408)943-0877	
High Speed ADC Clock Source		
TITLE	DWG NO	REV
SIZE	CAGE CODE	A1
SCALE:	FILENAME:	OF 1
SHEET	1	1



Information furnished by Linear Technology Corporation is believed to be accurate and reliable. However, no responsibility is assumed for its use. Linear Technology Corporation makes no representation that the interconnection of its circuits as described herein will not infringe on existing patent rights.

DEMO MANUAL DC1216

DEMONSTRATION BOARD IMPORTANT NOTICE

Linear Technology Corporation (LTC) provides the enclosed product(s) under the following **AS IS** conditions:

This demonstration board (DEMO BOARD) kit being sold or provided by Linear Technology is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not provided by LTC for commercial use. As such, the DEMO BOARD herein may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may or may not meet the technical requirements of the directive, or other regulations.

If this evaluation kit does not meet the specifications recited in the DEMO BOARD manual the kit may be returned within 30 days from the date of delivery for a full refund. **THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY THE SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THIS INDEMNITY, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.**

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases LTC from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.).

No License is granted under any patent right or other intellectual property whatsoever. **LTC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind.**

LTC currently services a variety of customers for products around the world, and therefore this transaction **is not exclusive**.

Please read the DEMO BOARD manual prior to handling the product. Persons handling this product must have electronics training and observe good laboratory practice standards. **Common sense is encouraged.**

This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a LTC application engineer.

Mailing Address:

Linear Technology
1630 McCarthy Blvd.
Milpitas, CA 95035

Copyright © 2004, Linear Technology Corporation

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Analog Devices Inc.:](#)

[DC1216A-A](#) [DC1216A-B](#) [DC1216A-C](#)