

General Specifications

Electrical Capacity (Resistive Load)

For MRA:	250mA @ 125V AC
For MRF or MRK:	0.4VA maximum @ 28V AC/DC maximum (Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V) Note: Find additional explanation of operating range in Supplement section.

Other Ratings

Contact Resistance:	10 milliohms maximum for MRA; 50 milliohms maximum for MRF & MRK
Insulation Resistance:	100 megohms minimum @ 500V DC
Dielectric Strength:	1,000V AC minimum for 1 minute minimum for MRA 500V AC minimum for 1 minute minimum for MRF & MRK
Mechanical Life:	30,000 operations minimum
Electrical Life:	10,000 operations minimum
Range of Operating Torque:	24.5 ~ 73.5mNm for MRA; 4.90 ~ 24.5mNm for MRF & MRK
Contact Timing:	Nonshorting (break-before-make) MRA – self-cleaning, sliding contact; MRF & MRK – self-cleaning, rotary contactor disk
Indexing:	30°

Materials & Finishes

Shaft:	Brass with nickel plating
Stopper Plate:	Steel with zinc plating for MRA & MRK; polyamide cover with stopper for MRF
Mount:	Zinc alloy with zinc plating
Movable Contacts:	Phosphor Bronze with silver plating for MRA; phosphor bronze with gold plating for MRF & MRK
End Contacts & Terminals:	Brass with silver plating for MRA; phosphor bronze with gold plating for MRF & MRK
Common Contacts & Terminals:	Brass with silver plating for MRA; phosphor bronze with gold plating for MRF & MRK
Case:	Diallyl phthalate for MRA; fiberglass reinforced polyamide for MRF & MRK

Environmental Data

Operating Temperature Range:	-10°C through +70°C (+14°F through +158°F)
Humidity:	90 ~ 95% humidity for 96 hours @ 40°C (104°F)
Vibration:	10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours
Shock:	50G (490m/s ²) acceleration (tested in 3 right angled directions, with 3 shocks in each direction)
Sealing:	MRK model meets IP67 of IEC60529 standards

Installation

Mounting Torque:	.686Nm (6.08 lb•in)
Cap Installation Force:	19.6 ~ 29.4N (4.41 ~ 6.61 lbf) for MRA & MRK

Processing

Soldering Time & Temperature:	Wave Soldering for MRA: See Profile A in Supplement section. Wave Soldering for MRF & MRK: See Profile B in Supplement section. Manual Soldering for MRA: See Profile A in Supplement section. Manual Soldering for MRF & MRK: See Profile B in Supplement section.
Cleaning:	Automated cleaning recommended. Stopper plate, as well as washers for MRA & MRK, must be in place to maintain automated cleaning. See Cleaning specifications in Supplement section.

Standards & Certifications

MRA, MRF, & MRK models have not been tested for UL recognition or CSA certification. These switches are designed for use in a low-voltage, low-current, logic-level circuit. When used as intended in a logic-level circuit, the results do not produce hazardous energy.

Distinctive Characteristics

Low profile body of MRF model accommodates space limitations required for PCB mounting. For the MRA and MRK bushing mount models, the range of behind panel body depths is .323" to .669" (8.2mm to 17.0mm).

Positive detent mechanism for distinct feel and audible feedback.

Metal bushing and housing construction increases durability.


Adjustable stopper plate allows 2–12 position settings.

High contact reliability achieved by the self-cleaning contact mechanism.


Break-before-make contact timing with sliding contacts in MRA and rotary contactor disk in MRF and MRK models.

Interior housing seal and molded-in PC terminals, plus shaft rubber o-ring on MRA and MRK and polyamide cover on MRF model, allow cleaning after automated soldering.

MRK model meets IP67 of IEC60529 specifications (similar to NEMA 4 & 13).

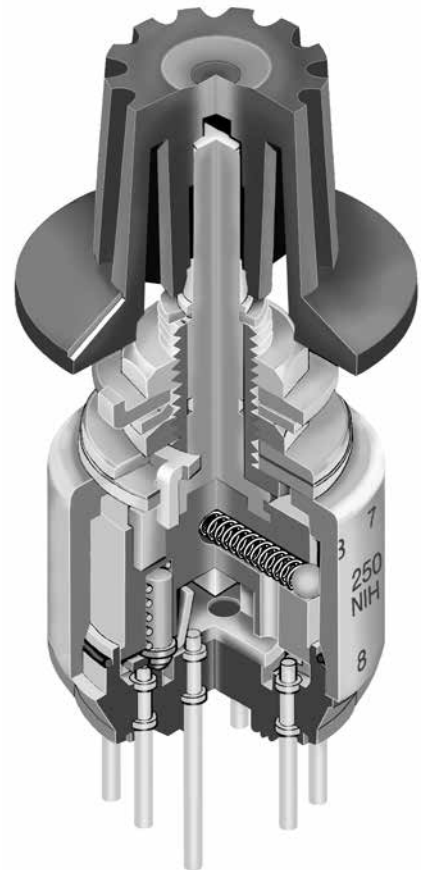

Actual Size

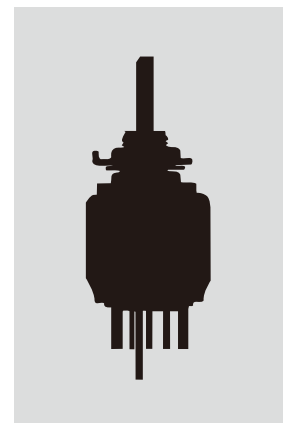


TYPICAL SWITCH ORDERING EXAMPLE

MR	A	206	A	
Actuators & Terminals	Poles & Circuits	Knobs	Colors	
A Shaft Actuated with PC Terminals	112 SP with 2-12 Positions	A Plain Black	For Plain Knob	
F Low Profile Screwdriver Actuated with PC Terminals	206 DP with 2-6 Positions	B Small Color Tipped	No Code Black	
K Low Profile Shaft Actuated with PC Terminals	403 4P with 2-3 Positions	C Large Color Tipped	For Color Tipped	
			A Black	
			B White	
			C Red	
			E Yellow	
			F Green	
			G Blue	
			H Gray	


DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

MRA206-A

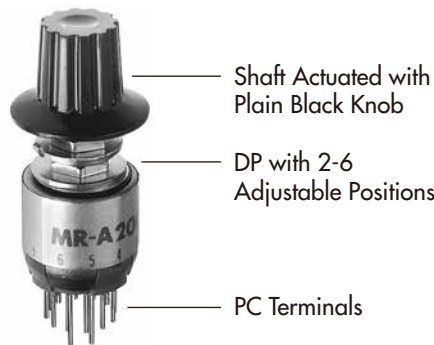


ACTUATORS & TERMINALS


A Shaft Actuated with PC Terminals

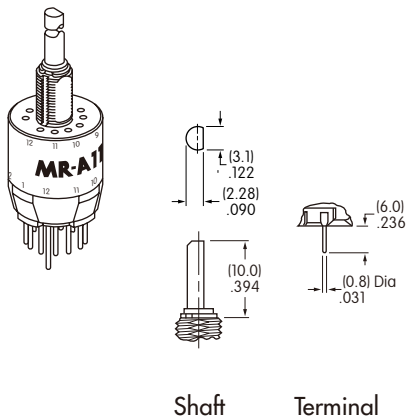

F Low Profile Screwdriver Actuated with PC Terminals

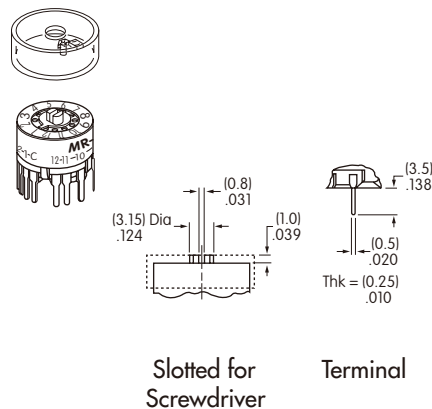




K Low Profile Shaft Actuated with PC Terminals

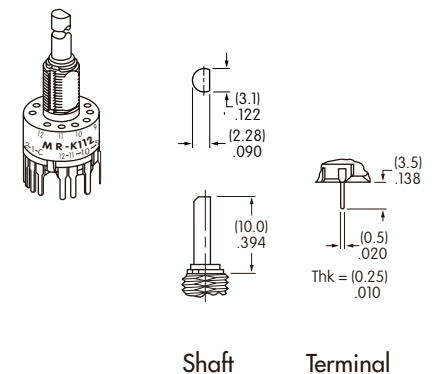

Toggle
Rockers
Pushbuttons
Illuminated PB
Programmable
Keylocks
Rotaries
Slides
Tactiles
Tilt
Touch
Indicators
Accessories
Supplement

Toggles
 Rockers
 Pushbuttons
 Illuminated PB
 Programmable
 Keylocks
 Rotaries
 Slides
 Tactiles
 Tilt
 Touch
 Indicators
 Accessories
 Supplement

POLES & CIRCUITS

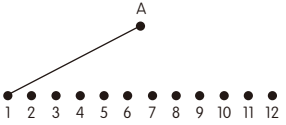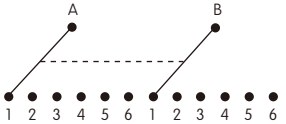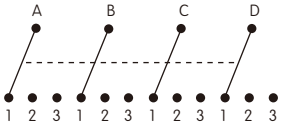
Pole	Model	Number of Positions	Stopper Settings	Number of Terminals	Schematics
SP	MRA112	2-12	2, 3, 4, . . . 12	1 COM, 12 LOAD	
	MRF112	2-12	2, 3, 4, . . . 12	1 COM, 12 LOAD	
	MRK112	2-12	2, 3, 4, . . . 12	1 COM, 12 LOAD	
DP	MRA206	2-6	2, 3, 4, 5, 6	2 COM, 12 LOAD	
	MRF206	2-6	2, 3, 4, 5, 6	2 COM, 12 LOAD	
	MRK206	2-6	2, 3, 4, 5, 6	2 COM, 12 LOAD	
4P	MRA403	2-3	2, 3	4 COM, 12 LOAD	
	MRF403	2-3	2, 3	4 COM, 12 LOAD	
	MRK403	2-3	2, 3	4 COM, 12 LOAD	

POSITION SETTING FOR MRA, MRF, & MRK MODELS

Each switch is supplied with the stopper set for the maximum number of positions allowed for that model. Prior to installation, the desired position setting should be made. Contact factory for continuous rotation.

MRF Models


1. Remove the protective cover from the switch body.
2. Turn the shaft counterclockwise to the extreme left by using a screwdriver.
3. Inside the cover is a magnifying lens which would be positioned over the number which is to be the maximum position used; when the cover is then snapped into the switch, the projection beside the lens fits into the correct hole for setting the stop.




MRK & MRA Models

1. Using the actuator knob, turn the shaft counterclockwise to the extreme left. If the shaft is not turned counterclockwise to the extreme left, proper setting cannot be achieved. At this extreme position, the white line on the knob points to the number 1 position shown on the side of the switch.
2. Remove the knob from the shaft and loosen the nut far enough to allow raising the stopper plate, plus washer(s), for resetting to the desired position.
3. Note the position numbers on the side of the switch; these correspond to the terminal numbers and stopper holes. Insert the stopper in the hole numbered for the maximum desired number of stop settings. Satisfactory switch functioning cannot be assured if the stopper plate is not properly positioned.
4. Tighten the nut (beveled side up) firmly against the stopper plate.

Standard Mounting Hardware Packaged Loose with Each Switch:


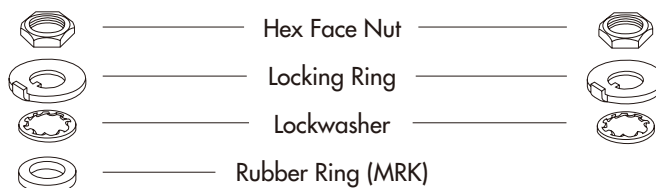


Factory Assembled:

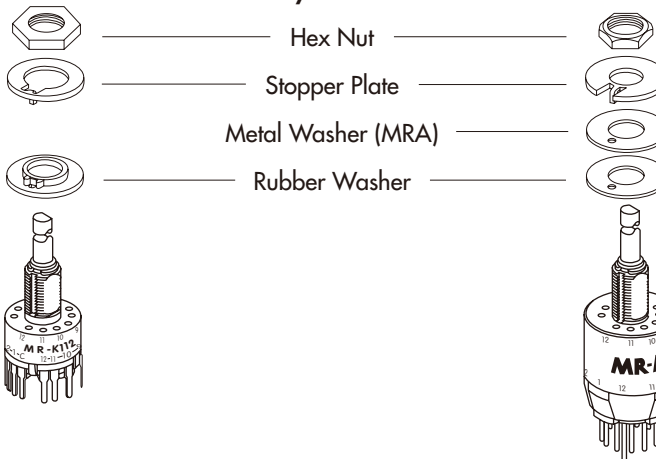


TYPICAL SWITCH DIMENSIONS


MRA • PC Terminals

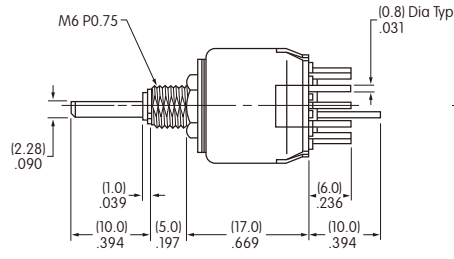


1 Pole



2 Pole





4 Pole




MRA112


MRF • PC Terminals




1 Pole



2 Pole





4 Pole




MRF403


MRK • PC Terminals

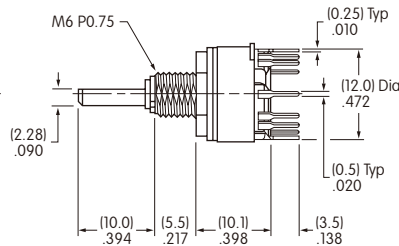


1 Pole



2 Pole



4 Pole




MRK112


MRK devices are designed to be panel mounted. Installation without panel mounting will affect reliability.

FOOTPRINTS


Single Pole MRA112




Double Pole MRA206




Four Pole MRA403




Single Pole MRF112 MRK112



Double Pole MRF206 MRK206



Four Pole MRF403 MRK403



Toggle
Rockers
Pushbuttons
Illuminated PB
Programmable
Keylocks
Rotaries
Slides
Tactiles
Tilt
Touch
Indicators
Accessories
Supplement




KNOBS

A AT433 Plain Black

Material:
Polyacetal


Color:
Black only



B AT4103 Small Color Tipped

Base Material:
Polyester
Base Color:
Black


Polyamide Tip
Colors:
A, B, C, E, F, G, H



C AT4104 Large Color Tipped

Base Material:
Polyester
Base Color:
Black

Polyamide Tip
Colors:
A, B, C, E, F, G, H




Color Codes: **A** Black **B** White **C** Red **E** Yellow **F** Green **G** Blue **H** Gray

PANEL CUTOUTS & MAXIMUM EFFECTIVE PANEL THICKNESS


MRA & MRK

Nonsealed Panel

Without
Keyway




With
Keyway



MRK

Sealed Panel



With Standard Hardware on Nonsealed Panel:
MRA .067" (1.7mm) MRK .087" (2.2mm)


Without Locking Ring on Nonsealed Panel:
MRA .098" (2.5mm) MRK .118" (3.0mm)

With AT513M & AT535 only on Sealed Panel:
MRK .106" (2.7mm)

STANDARD MOUNTING HARDWARE


AT513M Metric Hexagon Nut

Material:
Brass, nickel plating
1 for MRA; 1 for MRK




AT545 Locking Ring

Material:
Steel, chromate over zinc plating
1 for MRA; 1 for MRK




AT509 Lockwasher

Material:
Steel, chromate over zinc plating
1 for MRA; 1 for MRK



AT535 Rubber Ring




Material:
Nitrile butadiene rubber
1 for MRK



OPTIONAL SUPPORT BRACKET

AT543 Support Bracket for MRK

Material:
Steel with tin plating



A support bracket is needed when the MRK is mounted only to a PC board and does not have the bushing through a panel.

General Specifications

Electrical Capacity (Resistive Load)

- For MRX:** 2A @ 125V AC or 1A @ 30V DC
- For MRY:** For MRY106G: 0.4VA maximum @ 28V AC/DC maximum
(Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V)
Note: See Supplement Index to find explanation of operating range.
For all other MRY models: 3A @ 125V AC or 2A @ 30V DC
- For MRT:** For MRT22: 10A @ 125V AC or 4A @ 30V DC
For MRT23: 5A @ 125V AC or 3A @ 30V DC

Other Ratings

- Contact Resistance:** 10 milliohms maximum for MRX, MRY, & MRT; 20 milliohms maximum for MRY106G
- Insulation Resistance:** 100 megohms minimum @ 500V DC for MRX & MRY
200 megohms minimum @ 500V DC for MRT
- Dielectric Strength:** 1,000V AC minimum for 1 minute minimum
- Mechanical Life:** 15,000 operations minimum
- Electrical Life:** 7,500 operations minimum
- Range of Operating Torque:** 0.03 ~ 0.15Nm for MRX; 0.02 ~ 0.10Nm for MRY; 0.02 ~ 0.05Nm for MRT
- Contact Timing:** Nonshorting (break-before-make)
MRX: Self-cleaning, sliding contact; MRY: Rotary contactor dish; MRT: Butt contacts
- Indexing:** 45° for MRX; 60° for MRY; 120° for MRT22; 60° for MRT23

Materials & Finishes

- Shaft:** Brass with nickel plating
- Stopper Plate:** Steel with zinc plating for MRX & MRY
- Bushing/Housing:** Brass with nickel plating
- Movable Contacts:** Silver alloy for MRX & MRT; copper with silver plating for MRY106;
copper with gold plating for MRY106G
- End Contacts & Terminals:** Silver alloy & copper with silver plating for MRX & MRT; silver alloy plus brass with silver plating for MRY106; silver alloy with gold plating for MRY106G
- Common Contacts & Terminals:** Copper with silver plating for MRX, MRY106 & MRT22; brass with gold plating for MRY106G;
brass with silver plating for MRT23
- Base:** Phenolic resin

Environmental Data

- Operating Temperature Range:** -10°C through +70°C (+14°F through +158°F)
- Humidity:** 90 ~ 95% humidity for 96 hours @ 40°C (104°F)
- Vibration:** 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours
- Shock:** 50G (490m/s²) acceleration (tested in 3 right angled directions, with 3 shocks in each direction)

Installation

- Mounting Torque:** .686Nm (6.08 lb•in)
- Cap Installation Force:** 19.6 ~ 29.4N (4.41 ~ 6.61 lbf)
- Soldering Time & Temperature:** Manual Soldering: See Profile A in Supplement section.

Standards & Certifications

- UL:** File No. E44145 - Recognized only when ordered with marking on switch.
Add "/U" or "/CUL" before dash in part number to order UL recognized switch.
MRT22 models recognized at 10A @ 125V AC; MRT23 models recognized at 5A @ 125V AC

Distinctive Characteristics

Positive detent mechanism for distinct feel and audible feedback.

Metal bushing and housing construction increases durability.


Adjustable stopper plate allows 2-8 position settings.

High contact reliability achieved by the self-cleaning contact mechanism.


Break-before-make contact timing with various mechanism types: sliding contacts in MRX, contactor dish in MRY, and butt contacts in MRT models.

Terminal types include PC-turret for MRX, turret for MRY, and solder lug for MRT models.

Molded-in PC-turret and turret terminals prevent entry of flux and other contaminants.

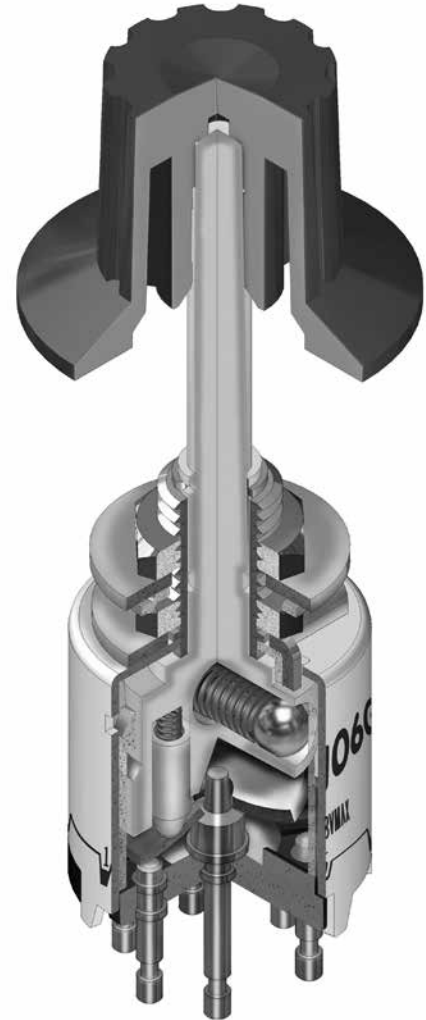

Actual Size

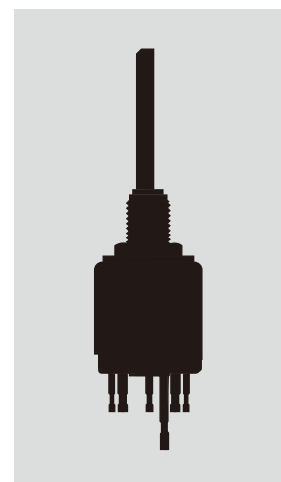


TYPICAL SWITCH ORDERING EXAMPLE

MR	X	108	A	
Actuators & Terminals		Poles & Circuits	Knobs	Colors
X Shaft Actuated with PC-Turret Terminals		108 SP with 2-8 Positions	A Plain Black	For Plain Knob
		204 DP with 2-4 Positions	B Small Color Tipped	No Code Black
		402 4P with 2 Positions	C Large Color Tipped	For Color Tipped
Y Shaft Actuated with Turret Terminals		106 SP with 2-6 Positions		A Black
		106G SP with 2-6 Positions Gold Contacts 0.4VA		B White
T Shaft Actuated with Solder Lug Terminals		22 DPDT ON-NONE-ON		C Red
		23 DPDT ON-OFF-ON		E Yellow
				F Green
				G Blue
				H Gray

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

MRX108-A

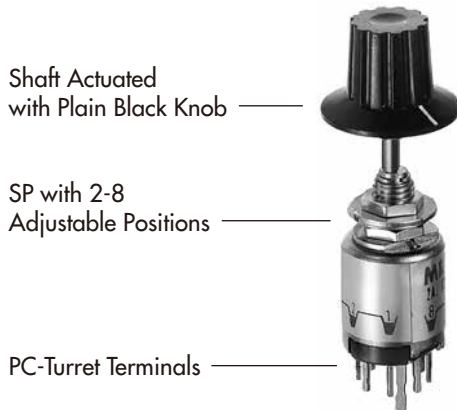

IMPORTANT:

MRT Switches are supplied without UL & cULus marking unless specified.




UL & cULus recognized only when ordered with marking on the switch.


Specific models, ratings, & ordering instructions are noted on the General Specifications page.

ACTUATORS & TERMINALS


X Shaft Actuated with PC-Turret Terminals

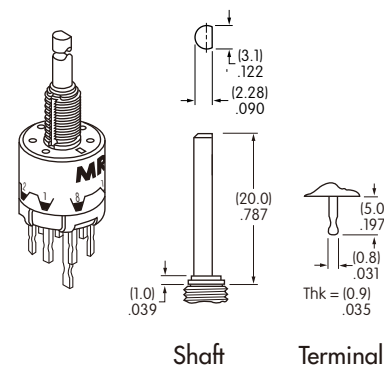

Y Shaft Actuated with Turret Terminals

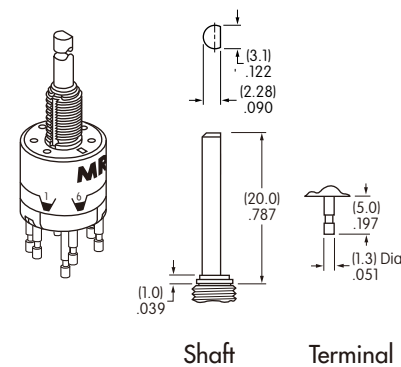

T Shaft Actuated with Solder Lug Terminals

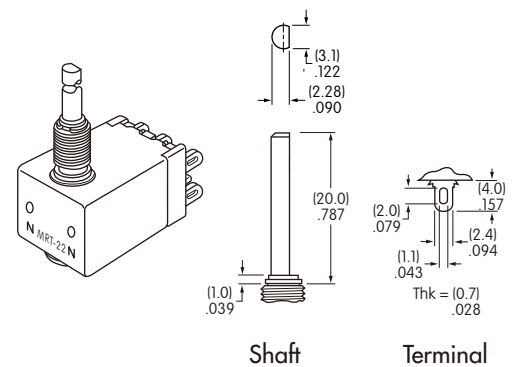

Toggle
Rockers
Pushbuttons
Illuminated PB
Programmable
Keylocks
Rotaries
Slides
Tactiles
Tilt
Touch
Indicators
Accessories
Supplement

POLES & CIRCUITS						
Pole	Model	Number of Positions	Stopper Settings	Number of Terminals	Schematics	
SP	MRX108	2-8	2, 3, 4, 5, 6, 7, 8	1 COM, 8 LOAD		
	MRY106 MRY106G	2-6	2, 3, 4, 5, 6	1 COM, 6 LOAD		
DP	MRX204	2-4	2, 3, 4	2 COM, 8 LOAD		
DPDT	MRT22	2	ON-NONE-ON	2-3 2-1 5-6 5-4		
	MRT23	3	ON-OFF-ON	2-3 OPEN 2-1 5-6 OPEN 5-4		
4P	MRX402	2	1 & 2	4 COM, 8 LOAD		

POSITION SETTING FOR MRX & MRY MODELS


Each switch is supplied with the stopper set for the maximum number of positions allowed for that model. Prior to installation, the desired position setting should be made. Contact factory for continuous rotation.

- Using the actuator knob, turn the shaft counterclockwise to the extreme left. If the shaft is not turned to this extreme position where the white line on the knob points to the number 1 position shown on the side of the switch, proper setting cannot be achieved.
- Remove the knob from the shaft and loosen the nut far enough to allow raising the stopper plate for resetting to the desired position.
- Note the position numbers on the side of the switch; these correspond to the terminal numbers and stopper holes. Insert the stopper in the hole numbered for the maximum desired number of stop settings. Satisfactory switch functioning cannot be assured if the stopper plate is not properly positioned.
- Tighten the nub (beveled side up) firmly against the stopper plate.

Mounting Hardware Packaged Loose with Each Switch




Factory Assembled:



TYPICAL SWITCH DIMENSIONS

Single, Double & Four Pole

MRX • PC-Turret Terminals

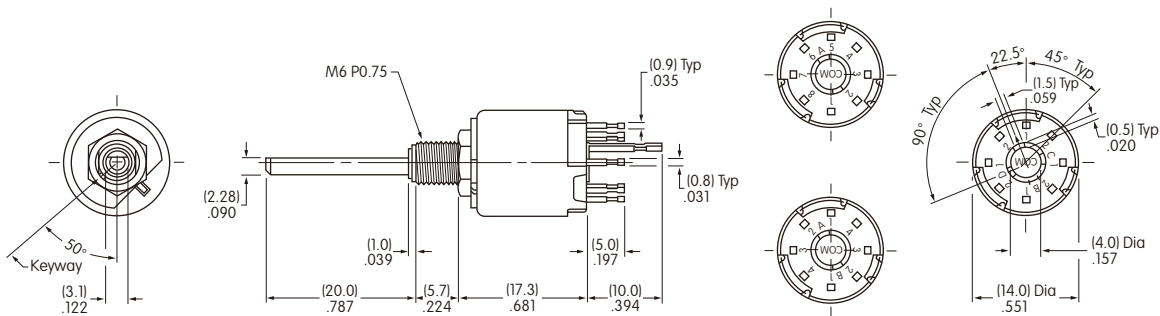


MRX108

TYPICAL SWITCH DIMENSIONS

MRY • Turret Terminals



Single Pole

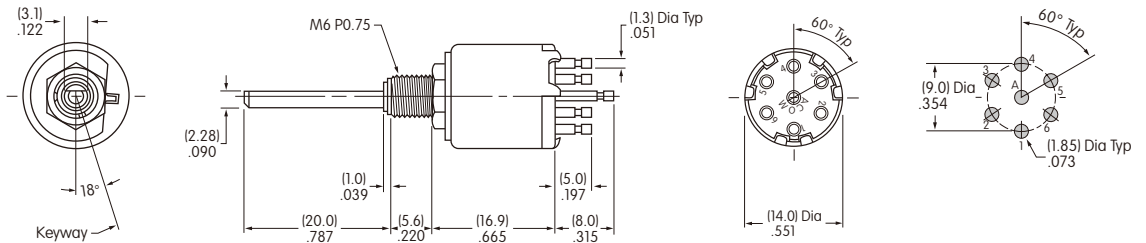

MRY106

MRT • Solder Lug Terminals


Double Pole

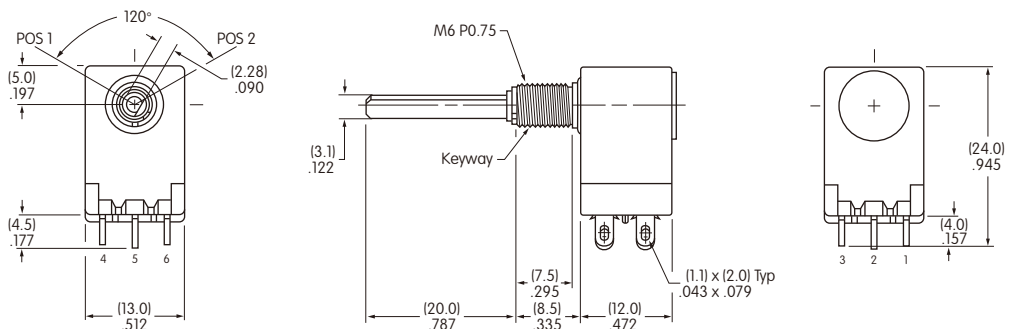

MRT22


MRT • Solder Lug Terminals

Double Pole

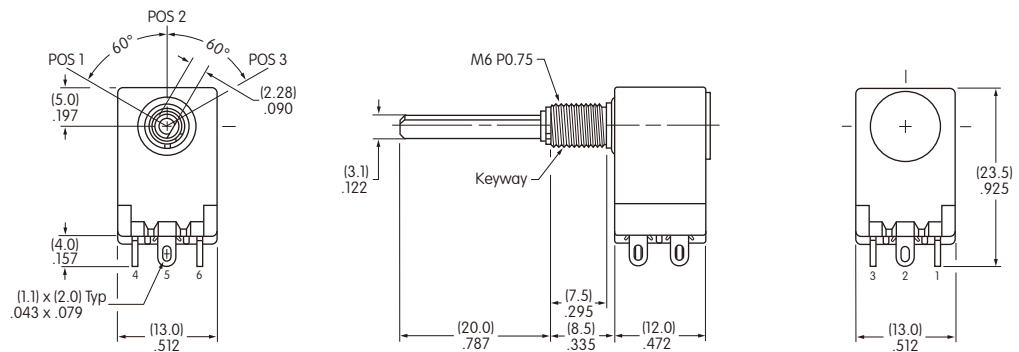


MRT23

PC FOOTPRINTS FOR MRX SINGLE, DOUBLE, & FOUR POLE

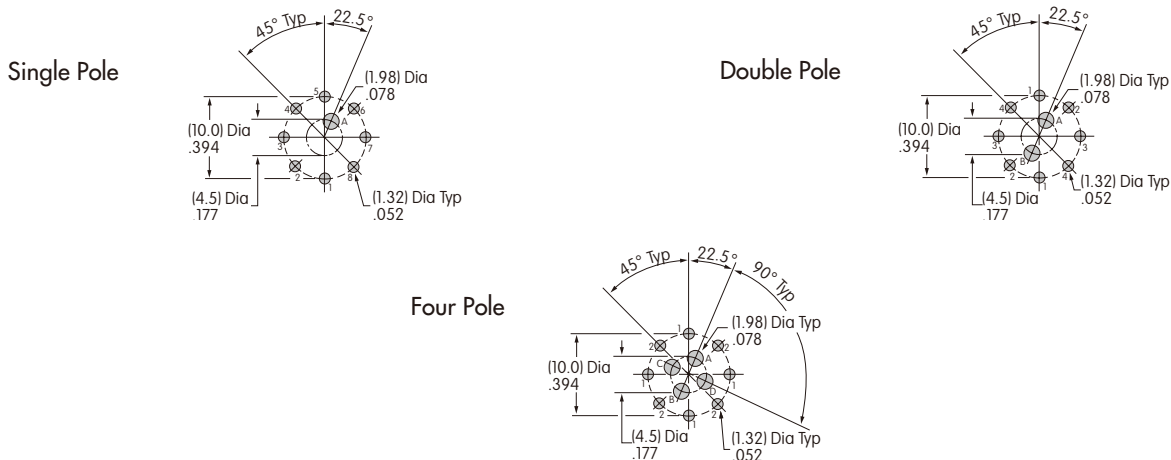


KNOBS

A AT433 Plain Black




Material: Polyacetal
Color: Black only

B AT4103 Small Color Tipped



Base Material: Polyester
Base Color: Black
Polyamide Tip
Colors: A, B, C, E, F, G, H

C AT4104 Large Color Tipped




Base Material: Polyester
Base Color: Black
Polyamide Tip
Colors: A, B, C, E, F, G, H


Color Codes: **A** Black **B** White **C** Red **E** Yellow **F** Green **G** Blue **H** Gray

PANEL CUTOUTS & MAXIMUM EFFECTIVE PANEL THICKNESS

Without Keyway



With Keyway



Maximum Effective Panel Thickness

With Standard Hardware: MRX & MRY .095" (2.4mm); MRT .106" (2.7mm)
Without Locking Ring: MRX & MRY .126" (3.2mm); MRT .138" (3.5mm)

General Specifications

Electrical Capacity (Resistive Load)

Logic Level: 0.4VA maximum @ 28V AC/DC maximum
(Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V)
Note: See Supplement Index to find explanation of operating range.

Other Ratings

Contact Resistance: 80 milliohms maximum
Insulation Resistance: 100 megohms minimum @ 500V DC
Dielectric Strength: 500V AC minimum for 1 minute minimum
Mechanical Life: 30,000 operations minimum
Electrical Life: 10,000 operations minimum
Operating Torque: 0.04Nm average
Contact Timing: Nonshorting (break-before-make)
Indexing: 45° for On-On-On & 90° for On-None-On

Materials & Finishes

Shaft: Brass with nickel plating
Bushing: Zinc alloy with nickel plating
Frame/Bracket: Steel with tin plating
Movable Contacts: Beryllium copper spring with gold plating
Stationary Contacts: Copper with gold plating
Terminals: Brass with tin plating
Base: Polyamide

Environmental Data

Operating Temperature Range: -10°C through +70°C (+14°F through +158°F)
Humidity: 90 ~ 95% humidity for 96 hours @ 40°C (104°F)
Vibration: 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours
Shock: 50G (490m/s²) acceleration (tested in 3 right angled directions, with 5 shocks in each direction)
Sealing: Use of optional o-ring AT535 with MRB meets IP67 of IEC60529 specifications

Installation

Mounting Torque: .686Nm (6.08 lb•in)
Cap Installation Force: 19.6 ~ 29.4N (4.41 ~ 6.61 lbf)

PCB Processing

Soldering: Wave Soldering Recommended: See Profile B in Supplement section
Manual Soldering: See Profile B in Supplement section
Cleaning: Automated cleaning. See Cleaning specifications in Supplement section.

Standards & Certifications

The MRB Series rotaries have not been tested for UL recognition or CSA certification. These switches are designed for use in a low-voltage, low-current, logic-level circuit. When used as intended in a logic-level circuit, the results do not produce hazardous energy.

Distinctive Characteristics

Double flatted bushing prevents rotation in panel and increases stability.

Totally sealed construction, achieved with combination of an interior o-ring, a seal between the frame and base, plus insert molded terminals, prevents contact contamination and allows automated soldering and cleaning.

Positive detent mechanism for distinct feel and audible feedback.

Break-before-make contact timing with sliding contact mechanism.


Metal bushing and frame/bracket provide durability.

Panel seal, achieved with use of optional exterior o-ring, conforms to IP67 of IEC60529 Standards.


High contact reliability achieved by the self-cleaning contact mechanism.

.100" x .100" (2.54mm x 2.54mm) terminal spacing conforms to standard PC board grid spacing for straight and right angle mounting.

Insert molded terminals lock out flux and other contaminants.

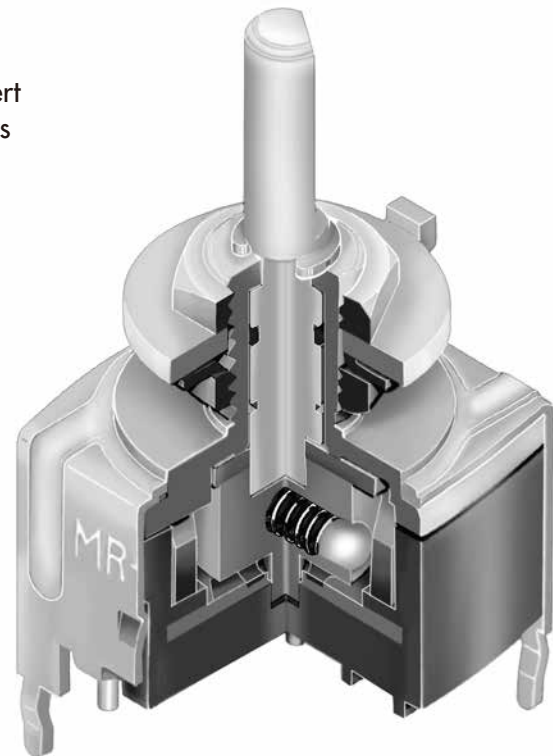

Actual Size

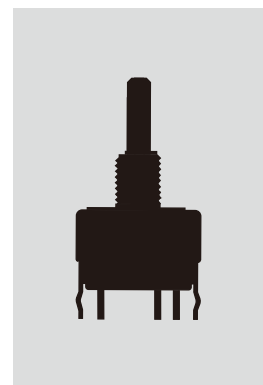

TYPICAL SWITCH ORDERING EXAMPLE

MRB **1** **2** **B** — **A**

Poles	
1	SPDT SP3T
2	DPDT DP3T

Terminals	
B	Straight with Bracket
H	Right Angle with Bracket


Knobs	
A	Plain Black
B	Small Color Tipped
C	Large Color Tipped

Colors	
For Plain Knob	
No Code	Black
For Color Tipped	
A	Black
B	White
C	Red
E	Yellow
F	Green
G	Blue
H	Gray

Circuits & Indexing				
2	ON	NONE	ON	90°
4	ON	ON	ON	45°

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

MRB12B-A







Plain Black Knob

SPDT with ON-NONE-ON Circuit & 90° Indexing


Straight PC Terminals with Bracket

POLES & CIRCUITS

Pole	Model	Actuator Positions			Connected Terminals			Throw & Schematics
		Position 1	Position 2	Position 3	Position 1	Position 2	Position 3	Note: Terminal numbers are not actually on switch
SP	MRB12	ON	NONE	ON	C1-1	OPEN	C1-2	SPDT 
	MRB14	ON	ON	ON	C1-1	C1-2	C1-3	SP3T 
DP	MRB22	ON	NONE	ON	C1-1 C2-4	OPEN	C1-2 C2-5	DPDT 
	MRB24	ON	ON	ON	C1-1 C2-4	C1-2 C2-5	C1-3 C2-6	DP3T 


TERMINALS

B Straight PC Terminals with Bracket



SPDT

H Right Angle PC Terminals with Bracket




DPDT

Toggles
 Rockers
 Pushbuttons
 Illuminated PB
 Programmable
 Keylocks
 Rotaries
 Slides
 Tactiles
 Tilt
 Touch
 Indicators
 Accessories
 Supplement

TYPICAL SWITCH DIMENSIONS

90° Indexing • SPDT & DPDT • Straight PC

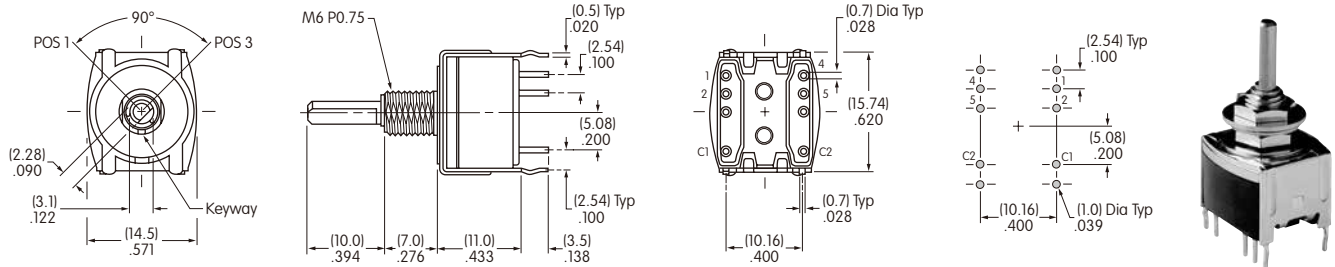


Actuator shown in Position 1

Single pole model does not have terminals 4, 5 & C2

MRB12B


90° Indexing • SPDT • Right Angle PC

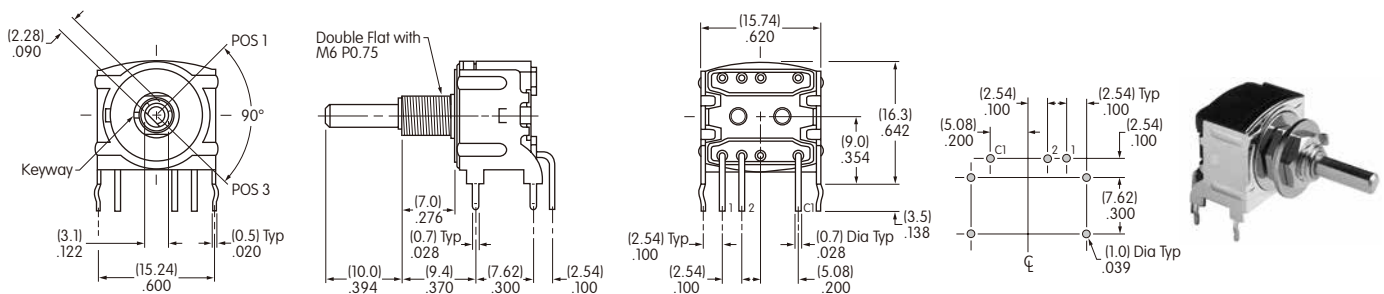

Actuator shown in Position 1

MRB12H


90° Indexing • DPDT • Right Angle PC

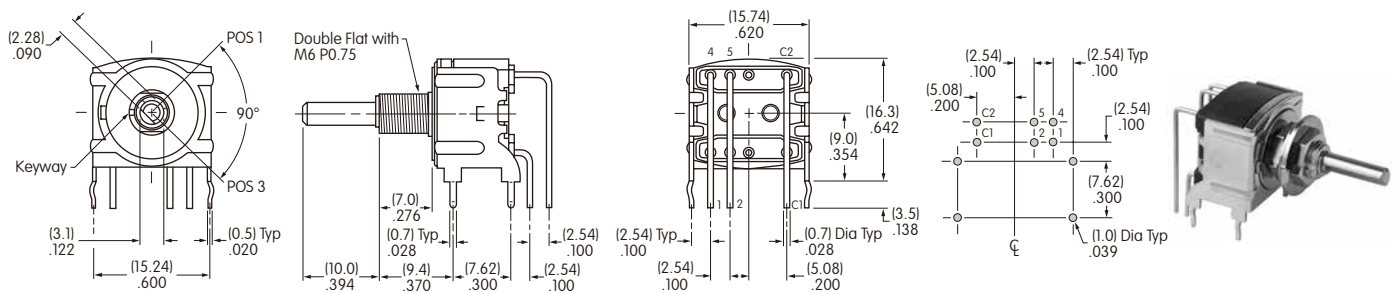

Actuator shown in Position 1

MRB22H

45° Indexing • SP3T & DP3T • Straight PC

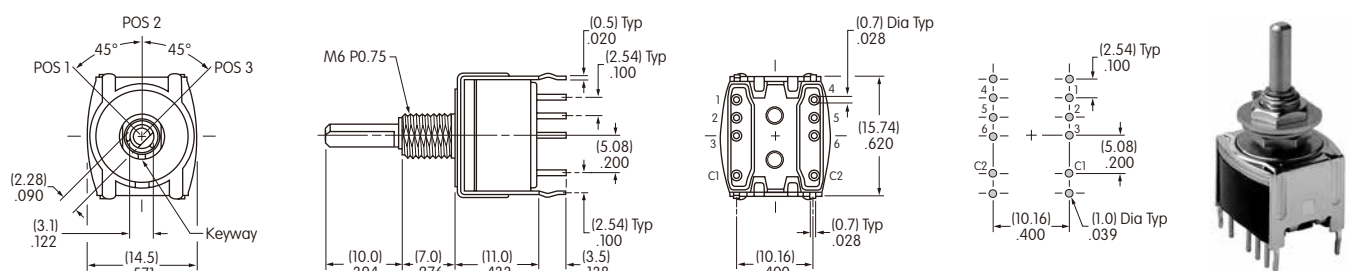


Actuator shown in Position 1

Single pole model does not have terminals 4, 5, 6 & C2


MRB14B

TYPICAL SWITCH DIMENSIONS

45° Indexing • SP3T • Right Angle PC

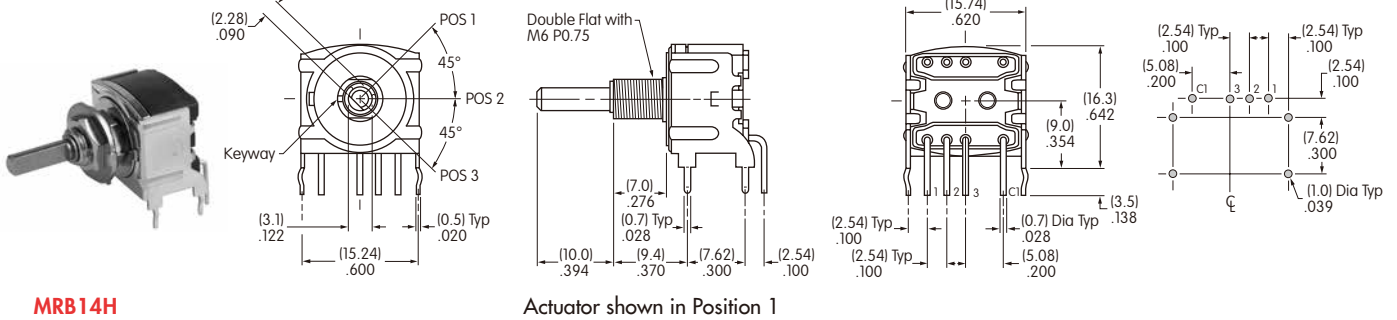


45° Indexing • DP3T • Right Angle PC

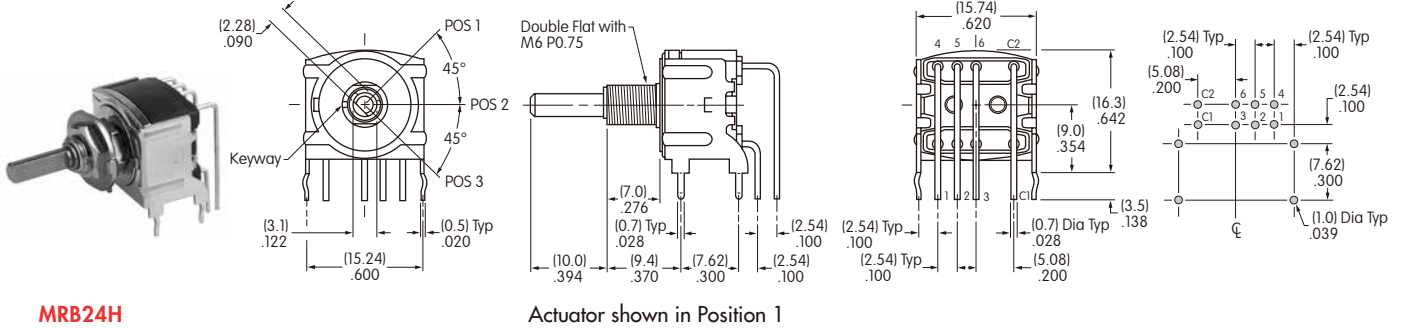

KNOBS


A AT433 Plain Black

Material: Polyacetal
Color: Black




B AT4103 Small Color Tipped

Polyester Base: Black
Polyamide Tip
Colors: A, B, C, E, F, G, H




C AT4104 Large Color Tipped

Polyester Base: Black
Polyamide Tip
Colors: A, B, C, E, F, G, H




Color Codes: **A** Black **B** White **C** Red **E** Yellow **F** Green **G** Blue **H** Gray

Shaft Detail



Mounting Precaution for Cap Clearance on Right Angle Models

When mounting a right angle switch, a cap clearance of .035" (0.9mm) is recommended.

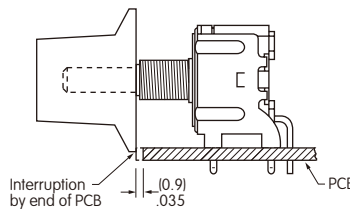


Standard Hardware Supplied


- AT513M Hex Nut
 - AT545 Locking Ring
 - AT509 Lockwasher
 - Optional Hardware
 - AT535 O-ring for Panel Seal
- See Supplement for details

PANEL CUTOUTS & MAXIMUM EFFECTIVE PANEL THICKNESS


With Standard Hardware
.087" (2.2mm)



Without Locking Ring
.118" (3.0mm)



Sealed Panel with 1 Hex Nut & 1 Rubber O-ring
.165" (4.2mm)



Toggle
Rockers
Pushbuttons
Illuminated PB
Programmable
Keylocks
Rotaries
Slides
Tactiles
Tilt
Touch
Indicators
Accessories
Supplement

