

## Specification

| Part Number: | MCT043C0CW480272LML |                  |             |
|--------------|---------------------|------------------|-------------|
| Version:     | 1                   |                  |             |
| Date:        | 25/05/2016          |                  |             |
| Revision     |                     |                  |             |
| VERSION      | DATE                | REVISED PAGE NO. | Note        |
| 0            | 2016/05/18          |                  | First issue |

design • manufacture • supply

|                       |                          |
|-----------------------|--------------------------|
| Display Size          | 4.3"                     |
| Resolution            | 480 x 272                |
| VGA Size              | WQVGA                    |
| Orientation           | Landscape                |
| Appearance            | RGB                      |
| Logic Voltage         | 3.3V                     |
| Interface             | RGB                      |
| Brightness            | 300 cd/m <sup>2</sup>    |
| Touchscreen           | Capacitive               |
| Module Size W x H x D | 105.50 x 67.20 x 4.60 mm |
| Operating Temperature | -20°C ~ +70°C            |
| Pin Out               | 40 - Way                 |



# Contents

1.Module Classification Information

2.Summary

3.General Specification

4.Interface

5.Contour Drawing

6.Block Diagram

7.Absolute Maximum Ratings

8.Electrical Characteristics

9.DC Characteristics

10.AC Characteristics

11.Optical Characteristics

12.Reliability

13.Touch Panel Information

14.Other

MIDAS

design • manufacture • supply



# Midas Active Matrix Display Part Number System

**MC T 057 A 6 \* W 320240 L M L \* \***  
**1 2 3 4 5 6 7 8 9 10 11 12 13**

- 1 = **MC:** Midas Components
- 2 = **T:** TFTA: Active Matrix OLED **M:** Monitor
- 3 = **Size**
- 4 = **Series**
- 5 = **Viewing Angle:** 6: 6 O'clock 12: 12 O'clock O: All Round Viewing Angle
- 6 = **Blank:** No Touch **T:** Resistive Touchscreen **C:** Capacitive Touchscreen
- 7 = **Operating Temp Range:**     **S:** 0+50Deg C     **B:** -20+60Deg C  
   **W:** -20+70Deg C     **E:** -30+85Deg C  
   **X:** -30+80Deg C
- 8 = **No of Pixels**
- 9 = **Orientation:** **P:** Portrait **L:** Landscape
- 10 = **Mode:** **R:** Reflective **M:** Transmissive **T:** Transflective  
**S:** Sunlight Readable (Transmissive) **W:** White on Black (Monochrome)
- 11 = **Backlight:** **Blank:** None **L:** LED **C:** CCFL
- 12 = **Blank:** No Module/board **C:** Controller board module (E-Tech)
- 13 = **Blank:** None **OB:** Optically Bonded **IPS:** In-plane switching



## 2.Summary

This technical specification applies to 4.3' color TFT-LCD panel. The 4.3' color TFT-LCD panel is designed for camcorder, digital camera application and other electronic products which require high quality flat panel displays. This module follows RoHS.



### 3. General Specifications

- Size: 4.3 inch
- Dot Matrix: 480 x RGBx272(TFT) dots
- Module dimension: 105.5(W) x 67.2(H) x 4.6(D) mm
- Active area: 95.04 x 53.856 mm
- Dot pitch: 0.066 x 0.198 mm
- LCD type: TFT, Normally White, Transmissive
- View Direction: 12 o'clock
- Gray Scale Inversion Direction: 6 o'clock
- Backlight Type: LED, Normally White
- CTP FW Version: 08
- With /Without TP: With CTP
- Surface: Glare

\*Color tone slight changed by temperature and driving voltage.

design • manufacture • supply



## 4.Interface

### 4.1. LCM PIN Definition

| Pin | Symbol | Function                        | Remark |
|-----|--------|---------------------------------|--------|
| 1   | VLED-  | Power for LED backlight cathode |        |
| 1   | VLED+  | Power for LED backlight anode   |        |
| 3   | GND    | Power ground                    |        |
| 4   | VCC    | Power voltage                   |        |
| 5   | R0     | Red data (LSB)                  |        |
| 6   | R1     | Red data                        |        |
| 7   | R2     | Red data                        |        |
| 8   | R3     | Red data                        |        |
| 9   | R4     | Red data                        |        |
| 10  | R5     | Red data                        |        |
| 11  | R6     | Red data                        |        |
| 12  | R7     | Red data (MSB)                  |        |
| 13  | G0     | Green data (LSB)                |        |
| 14  | G1     | Green data                      |        |
| 15  | G2     | Green data                      |        |
| 16  | G3     | Green data                      |        |
| 17  | G4     | Green data                      |        |
| 18  | G5     | Green data                      |        |
| 19  | G6     | Green data                      |        |
| 20  | G7     | Green data (MSB)                |        |
| 21  | B0     | Blue data (LSB)                 |        |
| 22  | B1     | Blue data                       |        |
| 23  | B2     | Blue data                       |        |
| 24  | B3     | Blue data                       |        |
| 25  | B4     | Blue data                       |        |
| 26  | B5     | Blue data                       |        |
| 27  | B6     | Blue data                       |        |
| 28  | B7     | Blue data (MSB)                 |        |
| 29  | GND    | Power ground                    |        |
| 30  | CLK    | Pixel clock                     |        |
| 31  | DISP   | Display on/off                  |        |
| 32  | Hsync  | Horizontal sync signal          |        |
| 33  | Vsync  | Vertical sync signal            |        |
| 34  | NC     | No connection                   |        |
| 35  | NC     | No connection                   |        |
| 36  | RESET  | Hardware reset                  |        |
| 37  | NC     | No connection                   |        |
| 38  | NC     | No connection                   |        |
| 39  | NC     | No connection                   |        |
| 40  | NC     | No connection                   |        |

## CTP PIN Definition



| Pin | Symbol | Function                         | Remark |
|-----|--------|----------------------------------|--------|
| 1   | VSS    | Ground for analog circuit        |        |
| 2   | VDDT   | Power Supply : +3.3V             |        |
| 3   | SCL    | I2C clock input                  |        |
| 4   | NC     | No connect                       |        |
| 5   | SDA    | I2C data input and output        |        |
| 6   | NC     | No connect                       |        |
| 7   | /RST   | External Reset, Low is active    |        |
| 8   | /WAKE  | External interrupt from the host |        |
| 9   | /INT   | External interrupt to the host   |        |
| 10  | VSS    | Ground for analog circuit        |        |

MIDAS

design • manufacture • supply




# 5. Contour Drawing

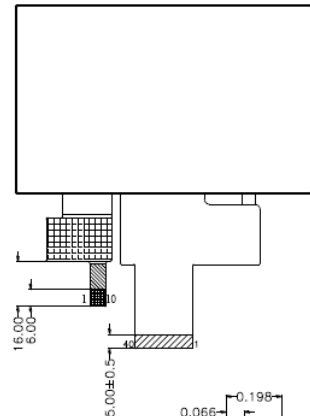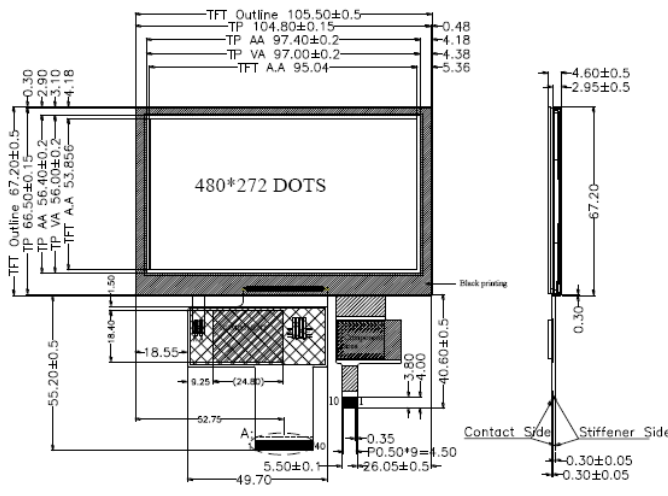


| PIN NO | SYMBOL |
|--------|--------|
| 1      | VSS    |
| 2      | VDDT   |
| 3      | SCL    |
| 4      | NC     |
| 5      | SDA    |
| 6      | NC     |
| 7      | /RST   |
| 8      | /WAKE  |
| 9      | /INT   |
| 10     | VSS    |

| PIN NO | SYMBOL |
|--------|--------|
| 1      | VLED-  |
| 2      | VLED+  |
| 3      | GND    |
| 4      | VCC    |
| 5      | R0     |
| 6      | R1     |
| 7      | R2     |
| 8      | R3     |
| 9      | R4     |
| 10     | R5     |
| 11     | R6     |
| 12     | R7     |
| 13     | G0     |
| 14     | G1     |
| 15     | G2     |
| 16     | G3     |
| 17     | G4     |
| 18     | G5     |
| 19     | G6     |
| 20     | G7     |
| 21     | B0     |
| 22     | B1     |
| 23     | B2     |
| 24     | B3     |
| 25     | B4     |
| 26     | B5     |
| 27     | B6     |
| 28     | B7     |
| 29     | GND    |
| 30     | CLK    |
| 31     | DISP   |
| 32     | Hsync  |
| 33     | Vsync  |
| 34     | NC     |
| 35     | NC     |
| 36     | RESET  |
| 37     | NC     |
| 38     | NC     |
| 39     | NC     |
| 40     | NC     |



DETAIL A  
SCALE 1:4




SCALE 1:100

The non-specified tolerance of dimension is ±0.3mm.

A ————— K  
CIRCUIT DIAGRAM(10dice),  
??? 20mA,?? 29~35V



## 6. Block Diagram

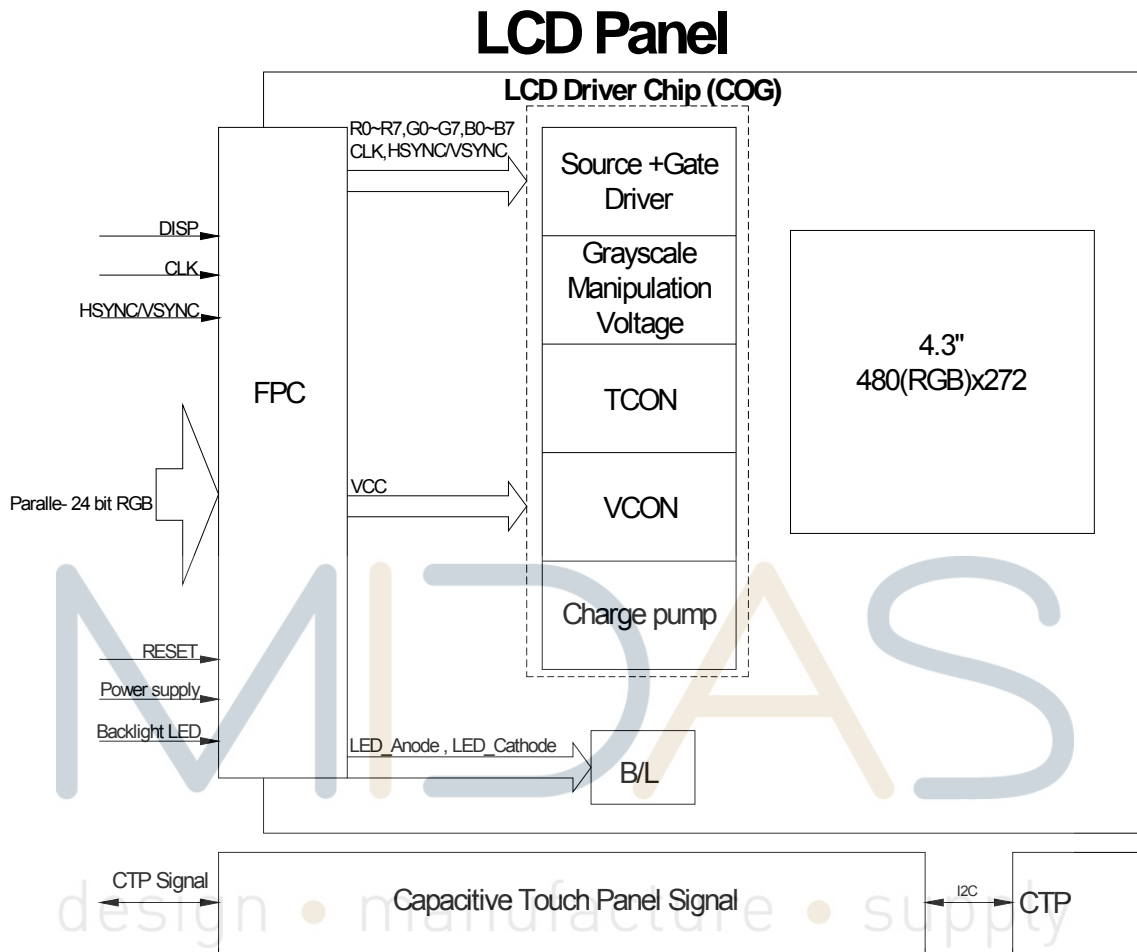


## 7. Absolute Maximum Ratings

| Item                  | Symbol | Min | Typ | Max | Unit |
|-----------------------|--------|-----|-----|-----|------|
| Operating Temperature | TOP    | -20 | —   | +70 | □    |
| Storage Temperature   | TST    | -30 | —   | +80 | □    |

Note: Device is subject to be damaged permanently if stresses beyond those absolute maximum ratings listed above

1. Temp.  $\leq 60^{\circ}\text{C}$ , 90% RH MAX. Temp.  $> 60^{\circ}\text{C}$ , Absolute humidity shall be less than 90% RH at  $60^{\circ}\text{C}$

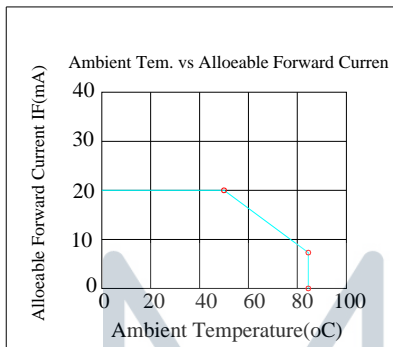

# MIDAS

design • manufacture • supply



## 8. Electrical Characteristics

### 8.1. Operating conditions:

| Item                      | Symbol | Condition | Min | Typ | Max | Unit |
|---------------------------|--------|-----------|-----|-----|-----|------|
| Supply Voltage For Logic  | VCC    | —         | 3.0 | 3.3 | 3.5 | V    |
| Digital operation current | Icc    | -         |     | 17  | 25  | mA   |

### 8.2. LED driving conditions

| Parameter         | Symbol | Min. | Typ.   | Max. | Unit | Remark     |
|-------------------|--------|------|--------|------|------|------------|
| LED current       |        | -    | 20     | -    | mA   |            |
| Power Consumption |        |      | 640    | 680  | mW   |            |
| LED voltage       | VBL+   | 30   | 32     | 34   | V    | Note 1     |
| LED Life Time     |        | -    | 50,000 | -    | Hr   | Note 2,3,4 |

Note 1 : There are 1 Groups LED



Note 2 : Ta = 25 °C

Note 3 : Brightness to be decreased to 50% of the initial value

Note 4 : The single LED lamp case

MIDAS

design • manufacture • supply



## 9.DC CHARATERISTICS

| Parameter                | Symbol   | Rating |     |        | Unit | Condition |
|--------------------------|----------|--------|-----|--------|------|-----------|
|                          |          | Min    | Typ | Max    |      |           |
| Low level input voltage  | $V_{IL}$ | 0      | -   | 0.3VCC | V    |           |
| High level input voltage | $V_{IH}$ | 0.7VCC | -   | VCC    | V    |           |

MIDAS


design • manufacture • supply



# 10.AC CHARATERISTICS

## 10.1. Parallel SYNC mode RGB input timing table



| Signal                    | Symbol | Min | Typ | Max | Unit |
|---------------------------|--------|-----|-----|-----|------|
| DCLK frequency            | fclk   | 5   | 9   | 12  | MHz  |
| VSD period time           | Tv     | 277 | 288 | 400 | H    |
| VSD display area          | Tvd    | 272 |     |     | H    |
| VSD back porch            | Tvb    | 3   | 8   | 31  | H    |
| VSD front porch           | Tvfp   | 2   | 8   | 97  | H    |
| HSD display area          | Thd    | 480 |     |     | CLK  |
| HSD period time           | Thb    | 520 | 525 | 800 | CLK  |
| HSD back porch            | Thbp   | 36  | 40  | 255 | CLK  |
| HSD front porch           | Thfp   | 4   | 5   | 65  | CLK  |
| CLK cycle time            | Tclk   | 83  | 110 | 200 | ns   |
| Clock width of high level | Tcwh   | 40  | -   | 60  | %    |
| Clock width of low level  | Tcwl   | 40  | -   | 60  | %    |
| Clock rising time         | trck   | 9   | -   | -   | ns   |
| Clock falling time        | tfck   | 9   | -   | -   | ns   |
| Data Setup Time           | tdesu  | 12  | -   | -   | ns   |
| Data Hold Time            | tdahd  | 12  | -   | -   | ns   |

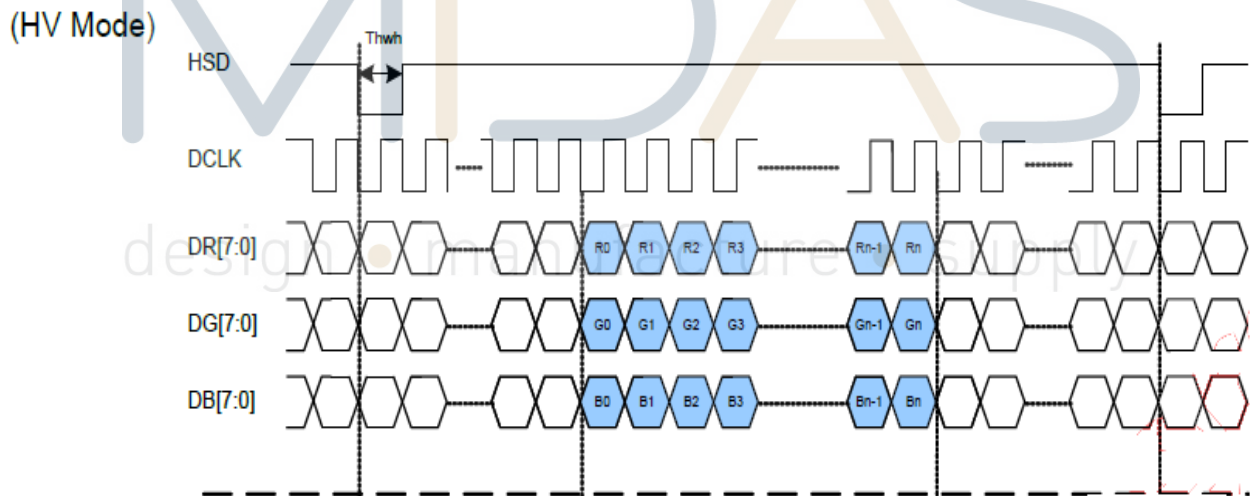

## 10.2. Waveform

### Timing Chart

#### Clock and Data Input Waveforms

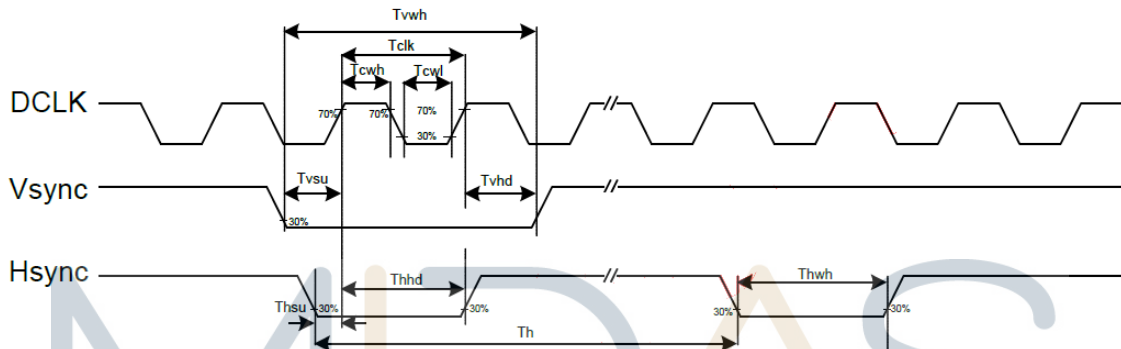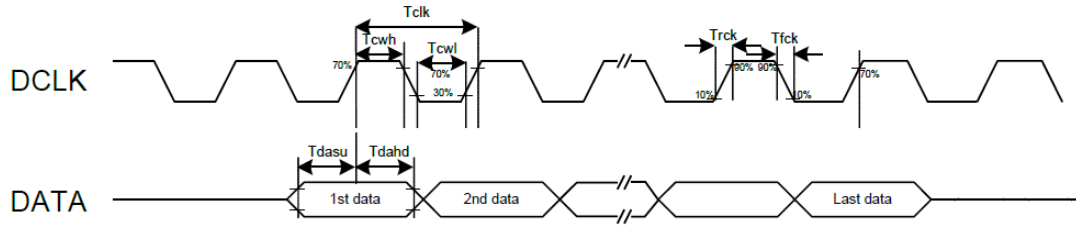

#### Data Input Format

##### Vertical input timing



# 11. Optical Characteristics

| Item  | Symbol | Condition.                     | Min | Typ. | Max. | Unit              | Remark            |          |
|---|--------|--------------------------------|-----|------|------|-------------------|-------------------|----------|
| Response time                                     | Tr     | $\theta=0^\circ, \phi=0^\circ$ | -   | 4    | 7    | ms                | Note 3            |          |
|   | Tf     |                                | -   | 11   | 17   | ms                |                   |          |
| Contrast ratio                                    | CR     | At optimized viewing angle     | 300 | 500  | -    | -                 | Note 4            |          |
| Color Chromaticity                                | White  | $\theta=0^\circ, \phi=0^\circ$ | Wx  | 0.26 | 0.31 | 0.36              | -                 | Note 2,5 |
|   |        |                                | Wy  | 0.28 | 0.33 | 0.38              | -                 |          |
| Viewing angle<br>(Gray Scale Inversion Direction) | Hor.   | $\Theta_R$                     | -   | 75   | -    | Deg.              | Note 1            |          |
|   |        | $\Theta_L$                     | -   | 75   | -    |                   |                   |          |
|   | Ver.   | $\Phi_T$                       | -   | 75   | -    |                   |                   |          |
|   |        | $\Phi_B$                       | -   | 75   | -    |                   |                   |          |
| Brightness  | -      | -                              | 250 | 300  | -    | cd/m <sup>2</sup> | Center of display |          |

Ta=25±2°C, IL=20mA

Note 1: Definition of viewing angle range

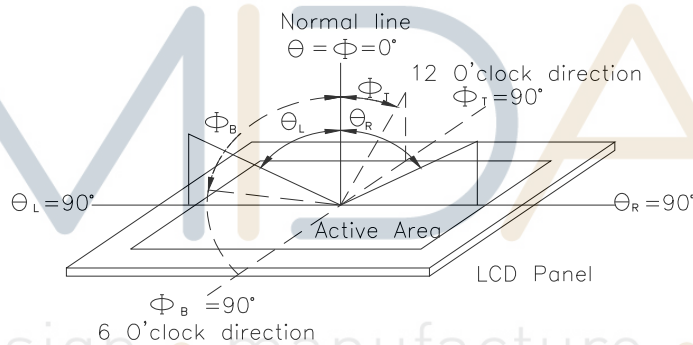


Fig. 11.1. Definition of viewing angle

Note 2: Test equipment setup:

After stabilizing and leaving the panel alone at a driven temperature for 10 minutes, the measurement should be executed. Measurement should be executed in a stable, windless, and dark room. Optical specifications are measured by Topcon BM-7 or BM-5 luminance meter 1.0° field of view at a distance of 50cm and normal direction.


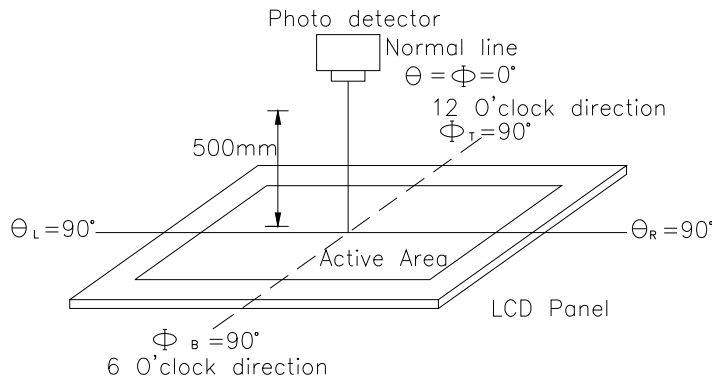


Fig. 11.2. Optical measurement system setup

Note 3: Definition of Response time:

The response time is defined as the LCD optical switching time interval between "White" state and "Black" state. Rise time,  $T_r$ , is the time between photo detector output intensity changed from 90% to 10%. And fall time,  $T_f$ , is the time between photo detector output intensity changed from 10% to 90%

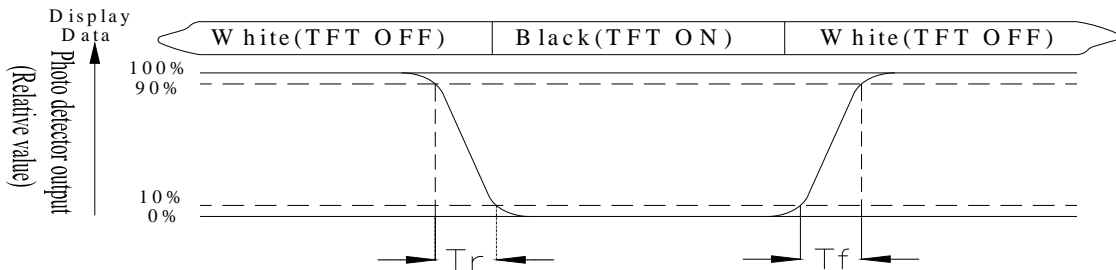

Note 4: Definition of contrast ratio:

The contrast ratio is defined as the following expression.

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD on the "White" state}}{\text{Luminance measured when LCD on the "Black" state}}$$

Note 5: White  $V_i = V_{i50} \pm 1.5V$

Black  $V_i = V_{i50} \pm 2.0V$

"±" means that the analog input signal swings in phase with VCOM signal.

"±" means that the analog input signal swings out of phase with VCOM signal.

The 100% transmission is defined as the transmission of LCD panel when all the input terminals of module are electrically opened.

Note 6: Definition of color chromaticity (CIE 1931)

Color coordinates measured at the center point of LCD

Note 7: Measured at the center area of the panel when all the input terminals of LCD panel are electrically opened.



# 12. Reliability

Content of Reliability Test (Wide temperature, -20°C~70°C)

| Environmental Test                   |  |   |      |
|--------------------------------------|--|---|------|
| Test Item                            | Content of Test  | Test Condition  | Note |
| High Temperature storage             | Endurance test applying the high storage temperature for a long time.  | 80°C<br>200hrs  | 2    |
| Low Temperature storage              | Endurance test applying the low storage temperature for a long time.   | -30°C<br>200hrs   | 1,2  |
| High Temperature Operation           | Endurance test applying the electric stress (Voltage & Current) and the thermal stress to the element for a long time.   | 70°C<br>200hrs  | —    |
| Low Temperature Operation            | Endurance test applying the electric stress under low temperature for a long time.   | -20°C<br>200hrs   | 1    |
| High Temperature/ Humidity Operation | The module should be allowed to stand at 60°C,90%RH max  | 60°C,90%RH<br>96hrs   | 1,2  |
| Thermal shock resistance             | The sample should be allowed stand the following 10 cycles of operation<br><br><div style="text-align: center;"> <p style="margin: 0;">-20°C    25°C    70°C</p> <p style="margin: 0;">30min    5min    30min</p> <p style="margin: 0;">1 cycle</p> </div> | -20°C/70°C<br>10 cycles   | —    |
| Vibration test                       | Endurance test applying the vibration during transportation and using.   | Total fixed amplitude : 3<br>15mm<br>Vibration Frequency :<br>10~55Hz<br>One cycle 60<br>seconds to 3<br>directions of X,Y,Z for<br>Each 15 minutes | 3    |
| Static electricity test              | Endurance test applying the electric stress to the terminal.   | VS=±600V(contact)<br>,±800v(air),<br>RS=330Ω<br>CS=150pF<br>10 times  | —    |


Note1: No dew condensation to be observed.

Note2: The function test shall be conducted after 4 hours storage at the normal Temperature and humidity after remove from the test chamber.

Note3: The packing have to including into the vibration testing.



# 13.Touch Panel Information

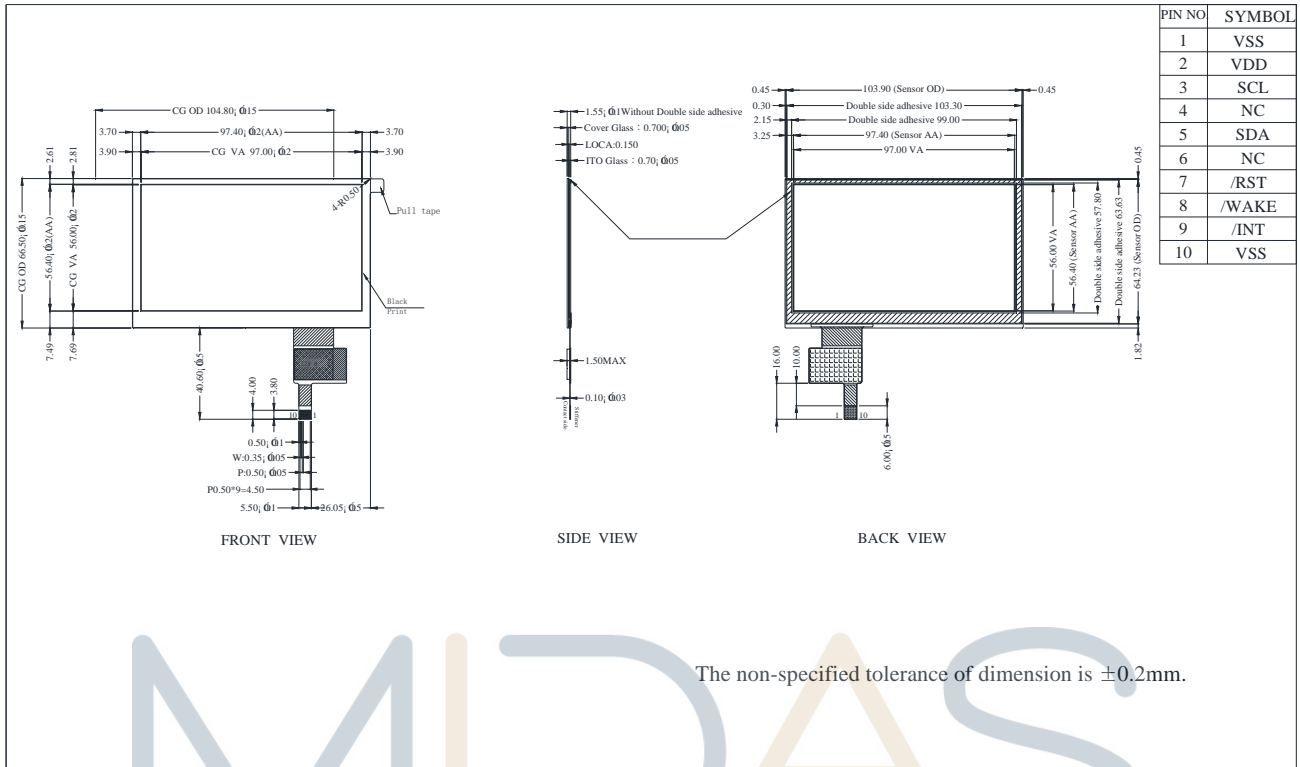

| PIN NO | SYMBOL |
|--------|--------|
| 1      | VSS    |
| 2      | VDD    |
| 3      | SCL    |
| 4      | NC     |
| 5      | SDA    |
| 6      | NC     |
| 7      | /RST   |
| 8      | /WAKE  |
| 9      | /INT   |
| 10     | VSS    |


The non-specified tolerance of dimension is  $\pm 0.2\text{mm}$ .

# MIDAS


design • manufacture • supply



### 13.1. CTP I2C Timing:

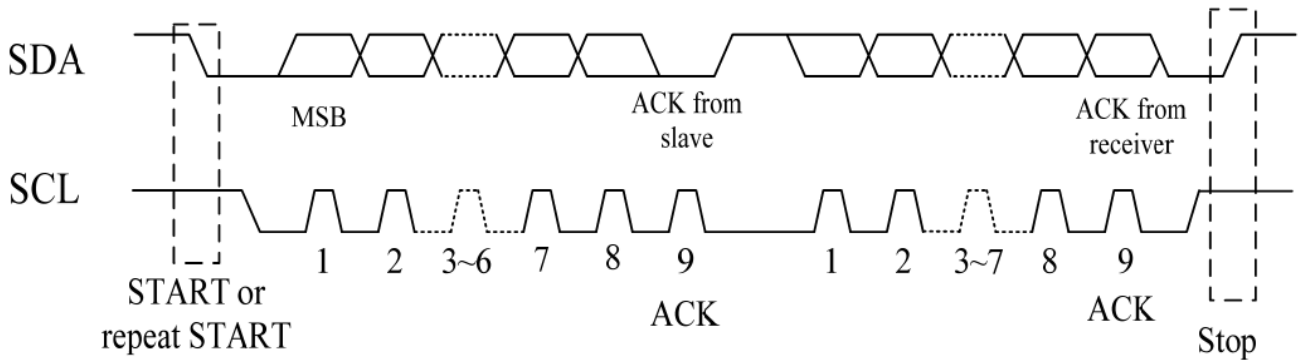

I2C Serial Data Transfer Format

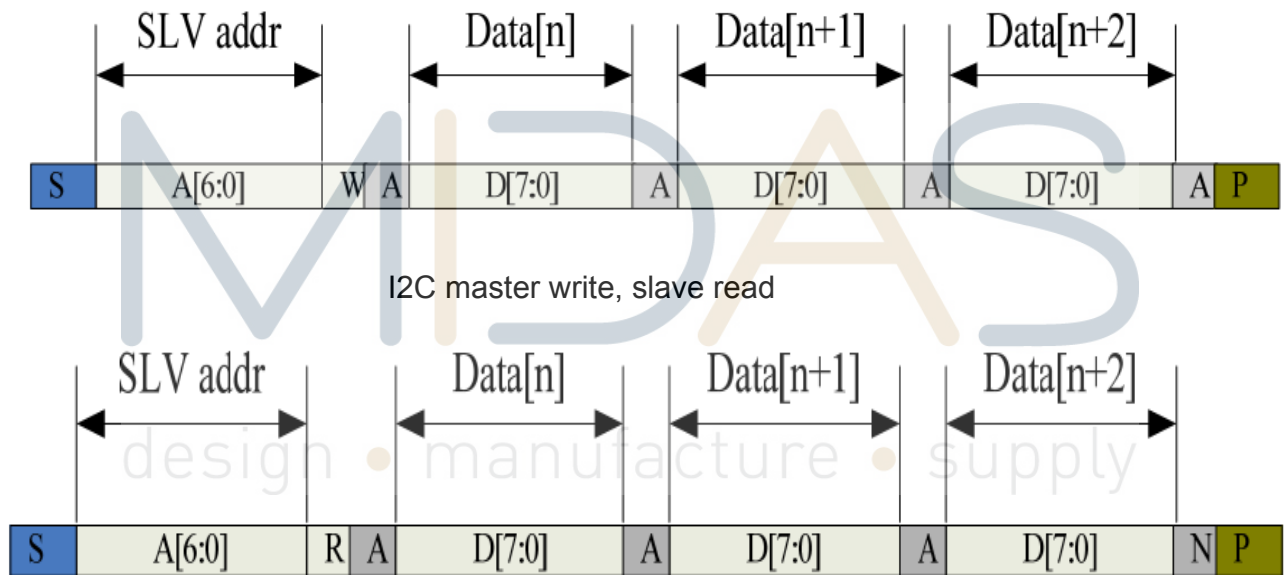

I2C master read, slave write

| Mnemonics | Description   |
|-----------|---|
| S         | 12C Start or 12C Restart  |
| A[6:0]    | Slave address   |
| R/W       | READ/WRITE bit, '1' for read, '0' for write   |
| A(N)      | ACK(NACK) bit   |
| P         | STOP: the indication of the end of a packet(if this bit is missing, S will indicate the end of the current packet and beginning of the next packet) |


Lists the meanings of the mnemonics used in the above figures

| Parameter  | Unit | Min | Max |
|--|------|-----|-----|
| SCL frequency                                    | KHz  | 0   | 400 |
| Bus free time between a STOP and START condition | us   | 4.7 | \   |
| Hold time (repeated) START condition             | us   | 4.0 | \   |
| Data setup time                                  | ns   | 250 | \   |
| Setup time for a repeated START condition        | us   | 4.7 | \   |
| Setup time for STOP condition                    | us   | 4.0 | \   |


Interface Timing Characteristics

AS FOR STANDARD CTPM, HOST NEED TO USE BOTH INTERRUPT CONTROL SIGNAL AND SERIAL DATA INTERFACE TO GET THE TOUCH DATA. HERE IS THE TIMING TO GET TOUCH DATA.


### 13.2. WRITE BYTES TO I2C SLAVE

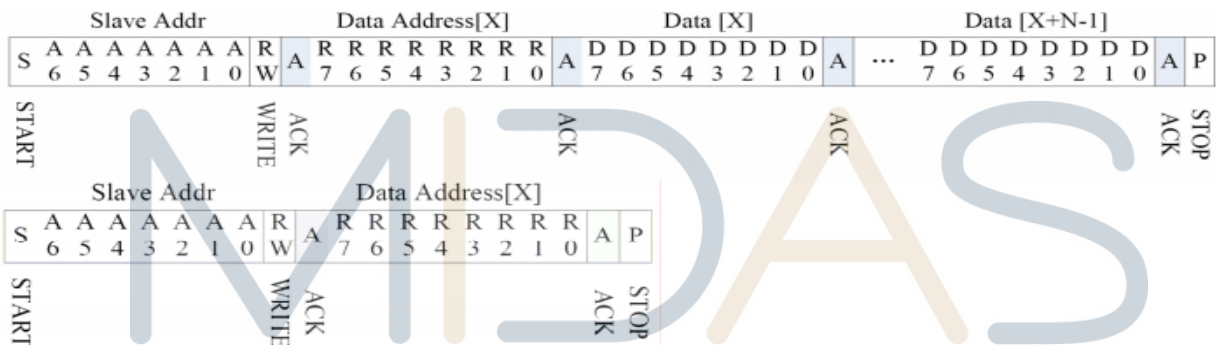

### READ X BYTES FROM I2C SLAVE

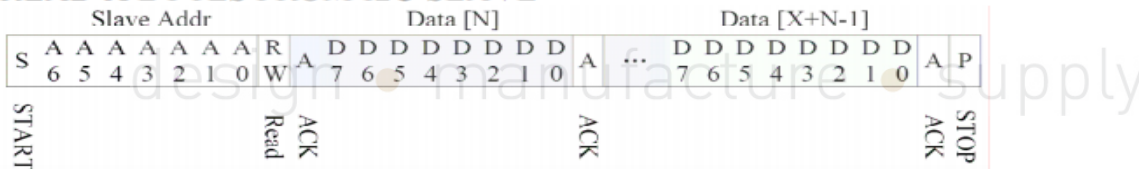

AS FOR STANDARD CTPM, HOST NEED TO USE BOTH INTERRUPT CONTROL SIGNAL AND SERIAL DATA INTERFACE TO GET THE TOUCH DATA, HERE IS THE TIMING TO GET TOUCH DATA.

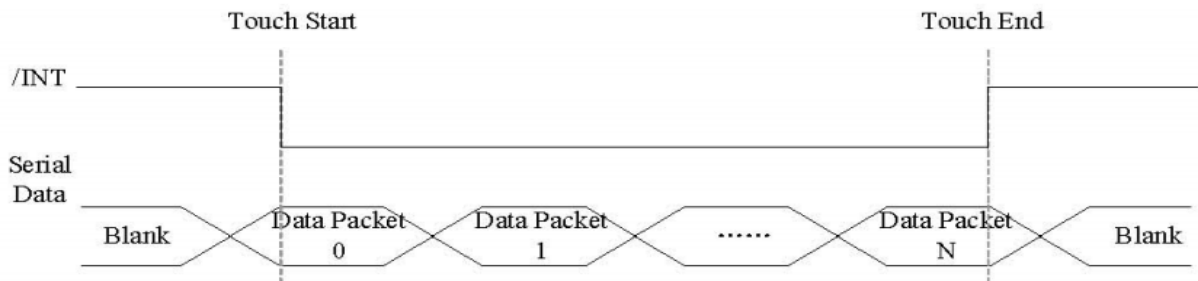

Address: 0x38

### 13.3. TOUCH DATA READ PROTOCOL

| NAME                             | VALUE | DESCRIPTION  |
|----------------------------------|-------|--|
| START CH                         | 0X00  | START COMMAND FOR CTPM TOUCH DATA PACKET,HOST MUST SEND CTPM A START CH COMMAND BEFORE READ TOUCH DATA |
| Lst READ BYTE~<br>LAST READ BYTE |       | TOUCH DATA PACKET SENT BY CTPM,EACH BYTE HAS 8-BIT DATA ,A TOUCH DATA PACKET CONSISTS OF N BYTE        |

A DATA PACKET STARTS WITH A HEADER AND ENDS WITH CRC CODE,AS FOR 5 POINTS DATA PACKET,THE LENGTH OF THE PACKET IS ALWAYS 26 BYTES IN SPIE OF ACTUAL TOUCH POINTS.

| Address | Name         | Bit7                                  | Bit6              | Bit5 | Bit4                                   | Bit3                        | Bit2                                   | Bit1 | Bit0 | Host Access |
|---------|--------------|---------------------------------------|-------------------|------|--|-----------------------------|--|------|------|-------------|
| 00h     | Devide__Mode |                                       | Device Model[2:0] |      |  |                             |  |      |      | RW          |
| 01h     | Gest__ID     | Gesture ID[7:0]                       |                   |      |  |                             |  |      |      | R           |
| 02h     | TD__Status   |                                       |                   |      |  | Number of touch points[3:0] |  |      | R    |             |
| 03h     | Touch1__XH   | 1 <sup>st</sup> Event Flag            |                   |      |  |                             | 1 <sup>st</sup> Touch X Position[11:8] |      |      | R           |
| 04h     | Touch1__XL   | 1 <sup>st</sup> Touch X Position[7:0] |                   |      |  |                             |  |      |      | R           |
| 05h     | Touch1__YH   | 1 <sup>st</sup> Touch ID[3:0]         |                   |      | 1 <sup>st</sup> Touch Y Position[11:8] |                             |  |      |      | R           |
| 06h     | Touch1__YL   | 1 <sup>st</sup> Touch Y Position[7:0] |                   |      |  |                             |  |      |      | R           |
| 09h     | Touch2__XH   | 2 <sup>nd</sup> Event Flag            |                   |      |  |                             | 2 <sup>nd</sup> Touch X Position[11:8] |      |      | R           |
| 0Ah     | Touch2__XL   | 2 <sup>nd</sup> Touch X Position[7:0] |                   |      |  |                             |  |      |      | R           |
| 0Bh     | Touch2__YH   | 2 <sup>nd</sup> Touch ID[3:0]         |                   |      | 2ndTouch Y Position[11:8]              |                             |  |      |      | R           |
| 0Ch     | Touch2__YL   | 2 <sup>nd</sup> Touch Y Position[7:0] |                   |      |  |                             |  |      |      | R           |
| 0Fh     | Touch3__XH   | 3rdEvent Flag                         |                   |      |  |                             | 3rdTouch X Position[11:8]              |      |      | R           |
| 10h     | Touch3__XL   | 3rd Touch X Position[7:0]             |                   |      |  |                             |  |      |      | R           |
| 11h     | Touch3__YH   | 3rdTouch ID[3:0]                      |                   |      | 3rdTouch Y Position[11:8]              |                             |  |      |      | R           |



|     |            |                           |                              |   |
|-----|------------|---------------------------|------------------------------|---|
| 12h | Touch3__YL | 3rd Touch Y Position[7:0] |                              | R |
| 15h | Touch4__XH | 4thEvent<br>Flag          | 4thTouch<br>X Position[11:8] | R |
| 16h | Touch4__XL | 4th Touch X Position[7:0] |                              | R |
| 17h | Touch4__YH | 4thTouch ID[3:0]          | 4thTouch<br>Y Position[11:8] | R |
| 18h | Touch4__YL | 4th Touch Y Position[7:0] |                              | R |
| 1Bh | Touch5__XH | 5thEvent<br>Flag          | 5thTouch<br>X Position[11:8] | R |
| 1Ch | Touch5__XL | 5th Touch X Position[7:0] |                              | R |
| 1Dh | Touch5__YH | 5thTouch ID[3:0]          | 5thTouch<br>Y Position[11:8] | R |
| 1Eh | Touch5__YL | 5th Touch Y Position[7:0] |                              | R |

# MIDAS

design • manufacture • supply

