






**Trip indicator, 2 x 1 NC, Screw terminals**

**Part no.** AGM2-01-PKZ0  
**Catalog No.** 072899  
**Alternate Catalog No.** XTPAXSATR02  
**EL-Nummer (Norway)** 4355146

### Delivery program

|   |  |  |
|---|--|--|
| Product range   |  | Accessories  |
| Accessories   |  | Trip-indicating auxiliary contacts   |
|   |  | Differential status indication<br>a) General trip indication (overload)<br>b) Short-circuit release<br>Short-circuits indicated locally by means of a red indicator that can be manually reset |
| <b>Contacts</b>   |  |  |
| N/C = Normally closed   |  | 2 x 1 NC   |
| Contact diagram   |  | <br>                   |
| Contact sequence  |  |    |
| Connection technique  |  | Screw terminals  |
| For use with  |  | Trip indicator PKZ0(4), PKE  |
| For use with  |  | PKZM0<br>PKZM4<br>PKZM0-T<br>PKM0<br>PKZM01<br>PKE   |
| Can be combined with auxiliary contact  |  | NHI11-PKZ0<br>NHI12-PKZ0<br>NHI21-PKZ0<br>NHI-E...   |
| <b>Notes</b> Can be fitted to the right of:<br>Motor protective circuit-breaker |  |  |

### Technical data

#### Auxiliary contacts

|                                       |                  |      |       |
|---------------------------------------|------------------|------|-------|
| Rated impulse withstand voltage       | U <sub>imp</sub> | V AC | 6000  |
| Overtoltage category/pollution degree |                  |      | III/3 |
| Rated operational voltage             | U <sub>e</sub>   | V    |       |
|                                       | U <sub>e</sub>   | V DC | 250   |

|  |              |               |  |
|--|--------------|---------------|--|
| Safe isolation to EN 61140                   |              |               |  |
| Between auxiliary contacts and main contacts |              | V AC          | 690  |
| Rated operational current                    | $I_e$        | A             |  |
| AC-15  |              |               |  |
| 220 - 240 V                                  | $I_e$        | A             | 3.5  |
| 380 - 415 V                                  | $I_e$        | A             | 2  |
| 440 V 500 V                                  | $I_e$        | A             | 1  |
| DC-13 L/R - 100 ms                           |              |               |  |
| 24 V   | $I_e$        | A             | 2  |
| 60 V   | $I_e$        | A             | 1  |
| 110 V  | $I_e$        | A             | 0.5  |
| 220 V  | $I_e$        | A             | 0.25   |
| Lifespan                                     |              | S             |  |
| Lifespan, mechanical                         | Operations   | $\times 10^6$ | > 0.01   |
| Lifespan, electrical                         | Operations   | $\times 10^6$ | 0.05   |
| Control circuit reliability                  | Failure rate | $\lambda$     | $<10^{-8}$ , < one failure at 100 million operations<br>(at $U_e = 24$ V DC, $U_{min} = 17$ V, $I_{min} = 5.4$ mA) |
| Short-circuit rating without welding         |              |               |  |
| Fuseless                                     |              | Type          | FAZ-B4/1-HI  |
| Fuse   |              | A gG/gL       | 10   |

### Terminal capacities

|   |  |                 |            |
|---|--|-----------------|------------|
| Solid or flexible conductor, with ferrule |  | mm <sup>2</sup> | 0,75 - 2,5 |
| Solid or stranded                         |  | AWG             | 18 - 14    |

### Rating data for approved types

|             |  |   |      |
|-------------|--|---|------|
| Pilot Duty  |  |   |      |
| AC operated |  |   | A600 |
| DC operated |  |   | Q300 |
| General Use |  |   |      |
| AC          |  | V | 600  |
| AC          |  | A | 5    |
| DC          |  | V | 250  |
| DC          |  | A | 1    |

## Design verification as per IEC/EN 61439

|  |            |    |  |
|--|------------|----|--|
| Technical data for design verification   |            |    |  |
| Rated operational current for specified heat dissipation   | $I_n$      | A  | 3.5  |
| Heat dissipation per pole, current-dependent   | $P_{vid}$  | W  | 0.1  |
| Equipment heat dissipation, current-dependent  | $P_{vid}$  | W  | 0  |
| Static heat dissipation, non-current-dependent   | $P_{vs}$   | W  | 0  |
| Heat dissipation capacity  | $P_{diss}$ | W  | 0  |
| Operating ambient temperature min.   |            | °C | -25  |
| Operating ambient temperature max.   |            | °C | 55   |
| IEC/EN 61439 design verification   |            |    |  |
| 10.2 Strength of materials and parts   |            |    |  |
| 10.2.2 Corrosion resistance  |            |    | Meets the product standard's requirements.                         |
| 10.2.3.1 Verification of thermal stability of enclosures   |            |    | Meets the product standard's requirements.                         |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |            |    | Meets the product standard's requirements.                         |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |            |    | Meets the product standard's requirements.                         |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |            |    | Meets the product standard's requirements.                         |
| 10.2.5 Lifting   |            |    | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.6 Mechanical impact   |            |    | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.7 Inscriptions  |            |    | Meets the product standard's requirements.                         |
| 10.3 Degree of protection of ASSEMBLIES  |            |    | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.4 Clearances and creepage distances   |            |    | Meets the product standard's requirements.                         |

|  |  |  |
|--|--|--|
| 10.5 Protection against electric shock                   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.6 Incorporation of switching devices and components   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.7 Internal electrical circuits and connections        |  | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors                 |  | Is the panel builder's responsibility.   |
| 10.9 Insulation properties                               |  |  |
| 10.9.2 Power-frequency electric strength                 |  | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage                         |  | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material |  | Is the panel builder's responsibility.   |
| 10.10 Temperature rise                                   |  | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating                               |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility                      |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function                                |  | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |


## Technical data ETIM 7.0

|  |   |                  |
|--|---|------------------|
| Low-voltage industrial components (EG000017) / Auxiliary contact block (EC000041)  |   |                  |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Component for low-voltage switching technology / Auxiliary switch block (ecl@ss10.0.1-27-37-13-02 [AKN342013]) |   |                  |
| Number of contacts as change-over contact  |   | 0                |
| Number of contacts as normally open contact  |   | 0                |
| Number of contacts as normally closed contact  |   | 2                |
| Number of fault-signal switches  |   | 1                |
| Rated operation current I <sub>e</sub> at AC-15, 230 V   | A | 3.5              |
| Type of electric connection  |   | Screw connection |
| Model  |   | Top mounting     |
| Mounting method  |   | Side mounting    |
| Lamp holder  |   | None             |

## Approvals


|                                      |  |  |
|--------------------------------------|--|--|
| Product Standards                    |  | UL 508; CSA-C22.2 No. 14; IEC60947-4-1; CE marking |
| UL File No.                          |  | E36332   |
| UL Category Control No.              |  | NLRV   |
| CSA File No.                         |  | 165628   |
| CSA Class No.                        |  | 3211-05  |
| North America Certification          |  | UL listed, CSA certified                           |
| Specially designed for North America |  | No   |

## Characteristics

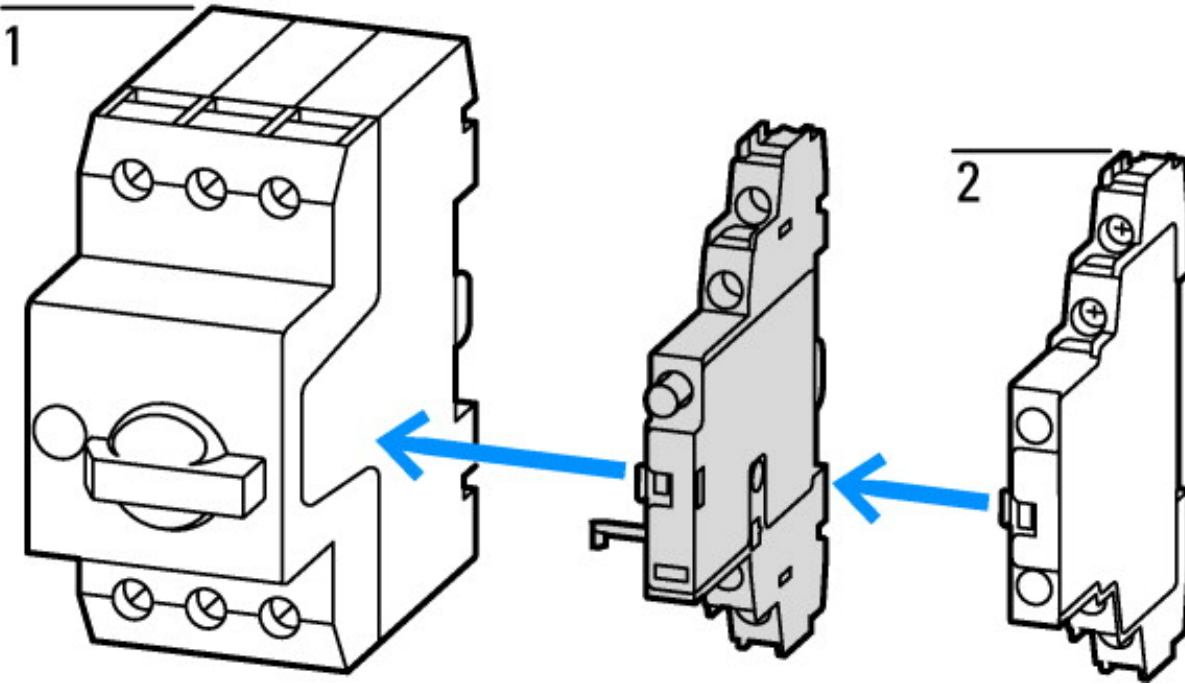

1: Motor-protective circuit-breakers  
2: Standard auxiliary contact

## Dimensions

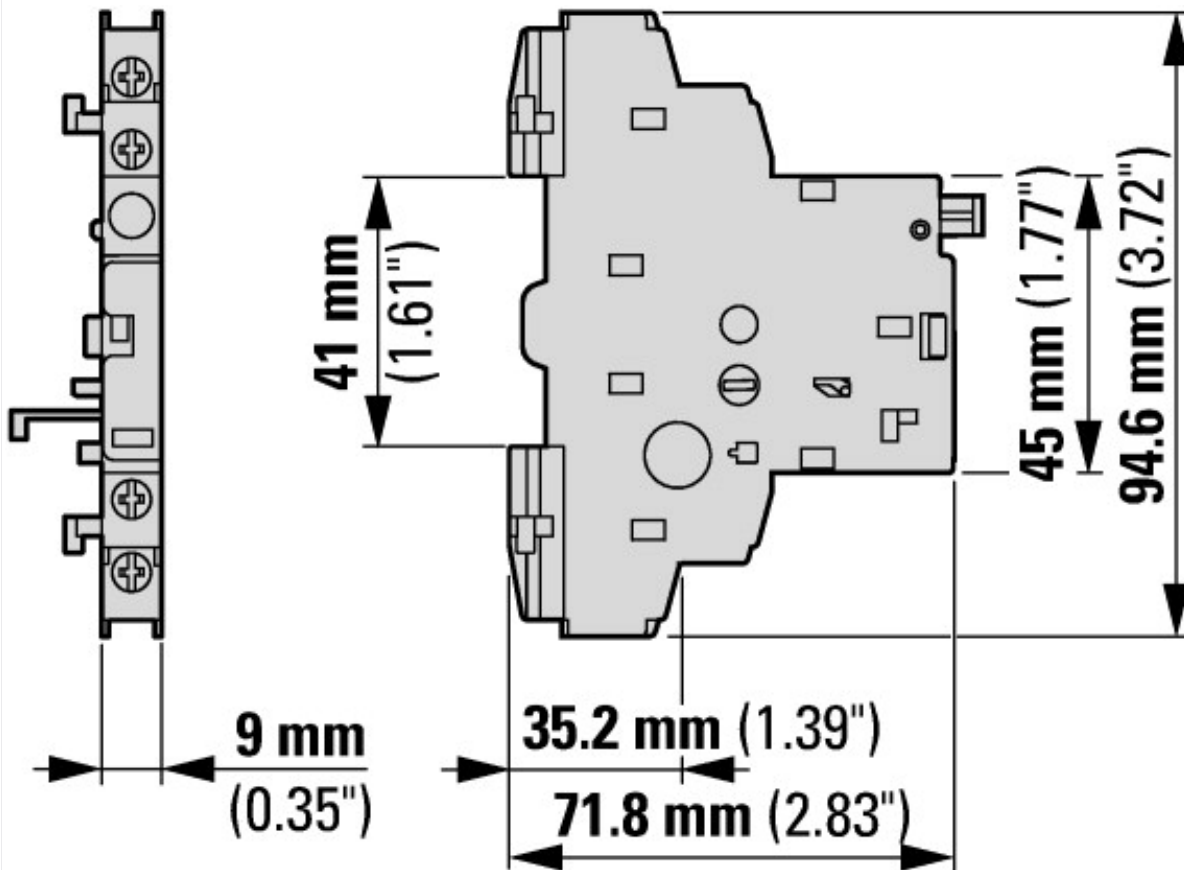

## Additional product information (links)

### IL03402030Z (AWA1210-1328) Trip-indicating auxiliary contact for PKZM0

IL03402030Z (AWA1210-1328) Trip-indicating auxiliary contact for PKZM0 [https://es-assets.eaton.com/DOCUMENTATION/AWA\\_INSTRUCTIONS/IL03402030Z2018\\_04.pdf](https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL03402030Z2018_04.pdf)

### IL03402034Z (AWA1210-1945) Motor-protective circuit-breaker, Starter

IL03402034Z (AWA1210-1945) Motor-protective circuit-breaker, Starter [https://es-assets.eaton.com/DOCUMENTATION/AWA\\_INSTRUCTIONS/IL03402034Z2018\\_06.pdf](https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL03402034Z2018_06.pdf)

Motor starters and "Special Purpose Ratings" for the North American market [http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct\\_3258146.pdf](http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf)

