


# inductive sensor

#### Ni50U-CK40-AP6X2-H1141




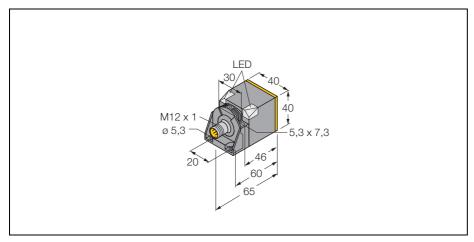

Туре	Ni50U-CK40-AP6X2-H1141 1625837	
Ident-No.		
Rated operating distance Sn	50 mm	
Mounting condition	non-flush, flush mounting possible	
Assured switching distance	≤ (0,81 x Sn) mm	
Repeatability	≤ 2 %	
Temperature drift	≤ ± 10 %	
Hysteresis	3 15 %	
Ambient temperature	-25+ 70 °C	
Operating voltage	10 30 VDC	
Residual ripple	≤ 10 % U <sub>SS</sub>	
DC rated operational current	≤ 200 mA	
No-load current I <sub>0</sub>	≤ 15 mA	
Residual current	≤ 0.1 mA	
Rated insulation voltage	≤ 0.5 kV	
Short-circuit protection	yes / cyclic	
Voltage dip at I <sub>a</sub>	≤ 1.8 V	
Wire breakage / Reverse polarity protection	yes / complete	
Output function	3-wire, normally open, pnp	
Insulation class		
Switching frequency	 ≤ 0.25 kHz	
Housing	rectangular, CK40	
Dimensions	65 x 40 x 40 mm	
	variable orientation of active face in 5 direc-	
	tions	
Housing material	plastic, PBT-GF30-V0, black	
Material active area	plastic, PA6-GF30-X, yellow	
Connection	Connector, M12 x 1	
Vibration resistance	55 Hz (1 mm)	
Shock resistance	30g (11 ms)	
Degree of protection	IP68	
Operating voltage display	2 x LEDs green	
Display switch state	2 x LED yellow	
Land along the second of the second	DO 4 01/40	

- rectangular, height 40 mm
- variable orientation of active face in 5 directions
- Plastic, PBT-GF30-V0
- Corner LEDs with high luminance level
- optimum visibility of operatingvoltage display and switching state in any installation position
- factor 1 for all metals
- extended switching distance
- degree of protection IP68
- magnetic field immune
- predamping protection through self-compensation
- partial embedding possible
- 3-wire DC, 10...30 VDC
- normally open, pnp output
- connector, M12 x 1

#### Wiring diagram



### **Functional principle**

Inductive sensors are designed for wearfree and non-contact detection of metal objects. uprox+ sensors have considerable advantages due to their patented multi-coil system. They excel in highest switching distances, maximum flexibility and operational reliability as well as efficient standardisation.

Included in scope of supply

BS4-CK40





# inductive sensor


# Ni50U-CK40-AP6X2-H1141



Mounting instructions	minimum distances
Distance D	240 mm
Distance W	105 mm
Distance S	60 mm
Distance G	300 mm
Distance N	30 mm
Width of the active area B	40 mm

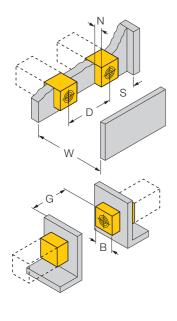

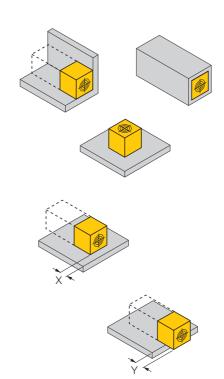



up to 4-side flush mounting possible

1-side flush mounting: Sr = 35 mm; D = 240 mm 2-side flush mounting: Sr = 25 mm; D = 240 mm 3-side flush mounting: Sr = 20 mm; D = 80 mm 4-side flush mounting: Sr = 17 mm; D = 60 mm

back-mounting as well as recessed mounting with switching distance reduction possible

recessed sensor mounting in metal:

x = 10 mm: Sr = 20 mm x = 20 mm: Sr = 20 mm x = 30 mm: Sr = 20 mm x = 40 mm: Sr = 20 mm

protruded sensor mounting on metal:

x = 10 mm: Sr = 40 mm x = 20 mm: Sr = 50 mm x = 30 mm: Sr = 50 mmx = 40 mm: Sr = 50 mm

mounting in aperture plate:

T = 150 mm:

sensor with rotated turning angle based on metal Sr = 50 mm

based on metal and one-side embedding Sr = 25 mm

based on metal and two-side embedding Sr = 15 mm

based on metal and three-side embedding Sr = 12 mm

The values stated relate to 1 mm thick steel plate.





# Ni50U-CK40-AP6X2-H1141

# **Accessories**

Type code	Ident-	Short text	Dimension drawing
	No.		
BSS-CP40	6901318	fixing clamp; material: polypropylene	