# SMD ONE PORT 390 MHz SAW RESONATOR







### > STANDARD SPECIFICATIONS:

CHARACTERISTICS			UNIT	MIN.	TYP.	MAX.
Center Frequency Fo			MHz	389.900	390.00	390.100
Tolerance from Fo			KHz		±75	
Insertion Loss		dB	-	1.2	2.0	
Quality Factor	Unloaded		-		11,500	
	50Ω loaded				1,800	
Temperature Stability	Turnover Temperature		°C		25	
	Turnover Frequency		KHz		Fo+7.7	
	Freq. Temp. Coefficient		ppm/°C <sup>2</sup>		0.037	
Frequency Aging		ppm/year			<±10	
DC Insulation Resistance			$M\Omega$	1.0		
RF Equivalent RLC Model	Motional Resistance R <sub>1</sub>		Ω		22	100
	Motional Inductance L <sub>1</sub>		μΗ		83	
	Motional Capacitance C <sub>1</sub>		fF		1.97	
	Shunt Capacitance C <sub>0</sub>		pF	2.0	3.0	4.0
Operating temp.		°C		-45°C to +85°C		
Storage temp.		°C	-45°C to +85°C			
Max. Rating	DC voltage V		±10			
RF Power Dissipation		dBm	0			

Data measured with: Source Impedance:  $Zs=50\Omega$ , Load Impedance:  $ZL=50\Omega$ , TA=25°C Electrostatic Sensitive Device. Handle with precaution.


#### > MARKING:

- 390R (390 Frequency in MHz)
- A ZYX (ZY: Date code Z for month from A to L; Y for year,

I.e. 4 for 2004


X: Traceability code)

# > FREQUENCY RESPONSE:



PIN NO.	NO. CONNECTIONS	
2	Input	
6	Output	
4,8	Case GND	
Others	GND	

### > OUTLINE DRAWING:

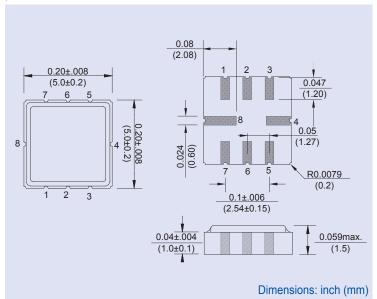

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.





## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

### **ABRACON:**

<u>ASR390.00N01-SD01</u> <u>ASR390.00N01-SD02</u> <u>ASR390.00N01-SE</u> <u>ASR390.33N01-SD01</u> <u>ASR390.33N01-SD02</u> ASR390.00N01-SS2 ASR390E-T