

*Al* 

### E480232

#### **Features**

- · Low Inductance
- · Built in Strain Relief
- · For Surface Mount Application in Order to Optimize Board Space
- High Temperature Soldering: 260°C/10 Seconds at Terminals
- Typical I<sub>D</sub>:less than 1uA above 10V
- Low Profile Package
- Repetition Rate( duty cycle): 0.01%
- · Glass Passivated Junction
- Excellent Clamping Capability
- Halogen Free Available Upon Request By Adding Suffix "-HF"
- Moisture Sensitivity Level 1
- Epoxy Meets UL 94 V-0 Flammability Rating
- Lead Free Finish/RoHS Compliant (Note1) ("P" Suffix Designates Compliant. See Ordering Information)

#### **Mechanical Data**

- Polarity: Color Band Denotes Positive End( cathode) Except Bi-directional Types
- Standard Packaging: 16mm Tape Per (EIA 481)
- Weight: 0.007 ounce, 0.21 gram
- Terminals: Solderable Per MIL-STD-750, Method 2026

### **Maximum Ratings**

- Operating Junction Temperature Range: -55°C to +175°C
- Storage Temperature Range: -55°C to +175°C
- Typical Thermal Resistance: 23°C/W Junction to Ambient

Peak Pulse Power Surge Current on 10/1000µs Waveform	I <sub>PPM</sub>	See the Table	Note 2		
Peak Pulse Power Dissipation on 10/1000µs Waveform	P <sub>PPM</sub>	5000W(Min)	Note 2,3		
Power Dissipationon infinite heat sink	$P_D$	6.5W	T <sub>L</sub> = 75°C.		
Fast response time	typically less than 1.0ps from 0 Volts to BV Min				

Note: 1. High Temperature Solder Exemption Applied, see EU Directive Annex 7a.

- 2. Non-repetitive current pulse and derated above  $T_A$ =25  $^{\circ}C$
- 3. Mounted on 8.0mm<sup>2</sup> copper pads to each terminal.


#### Pin Configuration:






# 5000 Watt TVS 11 to 400 Volts

## SMC (DO-214AB) (LEAD FRAME)



DIMENSIONS						
DIM INCI		HES	M	М	NOTE	
DIIVI	MIN	MAX	MIN	MAX	NOTE	
Α	0.079	0.103	2.00	2.62		
В	0.108	0.128	2.75	3.25		
С	0.002	0.008	0.051	0.203		
D	0.006	0.012	0.152	0.305		
E	0.030	0.060	0.76	1.52		
F	0.305	0.320	7.75	8.13		
G	0.260	0.280	6.60	7.11		
Н	0.220	0.245	5.59	6.22		

## Suggested Solder Pad Layout





Reverse Stand-Off Voltage		•	Test Current	Max. Clamping Voltage @I <sub>PP</sub>	Peak Pulse Current	Reverse Leakage Current@V <sub>RWM</sub>	Marking Code
V <sub>RWM</sub> (V)	Min	Max	I <sub>T</sub> (mA)	V <sub>C</sub> (V)	I <sub>PP</sub> (A)	I <sub>D</sub> (μA)	
11	12.2	13.5	10	18.2	275	800	5PEN
12	13.3	14.7	10	19.9	252	800	5PEP
13	14.4	15.9	10	21.5	233	500	5PEQ
14	15.6	17.2	10	23.2	216	200	5PER
15	16.7	18.5	1	24.4	205	100	5PES
16	17.8	19.7	1	26	193	50	5PET
17	18.9	20.9	1	27.6	181	20	5PEU
18	20	22.1	1	29.2	172	10	5PEV
20	22.2	24.5	1	32.4	155	5	5PEW
22	24.4	26.9	1	35.5	141	5	5PEX
24	26.7	29.5	1	38.9	129	5	5PEZ
26	28.9	31.9	1	42.1	119	5	5PFE
28	31.1	34.4	1	45.4	110	5	5PFG
30	33.3	36.8	1	48.4	103	5	5PFK
33	36.7	40.6	1	53.3	93.9	5	5PFM
36	40	44.2	1	58.1	86.1	5	5PFP
40	44.4	49.1	1	64.5	77.6	5	5PFR
43	47.8	52.8	1	69.4	72.1	5	5PFT
45	50	55.3	1	72.7	68.8	5	5PFV
48	53.3	58.9	1	77.4	64.7	5	5PFX
51	56.7		1	82.4	60.7		5PFZ
54	60	66.3	1	87.1	57.5	5	5RGE
58	64.4	71.2	1	93.6	53.5	5	5PGG
60	66.7	73.7	1	96.8	51.7	5	5PGK
64	71.1	78.6	1	103	48.6	5	5PGM
70	77.8	86	1	113	44.3	5	5PGP
75	83.3	92.1	1	121	41.4	5	5PGR
78	86.7	95.8	1	126	39.7	5	5PGT
85	94.4	104	1	137	36.5	5	5PGV
90	100	111	1	146	34.3	5	5PGX
100	111	123	1	162	30.9	5	5PGZ
110	122	135	1	177	28.3	5	5PHE
120	133	147	1	193	26	5	5PHG
130	144	159	1	209	24	5	5PHK
150	167	185	1	243	20.6	5	5PHM
160	178	197	1	259	19.3	5	5PHP
170	189	209	1	275	18.2	5	5PHR
180	200	220	1	292	17.1	5	5PHT
190	211	258	1	308	16.2	5	5PHV
200	224	247	1	324	15.4	5	5PHW
220	246	272	1	356	14.0	5	5PHX
250	279	309	1	405	12.3		5PHZ
300	335	371		486	10.3		5PJE
350	391	432	1	567	8.8	5	5PJG
400	447	494	1	648	7.7	5	5PJK
	Stand-Off Voltage  V <sub>RWM</sub> (V)  11  12  13  14  15  16  17  18  20  22  24  26  28  30  33  36  40  43  45  48  51  54  58  60  64  70  75  78  85  90  100  110  120  130  150  160  170  180  190  200  220  250  300  350	Stand-Off Voltage         Breakdov Vest           V <sub>RWM</sub> (V)         Min           11         12.2           12         13.3           13         14.4           14         15.6           15         16.7           16         17.8           17         18.9           18         20           20         22.2           22         24.4           24         26.7           26         28.9           28         31.1           30         33.3           33         36.7           36         40           40         44.4           43         47.8           45         50           48         53.3           51         56.7           54         60           58         64.4           60         66.7           64         71.1           70         77.8           75         83.3           78         86.7           85         94.4           90         100           100         111	Stand-Off Voltage         Very New Notage           Voltage         Very New Notage           Very New Notage         Very New Notage           Very New Notage         Very New Notage           11         12.2         13.5           12         13.3         14.7           13         14.4         15.9           14         15.6         17.2           15         16.7         18.5           16         17.8         19.7           17         18.9         20.9           18         20         22.1           20         22.2         24.5           22         24.4         26.9           24         26.7         29.5           26         28.9         31.9           28         31.1         34.4           30         33.3         36.8           33         36.7         40.6           36         40         44.2           40         44.4         49.1           43         47.8         52.8           45         50         55.3           48         53.3         58.9           51         56.7	Stand-Off Voltage         V <sub>BR</sub> (V)         Iest Current           V <sub>RWM</sub> (V)         Min         Max         I <sub>T</sub> (mA)           11         12.2         13.5         10           12         13.3         14.7         10           13         14.4         15.9         10           14         15.6         17.2         10           15         16.7         18.5         1           16         17.8         19.7         1           17         18.9         20.9         1           18         20         22.1         1           20         22.2         24.5         1           22         24.4         26.9         1           24         26.7         29.5         1           26         28.9         31.9         1           28         31.1         34.4         1           30         33.3         36.8         1           33         36.7         40.6         1           40         44.4         49.1         1           43         47.8         52.8         1           45         50         55.3	Stand-Off Voltage         V <sub>RR</sub> (V)         Test Current         Clamping Voltage @lpp           V <sub>RWM</sub> (V)         Min         Max         I <sub>T</sub> (mA)         V <sub>C</sub> (V)           11         12.2         13.5         10         18.2           12         13.3         14.7         10         19.9           13         14.4         15.9         10         21.5           14         15.6         17.2         10         23.2           15         16.7         18.5         1         24.4           16         17.8         19.7         1         26           17         18.9         20.9         1         27.6           18         20         22.1         1         29.2           20         22.2         24.5         1         32.4           22         24.4         26.9         1         35.5           24         26.7         29.5         1         38.9           26         28.9         31.9         1         42.1           28         31.1         34.4         1         45.4           30         33.3         36.8         1         48.4 <t< td=""><td>Stand-Off Voltage         V<sub>BR</sub>(V)         Current         Clamping Voltage (Q) Ipp         Pulse Current           V<sub>RWM</sub>(V)         Min         Max         I₁(mA)         V<sub>C</sub>(V)         I₁pp(A)           11         12.2         13.5         10         18.2         275           12         13.3         14.7         10         19.9         252           13         14.4         15.9         10         21.5         233           14         15.6         17.2         10         23.2         216           15         16.7         18.5         1         24.4         205           16         17.8         19.7         1         26         193           17         18.9         20.9         1         27.6         181           18         20         22.1         1         29.2         172           20         22.2         24.5         1         32.4         155           22         24.4         26.9         1         35.5         141           24         26.7         29.5         1         38.9         129           26         28.9         31.9         1         42.1</td><td>Stand-Off Voltage         V<sub>SR</sub>(V)         Least Current         Clamping Voltage @lep         Pulse Current@V<sub>RWM</sub>         Leakage Current@V<sub>RWM</sub>           V<sub>RWM</sub>(V)         Min         Max         I+(mA)         V<sub>C</sub>(V)         l<sub>pe</sub>(A)         l<sub>p</sub>(µ)           11         12.2         13.5         10         18.2         275         800           12         13.3         14.4         10         19.9         252         800           13         14.4         15.9         10         21.5         233         500           14         15.6         17.2         10         23.2         216         200           15         16.7         18.5         1         24.4         205         100           16         17.8         19.7         1         26         193         50           17         18.9         20.9         1         27.6         181         20           22.1         1         29.2         172.6         181         20         22.1         1         29.2         172.1         10           24         26.7         29.5         1         38.9         129         5         5         22         24.4</td></t<>	Stand-Off Voltage         V <sub>BR</sub> (V)         Current         Clamping Voltage (Q) Ipp         Pulse Current           V <sub>RWM</sub> (V)         Min         Max         I₁(mA)         V <sub>C</sub> (V)         I₁pp(A)           11         12.2         13.5         10         18.2         275           12         13.3         14.7         10         19.9         252           13         14.4         15.9         10         21.5         233           14         15.6         17.2         10         23.2         216           15         16.7         18.5         1         24.4         205           16         17.8         19.7         1         26         193           17         18.9         20.9         1         27.6         181           18         20         22.1         1         29.2         172           20         22.2         24.5         1         32.4         155           22         24.4         26.9         1         35.5         141           24         26.7         29.5         1         38.9         129           26         28.9         31.9         1         42.1	Stand-Off Voltage         V <sub>SR</sub> (V)         Least Current         Clamping Voltage @lep         Pulse Current@V <sub>RWM</sub> Leakage Current@V <sub>RWM</sub> V <sub>RWM</sub> (V)         Min         Max         I+(mA)         V <sub>C</sub> (V)         l <sub>pe</sub> (A)         l <sub>p</sub> (µ)           11         12.2         13.5         10         18.2         275         800           12         13.3         14.4         10         19.9         252         800           13         14.4         15.9         10         21.5         233         500           14         15.6         17.2         10         23.2         216         200           15         16.7         18.5         1         24.4         205         100           16         17.8         19.7         1         26         193         50           17         18.9         20.9         1         27.6         181         20           22.1         1         29.2         172.6         181         20         22.1         1         29.2         172.1         10           24         26.7         29.5         1         38.9         129         5         5         22         24.4







MCC Part Number	Reverse Stand-Off Voltage	Breakdown Voltage V <sub>BR</sub> (V)		Test Current	Max. Clamping Voltage @I <sub>PP</sub>	Peak ge Pulse Current	Reverse Leakage Current@V <sub>RWM</sub>	Marking Code
Bi-directional	V <sub>RWM</sub> (V)	Min	Max	I <sub>T</sub> (mA)	V <sub>C</sub> (V)	I <sub>PP</sub> (A)	I <sub>D</sub> (μA)	
5.0SMLJ11CA	11	12.2	13.5	10	18.2	275	800	5BEN
5.0SMLJ12CA	12	13.3	14.7	10	19.9	252	800	5BEP
5.0SMLJ13CA	13	14.4	15.9	10	21.5	233	500	5BEQ
5.0SMLJ14CA	14	15.6	17.2	10	23.2	216	200	5BER
5.0SMLJ15CA	15	16.7	18.5	1	24.4	205	100	5BES
5.0SMLJ16CA	16	17.8	19.7	1	26	193	50	5BET
5.0SMLJ17CA	17	18.9	20.9	1	27.6	181	20	5BEU
5.0SMLJ18CA	18	20	22.1	1	29.2	172	10	5BEV
5.0SMLJ20CA	20	22.2	24.5	1	32.4	155	5	5BEW
5.0SMLJ22CA	22	24.4	26.9	1	35.5	141	5	5BEX
5.0SMLJ24CA	24	26.7	29.5	1	38.9	129	5	5BEZ
5.0SMLJ26CA	26	28.9	31.9	1	42.1	119	5	5BFE
5.0SMLJ28CA	28	31.1	34.4	1	45.4	110	5	5BFG
5.0SMLJ30CA	30	33.3	36.8	1	48.4	103	5	5BFK
5.0SMLJ33CA	33	36.7	40.6	1	53.3	93.9	5	5BFM
5.0SMLJ36CA	36	40	44.2	1	58.1	86.1	5	5BFP
5.0SMLJ40CA	40	44.4	49.1	1	64.5	77.6	5	5BFR
5.0SMLJ43CA	43	47.8	52.8	1	69.4	72.1	5	5BFT
5.0SMLJ45CA	45	50	55.3	1	72.7	68.8	5	5BFV
5.0SMLJ48CA	48	53.3	58.9	1	77.4	64.7	5	5BFX
5.0SMLJ51CA	51	56.7	62.7	1	82.4	60.7	5	5BFZ
5.0SMLJ54CA	54	60	66.3	1	87.1	57.5	5	5BGE
5.0SMLJ58CA	58	64.4	71.2	1	93.6	53.5	5	5BGG
5.0SMLJ60CA	60	66.7	73.7	1	96.8	51.7	5	5BGK
5.0SMLJ64CA	64	71.1	78.6	1	103	48.6	5	5BGM
5.0SMLJ70CA	70	77.8	86	1	113	44.3	5	5BGP
5.0SMLJ75CA	75	83.3	92.1	1	121	41.4	5	5BGR
5.0SMLJ78CA	78	86.7	95.8	1	126	39.7	5	5BGT
5.0SMLJ85CA	85	94.4	104	1	137	36.5	5	5BGV
5.0SMLJ90CA	90	100	111	1	146	34.3	5	5BGX
5.0SMLJ100CA	100	111	123	1	162	30.9	5	5BGZ
5.0SMLJ110CA	110	122	135	1	177	28.3	5	5BHE
5.0SMLJ120CA	120	133	147	1	193	26	5	5BHG
5.0SMLJ130CA	130	144	159	1	209	24	5	5BHK
5.0SMLJ150CA	150	167	185	1	243	20.6	5	5BHM
5.0SMLJ160CA	160	178	197	1	259	19.3	5	5BHP
5.0SMLJ170CA	170	189	209	1	275	18.2	5	5BHR


Rev.3-2-03212019 3/5 MCCSEMI.COM




## **Curve Characteristics**

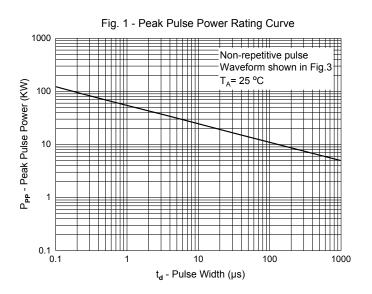

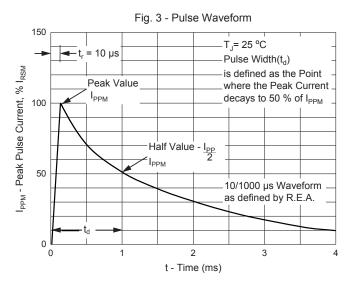

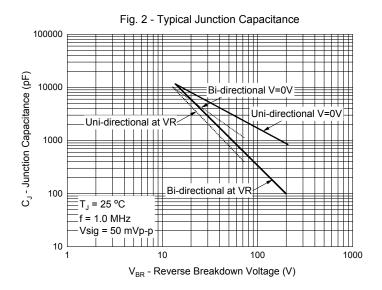

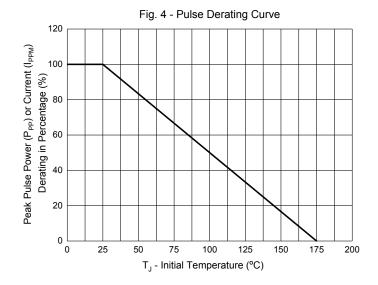

Rev.3-2-03212019 4/5 MCCSEMI.COM



## **Ordering Information**

Device	Packing
Part Number-TP	Tape&Reel:3Kpcs/Reel

Note: Adding "-HF" Suffix For Halogen Free, eg. Part Number-TP-HF

#### \*\*\*IMPORTANT NOTICE\*\*\*

**Micro Commercial Components Corp**. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. **Micro Commercial Components Corp**. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp**, and all the companies whose products are represented on our website, harmless against all damages.

#### \*\*\*LIFE SUPPORT\*\*\*

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

### \*\*\*CUSTOMER AWARENESS\*\*\*

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

Rev.3-2-03212019 5/5 MCCSEMI.COM

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Micro Commercial Components (MCC):

5.0SMLJ150A-TP 5.0SMLJ150CA-TP 5.0SMLJ15A-TP 5.0SMLJ15CA-TP 5.0SMLJ18A-TP 5.0SMLJ18CA-TP 5.0SMLJ24CA-TP 5.0SMLJ24CA-TP 5.0SMLJ33CA-TP 5.0SMLJ36A-TP 5.0SMLJ36CA-TP 5.0SMLJ36A-TP 5.0SMLJ36CA-TP 5.0SMLJ48A-TP 5.0SMLJ48CA-TP 5.0SMLJ12CA-TP 5.0SMLJ54CA-TP 5.0SMLJ130A-TP 5.0SMLJ36CA-TP 5.0SMLJ11A-TP 5.0SMLJ16CA-TP 5.0SMLJ15CA-TP 5.0SMLJ15CA-TP 5.0SMLJ170A-TP 5.0SMLJ16CA-TP 5.0SMLJ16CA-TP 5.0SMLJ16CA-TP 5.0SMLJ16CA-TP 5.0SMLJ16CA-TP 5.0SMLJ16CA-TP 5.0SMLJ16CA-TP 5.0SMLJ13A-TP 5.0SMLJ13A-TP 5.0SMLJ13CA-TP 5.0SMLJ14CA-TP 5.0SMLJ110CA-TP 5.0SMLJ110CA-TP 5.0SMLJ110CA-TP 5.0SMLJ110CA-TP 5.0SMLJ110CA-TP 5.0SMLJ110CA-TP 5.0SMLJ110CA-TP 5.0SMLJ110CA-TP 5.0SMLJ12CA-TP 5.0SMLJ12CA-TP 5.0SMLJ12CA-TP 5.0SMLJ12CA-TP 5.0SMLJ12CA-TP 5.0SMLJ12CA-TP 5.0SMLJ12CA-TP 5.0SMLJ16CA-TP 5.0SM