

## Buffer module - QUINT4-BUFFER/24DC/40 - 2908283

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



QUINT buffer module with maintenance-free capacitor-based energy storage for DIN rail mounting, input: 24 V DC, output: 24 V DC/40 A, including mounted UTA 107 universal DIN rail adapter.

### Product Description


Bridge failures lasting several seconds with the buffer modules from the QUINT range for DIN rails. The QUINT BUFFER combines an electronic switch-over unit and maintenance-free, capacitor-based energy storage in the same housing.

### Your advantages

- ✓ Space savings, thanks to the compact design
- ✓ Maintenance-free due to electrolytic capacitors
- ✓ Thanks to soft start, can also be used with power supplies in the low power range



### Key Commercial Data

Packing unit	1 pc
GTIN	 4 055626 309200
GTIN	4055626309200
Weight per Piece (excluding packing)	1,328.000 g
Custom tariff number	85322900
Country of origin	China

### Technical data

#### Dimensions

Width	72 mm
Height	130 mm
Depth	125 mm

#### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-25 °C ... 70 °C (> 40 °C Derating: 0.56 %/K / > 60 °C Derating: 2.5 %/K)
Ambient temperature (start-up type tested)	-40 °C

# Buffer module - QUINT4-BUFFER/24DC/40 - 2908283

## Technical data

### Ambient conditions

Ambient temperature (storage/transport)	-40 °C ... 70 °C
Max. permissible relative humidity (operation)	≤ 95 %
Climatic class	3K3 (in acc. with EN 60721)
Degree of pollution	2
Installation height	≤ 4000 m

### Input data

Input voltage	24 V DC (SELV)
Input voltage range	22.5 V DC ... 30 V DC
Current consumption (maximum)	46 A (max.)
Current consumption (idle)	0.2 A (No-load)
Current consumption (charging process)	0.8 A (charging process)
Fixed connect threshold	< 22 V DC

### Output data

Nominal output voltage	24 V DC (depending on the input voltage)
Nominal output current (I <sub>N</sub> )	40 A
Static Boost (I <sub>Stat.Boost</sub> )	45 A
Connection in parallel	no
Connection in series	No
Power loss nominal load max.	< 9 W

### General

IQ technology	no
Net weight	1.2 kg
Memory medium	Electrolytic capacitor
Efficiency	> 98 % (with charged energy storage device)
Protection class	Special application (SELV input voltage, hazardous voltages are generated in the device).
Degree of protection	IP20
MTBF (IEC 61709, SN 29500)	2813895 h (40 °C)
Mounting position	horizontal DIN rail NS 35, EN 60715
Assembly instructions	alignable: horizontally 0 mm, vertically 50 mm

### Connection data, input

Connection method	Screw connection
Conductor cross section solid min.	0.5 mm <sup>2</sup>
Conductor cross section solid max.	16 mm <sup>2</sup>
Conductor cross section flexible min.	0.5 mm <sup>2</sup>
Conductor cross section flexible max.	16 mm <sup>2</sup>
Conductor cross section AWG min.	10
Conductor cross section AWG max.	6
Stripping length	10 mm

# Buffer module - QUINT4-BUFFER/24DC/40 - 2908283

## Technical data

### Connection data, output

Connection method	Screw connection
Conductor cross section solid min.	0.5 mm <sup>2</sup>
Conductor cross section solid max.	16 mm <sup>2</sup>
Conductor cross section flexible min.	0.5 mm <sup>2</sup>
Conductor cross section flexible max.	16 mm <sup>2</sup>
Conductor cross section AWG min.	10
Conductor cross section AWG max.	6
Stripping length	10 mm

### Signaling

Signalization designation	U <sub>in</sub> OK
Output name	Electronic relay (photorelay)
Output description	floating 13/14
Output voltage	30 V DC
Continuous load current	200 mA
Status display	LED
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	1.5 mm <sup>2</sup>
Conductor cross section flexible min.	0.2 mm <sup>2</sup>
Conductor cross section flexible max.	1.5 mm <sup>2</sup>
Conductor cross section AWG min.	24
Conductor cross section AWG max.	16
Signalization designation	Ready
Output name	Transistor output, active
Output voltage	24 V (U <sub>N</sub> - 2 V (typical))
Continuous load current	20 mA
Status display	LED
Signalization designation	Reference potential for Ready

### Standards and Regulations

Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
Standards/regulations	EN 61000-4-2
Contact discharge	4 kV (Test Level 2)
Standards/regulations	EN 61000-4-3
Frequency range	80 MHz ... 1 GHz
Test field strength	10 V/m
Standards/regulations	EN 61000-4-4
Comments	Criterion B
Standards/regulations	EN 61000-4-6
Frequency range	0.15 MHz ... 80 MHz
Voltage	10 V
Low Voltage Directive	Conformance with Low Voltage Directive 2014/35/EC

# Buffer module - QUINT4-BUFFER/24DC/40 - 2908283

## Technical data

### Standards and Regulations


Standard - Electrical safety	IEC 60950-1/VDE 0805 (SELV)
UL approvals	UL Listed UL 508
	UL/C-UL Recognized UL 60950-1
Overvoltage category (EN 60950-1)	I

### Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 25;
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

## Drawings

Block diagram

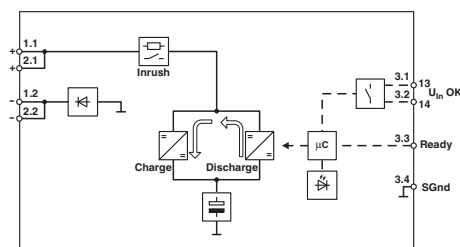

## Classifications

### eCl@ss

eCl@ss 5.1	27242700
eCl@ss 6.0	27242200
eCl@ss 7.0	27242209
eCl@ss 8.0	27049201
eCl@ss 9.0	27049201

### ETIM

ETIM 5.0	EC000599
ETIM 6.0	EC000599

### UNSPSC

UNSPSC 13.2	39121004
-------------	----------

## Approvals

### Approvals

# Buffer module - QUINT4-BUFFER/24DC/40 - 2908283

## Approvals

### Approvals

UL Listed / UL Recognized / cUL Recognized / cUL Listed / EAC / cULus Recognized / cULus Listed

---

### Ex Approvals

UL Listed / cUL Listed / cULus Listed

---

## Approval details

UL Listed		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 123528
UL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 211944
cUL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 211944
cUL Listed		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 123528
EAC			RU C- DE.A*30.B.01082
cULus Recognized			
cULus Listed			

## Accessories

### Accessories

Assembly adapter

## Buffer module - QUINT4-BUFFER/24DC/40 - 2908283

### Accessories

#### Assembly adapters - UWA 130 - 2901664



2-piece universal wall adapter for securely mounting the power supply in the event of strong vibrations. The profiles that are screwed onto the side of the power supply are screwed directly onto the mounting surface. The universal wall adapter is attached on the left/right.

---

#### Assembly adapters - UWA 182/52 - 2938235



Universal wall adapter for securely mounting the power supply in the event of strong vibrations. The power supply is screwed directly onto the mounting surface. The universal wall adapter is attached at the top/bottom.