

## Features

- For Switching and AF Amplifier Applications
- Halogen Free Available Upon Request By Adding Suffix "-HF"
- Moisture Sensitivity Level 1
- Epoxy Meets UL 94 V-0 Flammability Rating
- Lead Free Finish/RoHS Compliant ("P" Suffix Designates RoHS Compliant. See Ordering Information)

## Maximum Ratings


- Operating Junction Temperature Range: -55°C to +150°C
- Storage Temperature Range: -55°C to +150°C
- Thermal Resistance: 320°C/W Junction to Solder-point (Note1)
- Thermal Resistance: 403°C/W Junction to Ambient (Note1)

Parameter	Symbol	Rating	Unit
Collector-Base Voltage	$V_{CBO}$	-80	V
Collector-Emitter Voltage	$V_{CEO}$	-65	V
Emitter-Base Voltage	$V_{EBO}$	-5	V
Collector Current	$I_C$	-100	mA
Peak Collector Current	$I_{CM}$	-200	mA
Peak Emitter Current	$I_{EM}$	-200	mA
Power Dissipation $T_S=50^\circ\text{C}$ (Note1)	$P_D$	310	mW

Note: 1. Package Mounted 1.0\*1.0mm Pad Layout 1oz Copper That is On a Single-sided FR4 PCB.


Part Number	BC856A	BC856B
Marking	3A	3B

## Internal Structure




# PNP Small Signal Transistor

## SOT-23

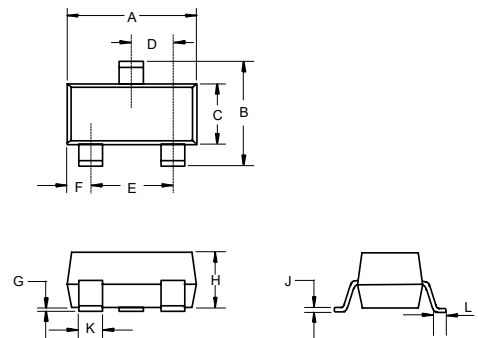

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	0.110	0.120	2.80	3.04	
B	0.083	0.104	2.10	2.64	
C	0.047	0.055	1.20	1.40	
D	0.034	0.041	0.85	1.05	
E	0.067	0.083	1.70	2.10	
F	0.018	0.024	0.45	0.60	
G	0.0004	0.006	0.01	0.15	
H	0.035	0.043	0.90	1.10	
J	0.003	0.007	0.08	0.18	
K	0.014	0.020	0.35	0.51	
L	0.007	0.020	0.20	0.50	

## Suggested Solder Pad Layout

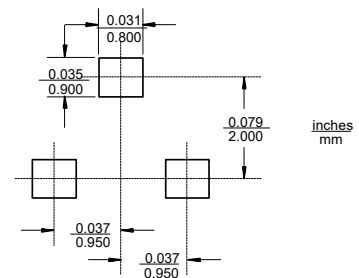

**Electrical Characteristics @ 25°C Unless Otherwise Specified**

Parameter	Symbol	Min	Typ	Max	Units	Conditions
Collector-Base Breakdown Voltage <sup>(Note2)</sup>	$V_{(BR)CBO}$	-80			V	$I_C=-10\mu A, I_E=0$
Collector-Emitter Breakdown Voltage <sup>(Note2)</sup>	$V_{(BR)CEO}$	-65			V	$I_C=-10mA, I_B=0$
Emitter-Base Breakdown Voltage <sup>(Note2)</sup>	$V_{(BR)EBO}$	-5			V	$I_E=-1\mu A, I_C=0$
Collector-Cutoff Current <sup>(Note2)</sup>	$I_{CES}$			-15	nA	$V_{CE}=-80V$
	$I_{CBO}$			-15	nA	$V_{CB}=-30V$
				-4	$\mu A$	$V_{CB}=-30V, T_A=150^\circ C$
DC Current Gain <sup>(Note2)</sup>	BC856 A	125	180	250		$V_{CE}=-5Vdc, I_C=-2mA$
	BC856 B	220	290	475		
Small Signal Current Gain	BC856 A		200			$V_{CE}=-5V$ $I_C=-2mA$ $f=1KHz$
	BC856 B		330			
Input Impedance	BC856 A		2.7		K $\Omega$	
	BC856 B		4.5			
Output Admittance	BC856 A		18		$\mu S$	
	BC856 B		30			
Reverse Voltage Transfer Ratio	BC856 A		$1.5 \times 10^{-4}$			
	BC856 B		$2 \times 10^{-4}$			
Collector-Emitter Saturation Voltage <sup>(Note2)</sup>	$V_{CE(sat)}$		-75	-300	mV	$I_C=-10mA, I_B=-0.5mA$
			-250	-650	mV	$I_C=-100mA, I_B=-5mA$
Base-Emitter Saturation Voltage <sup>(Note2)</sup>	$V_{BE(sat)}$		-700		mV	$I_C=-10mA, I_B=-0.5mA$
			-850		mV	$I_C=-100mA, I_B=-5mA$
Base-Emitter Voltage <sup>(Note2)</sup>	$V_{BE}$	-600	-650	-750	mV	$V_{CE}=-5V, I_C=-2mA$
				-820	mV	$V_{CE}=-5V, I_C=-10mA$
Current Gain-Bandwidth Product	$f_T$	100	200		MHz	$V_{CE}=-5V, I_C=-10mA, f=100MHz$
Collector-Base Capacitance	$C_{CBO}$		3		pF	$V_{CB}=-10V, f=1MHz$
Noise Figure	NF		2	10	dB	$V_{CE}=-5V, I_C=-200\mu A$ $R_S=2K\Omega, f=1KHz, \Delta f=200Hz$

Note: 2. Short Duration Pulse Test to Minimize Self-heating Effect.

**Curve Characteristics**

Fig. 1 - Static Characteristics

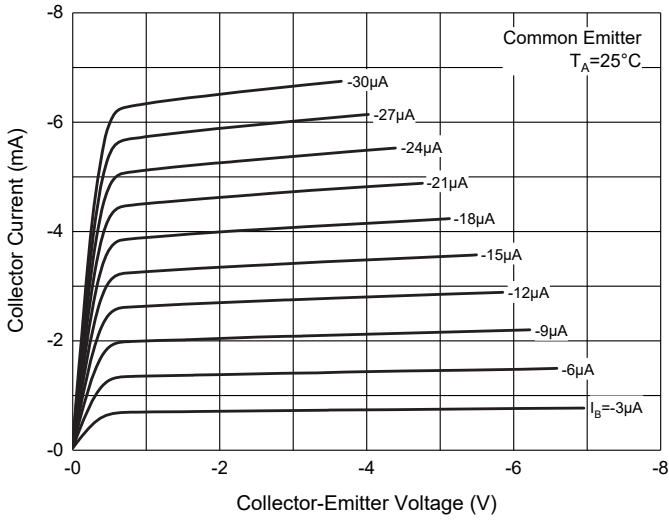


Fig. 2 - DC Current Gain Characteristics

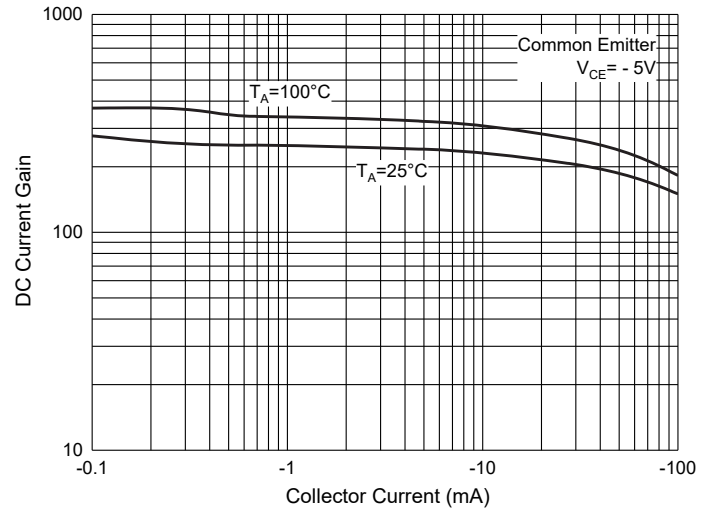


Fig. 3 - Collector-Emitter Saturation Voltage Characteristics

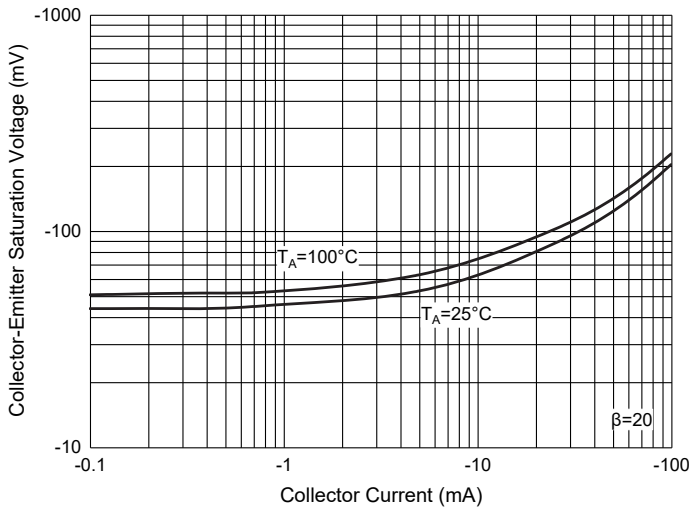


Fig. 4 - Base-Emitter Saturation Voltage Characteristics

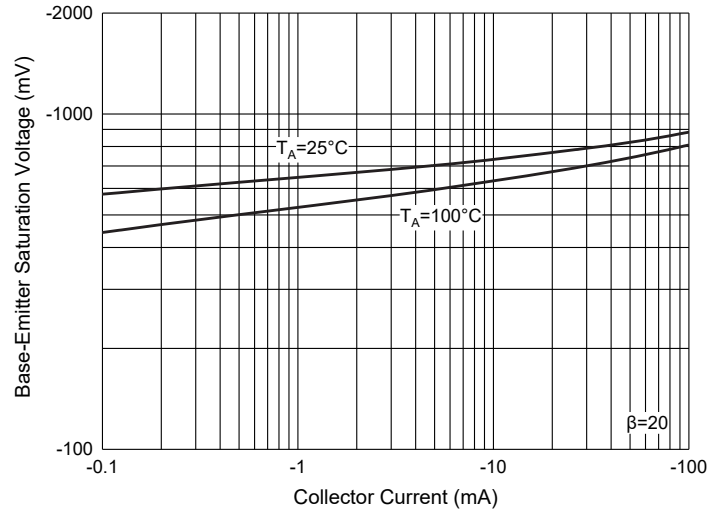


Fig. 5 - Base-Emitter Voltage Characteristics


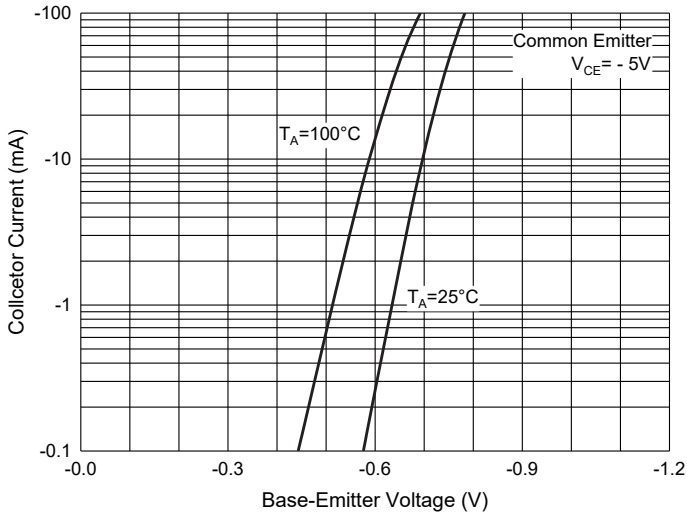


Fig. 6 - Collector Power Derating Curve

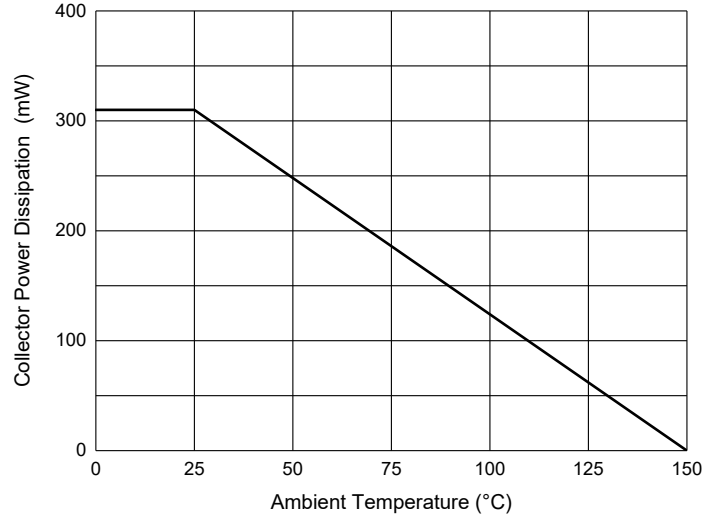

## Ordering Information

Device	Packing
Part Number-TP	Tape&Reel: 3Kpcs/Reel

Note : Adding "-HF" Suffix For Halogen Free, eg. Part Number-TP-HF

### \*\*\*IMPORTANT NOTICE\*\*\*

**Micro Commercial Components Corp.** reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp** . does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp** . and all the companies whose products are represented on our website, harmless against all damages.

### \*\*\*LIFE SUPPORT\*\*\*

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

### \*\*\*CUSTOMER AWARENESS\*\*\*

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.