


Data sheet | Item number: 870-407

Jumper; 7-way; insulated; light gray

www.wago.com/870-407

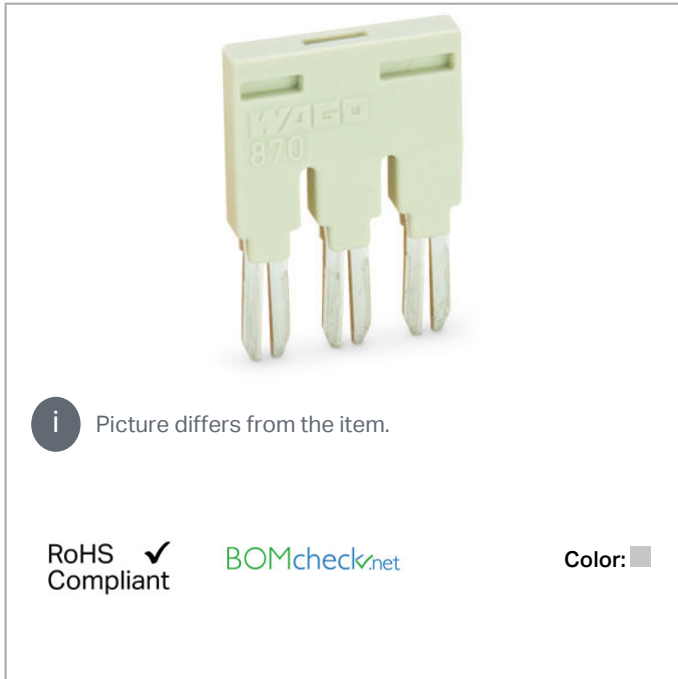

Data

Electrical data

Ratings per IEC/EN 60664-1

Rated current	18 A
---------------	------

Ex information

Rated current (Ex e II)	13.5 A
-------------------------	--------

Physical data

Width	34 mm / 1.339 inch
Height	2.5 mm / 0.098 inch

Material data

Color	light gray
-------	------------

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Fire load	0.034 MJ
Weight	3.4 g

Commercial data

Product Group	16 (Rail Mounted Terminal Block with CCC)
Packaging type	BOX
Country of origin	DE
GTIN	4044918508346
Customs tariff number	85366990990

Downloads

Documentation

Bid Text

870-407 X81 - Datei	Feb 19, 2019	xml 2.6 kB	Download
------------------------	--------------	---------------	----------

870-407 doc - Datei	Jan 4, 2018	doc 24.1 kB	Download
------------------------	-------------	----------------	----------

Additional Information

Technical explanations	Apr 3, 2019	pdf 2.2 MB	Download
------------------------	-------------	---------------	----------

CAD/CAE-Data

CAD data

2D/3D Models 870-407	URL	Download
----------------------	-----	----------

CAE data

ZUKEN Portal 870-407	URL	Download
----------------------	-----	----------

WSCAD Universe 870-407	URL	Download
------------------------	-----	----------


Installation Notes

Commoning

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.

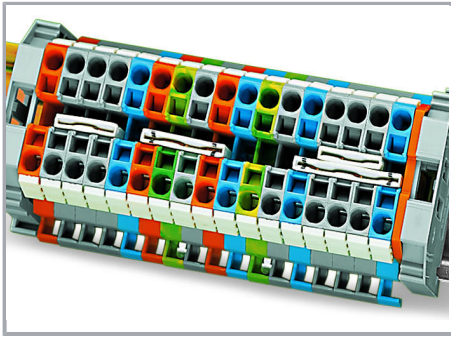

Commoning with push-in type jumper bars:

Two parallel jumper slots are accommodated in one terminal block.

Push jumper bars down firmly until fully inserted. When using multipole bars, push alternately on the right and then left side, until installed.

Push-in type jumper bars 1 – 3 – 5 – 7 or
1 – – 4 – – 7

upon request

Subject to changes. Please also observe the further product documentation!