


Parallel Type Air Gripper

Series *MHZ*

ø6, ø10, ø16, ø20, ø25, ø32, ø40

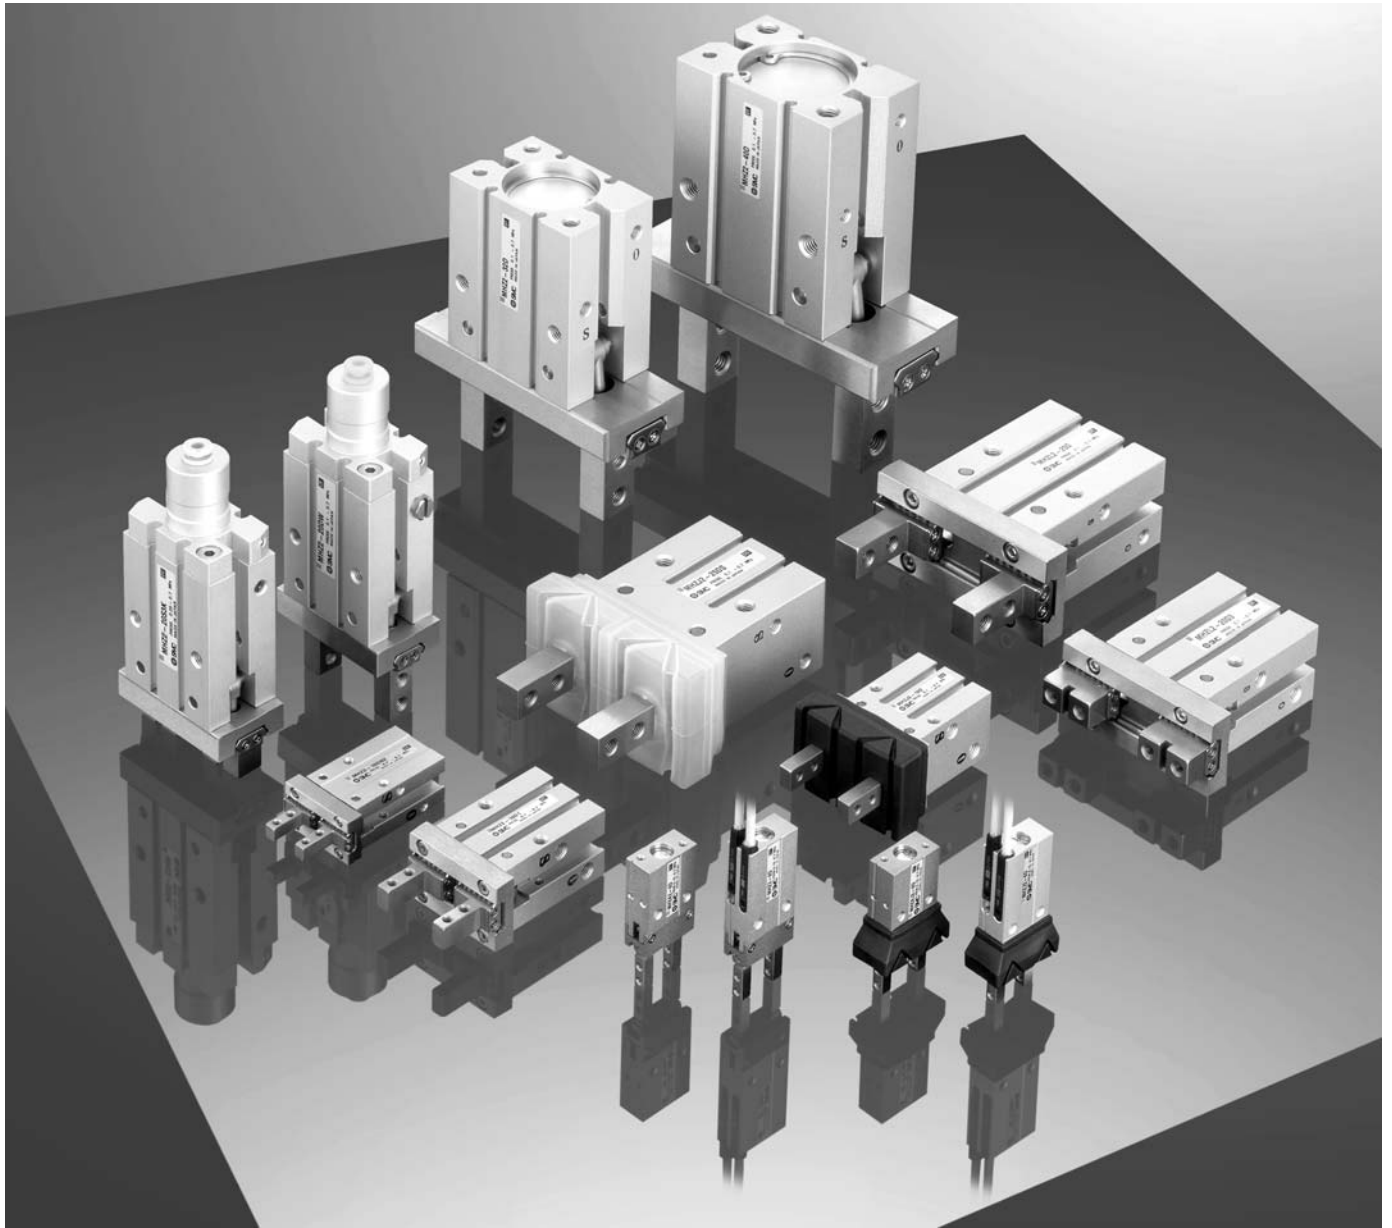




Series upgraded with the addition of new models and expanded size variations

- Long stroke/MHZL2 and compact series/MHZA□2-6 introduced
 - ø6, ø32 and ø40 added to standard MHZ2
 - ø6 added to MHZJ2 with dust cover

Integral linear guide used for high

- **Linear guide slippage prevention**
Guide slippage is prevented by two positioning dowel pins.


• **Repeatability: $\pm 0.01\text{mm}$**

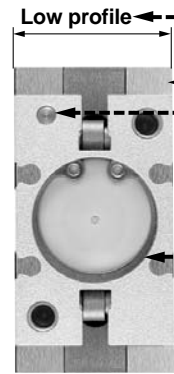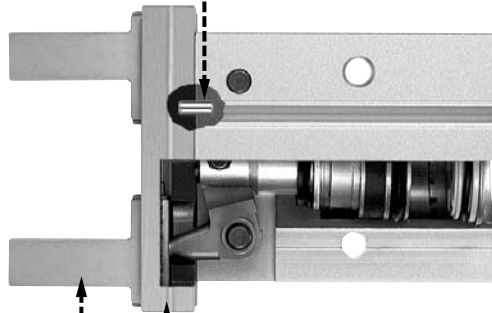


- **Martensitic stainless steel**

High degree of mounting flexibility

Can be mounted five ways from three directions.

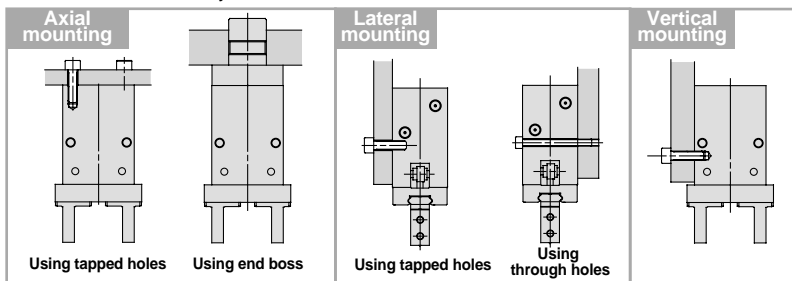

Finger positions can be selected (Standard type/MHZ2)

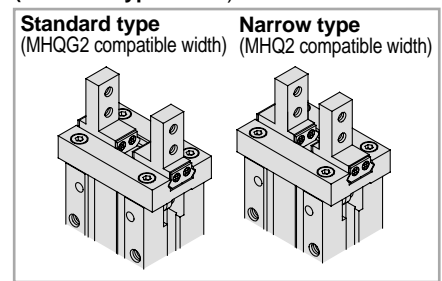

Series Variations

Series	Bore size (mm)	Action	Body options							Finger options			
			Basic type	End boss type						Basic type (tapped in open/close direction)	Side tapped	Through holes in open/close direction	Flat type fingers
			Side ported	Side ported	With One-touch fitting for coaxial tube	With One-touch fitting	With M3 port	With M5 port	With hose nipple				
Compact series													
Standard MHZA2-6	6	Double acting Single acting (normally open) Single acting (normally closed)	●	●	●	●	●	●	●	●	●	●	●
With dust cover MHZAJ2-6	6	Double acting Single acting (normally open) Single acting (normally closed)	●	●	●	●	●	●	●	●	●	●	●
Standard MHZ2	6	Double acting Single acting (normally open) Single acting (normally closed)	●	●	●	●	●	●	●	●	●	●	●
	10, 16 20, 25	Double acting Single acting (normally open) Single acting (normally closed)	●	●	●	●	●	●	●	●	●	●	●
	32, 40	Double acting Single acting (normally open) Single acting (normally closed)	●	●	●	●	●	●	●	●	●	●	●
Long stroke MHZL2	10, 16 20, 25	Double acting Single acting (normally open) Single acting (normally closed)	●	●	●	●	●	●	●	●	●	●	●
With dust cover MHZJ2	6	Double acting Single acting (normally open) Single acting (normally closed)	●	●	●	●	●	●	●	●	●	●	●
	10, 16 20, 25	Double acting Single acting (normally open) Single acting (normally closed)	●	●	●	●	●	●	●	●	●	●	●

rigidity and high precision


Body thickness tolerance: $\pm 0.05\text{mm}$

No guide protrusion in direction of body thickness

Improved remounting accuracy
Positioning dowel pin holes provided

Top mounting centering location
Mounting is more secure with a depth 0.5 to 2mm greater than conventional types

Integral guide rail construction

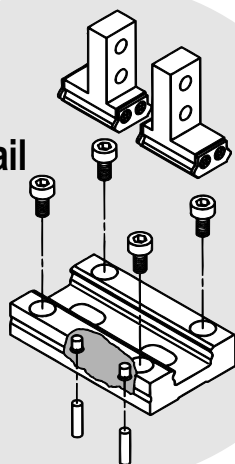

Accommodates diverse work piece diameters with a single unit

- Nearly double the standard stroke
- Long strokes are also compact and light weight

Series	Opening/Closing stroke mm (Open — Closed)	Weight g	Body thickness mm
MHZL2-10	8 (4)	60	16.4
MHZL2-16	12 (6)	135	23.6
MHZL2-20	18 (10)	270	27.6
MHZL2-25	22 (14)	470	33.6

Values inside () are for standard series MHZ2.

Long strokes MHZL2



A wide variety of types and broad size variations

Compact series (without auto switch)

ø6



With dust cover


ø10 to ø25

ø6




Standard type

ø6



ø10 to ø25

ø32, ø40

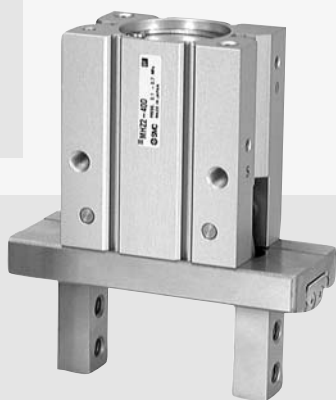

Long stroke


ø10 to ø25



Compact Series (Without Auto Switch)

Series *MHZA2-6/MHZAJ2-6*

How to Order


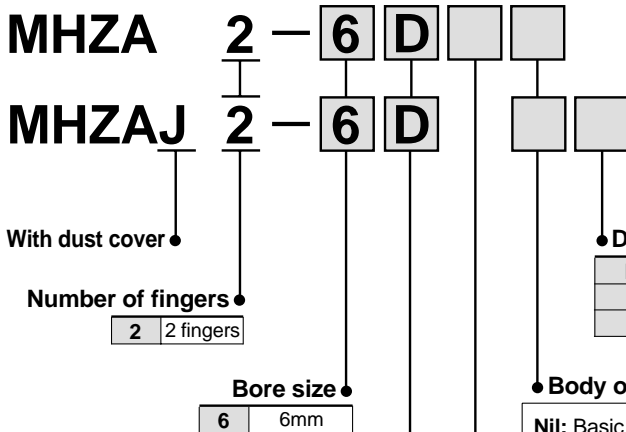


Action	Description
D	Double acting
S	Single acting (normally open)
C	Single acting (normally closed)

● Dust cover type

Nil	Chloroprene rubber (CR)
F	Fluoro rubber (FKM)
S	Silicon rubber (Si)

● Body option

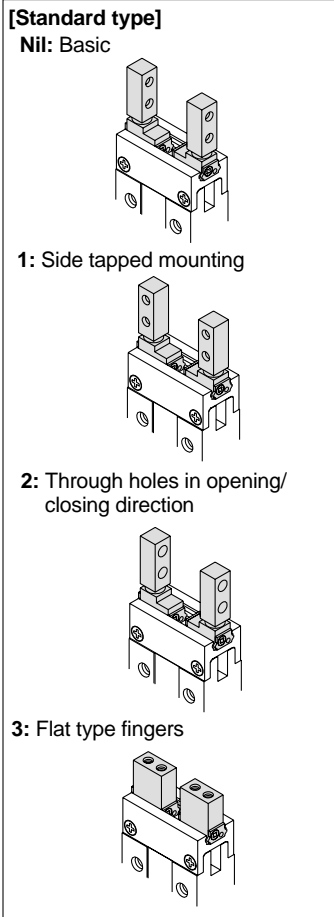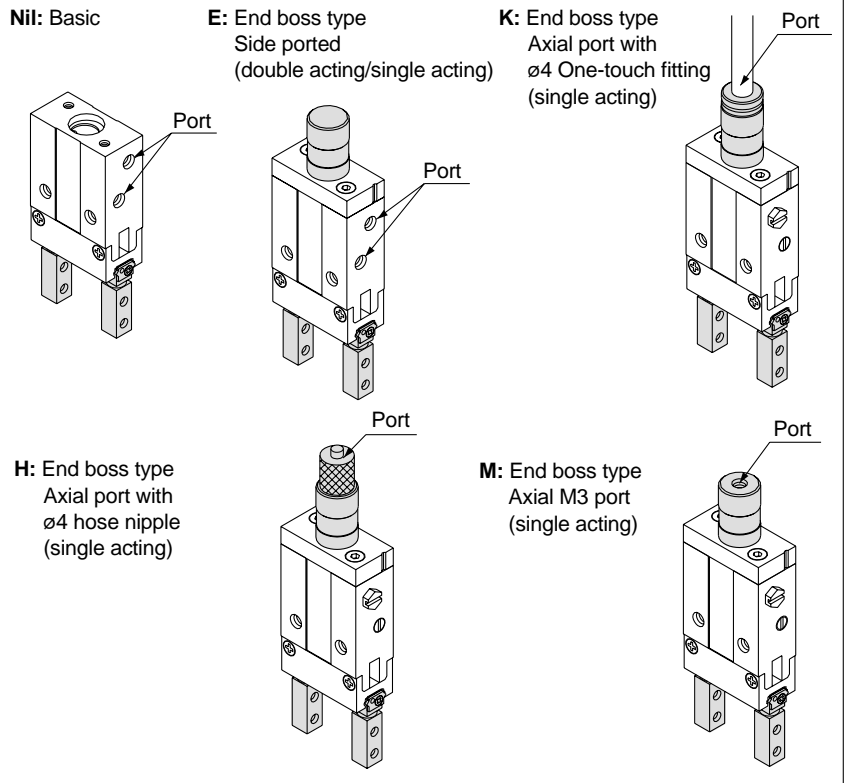



Specifications

Fluid		Air	
Operating pressure	Double acting		0.15 to 0.7MPa
	Single acting	Normally open	0.3 to 0.7MPa
		Normally closed	
Ambient and fluid temperature			-10 to 60 °C
Repeatability			±0.01mm
Maximum operating frequency			180c.p.m.
Lubrication			Non-lube
Action			Double acting, Single acting


Models

Action	Model	Bore size (mm)	Gripping force ^{Note 1)}		Opening/Closing stroke (both sides) mm	Weight g	
			Gripping force per finger Effective value N				
			External gripping force	Internal gripping force			
Double acting	MHZA2-6D	6	3.3	6.1	4	26	
	MHZAJ2-6D	6					
Single acting	Normally open	MHZA2-6S	1.9	—	4	26	
		MHZAJ2-6S					6
	Normally closed	MHZA2-6C	6	—	3.7	4	26
		MHZAJ2-6C	6				


Note 1) Values based on pressure of 0.5MPa, gripping point L = 20mm, at center of stroke.

Symbols:


Double acting type



Single acting type, normally open



Single acting type, normally closed



Options


• Body options/End boss type

Symbol	Piping port position	Type of piping port	Applicable model	
		MHZA2-6/MHZAJ2-6	Double acting	Single acting
Nil	Standard	M3	●	●
E	Side ported	M3	●	●
K	Axial port	With ø4 One-touch fitting	—	●
H		With ø4 hose nipple	—	●
M		M3	—	●


Series MHZA2-6/MHZAJ2-6

Construction/Standard Type MHZA2-6


Double acting/with fingers open

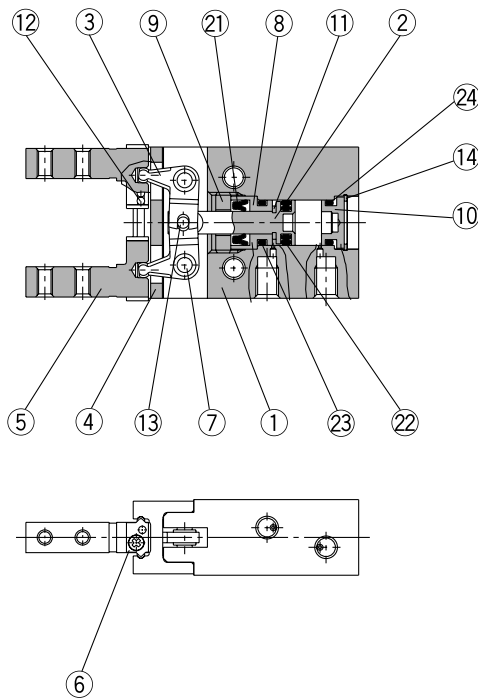


Double acting/with fingers closed



Single acting/normally open

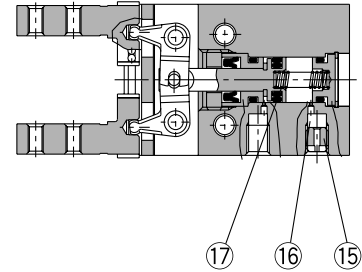

Single acting/normally closed



Parts list

No.	Description	Material	Note
1	Body	Aluminum alloy	Hard anodized
2	Piston	Stainless steel	
3	Lever	Stainless steel	Heat treated
4	Guide	Stainless steel	Heat treated
5	Finger	Stainless steel	Heat treated
6	Roller stopper	Stainless steel	
7	Lever shaft	Stainless steel	Nitrided
8	Holder	Brass	Electroless nickel plated
9	Holder lock	Stainless steel	
10	Cap	Aluminum alloy	Clear anodized
11	Bumper	Urethane rubber	
12	Steel balls	High carbon chromium bearing steel	
13	Needle roller	High carbon chromium bearing steel	

Parts list

No.	Description	Material	Note
14	C type snap ring	Carbon steel	Nickel plated
15	Exhaust plug	Brass	Electroless nickel plated
16	Exhaust filter	Polyvinyl formal	
17	N.O. spring	Stainless steel spring wire	
18	N.C. spring	Stainless steel spring wire	
19	N.C. holder	Brass	Electroless nickel plated
20	N.C. spacer	Stainless steel	
21	Rod seal	NBR	
22	Piston seal	NBR	
23	Gasket	NBR	
24	Gasket	NBR	

Replacement parts: Seal kits


Seal kit no.	Description
MHZA6-PS	Kit includes items 21, 22, 23 and 24 from the table above.

* Seal kits consist of items 21, 22, 23 and 24 in one kit, and can be ordered using the seal kit number.


Note) Contact SMC when replacing seals.

Construction/With Dust Cover MHZAJ2-6


Double acting/with fingers open

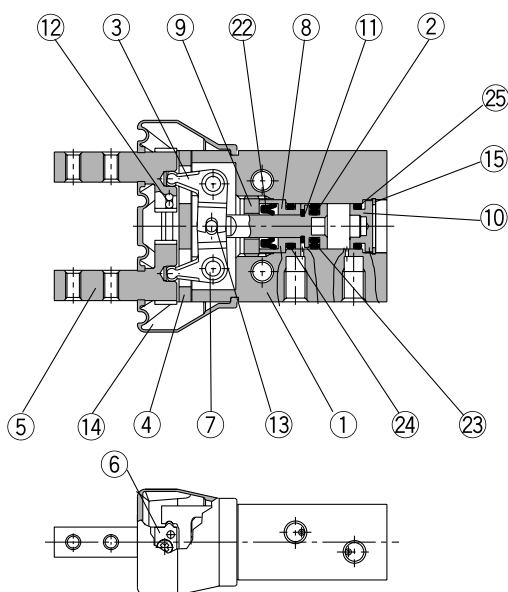


Double acting/with fingers closed



Single acting/normally open

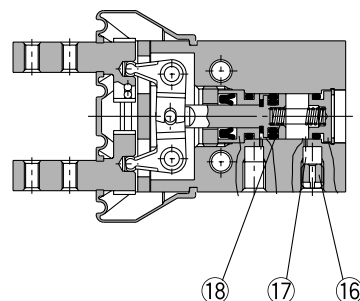

Single acting/normally closed



Parts list

No.	Description	Material	Note
1	Body	Aluminum alloy	Hard anodized
2	Piston	Stainless steel	
3	Lever	Stainless steel	Heat treated
4	Guide	Stainless steel	Heat treated
5	Finger	Stainless steel	Heat treated
6	Roller stopper	Stainless steel	
7	Lever shaft	Stainless steel	Nitrided
8	Holder	Brass	Electroless nickel plated
9	Holder lock	Stainless steel	
10	Cap	Aluminum alloy	Clear anodized
11	Bumper	Urethane rubber	
12	Steel balls	High carbon chromium bearing steel	
13	Needle roller	High carbon chromium bearing steel	

Replacement parts: Seal kits

Seal kit no.	Description
MHZAJ6-PS	Kit includes items 22, 23, 24 and 25 from the table above.

* Seal kits consist of items 22, 23, 24 and 25 in one kit, and can be ordered using the seal kit number.

Note) Contact SMC when replacing seals.

Parts list

No.	Description	Material	Note
14	Dust cover	CR	Chloroprene rubber
		FKM	Fluoro rubber
		Si	Silicon rubber
15	C type snap ring	Carbon steel	Nickel plated
16	Exhaust plug	Brass	Electroless nickel plated
17	Exhaust filter	Polyvinyl formal	
18	N.O. spring	Stainless steel spring wire	
19	N.C. spring	Stainless steel spring wire	
20	N.C. holder	Brass	Electroless nickel plated
21	N.C. spacer	Stainless steel	
22	Rod seal	NBR	
23	Piston seal	NBR	
24	Gasket	NBR	
25	Gasket	NBR	

Replacement parts: Dust covers


Material	Part number
CR	MHZAJ2-J6
FKM	MHZAJ2-J6F
Si	MHZAJ2-J6S

Series MHZA2-6/MHZAJ2-6


Dimensions/Standard Type

MHZA2-6□
 Double acting/Single acting
 Basic Type

Scale: 100%

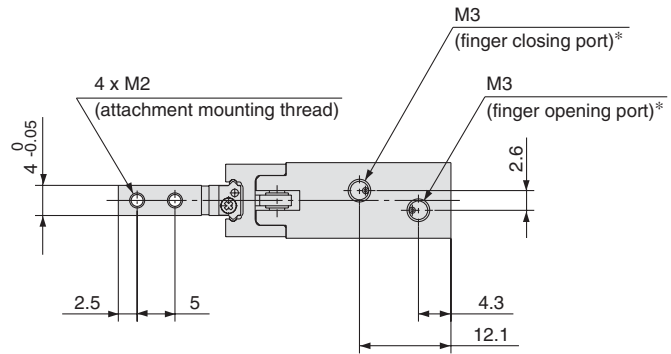

* For single action, the port on one side is a breathing hole

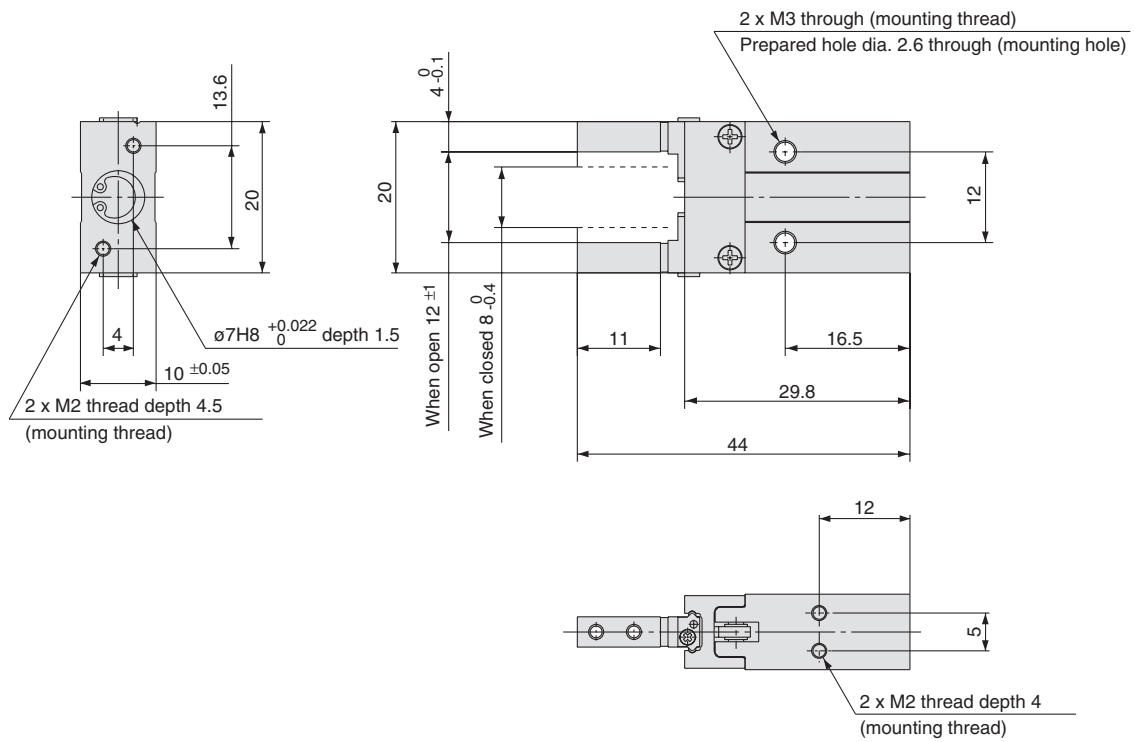


Dimensions/With dust cover


MHZAJ2-6□

Double acting/Single acting
Basic Type

Scale: 100%

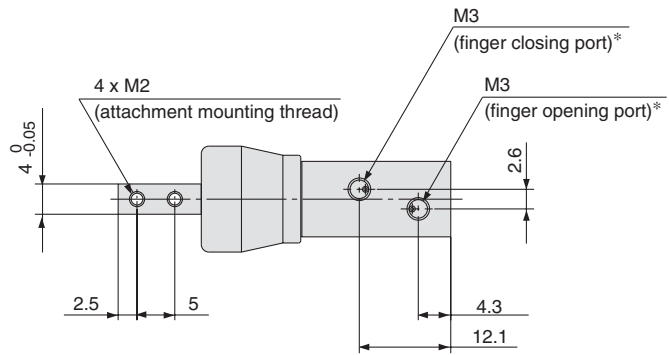


* For single action, the port on one side is a breathing hole.

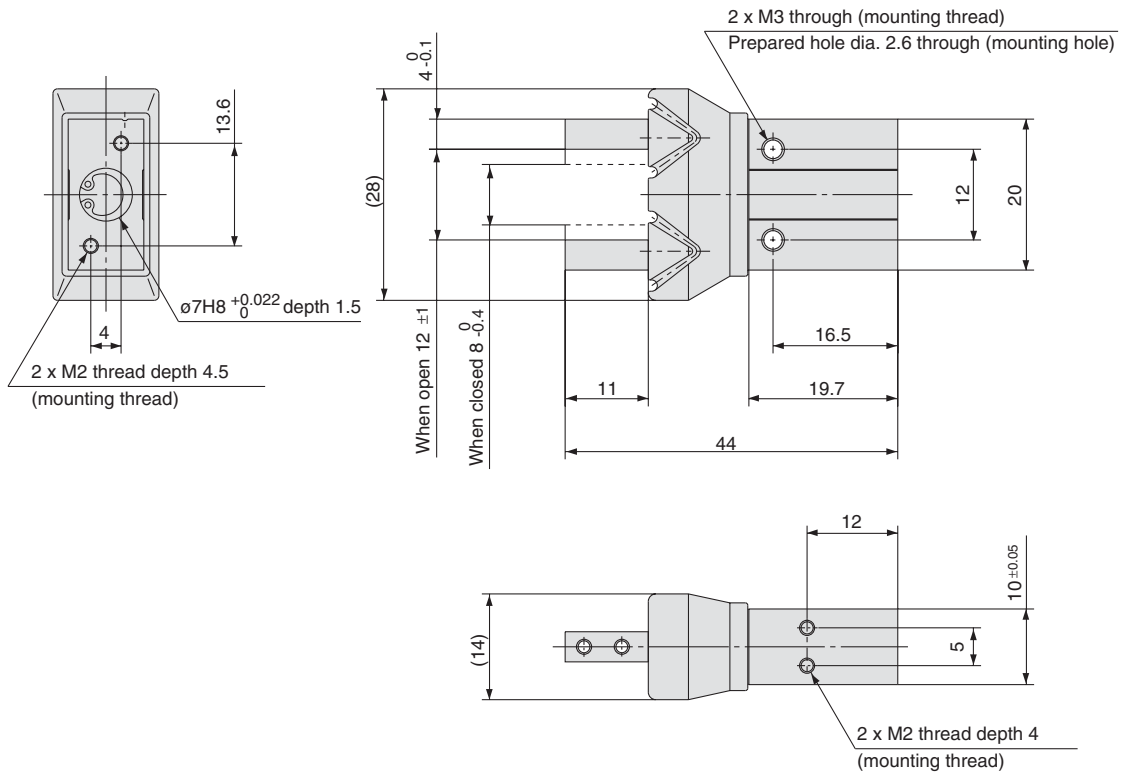

Series MHZA2-6


Finger Options

Side Tapped Mounting [1]

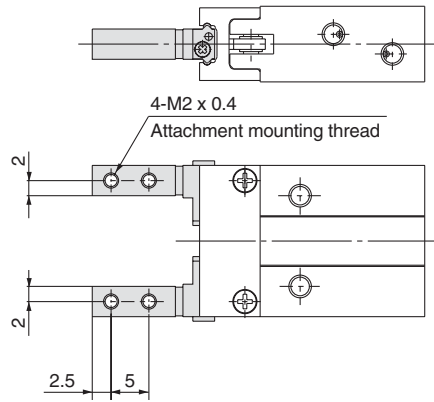


* Specifications and dimensions other than the above are the same as the basic type.

Through Holes in Opening/Closing Direction [2]

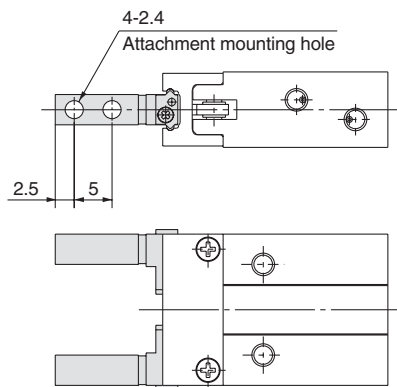

* Specifications and dimensions other than the above are the same as the basic type.

Flat Type Fingers [3]

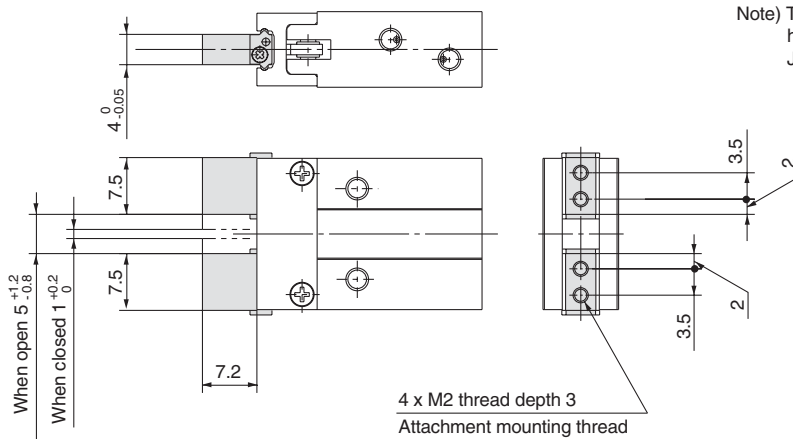

Note) To mount attachments, use M2 hexagon socket head cap screws with $\phi 3.3$ top diameter, or JISB1101 type M2 round head screws.

Weight: 25g

* Specifications and dimensions other than the above are the same as the basic type.

Series MHZA2-6/MHZAJ2-6


Body Options: End Boss Type

Applicable Models

Symbol	Piping port position	Type of piping port		Applicable model	
		MHZA2	MHZAJ2	Double acting	Single acting
E	Side ported	M3		●	●
H	Axial port	With ø4 hose nipple		—	●
K		With ø4 One-touch fitting		—	●
M		M3		—	●


Side Ported [E]

MHZA2-6□□E

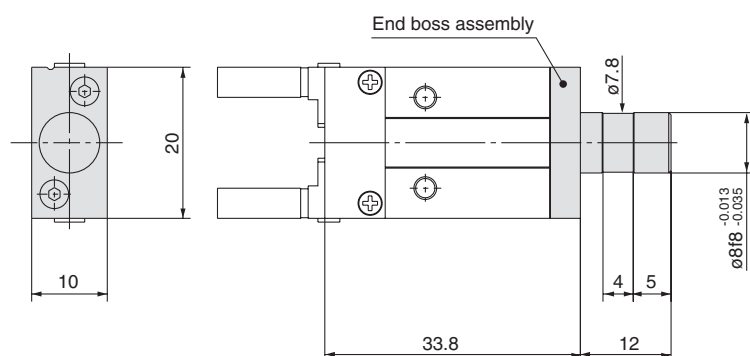

* Specifications and dimensions other than the above are the same as the basic type.


MHZAJ2-6□□E

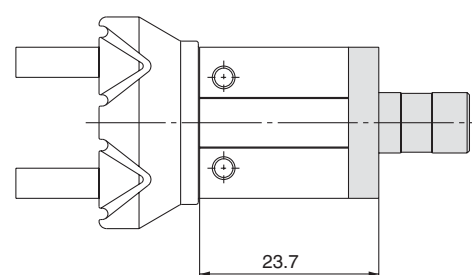

* Specifications and dimensions other than the above are the same as the basic type or the end boss dimensions of the MHZA type.


Axial Port (with Hose Nipple) [H]

MHZA2-6^S_C□H

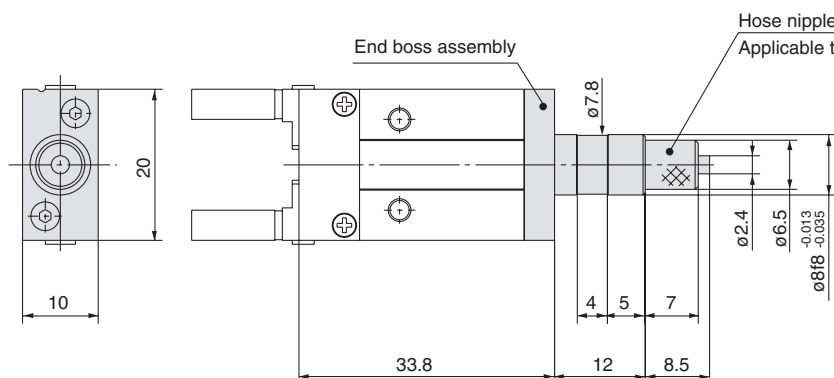

* Specifications and dimensions other than the above are the same as the basic type.

MHZAJ2-6^S_C□H

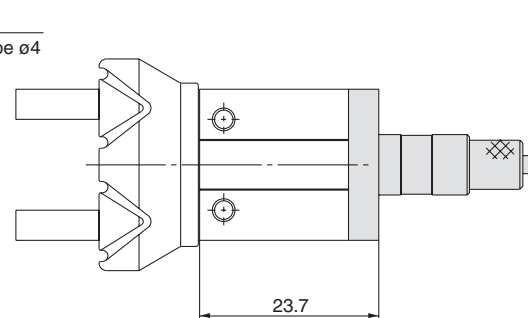

* Specifications and dimensions other than the above are the same as the basic type or the end boss dimensions of the MHZA type.

Applicable Tubing

Description/Model	Nylon tubing	Soft nylon tubing	Polyurethane tubing	Polyurethane coiled tubing
Specification	T0425	TS0425	TU0425	TCU0425B-1
Outside diameter mm	4	4	4	4
Max. operating pressure MPa	1.0	0.8	0.5	0.5
Minimum bending radius mm	13	12	10	—
Operating temperature °C	-20 to 60	-20 to 60	-20 to 60	-20 to 60
Material	Nylon 12	Nylon 12	Polyurethane	Polyurethane


Refer to catalogue CAT.501-B "Air Fittings and Tubing" regarding One-touch fittings and tubing.

Series MHZA2-6/MHZAJ2-6

Axial Port (with One-touch Fitting) [K]

MHZA2-6 $\frac{S}{C}$ □K

MHZAJ2-6 $\frac{S}{C}$ □K

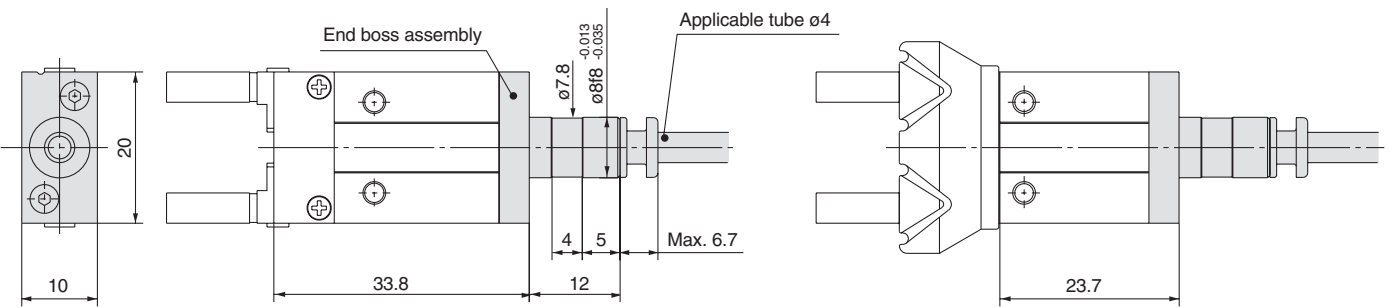

* Specifications and dimensions other than the above are the same as the basic type.

* Specifications and dimensions other than the above are the same as the basic type or the end boss dimensions of the MHZA type.

Applicable tubing


Description/Model	Nylon tubing	Soft nylon tubing	Polyurethane tubing	Polyurethane coiled tubing
Specification	T0425	TS0425	TU0425	TCU0425B-1
Outside diameter mm	4	4	4	4
Max. operating pressure MPa	1.0	0.8	0.5	0.5
Minimum bending radius mm	13	12	10	—
Operating temperature °C	-20 to 60	-20 to 60	-20 to 60	-20 to 60
Material	Nylon 12	Nylon 12	Polyurethane	Polyurethane

Refer to catalogue CAT. 501-B "Air Fittings and Tubing" regarding One-touch fittings and tubing.

Axial Port (M3 Port) [M]

MHZA2-6 $\frac{S}{C}$ □M

MHZAJ2-6 $\frac{S}{C}$ □M

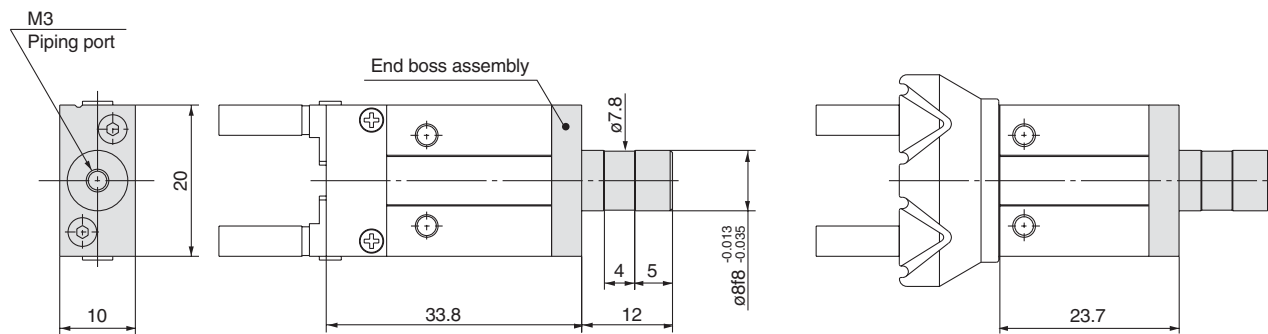

* Specifications and dimensions other than the above are the same as the basic type.

* Specifications and dimensions other than the above are the same as the basic type or the end boss dimensions of the MHZA type.



Weights

Model	End boss type (symbol)			
	E	H	K	M
MHZA2-6□□	28	28	28	28
MHZAJ2-6□□	29	29	29	29

Unit: g

Standard Type Series *MHZ2*

How to Order

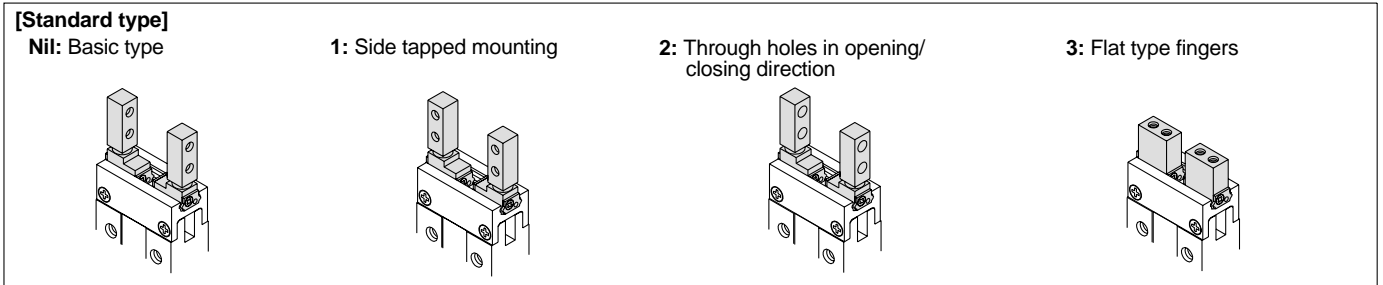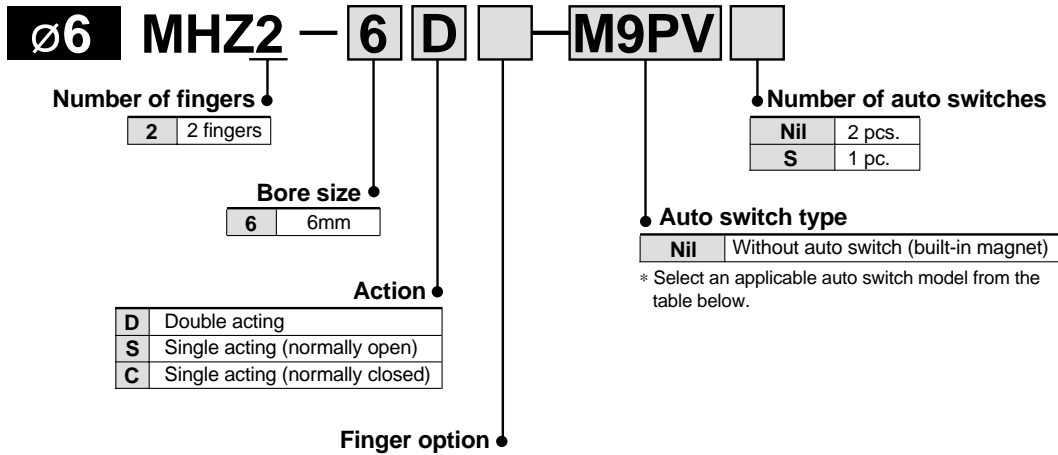

Applicable auto switches

Type	Special function	Electrical entry	Indicator light	Wiring (output)	Load voltage		Auto switch part no.		Lead wire length (m)*				Applicable load		
					DC	AC	Electrical entry direction		0.5 (Nil)	3 (L)	5 (Z)	Flexible lead wire (-61)			
							Perpendicular	In-line							
Solid state switch	—	Grommet	Yes	3 wire (NPN)	24V	12V	—	M9NV	M9N	●	●	—	○	—	Relay, PLC
				3 wire (PNP)				—	—	●	●	○	○		
				—				M9PV	M9P	●	●	—	○		
				—				F8P	—	●	●	○	○		
				2 wire				M9BV	M9B	●	●	—	○		
							F8B	—	●	●	○	○			

* Lead wire length symbols: 0.5m Nil (Example) M9N
 3m L (Example) M9NL
 5m Z (Example) M9NZ

* Auto switches marked with a "○" symbol are produced upon receipt of order.

Note 1) When using a D-F8□ switch, mount it at a distance of 10mm or more from magnetic substances such as iron, etc.

Note 2) Add "-61" at the end of the part number for the flexible lead wire.

(Examples)

When ordering with an air gripper

MHZ□ 2-16D-M9NVS□61

● Flexible lead wire

When ordering auto switches only

D-M9PL□61

● Flexible lead wire

How to Order

ø10 to ø25 MHZ2 - 16 D - - - M9PV - -

Number of fingers

2	2 fingers
---	-----------

Bore size

10	10mm
16	16mm
20	20mm
25	25mm

Action

D	Double acting
S	Single acting (normally open)
C	Single acting (normally closed)

Number of auto switches

Nil	2 pcs.
S	1 pc.




Auto switch type

Nil	Without auto switch (built-in magnet)
-----	---------------------------------------


* Select an auto switch model from the table below.

Body option


Nil: Basic type
E: End boss type Side ported (double acting/single acting)
W: End boss type Axial port with ø4 One-touch fitting for coaxial tubing (double acting)



K: End boss type Axial port with ø4 One-touch fitting (single acting)



M: End boss type Axial M5 port (single acting)




Finger position/Option


Standard type

[MHQG2 compatible type]


Nil: Basic type



1: Side tapped mounting




2: Through holes in opening/closing direction




Narrow type

[MHQ2 compatible type]


N: Basic type



N1: Side tapped mounting




N2: Through holes in opening/closing direction



3: Flat type fingers



The flat type fingers do not have standard and narrow options. When MHQG2/MHQ2 compatible types are required, see the -X51 order made specifications on page 5-60



Applicable auto switches

Type	Special function	Electrical entry	Indicator light	Wiring (output)	Load voltage		Auto switch part no.		Lead wire length (m)*			Applicable load	Applicable model					
					DC	AC	Electrical entry direction	In-line	0.5 (Nil)	3 (L)	5 (Z)		Flexible lead wire (-61)	ø10	ø16	ø20	ø25	
Solid state auto switch	—	Grommet	Yes	3 wire (NPN)	24V	—	Y69A	Y59A	●	●	○	Standard	IC circuit	●	●	●	●	
							M9NV	M9N	●	●	—	○	—	—	—	—	—	
				3 wire (PNP)	12V	Y7PV	Y7P	●	●	○	Standard	IC circuit	●	●	●	●		
						M9PV	M9P	●	●	—	○	—	—	—	—			
				2 wire	12V	Y69B	Y59B	●	●	○	○	—	—	—	—	—		
						M9BV	M9B	●	●	—	○	—	—	—	—			
	Diagnostic indication (2 colour indicator)	—	—	—	3 wire (NPN)	24V	—	Y7NVV	Y7NV	●	●	○	Standard	IC circuit	—	—	—	—
								M9NVV	M9NV	●	●	○	○	—	—	—	—	
					3 wire (PNP)	12V	Y7PVV	Y7PV	●	●	○	Standard	IC circuit	—	—	—	—	
							M9PVV	M9PV	●	●	○	○	—	—	—	—		
					2 wire	12V	Y7BVV	Y7BV	●	●	○	Standard	—	—	—	—	—	
							M9BVV	M9BV	●	●	○	○	—	—	—	—		

* Lead wire length symbols: 0.5m Nil (Example) M9N
 3m L (Example) M9NL
 5m Z (Example) Y59AZ

* Auto switches marked with a "○" symbol are produced upon receipt of order.

Note 1) Use caution regarding hysteresis in the 2 color indicator types. When using this type, refer to "Auto Switch Hysteresis" on page 5-55

Note 3) Through hole mounting is not possible when using auto switch types D-Y59, D-Y69, or D-Y7.

Note 2) Add "-61" at the end of the part number for the flexible lead wire.

(Examples)

When ordering with an air gripper

MHZ 2-16D-M9NVS-61



Flexible lead wire ●

When ordering auto switches only

D-M9PL-61

Flexible lead wire ●

How to Order

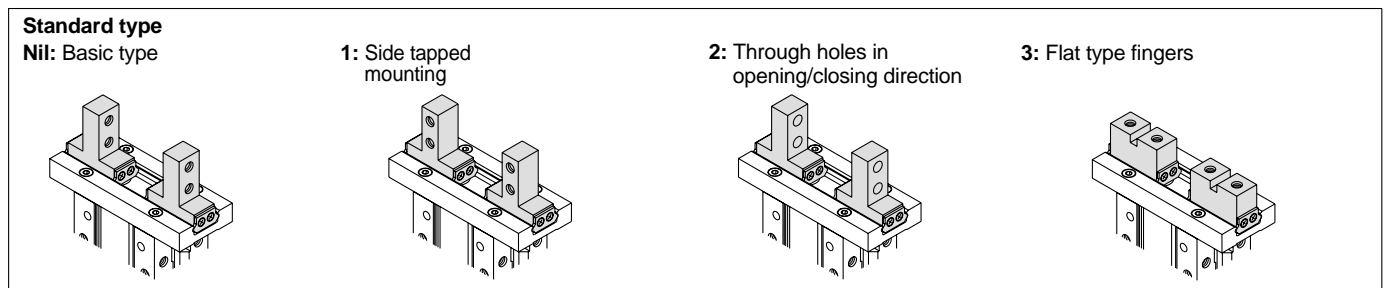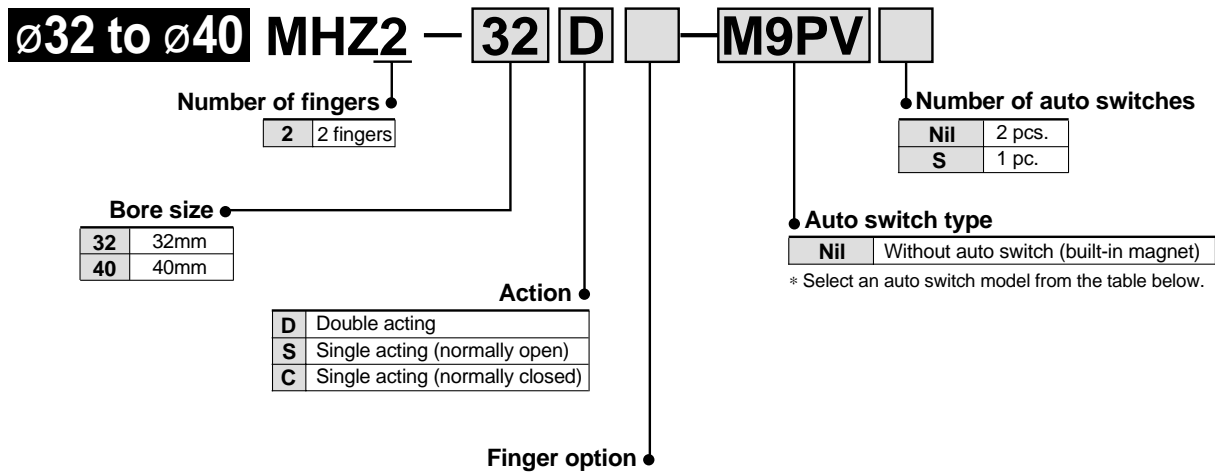

Applicable auto switches

Type	Special function	Electrical entry	Indicator light	Wiring (output)	Load voltage		Auto switch part no.		Lead wire length (m)*			Applicable load	Applicable model						
					DC	AC	Electrical entry direction		0.5 (Nil)	3 (L)	5 (Z)		Flexible lead wire (-61)	ø32	ø40				
							Perpendicular	In-line											
Solid state auto switch	—	Grommet	Yes	3 wire (NPN)	5V, 12V	—	Y69A	Y59A	●	●	○	Standard	IC circuit	●	●				
							M9NV	M9N	●	●	—	○	—	●	●				
							F8N	—	●	●	○	○	—	●	●				
							Y7PV	Y7P	●	●	○	Standard	IC circuit	●	●				
							M9PV	M9P	●	●	—	○	—	●	●				
							F8P	—	●	●	○	○	—	●	●				
				Diagnostic indication (2 colour indicator)	Grommet	Yes	2 wire	24V	—	Y69B	Y59B	●	●	○	○	—	Relay, PLC	●	●
										M9BV	M9B	●	●	—	○	—	●	●	
										F8B	—	●	●	○	○	—	●	●	
										Y7NWV	Y7NW	●	●	○	Standard	IC circuit	●	●	
										M9NWV	M9NW	●	●	○	○	—	●	●	
										Y7PWV	Y7PW	●	●	○	Standard	IC circuit	●	●	
	—	Grommet	Yes	2 wire	12V	—	Y7BWV	Y7BW	●	●	○	Standard	—	●	●				
							M9BWV	M9BW	●	●	○	○	—	●	●				

* Lead wire length symbols: 0.5m Nil (Example) M9N
 3m L (Example) M9NL
 5m Z (Example) Y59AZ

* Auto switches marked with a "○" symbol are produced upon receipt of order.

Note 1) Use caution regarding hysteresis in the 2 color indicator types. When using this type, refer to "Auto Switch Hysteresis" on page 5-55

Note 2) Add "-61" at the end of the part number for the flexible lead wire.

(Examples)

When ordering with an air gripper

MHZ□2-16D-M9NVS-□61

● Flexible lead wire

When ordering auto switches only

D-M9PL-□61

● Flexible lead wire

Note 3) Through hole mounting is not available when using auto switch types D-Y59, D-Y69, or D-Y7.

Series MHZ2

ø6



ø10 to ø25




ø32, ø40




Symbols:


Double acting type



Single acting type, normally open



Single acting type, normally closed



Specifications

Fluid		Air	
Operating pressure	Double acting		ø6: 0.15 to 0.7MPa ø10: 0.2 to 0.7MPa ø16 to ø40: 0.1 to 0.7MPa
	Single acting	Normally open	ø6: 0.3 to 0.7MPa ø10: 0.35 to 0.7MPa ø16 to ø40: 0.25 to 0.7MPa
		Normally closed	
Ambient and fluid temperature		-10 to 60°C	
Repeatability		ø6 to ø25: ±0.01mm ø32, ø40: ±0.02mm	
Maximum operating frequency		ø6 to ø25: 180c.p.m. ø32, ø40: 60c.p.m.	
Lubrication		Non-lube	
Action		Double acting, Single acting	
Auto switch (option) ^{Note)}		Solid state switch (3 wire, 2 wire)	

Models

Action	Model	Bore size (mm)	Gripping force ^{Note 1)}		Opening/Closing stroke (both sides) mm	Weight ^{Note 2)} g	
			Gripping force per finger Effective value N				
			External gripping force	Internal gripping force			
Double acting	MHZ2-6D	6	3.3	6.1	4	27	
	MHZ2-10D(N)	10	11	17	4	55	
	MHZ2-16D(N)	16	34	45	6	115	
	MHZ2-20D(N)	20	42	66	10	235	
	MHZ2-25D(N)	25	65	104	14	430	
	MHZ2-32D	32	158	193	22	715	
Single acting	Normally open	MHZ2-40D	40	254	318	30	1275
		MHZ2-6S	6	1.9	—	4	27
		MHZ2-10S(N)	10	7.1	—	4	55
		MHZ2-16S(N)	16	27	—	6	115
		MHZ2-20S(N)	20	33	—	10	240
		MHZ2-25D(N)	25	45	—	14	435
	Normally closed	MHZ2-32S	32	131	—	22	760
		MHZ2-40S	40	217	—	30	1370
		MHZ2-6C	6	—	3.7	4	27
		MHZ2-10C(N)	10	—	13	4	55
		MHZ2-16C(N)	16	—	38	6	115
		MHZ2-20C(N)	20	—	57	10	240
		MHZ2-25C(N)	25	—	83	14	430
		MHZ2-32C	32	—	161	22	760
MHZ2-40C	40	—	267	30	1370		

Note 1) Values based on pressure of 0.5MPa, gripping point L = 20mm, at center of stroke.

Note 2) Values excluding weight of auto switch.


Options

• Body options/End boss type

Symbol	Piping port position	Type of piping port							Applicable model	
		MHZ2-6	MHZ2-10	MHZ2-16	MHZ2-20	MHZ2-25	MHZ2-32	MHZ2-40	Double acting	Single acting
Nil	Basic type	M3		M5					●	●
E	Side ported	—	M3	M5			—	—	●	●
W	Axial port	—	With ø4 One-touch fitting for coaxial tube				—	—	●	—
K	Axial port	—	With ø4 One-touch fitting				—	—	—	●
M	Axial port	—	M5					—	—	●

* For detailed body option specifications, refer to option specifications on page 5-32

Clean Room Series: Air Gripper

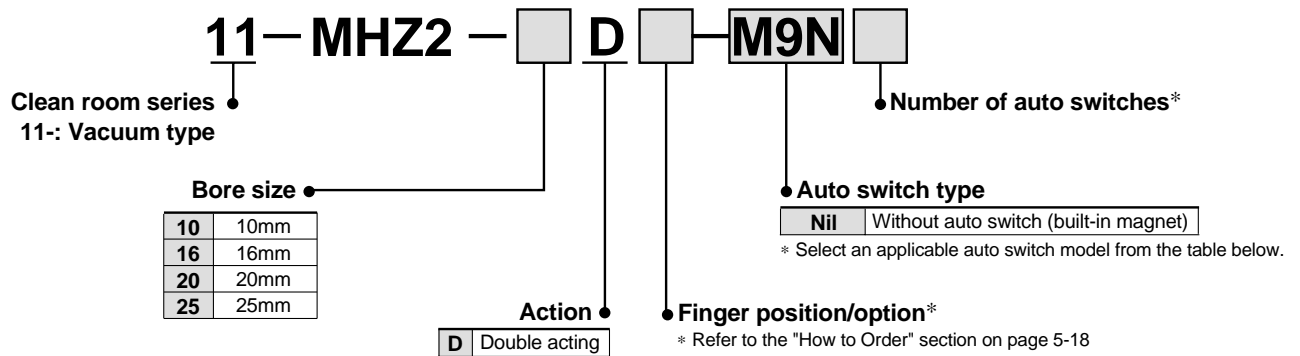

Applicable auto switches

Type	Special function	Electrical entry	Indicator light	Wiring (output)	Load voltage		Auto switch part no.		Lead wire length (m)*			Applicable load		
					DC	AC	Electrical entry direction		0.5 (Nil)	3 (L)	5 (Z)		Flexible lead wire (-61)	
							Perpendicular	In-line						
Solid state switch	—	Grommet	Yes	3 wire (NPN)	24V	12V	—	M9NV	M9N	●	●	—	○	Relay, PLC
				3 wire (PNP)				—	—	●	●	○	○	
				2 wire				M9PV	M9P	●	●	—	○	
				—				F8P	—	●	●	○	○	
				—				M9BV	M9B	●	●	—	○	
				—				F8B	—	●	●	○	○	

* Lead wire length symbols: 0.5m Nil (Example) M9N
3m L (Example) M9NL
5m Z (Example) M9NZ

* Auto switches marked with a "O" symbol are produced upon receipt of order.

Note 1) When using a D-F8□ switch, mount it at a distance of 10mm or more from magnetic substances such as iron, etc.

Note 2) Add "-61" at the end of the part number for the flexible lead wire.

(Examples)

When ordering with an air gripper

MHZ□2-16D-M9NVS-61

● Flexible lead wire



When ordering auto switches only

D-M9PL-61

● Flexible lead wire

Specifications

Fluid	Air
Operating pressure	ø10: 0.2 to 0.7MPa ø16 to ø25: 0.1 to 0.7MPa
Ambient and fluid temperature	-10 to 60°C
Repeatability	±0.01mm
Maximum operating frequency	180c.p.m.
Lubrication	Non-lube
Action	Double acting
Particulate generation grade	Grade 2
Auto switch (option)	Solid state switch (3 wire, 2 wire)

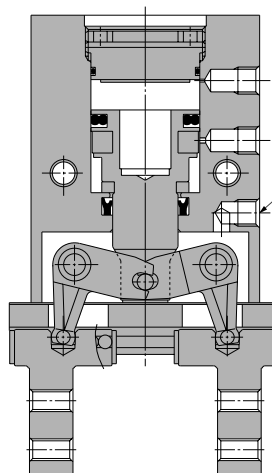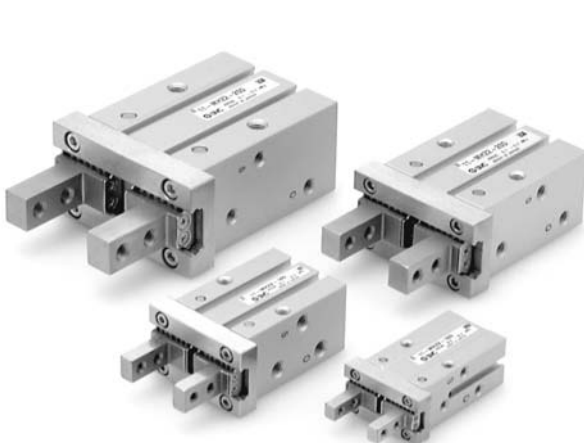

Relief port


The concentrated vacuuming of internally generated particulates prevents them from spreading into the clean room.

For details, refer to SMC Information "Clean Series: Air Gripper Series 11-MHZ2" (98-E461).


Series MHZ2

Construction/MHZ2-6□


Double acting/with fingers open

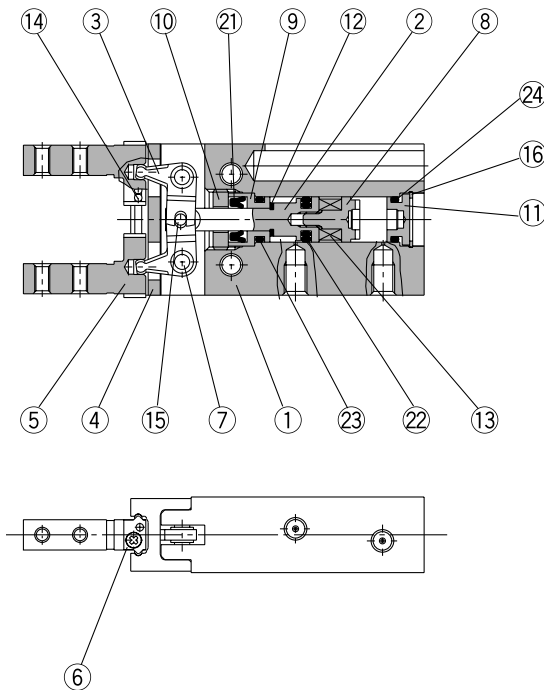


Double acting/with fingers closed

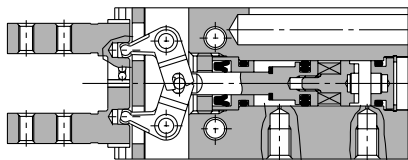

Single acting/normally open

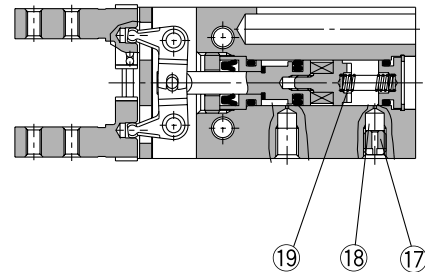

Single acting/normally closed

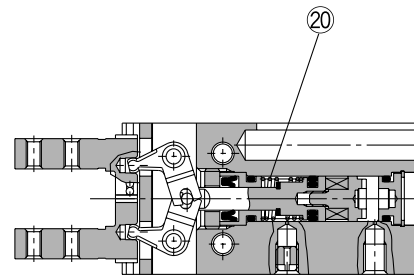

Parts list

No.	Description	Material	Note
1	Body	Aluminum alloy	Hard anodized
2	Piston	Stainless steel	
3	Lever	Stainless steel	Heat treated
4	Guide	Stainless steel	Heat treated
5	Finger	Stainless steel	Heat treated
6	Roller stopper	Stainless steel	
7	Lever shaft	Stainless steel	Nitrided
8	Magnet holder	Stainless steel	
9	Holder	Brass	Electroless nickel plated
10	Holder lock	Stainless steel	
11	Cap	Aluminum alloy	Clear anodized
12	Bumper	Urethane rubber	
13	Magnet	Rare earth magnet	Nickel plated

Parts list

No.	Description	Material	Note
14	Steel balls	High carbon chromium bearing steel	
15	Needle roller	High carbon chromium bearing steel	
16	C type snap ring	Carbon steel	Nickel plated
17	Exhaust plug	Brass	Electroless nickel plated
18	Exhaust filter	Polyvinyl formal	
19	N.O. spring	Stainless steel spring wire	
20	N.C. spring	Stainless steel spring wire	
21	Rod seal	NBR	
22	Piston seal	NBR	
23	Gasket	NBR	
24	Gasket	NBR	

Replacement parts: Seal kits


Seal kit no.	Description
MHZ6-PS	Kit includes items 21, 22, 23 and 24 from the table above.

* Seal kits consist of items 21, 22, 23 and 24 in one kit, and can be ordered using the seal kit number.


Note) Contact SMC when replacing seals.

Construction/MHZ2-10□ to 40□


Double acting/with fingers open

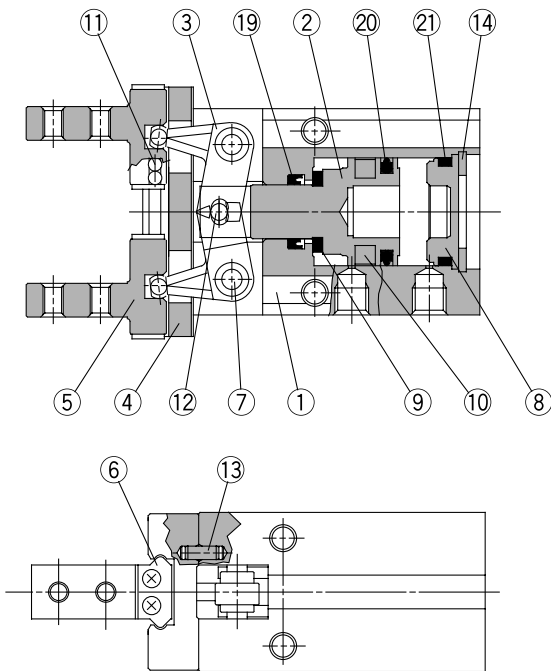


Single acting/normally open

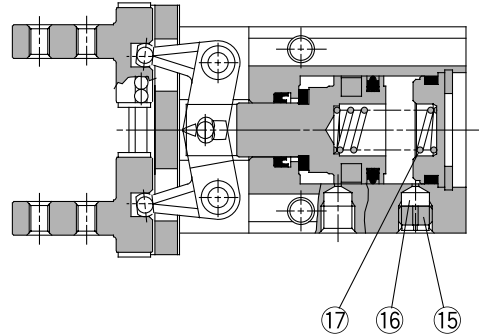

Single acting/normally closed

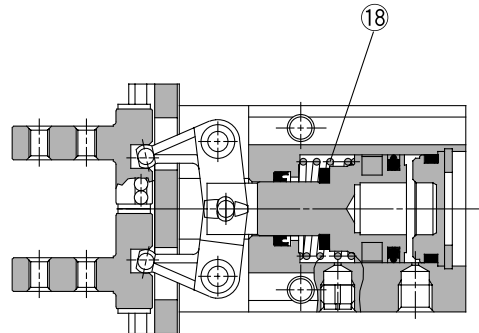

Double acting/with fingers closed

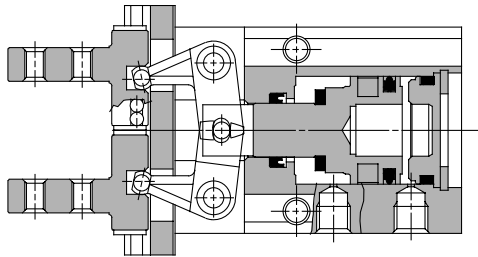

Parts list

No.	Description	Material	Note
1	Body	Aluminum alloy	Hard anodized
2	Piston	ø10, ø16: Stainless steel ø20 to ø40: Aluminum alloy	ø20 to ø40: Hard anodized
3	Lever	Stainless steel	Heat treated
4	Guide	Stainless steel	Heat treated
5	Finger	Stainless steel	Heat treated
6	Roller stopper	Stainless steel	
7	Lever shaft	Stainless steel	Nitrided
8	Cap	ø10 to ø25: Synthetic resin ø32, ø40: Aluminum alloy	ø32, ø40: Clear anodized
9	Bumper	Urethane rubber	
10	Rubber magnet	Synthetic rubber	

Parts list

No.	Description	Material	Note
11	Steel balls	High carbon chromium bearing steel	
12	Needle roller	High carbon chromium bearing steel	
13	Parallel pin	Stainless steel	
14	C type snap ring	Carbon steel	Nickel plated
15	Exhaust plug A	Brass	Electroless nickel plated
16	Exhaust filter A	Polyvinyl formal	
17	N.O. spring	Stainless steel spring wire	
18	N.C. spring	Stainless steel spring wire	
19	Rod seal	NBR	
20	Piston seal	NBR	
21	Gasket	NBR	

Replacement parts: Seal kits

Seal kit no.						Description
MHZ2-10D	MHZ2-16D	MHZ2-20D	MHZ2-25D	MHZ2-32D	MHZ2-40D	Kits include items 19, 20 and 21 from the table above.
MHZ10-PS	MHZ16-PS	MHZ20-PS	MHZ25-PS	MHZ32-PS	MHZ40-PS	


* Seal kits consist of items 19, 20 and 21 in one kit, and can be ordered using the seal kit number for each cylinder bore size.

Series MHZ2


Dimensions

Scale: 100%


MHZ2-6□
 Double acting/Single acting
 Basic type

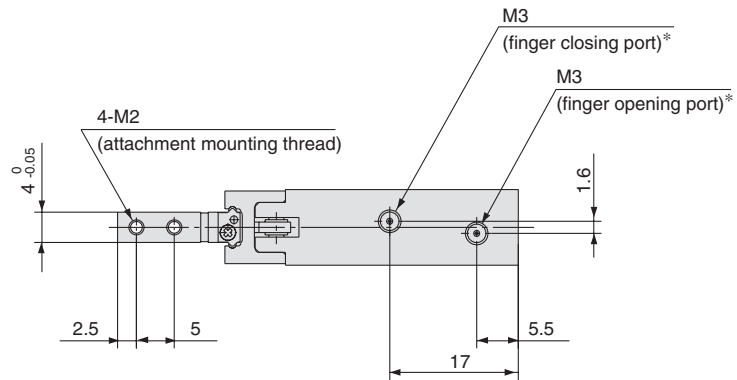

* For single action, the port on one side is a breathing hole.

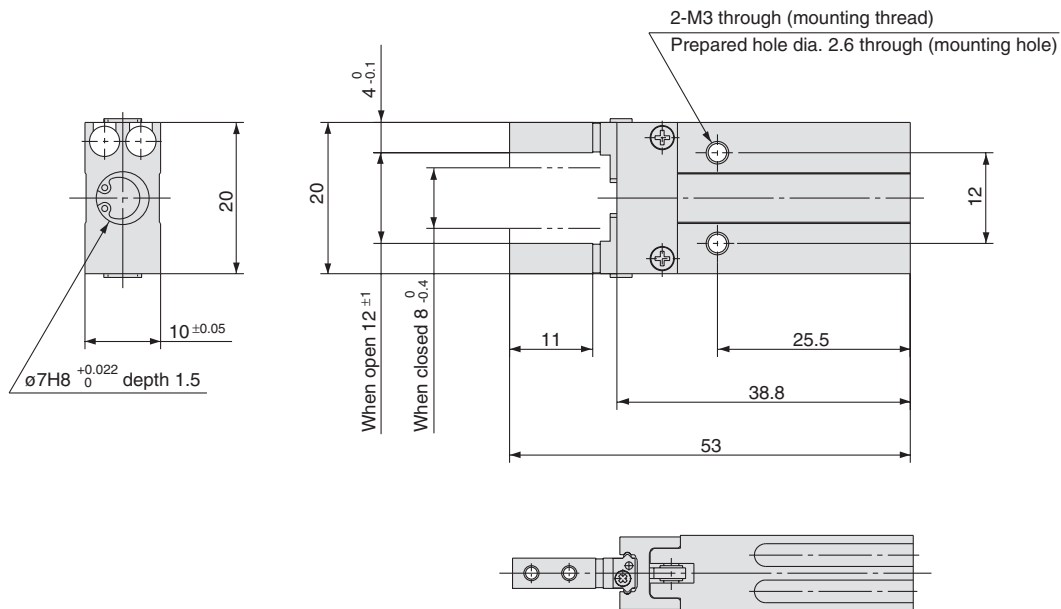


Auto switch mounting groove dimensions

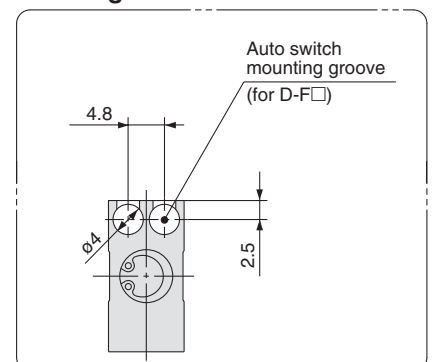




MHZ2-10□

**Double acting/Single acting
Basic type**


Scale: 90%

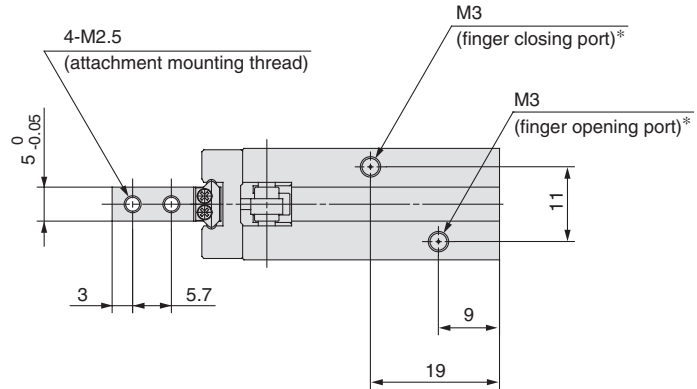


* For single action, the port on one side is a breathing hole.

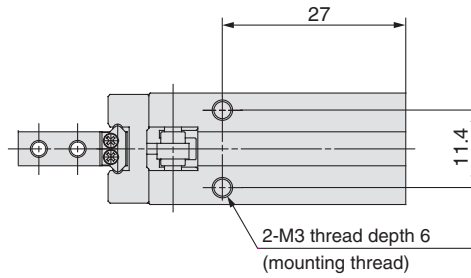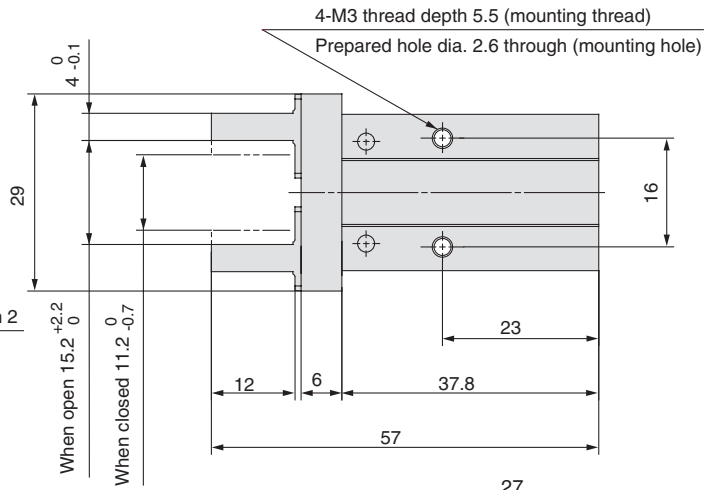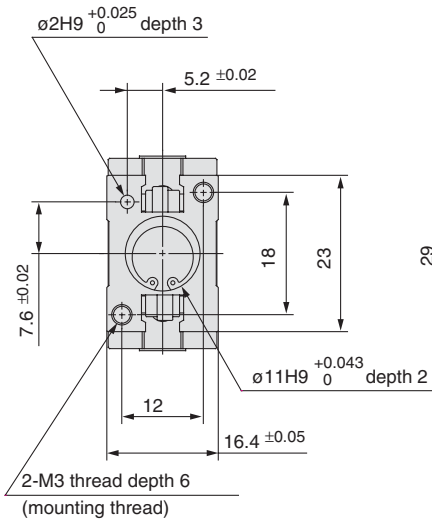

Auto switch mounting groove dimensions

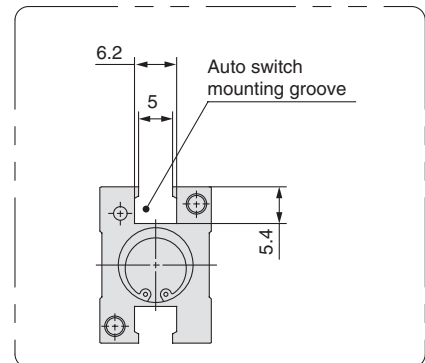

Finger position/Narrow type

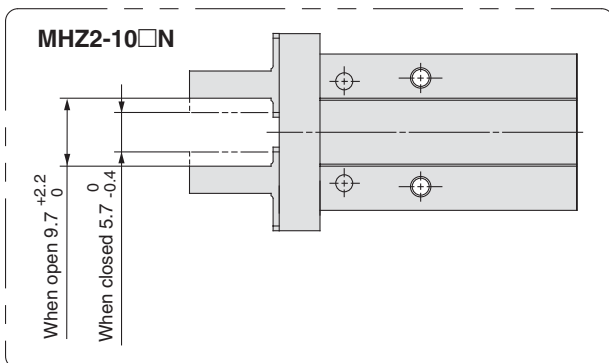


Note) When using D-Y59, D-Y69 and D-Y7 type auto switches, through hole mounting is not possible.

Series MHZ2

Dimensions


MHZ2-16□
Double acting/Single acting
Basic type

Scale: 65%

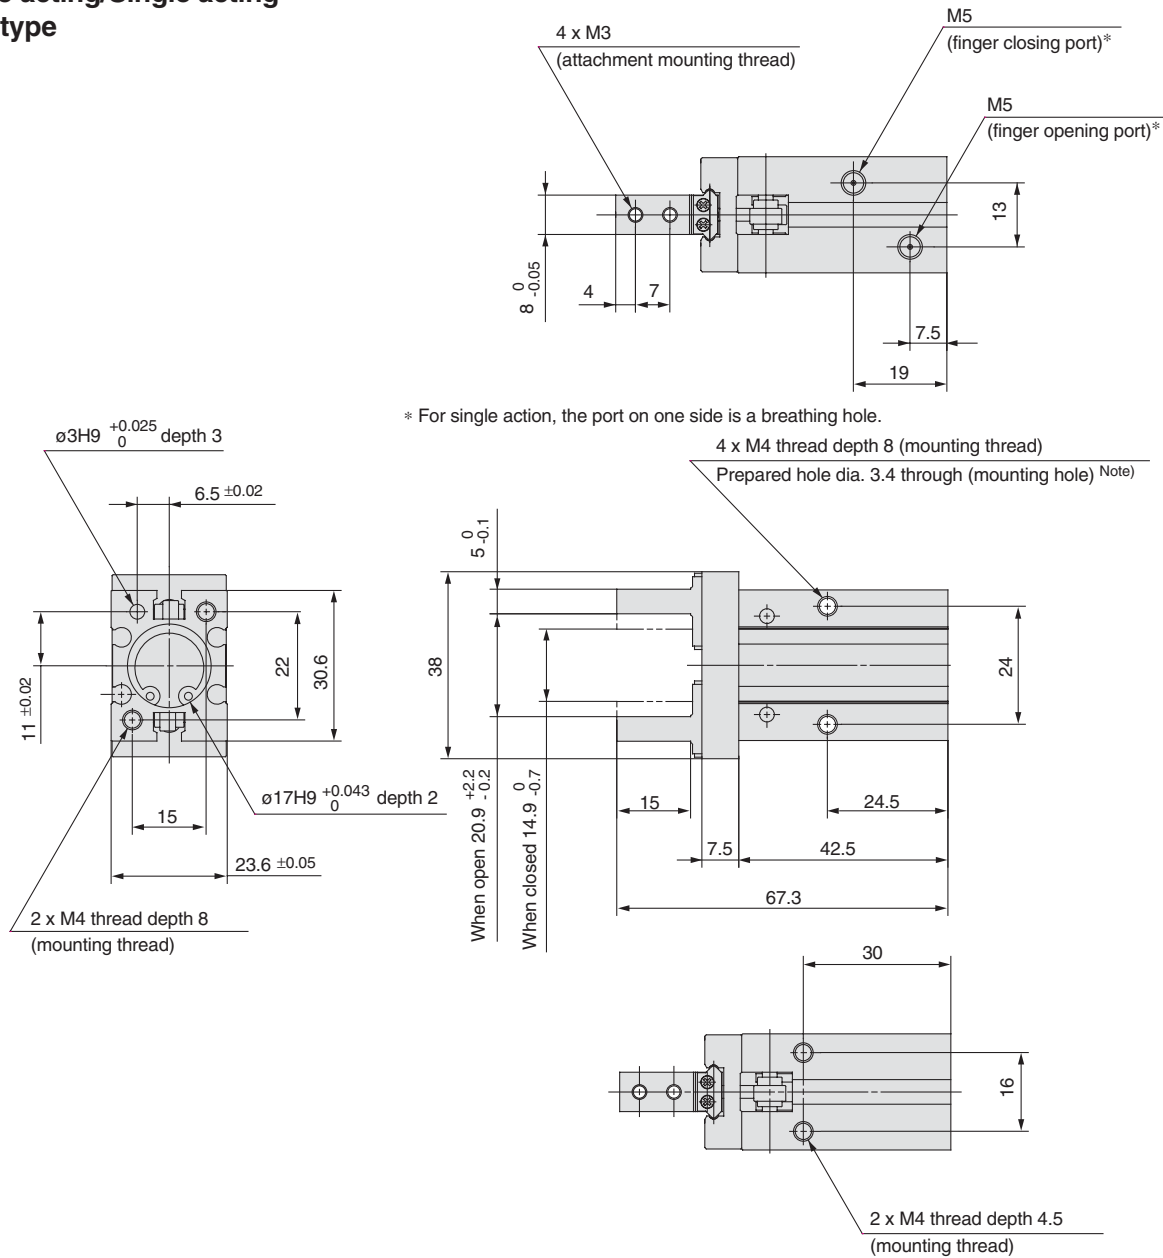


* For single action, the port on one side is a breathing hole.

Auto switch mounting groove dimensions

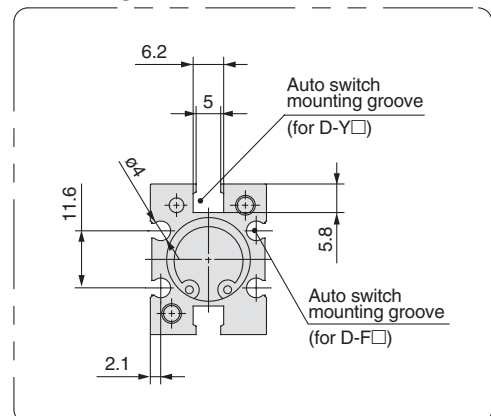

Note) When using D-Y59, D-Y69 and D-Y7 type auto switches, through hole mounting is not possible.


Finger position/Narrow type

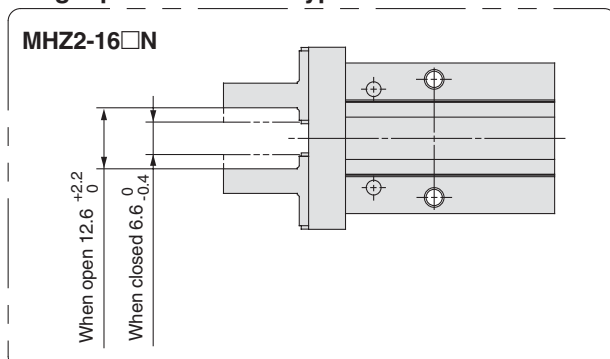




MHZ2-20□

**Double acting/Single acting
Basic type**


Scale: 60%

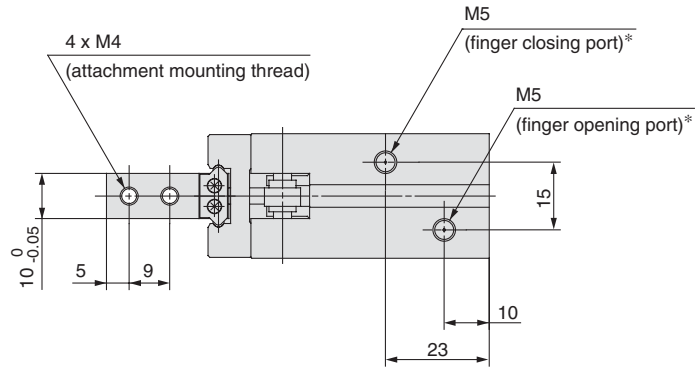


* For single action, the port on one side is a breathing hole.

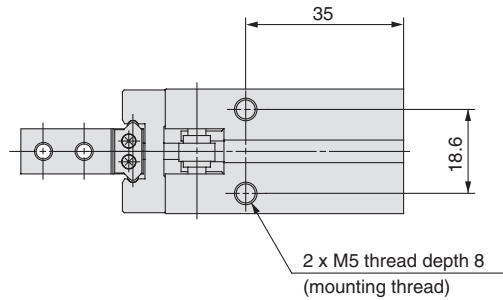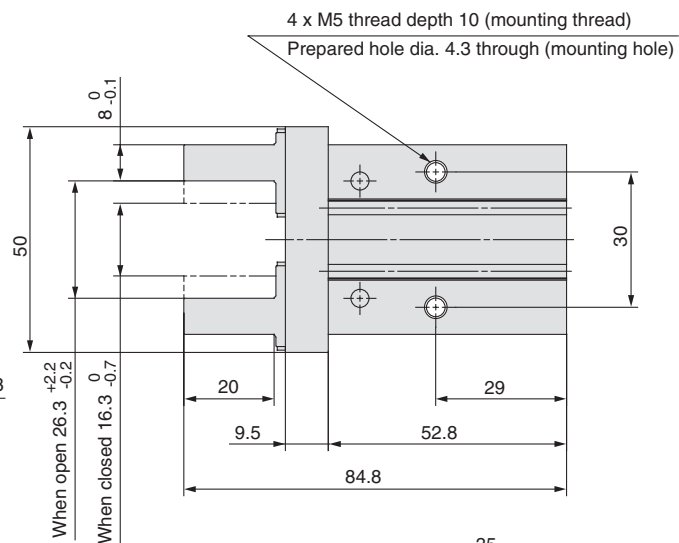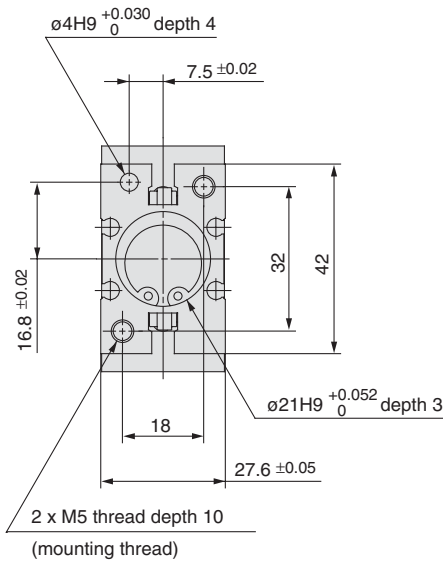

Auto switch mounting groove dimensions

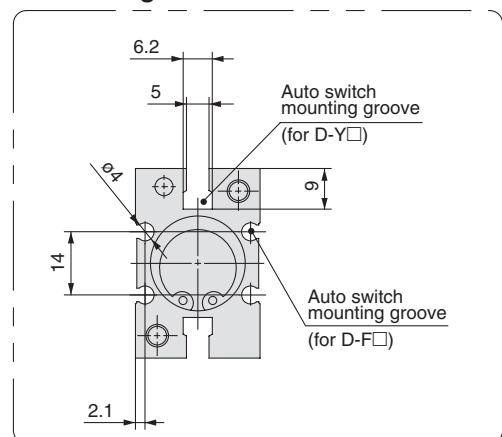

Finger position/Narrow type

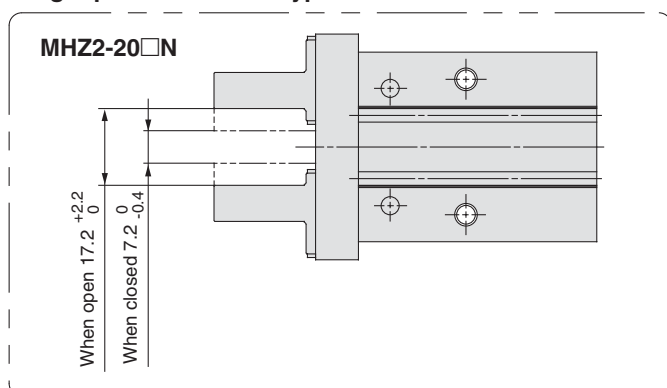

Note) When using D-Y59, D-Y69 and D-Y7 type auto switches, through hole mounting is not possible.

Series MHZ2


Dimensions

MHZ2-25□

Double acting/Single acting

Basic type

Scale: 50%

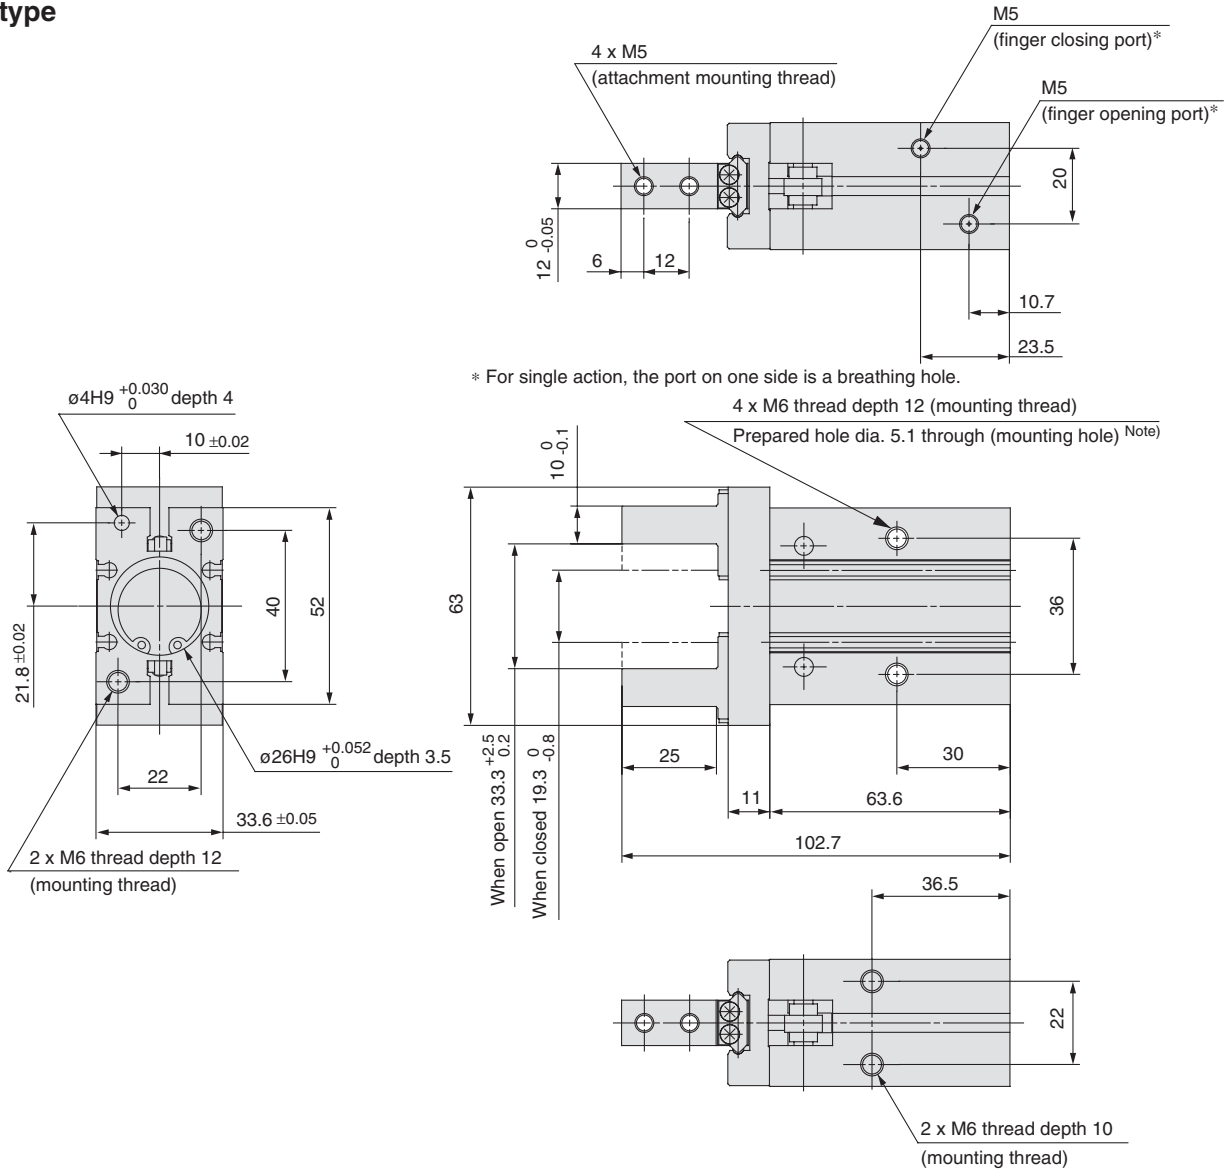


* For single action, the port on one side is a breathing hole.

4 x M6 thread depth 12 (mounting thread)

Prepared hole dia. 5.1 through (mounting hole) ^{Note}


Auto switch mounting groove dimensions

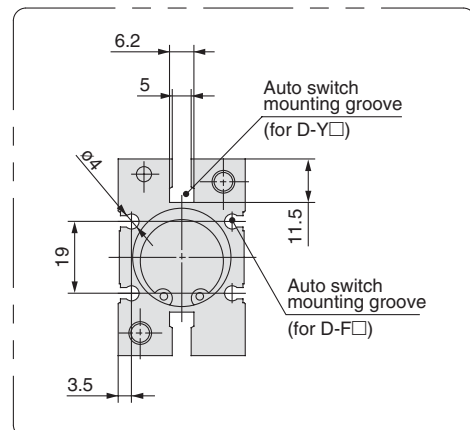

Note) When using D-Y59, D-Y69 and D-Y7 type auto switches, through hole mounting is not possible.

Finger position/Narrow type


MHZ2-25□N

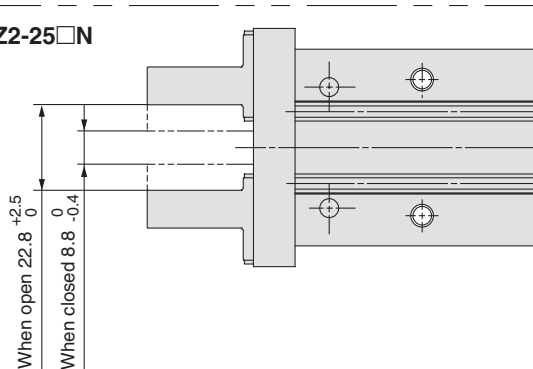

MHZ2-32
Double acting/Single acting
Basic Type

Scale: 40%

The values inside () are dimensions for the single acting type.

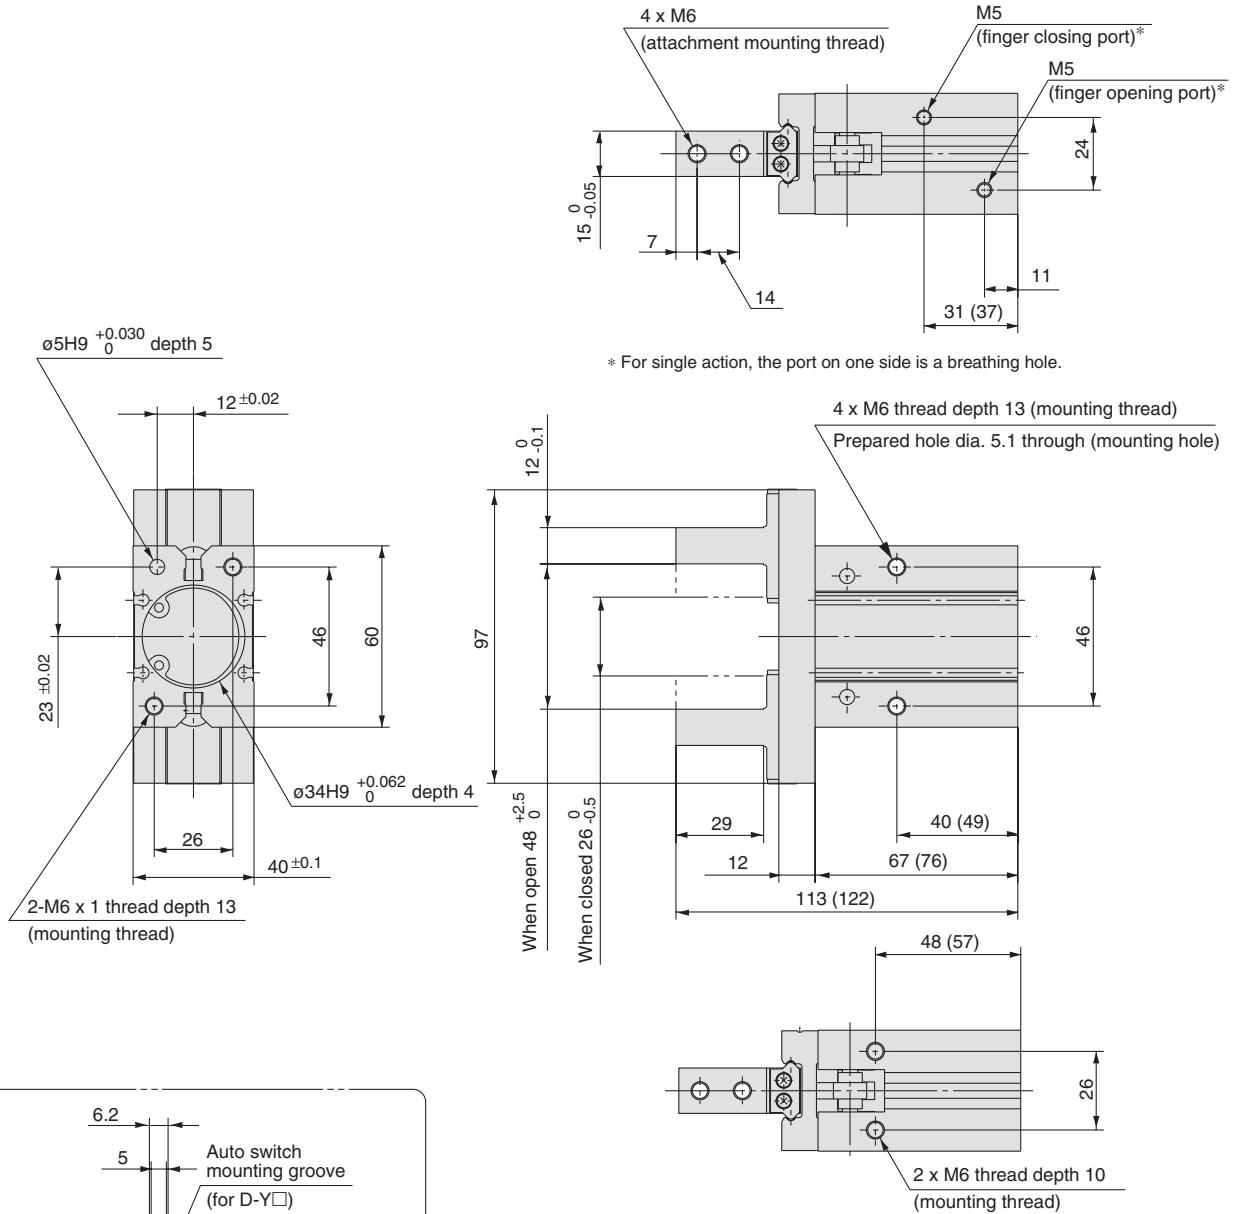

* For single action, the port on one side is a breathing hole.

Note) When using D-Y59, D-Y69 and D-Y7 type auto switches, through hole mounting is not possible.

Series MHZ2


Dimensions

MHZ2-40□

Double acting/Single acting
Basic type

Scale: 40%





The values inside () are dimensions for the single acting type.

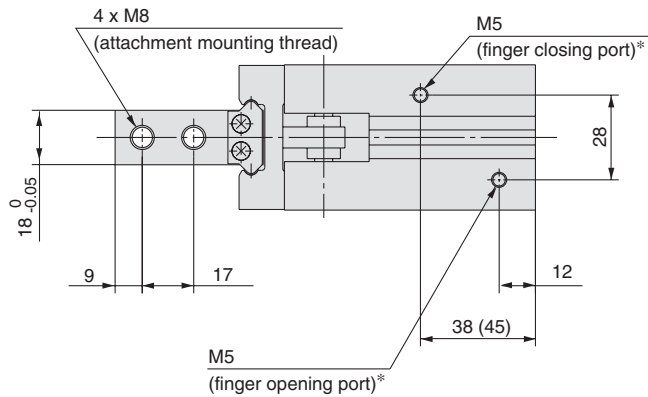

* For single action, the port on one side is a breathing hole.

4 x M8 thread depth 16 (mounting thread)

Prepared hole dia. 6.6 through (mounting thread) ^{Note)}

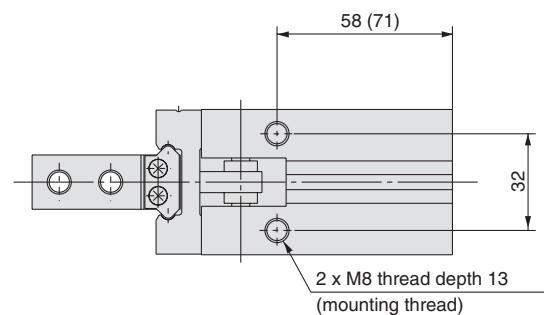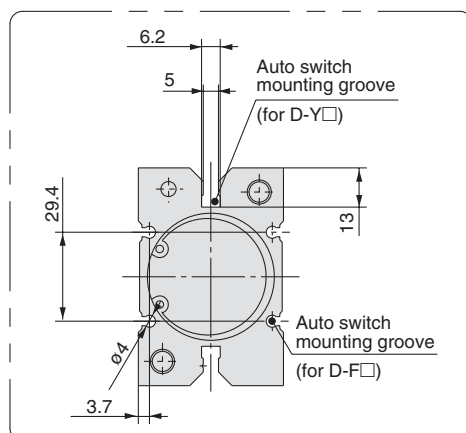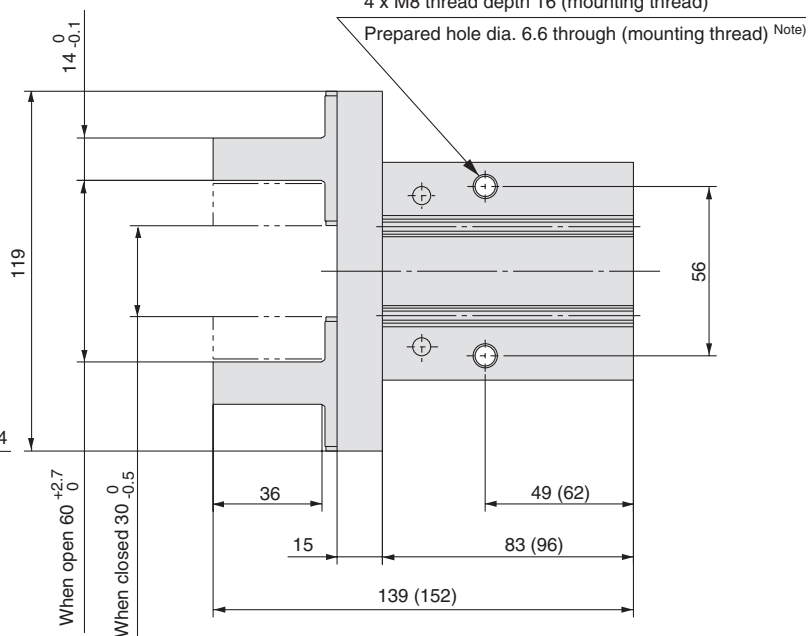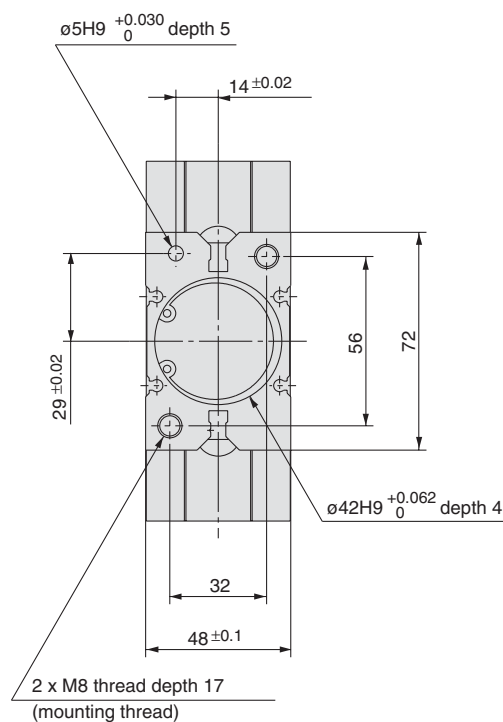


Note) When using D-Y59, D-Y69 and D-Y7 type auto switches, through hole mounting is not possible.

Standard Type/Series MHZ2

Finger Options

Side Tapped Mounting [1/N1]

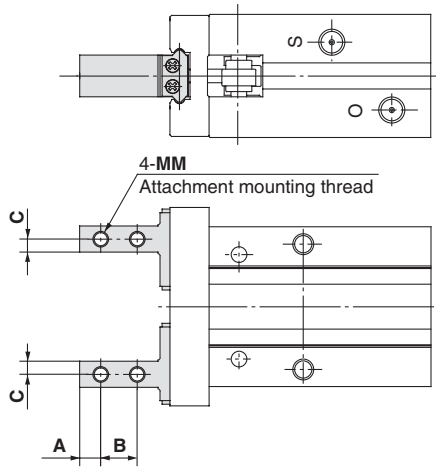


Unit: mm

Model	A	B	C	MM
MHZ2- 6□1	2.5	5	2	M2
MHZ2-10□ ¹ _{N1} □	3	5.7	2	M2.5
MHZ2-16□ ¹ _{N1} □	4	7	2.5	M3
MHZ2-20□ ¹ _{N1} □	5	9	4	M4
MHZ2-25□ ¹ _{N1} □	6	12	5	M5
MHZ2-32□1□	7	14	6	M6
MHZ2-40□1□	9	17	7	M8

* Specifications and dimensions other than the above are the same as the basic type (including narrow type).

Through Holes in Opening/Closing Direction [2/N2]

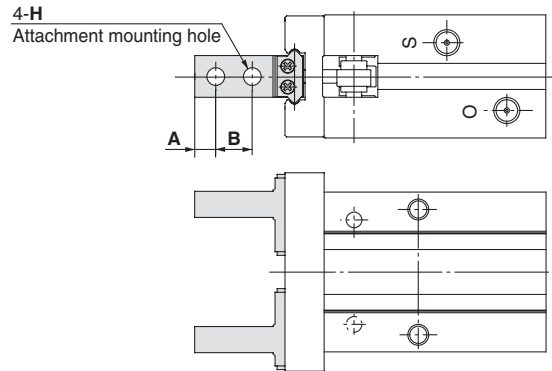


Unit: mm

Model	A	B	H
MHZ2- 6□2	2.5	5	2.4
MHZ2-10□ ² _{N2} □	3	5.7	2.9
MHZ2-16□ ² _{N2} □	4	7	3.4
MHZ2-20□ ² _{N2} □	5	9	4.5
MHZ2-25□ ² _{N2} □	6	12	5.5
MHZ2-32□2□	7	14	6.6
MHZ2-40□2□	9	17	9

* Specifications and dimensions other than the above are the same as the basic type (including narrow type).

Flat Type Fingers [3]

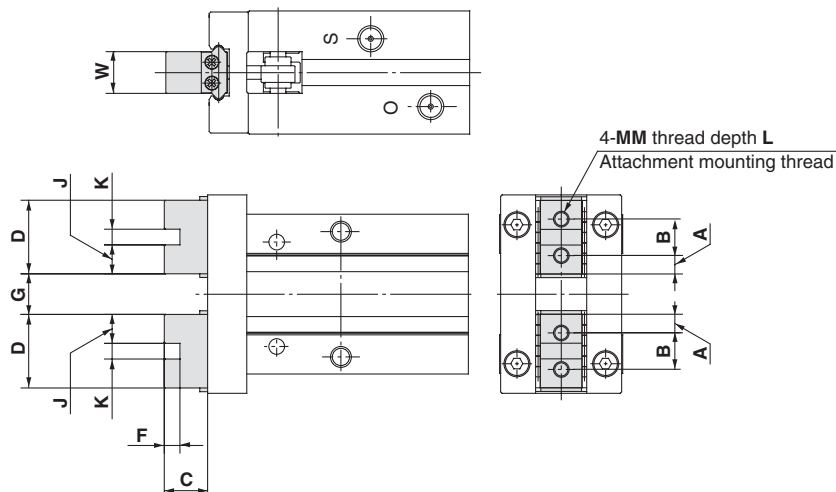

Unit: mm

Model	A	B	C	D	F	G		J	K	MM	L	W	Weight g
						Open	Closed						
MHZ2- 6□3 *1)	2	3.5	7.2	7.5	—	5 ^{+1.2} _{-0.8}	1 ^{+0.2} ₀	—	—	M2	3	4 ⁰ _{-0.05}	26
MHZ2-10□3□ *2), *3)	2.45	6	5.2	10.9	2	5.4 ^{+2.2} ₀	1.4 ⁰ _{-0.2}	4.45	2H9 ^{+0.025} ₀	M2.5	5	5 ⁰ _{-0.05}	55
MHZ2-16□3□ *2), *3)	3.05	8	8.3	14.1	2.5	7.4 ^{+2.2} ₀	1.4 ⁰ _{-0.2}	5.8	2.5H9 ^{+0.025} ₀	M3	6	8 ⁰ _{-0.05}	115
MHZ2-20□3□ *2), *3)	3.95	10	10.5	17.9	3	11.6 ^{+2.3} ₀	1.6 ⁰ _{-0.2}	7.45	3H9 ^{+0.025} ₀	M4	8	10 ⁰ _{-0.05}	235
MHZ2-25□3□ *2), *3)	4.9	12	13.1	21.8	4	16 ^{+2.5} ₀	2 ⁰ _{-0.2}	8.9	4H9 ^{+0.030} ₀	M5	10	12 ⁰ _{-0.05}	420
MHZ2-32□3□	7.3	20	18	34.6	5	25 ^{+2.7} ₀	3 ⁰ _{-0.2}	14.8	5H9 ^{+0.030} ₀	M6	12	15 ⁰ _{-0.05}	740 (785) *4)
MHZ2-40□3□	8.7	24	22	41.4	6	33 ^{+2.9} ₀	3 ⁰ _{-0.2}	17.7	6H9 ^{+0.030} ₀	M8	16	18 ⁰ _{-0.05}	1335 (1430) *4)

*1) To mount attachments, use M2 hexagon socket head cap screws with $\phi 3.3$ top diameter, or JISB1101 type M2 round head screws.

*2) Specifications and dimensions other than the above are the same as the basic type (including narrow type).

*3) The overall length is the same as the MHQ(G) flat finger type.

*4) The values inside () are for the single acting type.


Standard Type/Series MHZ2

Body Options: End Boss Type

Applicable Models

Symbol	Piping port position	Type of Piping Port				Applicable model		
		MHZ2-10	MHZ2-16	MHZ2-20	MHZ2-25	Double acting	Single acting	
							Normally open	Normally closed
E	Side ported	M3	M5		●	●	●	
W	Axial port	With $\phi 4$ One-touch fitting for coaxial tube				●	—	—
K		With $\phi 4$ One-touch fitting				—	●	●
M		M5 x 0.8				—	●	●

Side Ported [E]

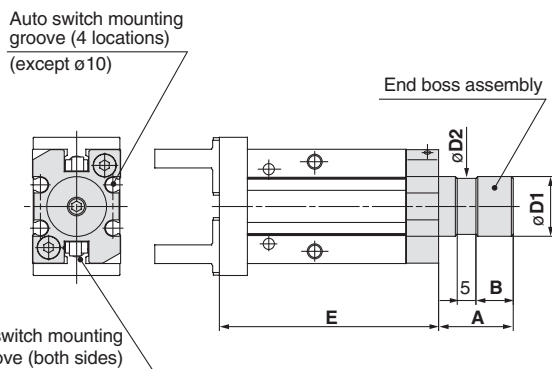


- * Refer to the dimension table.
- * When auto switches are used, side mounting with through holes is not possible.

Unit: mm

Model	Kit no.	A	B	D1	D2	E
MHZ2-10□□	MHZ-A1010	15	7	12f8 ^{-0.016} _{-0.043}	11	52.8
MHZ2-16□□	MHZ-A1610	20	10	16f8 ^{-0.016} _{-0.043}	15	58.7
MHZ2-20□□	MHZ-A2010	22	12	20f8 ^{-0.020} _{-0.053}	19	70.5
MHZ2-25□□	MHZ-A2510	25	15	25f8 ^{-0.020} _{-0.053}	24	82.9

Other dimensions and specifications correspond to the standard type.

Axial Port (One-Touch Fitting for Coaxial Tubing) [W]

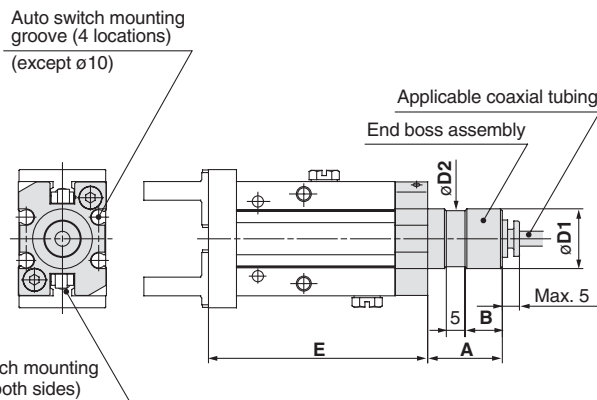

- * Refer to the dimension table.
- * When auto switches are used, side mounting with through holes is not possible.


Unit: mm

Model	A	B	D1	D2	E
MHZ2-10□□	15	7	12f8 ^{-0.016} _{-0.043}	11	52.8
MHZ2-16□□	20	10	16f8 ^{-0.016} _{-0.043}	15	58.7
MHZ2-20□□	22	12	20f8 ^{-0.020} _{-0.053}	19	70.5
MHZ2-25□□	25	15	25f8 ^{-0.020} _{-0.053}	24	82.9

Other dimensions and specifications correspond to the standard type.

Applicable coaxial tubing


Reference symbol



Specification	Model	TW04B-20
Outside diameter		4mm
Max. operating pressure		0.6MPa
Min. bending radius		10mm
Operating temperature		-20 to 60°C
Material		Nylon 12


Changing from Coaxial to Single Tubing

Changing to single tubing is possible by using a branch "Y" or branch tee fitting. In this case particularly, single tube fittings and tubing for $\phi 3.2$ will be necessary.

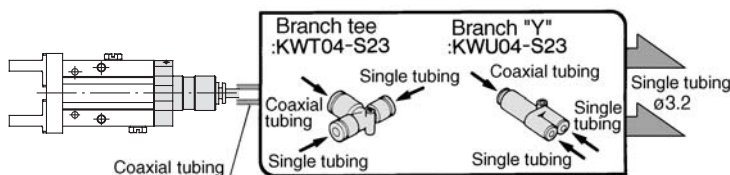


Branch tee, Different diameter tee, Branch "Y", Male run tee

Refer to catalog CAT.E004-A "Coaxial Air Tubing System" regarding coaxial tubing.

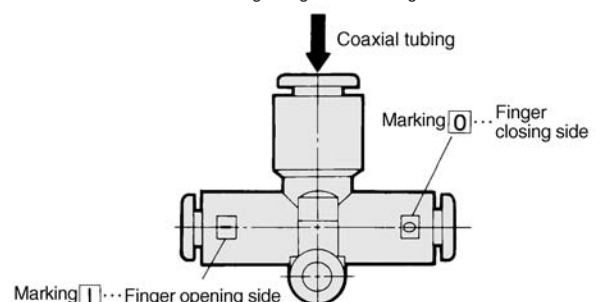

Axial Port (with One-touch Fitting) [K]

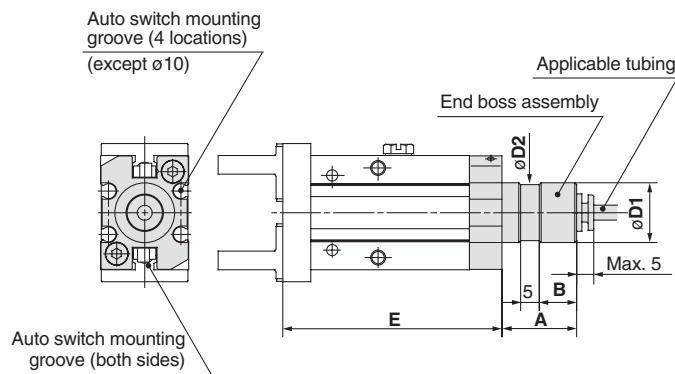

* Refer to the dimension table.
 * When auto switches are used, side mounting with through holes is not possible.

Unit: mm

Model	A	B	D1	D2	E
MHZ2-10□□	15	7	12f8 ^{-0.016} _{-0.043}	11	52.8
MHZ2-16□□	20	10	16f8 ^{-0.016} _{-0.043}	15	58.7
MHZ2-20□□	22	12	20f8 ^{-0.020} _{-0.053}	19	70.5
MHZ2-25□□	25	15	25f8 ^{-0.020} _{-0.053}	24	82.9


Other dimensions and specifications correspond to the standard type.

Applicable tubing

Description/ Model	Nylon tubing	Soft nylon tubing	Polyurethane tubing	Polyurethane coiled tubing
	T0425	TS0425	TU0425	TCU0425B-1
Outside diameter mm	4	4	4	4
Max. operating pressure MPa	1.0	0.8	0.5	0.5
Min. bending radius mm	13	12	10	—
Operating temperature °C	-20 to 60	-20 to 60	-20 to 60	-20 to 60
Material	Nylon 12	Nylon 12	Polyurethane	Polyurethane

Refer to catalog CAT. E501-B "Air Fittings and Tubing" regarding One-touch fittings and tubing.

Axial Port (M5 Port) [M]

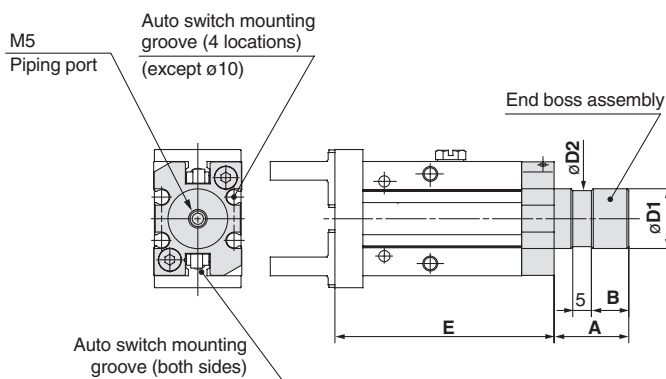

* Refer to the dimension table.
 * When auto switches are used, side mounting with through holes is not possible.

Unit: mm

Model	A	B	D1	D2	E
MHZ2-10□□	15	7	12f8 ^{-0.016} _{-0.043}	11	52.8
MHZ2-16□□	20	10	16f8 ^{-0.016} _{-0.043}	15	58.7
MHZ2-20□□	22	12	20f8 ^{-0.020} _{-0.053}	19	70.5
MHZ2-25□□	25	15	25f8 ^{-0.020} _{-0.053}	24	82.9

Other dimensions and specifications correspond to the standard type.

Weights


Unit: g

Model	End boss type (symbol)			
	E	W	K	M
MHZ2-10□□	65	64	66	65
MHZ2-16□□	148	147	148	147
MHZ2-20□□	277	277	277	277
MHZ2-25□□	495	495	496	494

Long Stroke

Series MHZL2

How to Order

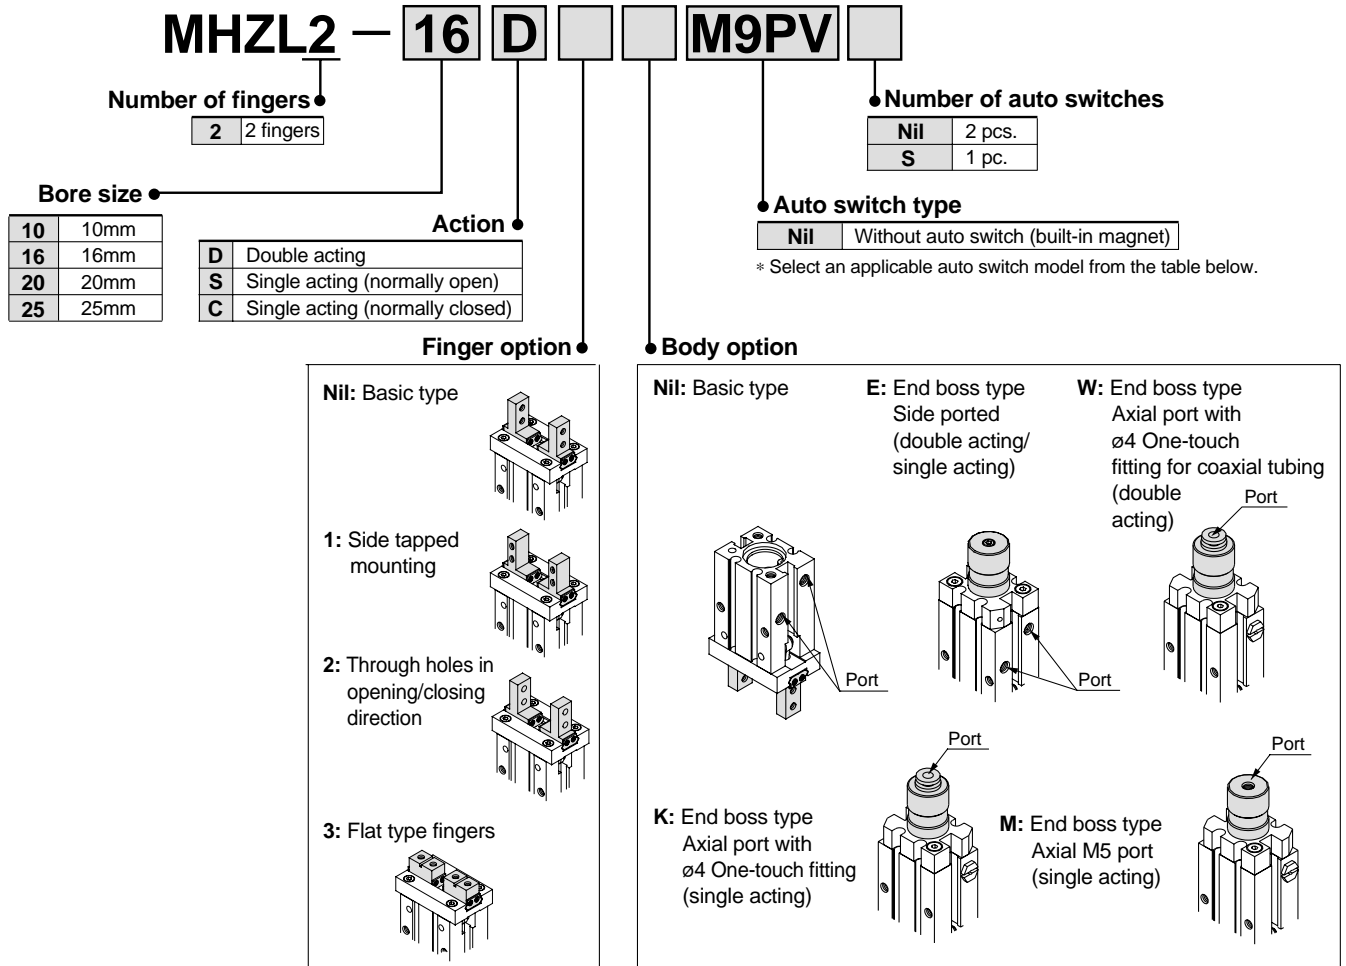

Applicable auto switches

Type	Special function	Electrical entry	Indicator light	Wiring (output)	Load voltage		Auto switch part no.		Lead wire length (m) [*]			Flexible lead wire (-61) ^{Note 2)}	Applicable load	Applicable model									
					DC	AC	Electrical entry direction		0.5 (Nil)	3 (L)	5 (Z)			ø10	ø16	ø20	ø25						
							Perpendicular	In-line															
Solid state switch	—	Grommet	Yes	3 wire (NPN)	24V	—	Perpendicular	In-line	●	●	○	Standard	IC circuit	●	●	●	●						
									●	●	—			○	—	●	●	●	●				
									●	●	○			○	—	●	●	●	●				
									●	●	○			○	—	●	●	●	●				
				Diagnostic indication (2 colour indicator)	Grommet	Yes	3 wire (PNP)	24V	—	Perpendicular	In-line	●	●	○	Standard	IC circuit	Relay, PLC	●	●	●	●		
												●	●	—				○	—	●	●	●	●
												●	●	○				○	—	●	●	●	●
												●	●	○				○	—	●	●	●	●
	2 wire	24V	—				Perpendicular	In-line	●	●	○	Standard	—	●	●	●	●						
									●	●	—			○	—	●	●	●	●				
									●	●	○			○	—	●	●	●	●				
									●	●	○			○	—	●	●	●	●				

* Lead wire length symbols: 0.5m Nil (Example) M9N
 3m L (Example) M9NL
 5m Z (Example) Y59AZ

Note 2) Add "-61" at the end of the part number for the flexible lead wire.
 (Examples)

* Auto switches marked with a "O" symbol are produced upon receipt of order.

Note 1) Use caution regarding hysteresis in the 2 color indicator types. When using this type, refer to "Auto Switch Hysteresis" on page 5-55

Note 3) Through hole mounting is not possible when using auto switch types D-Y59, D-Y69, or D-Y7.

When ordering with an air gripper

MHZL2-16D-M9NVS-61

Flexible lead wire

When ordering auto switches only

D-M9PL-61

Flexible lead wire


Specifications




Fluid		Air	
Operating pressure	Double acting		$\phi 10$: 0.2 to 0.7MPa $\phi 16$ to $\phi 25$: 0.1 to 0.7MPa
	Single acting	Normally open	$\phi 10$: 0.35 to 0.7MPa
		Normally closed	$\phi 16$ to $\phi 25$: 0.25 to 0.7MPa
Ambient and fluid temperature		-10 to 60°C	
Repeatability		± 0.01 mm	
Maximum operating frequency		120c.p.m.	
Lubrication		Non-lube	
Action		Double acting, Single acting	
Auto switch (option) <small>Note)</small>		Solid state switch (3 wire, 2 wire)	

Symbols:


Double acting type



Single acting type, normally open



Single acting type, normally closed



Models

Action	Model	Bore size (mm)	Gripping force <small>Note 1)</small>		Opening/Closing stroke (both sides) mm	<small>Note 2)</small> Weight g	
			Gripping force per finger Effective value N				
			External gripping force	Internal gripping force			
Double acting	MHZL2-10D	10	11	17	8	60	
	MHZL2-16D	16	34	45	12	135	
	MHZL2-20D	20	42	66	18	270	
	MHZL2-25D	25	65	104	22	470	
Single acting	Normally open	MHZL2-10S	10	7.1	—	8	70
		MHZL2-16S	16	27		12	145
		MHZL2-20S	20	33		18	290
		MHZL2-25S	25	50		22	515
	Normally closed	MHZL2-10C	10	—	13	8	70
		MHZL2-16C	16		38	12	140
		MHZL2-20C	20		57	18	290
		MHZL2-25C	25		85	22	515

Note 1) Values based on pressure of 0.5MPa, gripping point L = 20mm, at center of stroke.

Note 2) Values excluding weight of auto switch.

Options

• Body options/End boss type


Symbol	Piping port position	Type of piping port				Applicable model	
		MHZL2-10	MHZL2-16	MHZL2-20	MHZL2-25	Double acting	Single acting
Nil	Basic type	M3	M5			●	●
E	Side ported	M3	M5			●	●
W	Axial port	With $\phi 4$ One-touch fitting for coaxial tube				●	—
K	Axial port	With $\phi 4$ One-touch fitting				—	●
M	Axial port	M5				—	●

* For detailed body option specifications, refer to option specifications on pages 5-42 and 5-43


Series MHZL2

Construction/MHZL2-10□ to 25□


Double acting/with fingers open

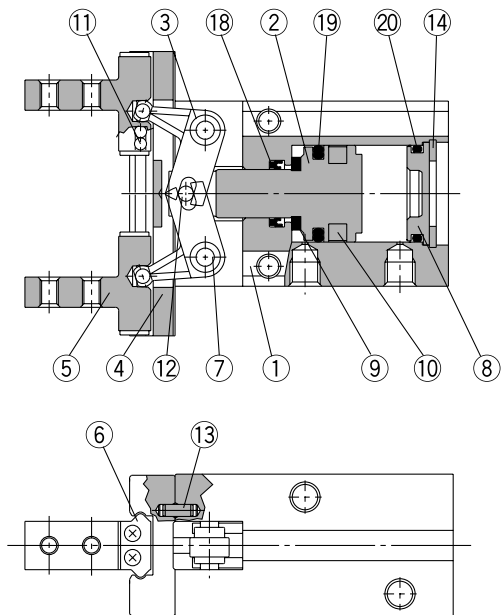


Double acting/with fingers closed

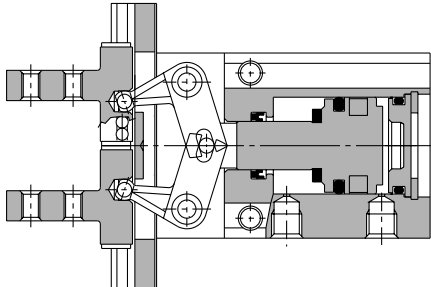

Single acting/normally open

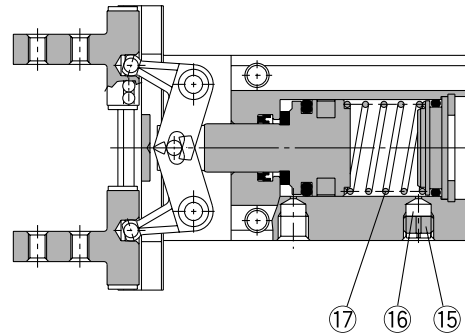

Single acting/normally closed

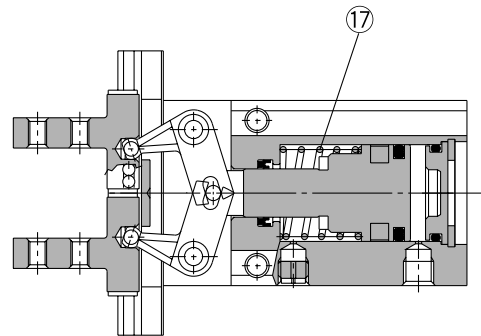

Parts list

No.	Description	Material	Note
1	Body	Aluminum alloy	Hard anodized
2	Piston	ø10, ø16: Stainless steel ø20, ø25: Aluminum alloy	Hard anodized
3	Lever	Stainless steel	Heat treated
4	Guide	Stainless steel	Heat treated
5	Finger	Stainless steel	Heat treated
6	Roller stopper	Stainless steel	
7	Lever shaft	Stainless steel	Nitrided
8	Cap	Aluminum alloy	Clear anodized
9	Bumper	Urethane rubber	
10	Rubber magnet	Synthetic rubber	

Parts list

No.	Description	Material	Note
11	Steel balls	High carbon chromium bearing steel	
12	Needle roller	High carbon chromium bearing steel	
13	Parallel pin	Stainless steel	
14	C type snap ring	Carbon steel	Nickel plated
15	Exhaust plug A	Brass	Electroless nickel plated
16	Exhaust filter A	Polyvinyl formal	
17	Spring	Stainless steel spring wire	
18	Rod seal	NBR	
19	Piston seal	NBR	
20	O-ring	NBR	

Replacement parts: Seal kits

Seal kit no.				Description
MHZL2-10D	MHZL2-16D	MHZL2-20D	MHZL2-25D	Kits include items 18, 19 and 20 from the table above.
MHZL10-PS	MHZL16-PS	MHZL20-PS	MHZL25-PS	


* Seal kits consist of items 18, 19 and 20 in one kit, and can be ordered using the seal kit number for each cylinder bore size.

Dimensions




MHZL2-10 □
Double acting/Single acting
Basic type

Scale: 100%


The values inside () are dimensions for the single acting type.

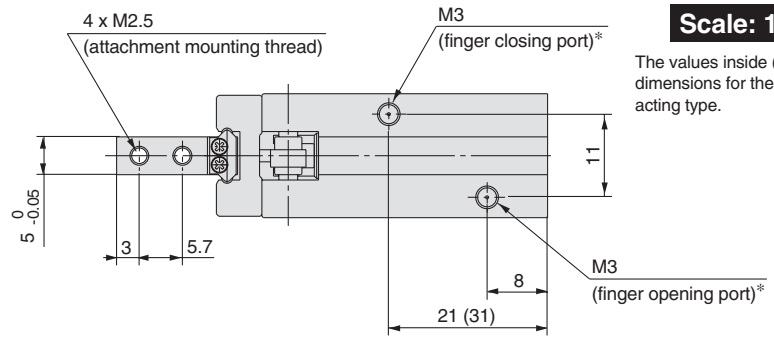

* For single action, the port on one side is a breathing hole.

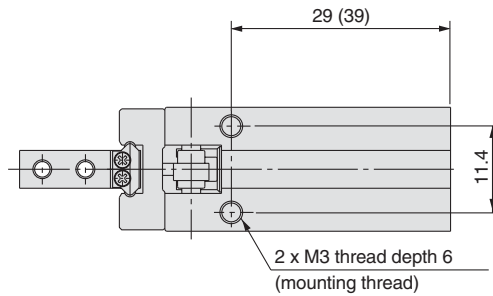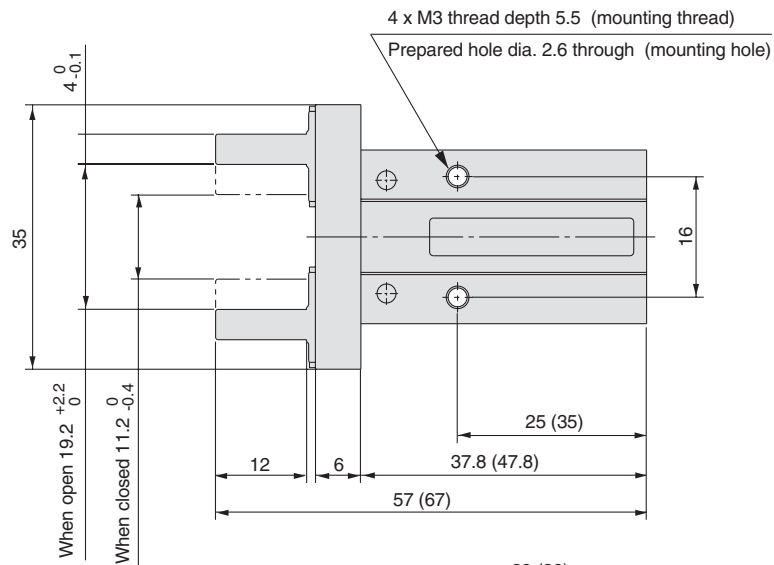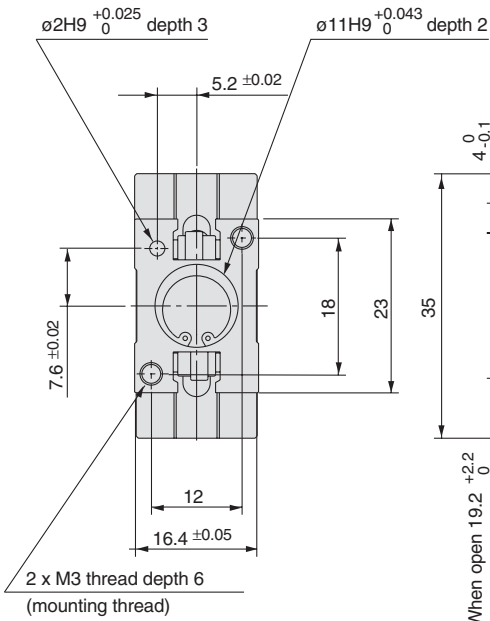

Auto switch mounting groove dimensions

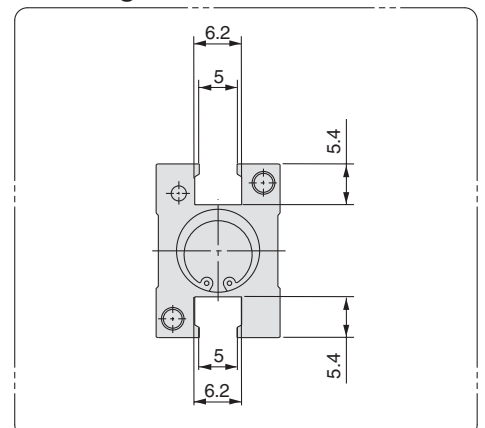

No) When using auto switches D-Y59, D-Y69 and D-Y7, through hole mounting is not possible.


Series MHZL2

Dimensions




MHZL2-16 □
Double acting/Single acting
Basic type

Scale: 75%


The values inside () are dimensions for the single acting type.

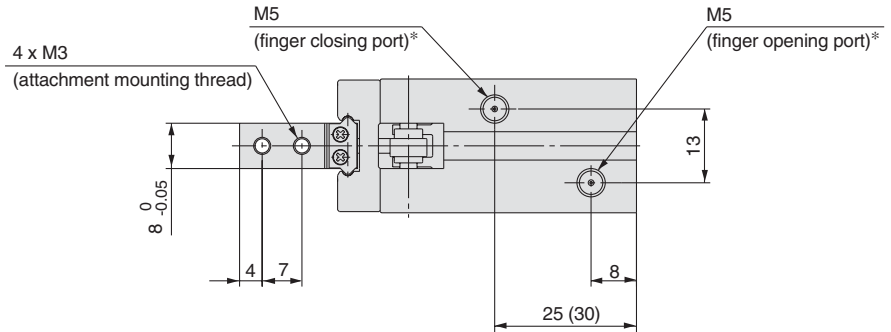

* For single action, the port on one side is a breathing hole.

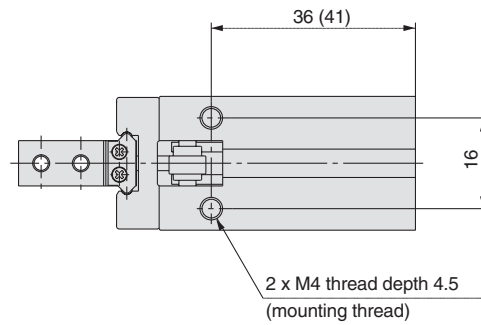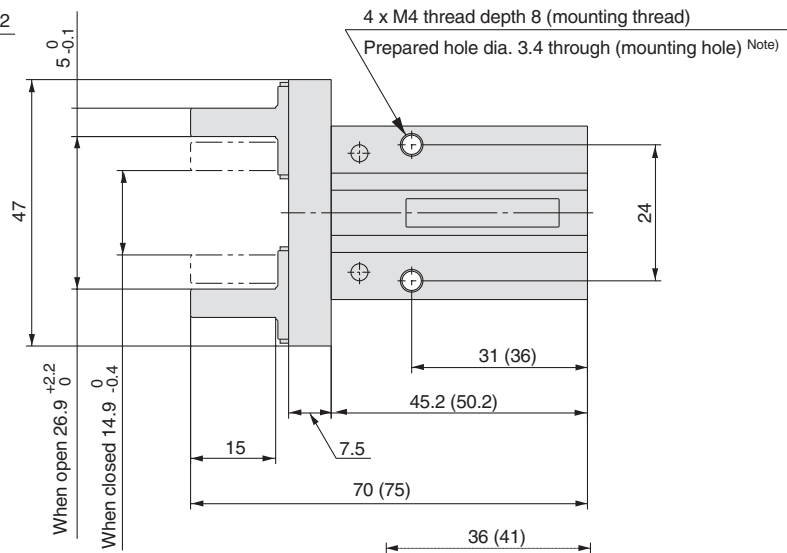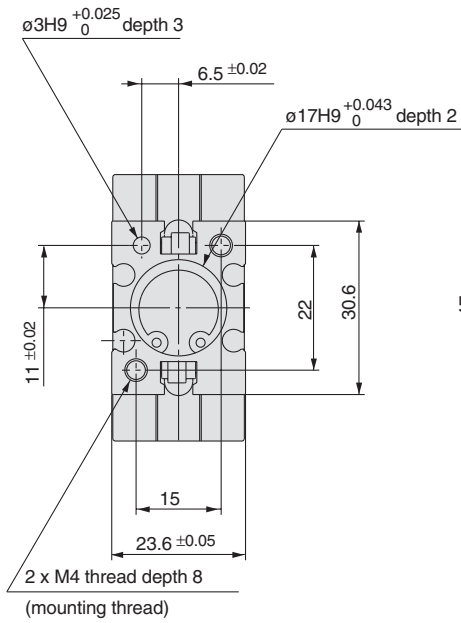

Auto switch mounting groove dimensions

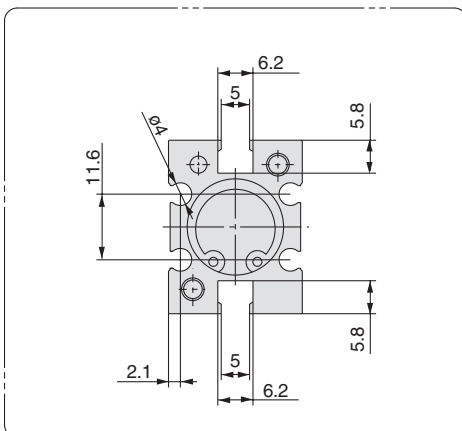


Note) When using D-Y59, D-Y69 and D-Y7 type auto switches, through hole mounting is not possible.

MHZL2-20
Double acting/Single acting
Basic type


Scale: 60%

The values inside () are dimensions for the single acting type.

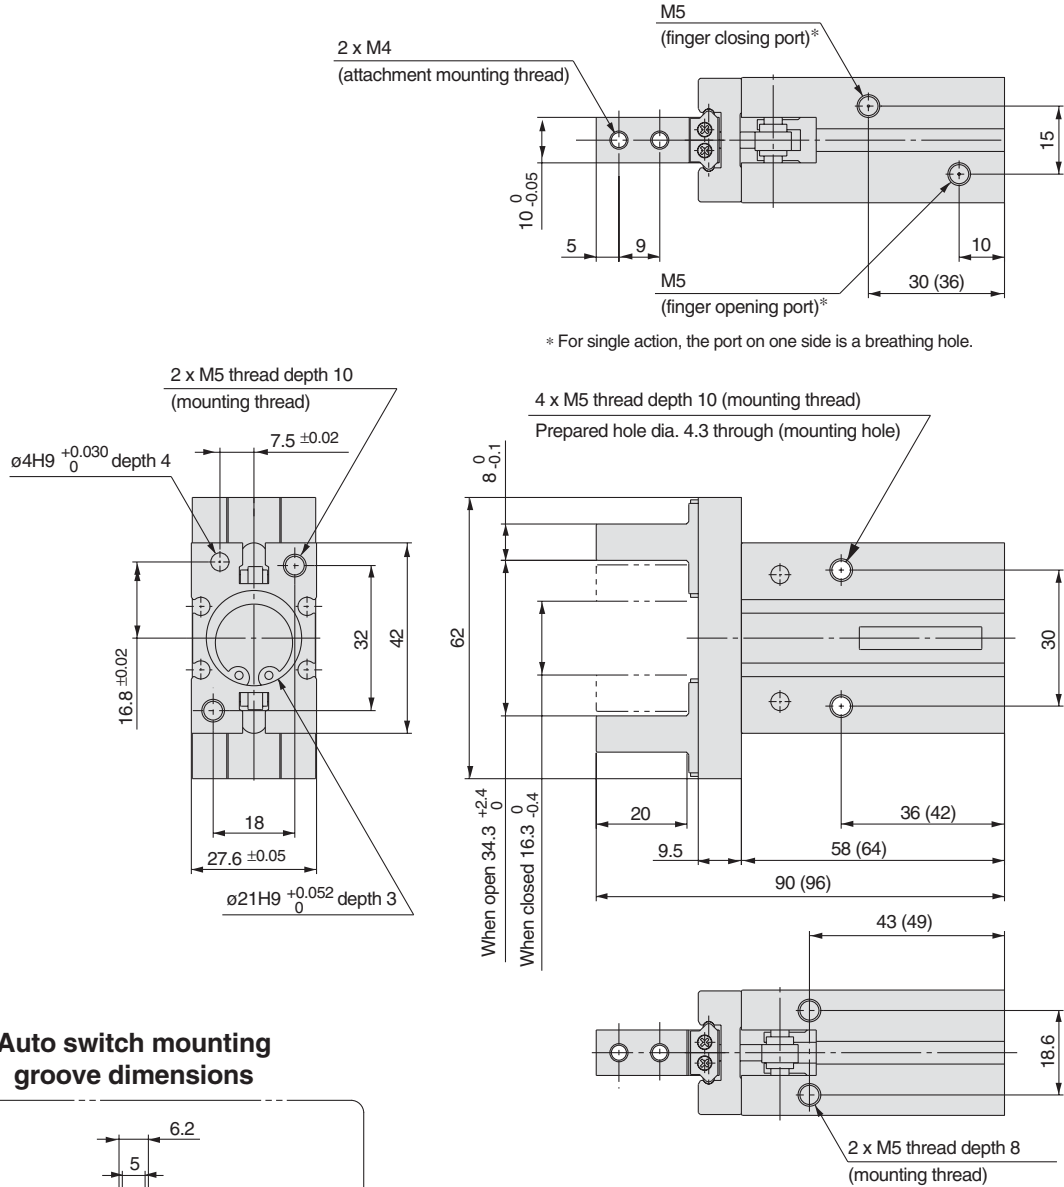

* For single action, the port on one side is a breathing hole.

Auto switch mounting groove dimensions

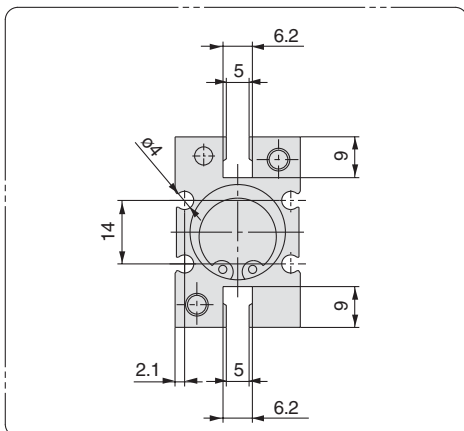

Note) When using D-Y59, D-Y69 and D-Y7 type auto switches, through hole mounting is not possible.


Series MHZL2

Dimensions




MHZL2-25
Double acting/Single acting
Basic type

Scale: 50%


The values inside () are dimensions for the single acting type.

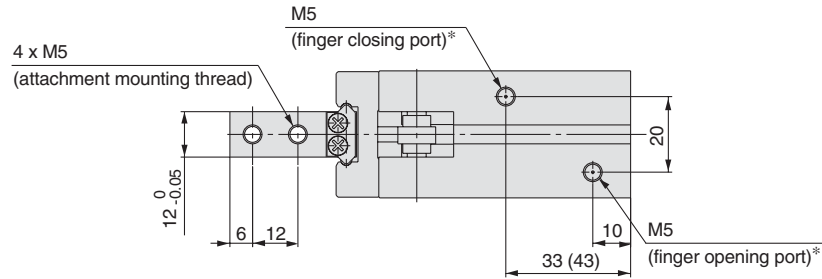

* For single action, the port on one side is a breathing hole.

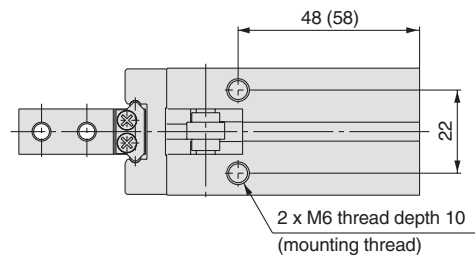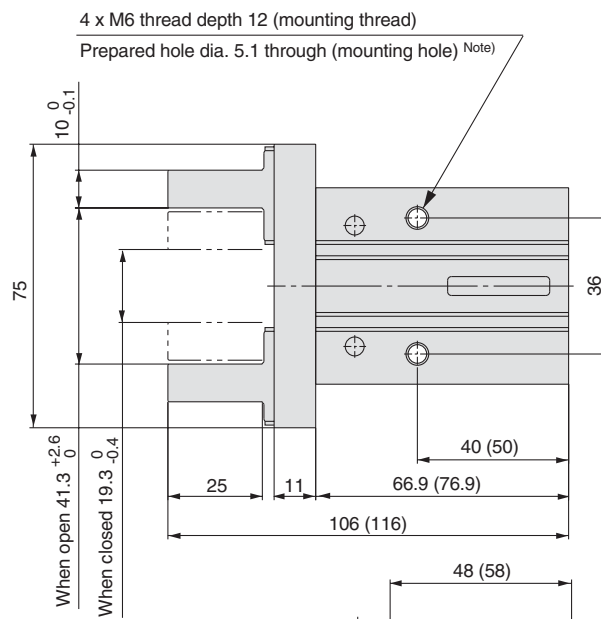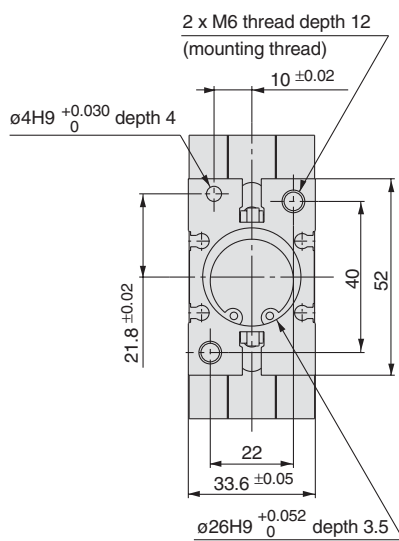


Auto switch mounting groove dimensions

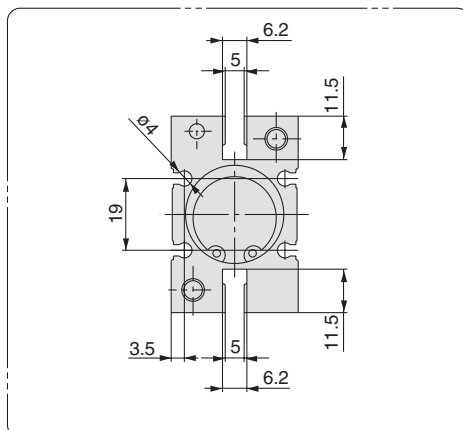

Note) When using D-Y59, D-Y69 and D-Y7 type auto switches, through hole mounting is not possible.

Long Stroke/Series MHZL2 Finger Options

Side Tapped Mounting [1]

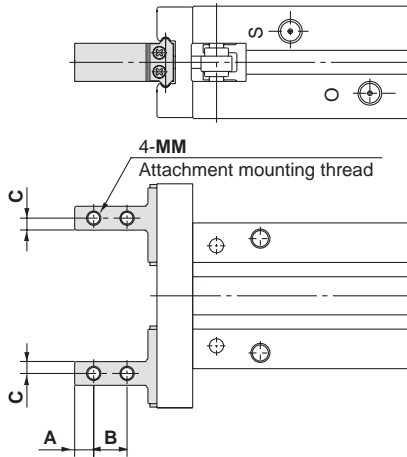


Unit: mm

Model	A	B	C	MM
MHZL2-10□1□	3	5.7	2	M2.5
MHZL2-16□1□	4	7	2.5	M3
MHZL2-20□1□	5	9	4	M4
MHZL2-25□1□	6	12	5	M5

* Specifications and dimensions other than the above are the same as the basic type.

Through Holes in Opening/Closing Direction [2]

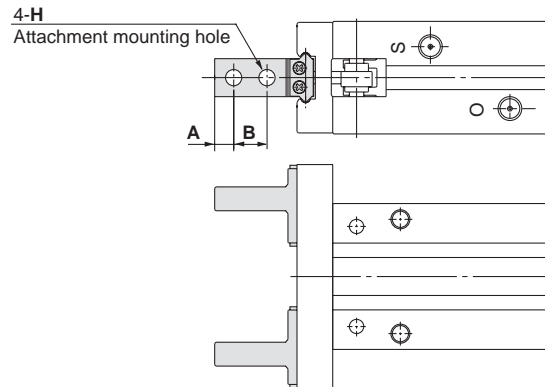


Unit: mm

Model	A	B	H
MHZL2-10□2□	3	5.7	2.9
MHZL2-16□2□	4	7	3.4
MHZL2-20□2□	5	9	4.5
MHZL2-25□2□	6	12	5.5

* Specifications and dimensions other than the above are the same as the basic type.

Flat Type Fingers [3]

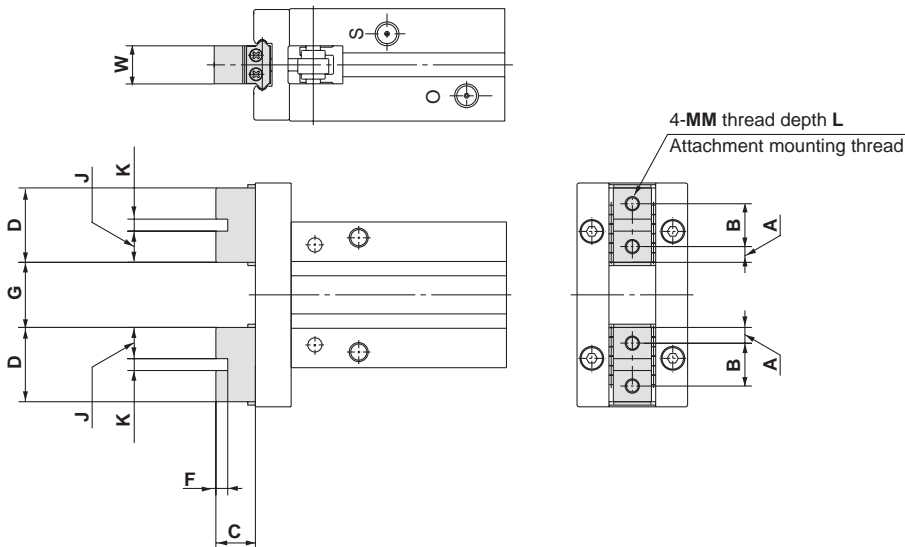

Unit: mm

Model	A	B	C	D	F	G		J	K	MM	L	W	Weight g	
						Open	Closed						Double acting	Single acting
MHZL2-10□3□	2.45	7	5.2	11.9	2	9.4 ^{+2.2} ₀	1.4 ⁰ _{-0.2}	4.95	2H9 ^{+0.025} ₀	M2.5	5	5 ⁰ _{-0.05}	60	70
MHZL2-16□3□	3.3	9	8.3	15.6	2.5	13.4 ^{+2.2} ₀	1.4 ⁰ _{-0.2}	6.55	2.5H9 ^{+0.025} ₀	M3	6	8 ⁰ _{-0.05}	135	145
MHZL2-20□3□	3.95	12	10.5	19.9	3	19.6 ^{+2.4} ₀	1.6 ⁰ _{-0.2}	8.45	3H9 ^{+0.025} ₀	M4	8	10 ⁰ _{-0.05}	270	290
MHZL2-25□3□	4.9	14	13.1	23.8	4	24 ^{+2.6} ₀	2 ⁰ _{-0.2}	9.9	4H9 ^{+0.030} ₀	M5	10	12 ⁰ _{-0.05}	460	505

* Specifications and dimensions other than the above are the same as the basic type.


Long Stroke/Series MHZL2

Body Options: End Boss Type

Applicable Models

Symbol	Piping port position	Type of Piping Port				Applicable model		
		MHZL2-10	MHZL2-16	MHZL2-20	MHZL2-25	Double acting	Single acting	
							Normally open	Normally closed
E	Side ported	M3	M5		●	●	●	
W	Axial port	With $\phi 4$ One-touch fitting for coaxial tube				●	—	—
K		With $\phi 4$ One-touch fitting				—	●	●
M		M5 x 0.8				—	●	●

Side Ported [E]

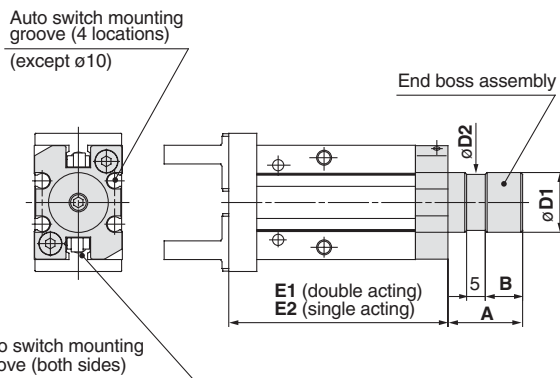


- * Refer to the dimension table.
- * When auto switches are used, side mounting with through holes is not possible.

Unit: mm

Model	Kit no.	A	B	D1	D2	E1	E2
MHZL2-10□□	MHZ-A1010	15	7	12f8 ^{-0.016} _{-0.043}	11	52.8	62.8
MHZL2-16□□	MHZ-A1610	20	10	16f8 ^{-0.016} _{-0.043}	15	61.4	66.4
MHZL2-20□□	MHZ-A2010	22	12	20f8 ^{-0.020} _{-0.053}	19	75.7	81.7
MHZL2-25□□	MHZ-A2510	25	15	25f8 ^{-0.020} _{-0.053}	24	86.2	96.2

Other dimensions and specifications correspond to the standard type.

Axial Port (One-touch Fitting for Coaxial Tubing) [W]

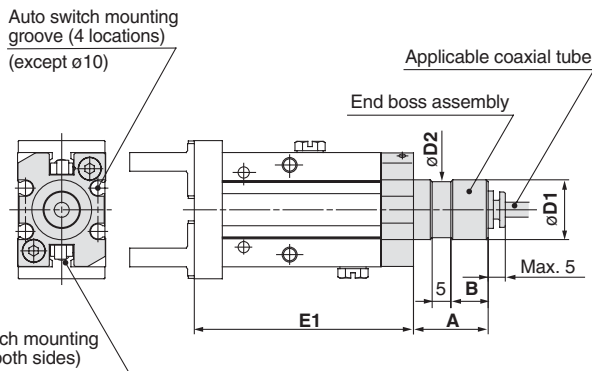

- * Refer to the dimension table.
- * When auto switches are used, side mounting with through holes is not possible.


Unit: mm

Model	A	B	D1	D2	E1
MHZL2-10□□	15	7	12f8 ^{-0.016} _{-0.043}	11	52.8
MHZL2-16□□	20	10	16f8 ^{-0.016} _{-0.043}	15	61.4
MHZL2-20□□	22	12	20f8 ^{-0.020} _{-0.053}	19	75.7
MHZL2-25□□	25	15	25f8 ^{-0.020} _{-0.053}	24	86.2

Other dimensions and specifications correspond to the standard type.

Applicable coaxial tubing


Reference symbol



Specification	Model	TW04B-20
Outside diameter		4mm
Max. operating pressure		0.6MPa
Min. bending radius		10mm
Operating temperature		-20 to 60°C
Material		Nylon 12


Changing from Coaxial to Single Tubing

Changing to single tubing is possible by using a branch "Y" or branch tee fitting. In this case particularly, single tube fittings and tubing for $\phi 3.2$ will be necessary.

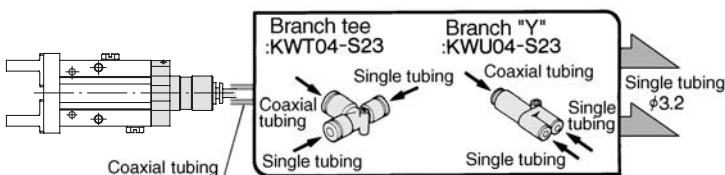


Branch tee, Different diameter tee, Branch "Y", Male run tee

Refer to catalogue CAT.E004-A "Coaxial Air Tubing System" regarding coaxial tubing.

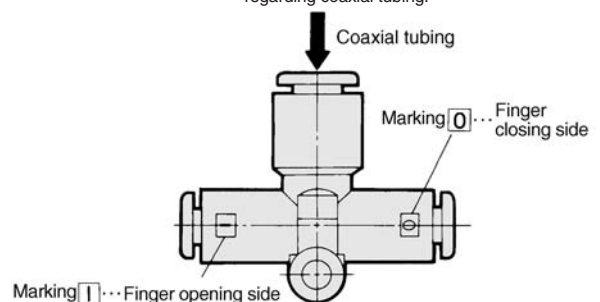

Axial Port (with One-touch Fitting) [K]

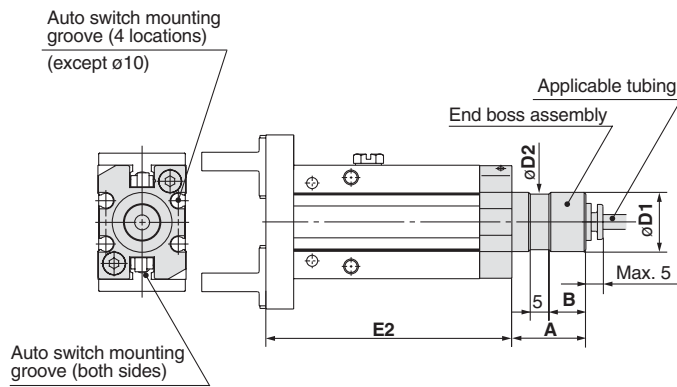

- * Refer to the dimension table.
- * When auto switches are used, side mounting with through holes is not possible.

Unit: mm

Model	A	B	D1	D2	E2
MHZL2-10□□	15	7	12f8 ^{-0.016} _{-0.043}	11	62.8
MHZL2-16□□	20	10	16f8 ^{-0.016} _{-0.043}	15	66.4
MHZL2-20□□	22	12	20f8 ^{-0.020} _{-0.053}	19	81.7
MHZL2-25□□	25	15	25f8 ^{-0.020} _{-0.053}	24	96.2


Other dimensions and specifications correspond to the standard type.

Applicable tubing

Description Model	Nylon tubing	Soft nylon tubing	Polyurethane tubing	Polyurethane coiled tubing
	Specification	T0425	TS0425	TU0425
Outside diameter mm	4	4	4	4
Max. operating pressure MPa	1.0	0.8	0.5	0.5
Min. bending radius mm	13	12	10	—
Operating temperature °C	-20 to 60	-20 to 60	-20 to 60	-20 to 60
Material	Nylon 12	Nylon 12	Polyurethane	Polyurethane

Refer to catalog CAT. 501-B "Air Fittings and Tubing" regarding One-touch fittings and tubing.

Axial Port (M5 Port) [M]

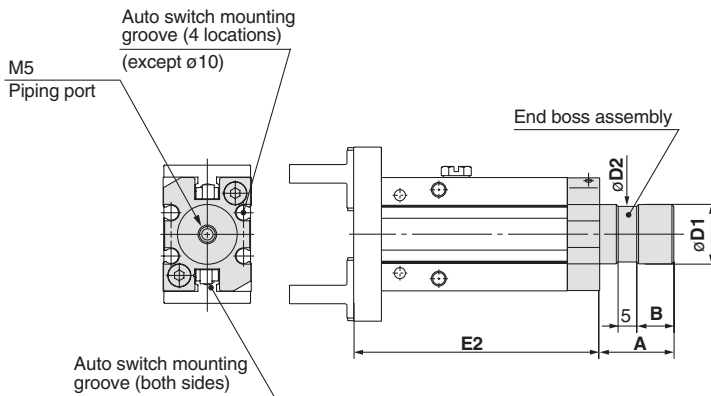

- * Refer to the dimension table.
- * When auto switches are used, side mounting with through holes is not possible.

Unit: mm

Model	A	B	D1	D2	E2
MHZL2-10□□	15	7	12f8 ^{-0.016} _{-0.043}	11	62.8
MHZL2-16□□	20	10	16f8 ^{-0.016} _{-0.043}	15	66.4
MHZL2-20□□	22	12	20f8 ^{-0.020} _{-0.053}	19	81.7
MHZL2-25□□	25	15	25f8 ^{-0.020} _{-0.053}	24	96.2

Other dimensions and specifications correspond to the standard type.

Weights

Unit: g

Model	End boss type (symbol)				
	E		W	K	M
	Double acting	Single acting			
MHZL2□-10□□	70	80	70	80	80
MHZL2□-16□□	170	180	170	180	180
MHZL2□-20□□	310	330	310	330	330
MHZL2□-25□□	535	580	535	580	580

With Dust Cover

Series *MHZJ2*

How to Order

MHZJ2-16 D [] [] M9PV []

Number of fingers

2	2 fingers
---	-----------

Bore size

6	6mm
10	10mm
16	16mm
20	20mm
25	25mm

Action

D	Double acting
S	Single acting (normally open)
C	Single acting (normally closed)

Auto switch type

Nil	Without auto switch (built-in magnet)
-----	---------------------------------------

* Select an applicable auto switch model from the table below.

Body option

* ø6 is only applicable with basic type.

Dust cover type

Nil	Chloroprene rubber (CR)
F	Fluoro rubber (FKM)
S	Silicon rubber (SI)

Nil: Basic type

E: End boss type Side ported (double acting/single acting)

W: End boss type Axial port with ø4 One-touch fitting for coaxial tubing (double acting)

K: End boss type Axial port with ø4 One-touch fitting (single acting)

M: End boss type Axial M5 port (single acting)

Applicable auto switches/ * Switch types D-Y5/6 and D-Y7 cannot be mounted when equipped with dust cover/MHZJ2.

Type	Special function	Electrical entry	Indicator light	Wiring (output)	Load voltage		Auto switch part no.		Lead wire length (m)*				Applicable load	Applicable model					
					DC	AC	Electrical entry direction		0.5 (Nil)	3 (L)	5 (Z)	Flexible lead wire (-61)		ø6	ø10	ø16	ø20	ø25	
							Perpendicular	In-line											
Solid state switch	—	Grommet	Yes	3 wire (NPN)	24V	12V	—	M9NV	M9N	●	●	—	○	Relay, PLC	●	●	●	●	●
				3 wire (PNP)				F8N	—	●	●	○	○		●	●	●	●	●
				2 wire				M9PV	M9P	●	●	—	○		●	●	●	●	●
				3 wire (NPN)				F8P	—	●	●	○	○		●	●	●	●	●
				3 wire (PNP)				M9BV	M9B	●	●	—	○		●	●	●	●	●
				2 wire				F8B	—	●	●	○	○		●	●	●	●	●
	Diagnostic indication (2 colour indicator)	—	—	—	3 wire (NPN)	—	—	M9NV	M9N	●	●	○	○	—	—	—	—	—	—
	3 wire (PNP)				M9PV			M9P	●	●	○	○	—		—	—	—		
	2 wire				M9BV			M9B	●	●	○	○	—		—	—	—		
	2 wire				F8B			—	●	●	○	○	—		—	—	—		
Water resistant (2 colour indicator)	—	—	—	3 wire (NPN)	—	—	M9NV	M9N	●	●	○	○	—	—	—	—	—	—	
3 wire (PNP)				M9PV			M9P	●	●	○	○	—		—	—	—			
2 wire				M9BV			M9B	●	●	○	○	—		—	—	—			
—	—	—	—	2 wire	—	—	M9BA	—	—	●	○	○	—	●	●	●	●	●	

* Lead wire length symbols: 0.5m Nil (Example) M9N
 3m L (Example) M9NL
 5m Z (Example) M9NWZ

* Auto switches marked with a "○" symbol are produced upon receipt of order.

Note 1) Use caution regarding hysteresis in the 2 colour indicator types. When using this type, refer to "Auto Switch Hysteresis" on page 5-55

Note 2) When using a D-F8□ switch on sizes ø6 and ø10, mount it at a distance of 10mm or more from magnetic substances such as iron, etc.

Note 3) Add "-61" at the end of the part number for the flexible lead wire.

(Examples)

When ordering with an air gripper

MHZ □ 2-16D-M9NVS □ 61

Flexible lead wire ●

When ordering auto switches only

D-M9PL □ 61

Flexible lead wire ●

Specifications




Fluid		Air	
Operating pressure	Double acting	ø6: 0.15 to 0.7MPa ø10: 0.2 to 0.7MPa ø16 to ø25: 0.1 to 0.7MPa	
		Single acting	Normally open ø6: 0.3 to 0.7MPa ø10: 0.35 to 0.7MPa
	Normally closed ø16 to ø25: 0.25 to 0.7MPa		
Ambient and fluid temperature		-10 to 60°C	
Repeatability		±0.01mm	
Maximum operating frequency		180c.p.m.	
Lubrication		Non-lube	
Action		Double acting, Single acting	
Auto switch (option) ^{Note)}		Solid state switch (3 wire, 2 wire)	


Models

Symbols:


Double acting type



Single acting type, normally open



Single acting type, normally closed



Action	Model	Bore size (mm)	Gripping force ^{Note 1)}		Opening/ Closing stroke (both sides) mm	Weight ^{Note 2)} g	
			Gripping force per finger Effective value N				
			External gripping force	Internal gripping force			
Double acting	MHZJ2- 6D	6	3.3	6.1	4	28	
	MHZJ2-10D	10	9.8	17	4	60	
	MHZJ2-16D	16	30	40	6	130	
	MHZJ2-20D	20	42	66	10	250	
	MHZJ2-25D	25	65	104	14	460	
Single acting	Normally open	MHZJ2- 6S	6	1.9	—	4	28
		MHZJ2-10S	10	6.3		4	60
		MHZJ2-16S	16	24		6	130
		MHZJ2-20S	20	28		10	255
		MHZJ2-25S	25	45		14	264
	Normally closed	MHZJ2- 6C	6	—	3.7	4	28
		MHZJ2-10C	10		12	4	60
		MHZJ2-16C	16		31	6	130
		MHZJ2-20C	20		56	10	255
		MHZJ2-25C	25		83	14	460

Note 1) Values based on pressure of 0.5MPa, gripping point L = 20mm, at center of stroke.

Note 2) Values excluding weight of auto switch.

Options

● Body options/End boss type


Symbol	Piping port position	Type of piping port				Applicable model	
		MHZJ2-10	MHZJ2-16	MHZJ2-20	MHZJ2-25	Double acting	Single acting
Nil	Basic type	M3 x 0.5	M5 x 0.8			●	●
E	Axial port	M3 x 0.5	M5 x 0.8			●	●
W	Axial port	With ø4 One-touch fitting for coaxial tube				●	—
K	Axial port	With ø4 One-touch fitting				—	●
M	Axial port	M5 x 0.8				—	●

* For detailed body option specifications, refer to option specifications on pages 5-53 and 5-54


Series MHZJ2

Construction/MHZJ2-6□


Double acting/with fingers open

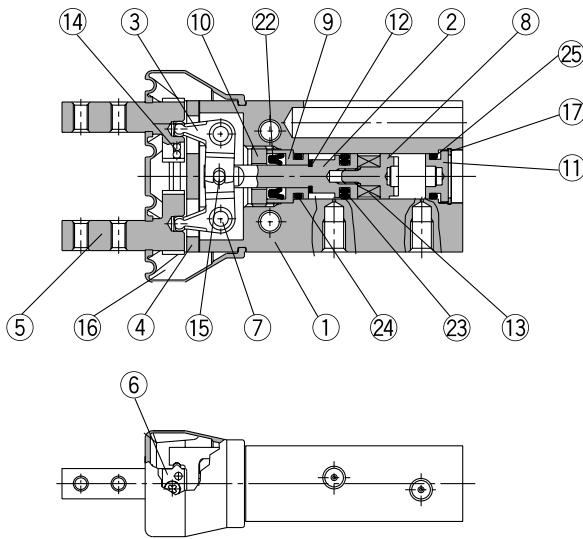


Single acting/normally open

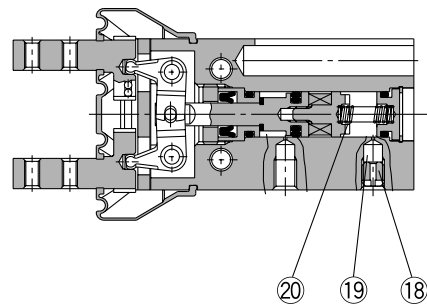

Single acting/normally closed

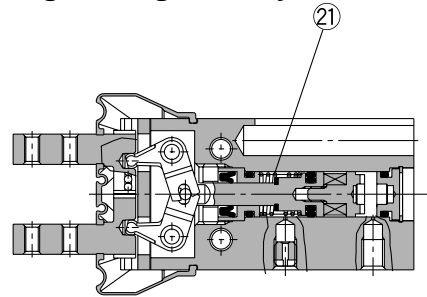

Double acting/with fingers closed

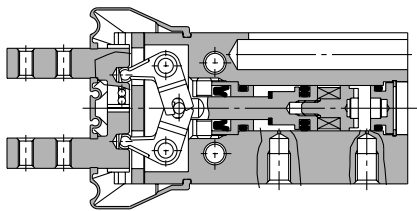

Parts list

No.	Description	Material	Note
1	Body	Aluminum alloy	Hard anodized
2	Piston	Stainless steel	
3	Lever	Stainless steel	Heat treated
4	Guide	Stainless steel	Heat treated
5	Finger	Stainless steel	Heat treated
6	Roller stopper	Stainless steel	
7	Lever shaft	Stainless steel	Nitrided
8	Magnet holder	Stainless steel	
9	Holder	Brass	Electroless nickel plated
10	Holder lock	Stainless steel	
11	Cap	Aluminum alloy	Clear anodized
12	Bumper	Urethane rubber	
13	Magnet	Rare earth magnet	Nickel plated
14	Steel balls	High carbon chromium bearing steel	
15	Needle roller	High carbon chromium bearing steel	
16	Dust cover	CR	Chloroprene rubber
		FKM	Fluoro rubber
		Si	Silicon rubber
17	C type snap ring	Carbon steel	Nickel plated
18	Exhaust plug	Brass	Electroless nickel plated
19	Exhaust filter	Polyvinyl formal	
20	N.O. spring	Stainless steel spring wire	
21	N.C. spring	Stainless steel spring wire	
22	Rod seal	NBR	
23	Piston seal	NBR	
24	Gasket	NBR	
25	Gasket	NBR	

Replacement parts: Seal kits

Seal kit no.	Description
MHZJ6-PS	Kit includes items 22, 23, 24 and 25 from the table on the left.

* Seal kits consist of items 22, 23, 24 and 25 contained in one kit, and can be ordered using the seal kit number.


Note) Contact SMC when replacing seals.

Replacement parts: Dust covers


Material	Part no.
CR	MHZJ2-J6
FKM	MHZJ2-J6F
Si	MHZJ2-J6S

Construction/MHZJ2-10□ to 25□


Double acting/with fingers open

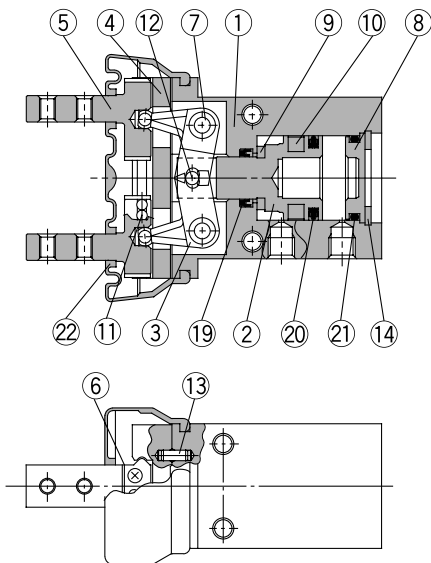


Single acting/normally open

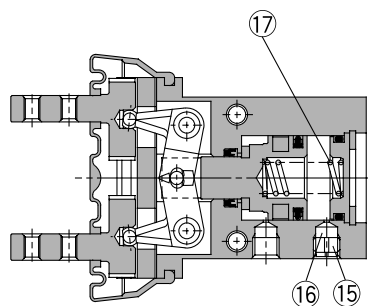

Single acting/normally closed

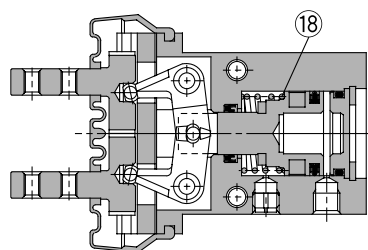

Double acting/with fingers closed

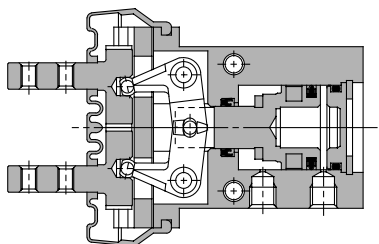

Parts list

No.	Description	Material	Note
1	Body	Aluminum alloy	Hard anodized
2	Piston	ø10, ø16: Stainless steel ø20, ø25: Aluminum alloy	ø20, ø25: Hard anodized
3	Lever	Stainless steel	Heat treated
4	Guide	Stainless steel	Heat treated
5	Finger	Stainless steel	Heat treated
6	Roller stopper	Stainless steel	
7	Lever shaft	Stainless steel	Nitrided
8	Cap	Aluminum alloy	Hard anodized
9	Bumper	Urethane rubber	
10	Rubber magnet	Synthetic rubber	
11	Steel balls	High carbon chromium bearing steel	
12	Needle roller	High carbon chromium bearing steel	
13	Parallel pin	Stainless steel	
14	C type snap ring	Carbon steel	Nickel plated
15	Exhaust plug A	Brass	Electroless nickel plated
16	Exhaust filter A	Polyvinyl formal	
17	N.O. spring	Stainless steel spring wire	
18	N.C. spring	Stainless steel spring wire	
19	Rod seal	NBR	
20	Piston seal	NBR	
21	Gasket	NBR	
22	Dust cover	CR	Chloroprene rubber
		FKM	Fluoro rubber
		Si	Silicon rubber

Replacement parts: Seal kits

Seal kit no.				Description
MHZJ2-10□	MHZJ2-16□	MHZJ2-20□	MHZJ2-25□	Kits include ^{Note 2)} items 19, 20 and 21 from the table on the left
MHZJ10-PS	MHZJ16-PS	MHZJ20-PS	MHZJ25-PS	

Note 2) Seal kits consist of items 19, 20 and 21 in one kit, and can be ordered using the seal kit number for each cylinder bore size.

Replacement parts: Dust covers


Material	Part no.			
	MHZJ2-10□	MHZJ2-16□	MHZJ2-20□	MHZJ2-25□
CR	MHZJ2-J10	MHZJ2-J16	MHZJ2-J20	MHZJ2-J25
FKM	MHZJ2-J10F	MHZJ2-J16F	MHZJ2-J20F	MHZJ2-J25F
Si	MHZJ2-J10S	MHZJ2-J16S	MHZJ2-J20S	MHZJ2-J25S

Series MHZJ2


Dimensions

MHZJ2-6□
 Double acting/Single acting
 Basic type


Scale: 100%

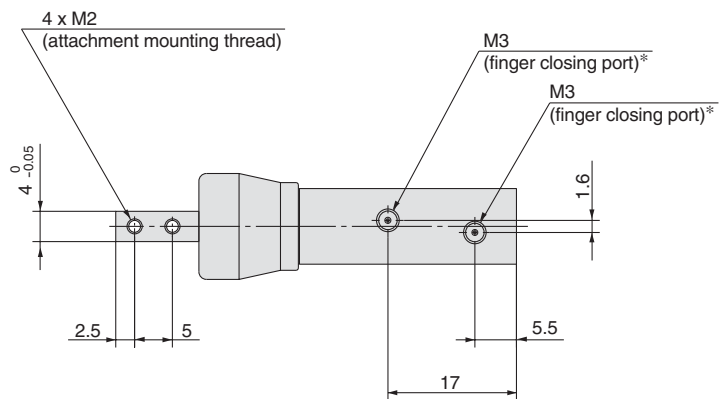

* For single action, the port on one side is a breathing hole.



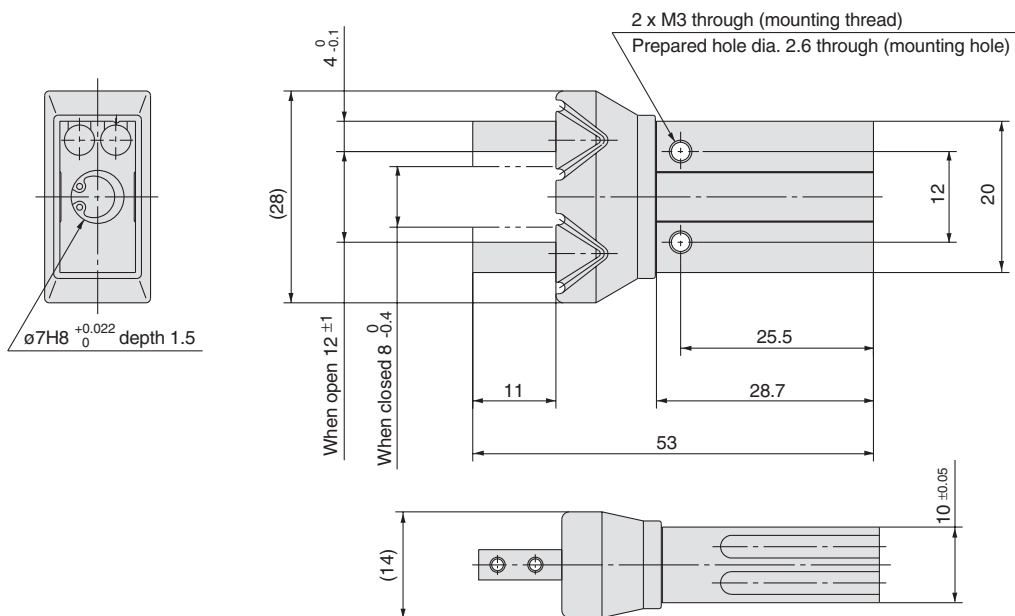


Auto switch mounting groove dimensions

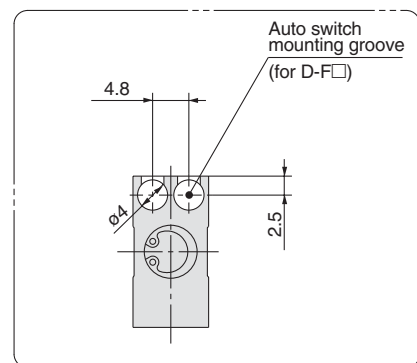


MHZJ2-10 □
Double acting/Single acting
Basic type


Scale: 90%

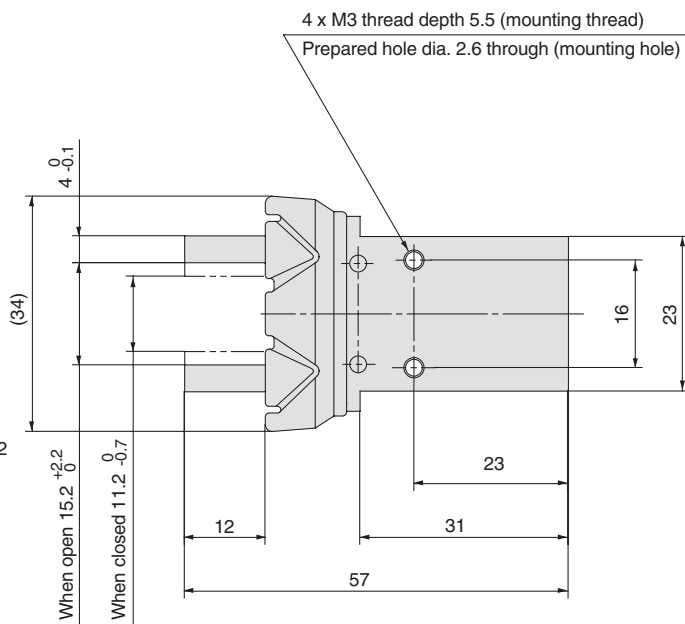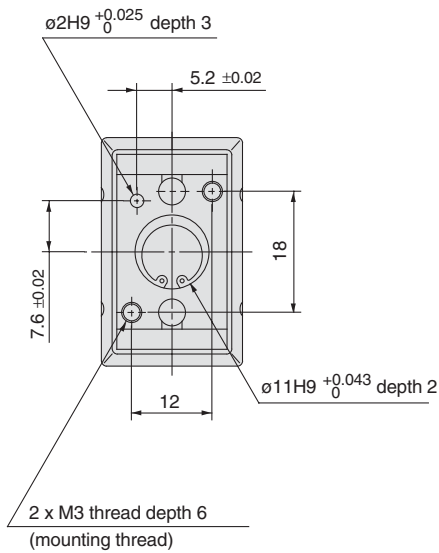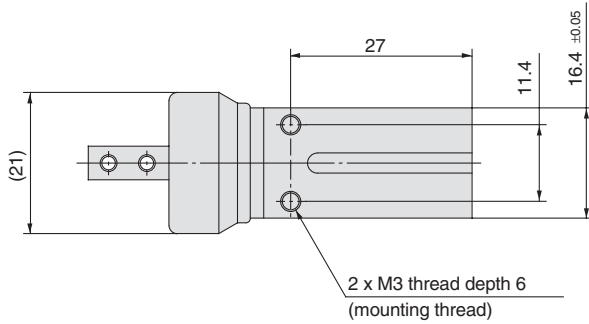

Auto switch mounting groove dimensions

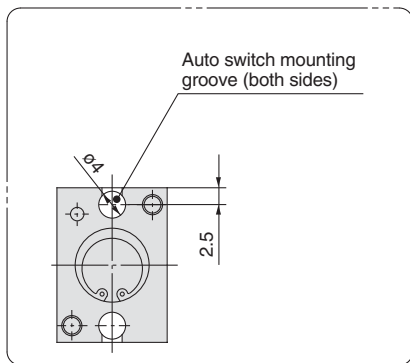

Note) When using auto switches, through hole mounting is not possible.

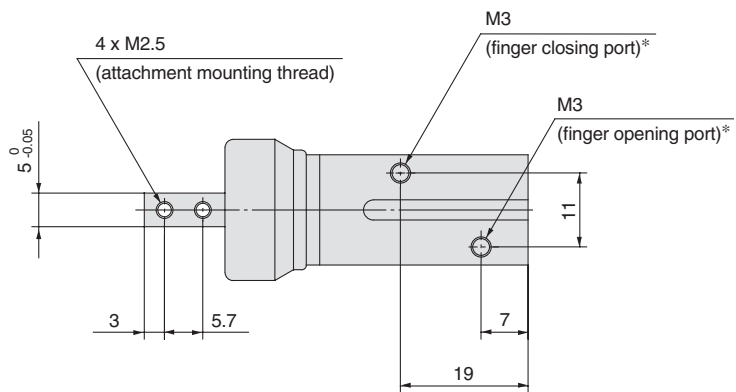

* For single action, the port on one side is a breathing hole.

Series MHZJ2


Dimensions

MHZJ2-16□


Double acting/Single acting

Basic type


Scale: 60%

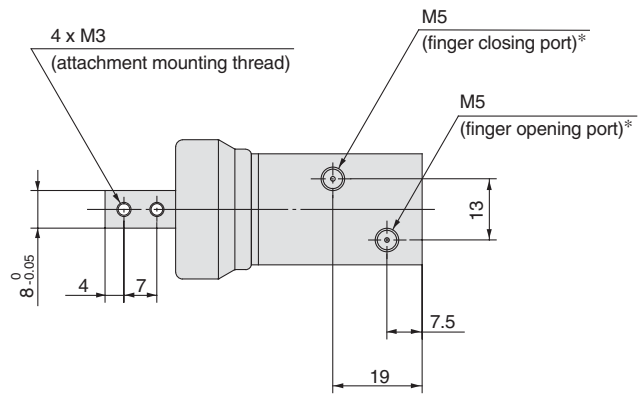

* For single action, the port on one side is a breathing hole.

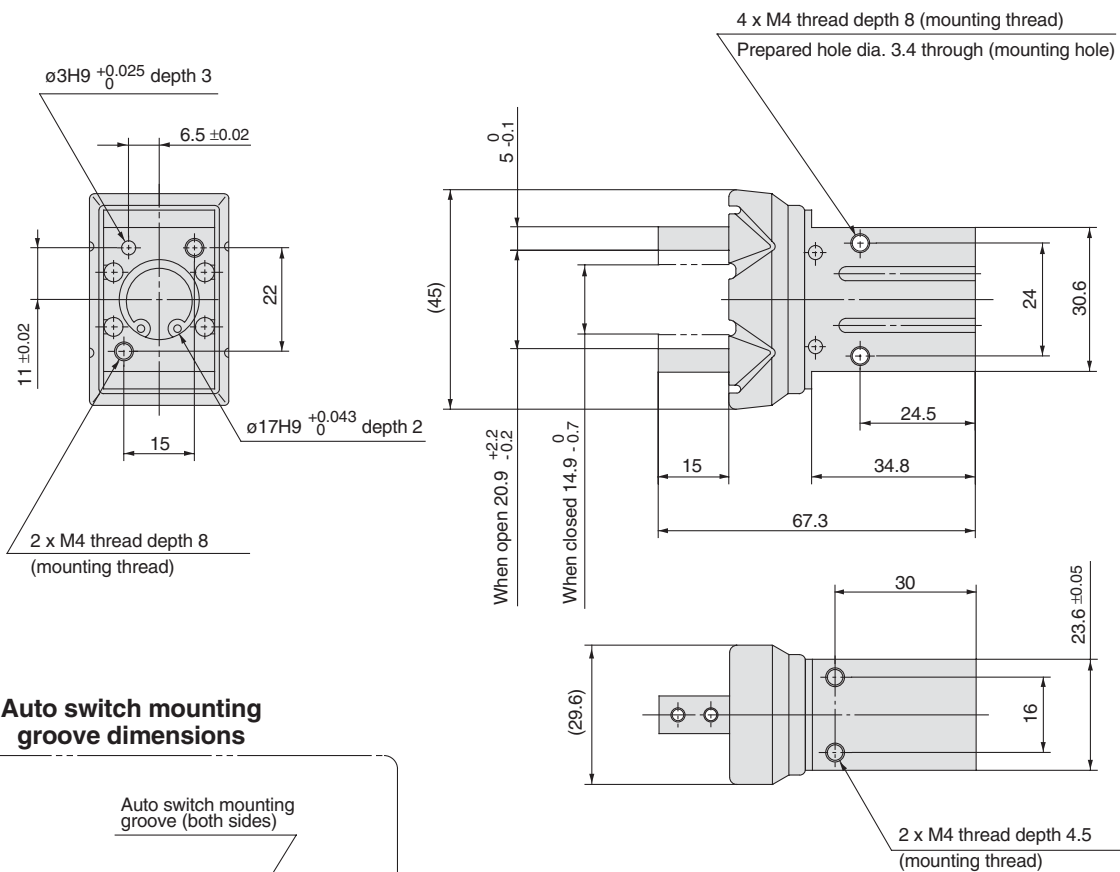


Auto switch mounting groove dimensions


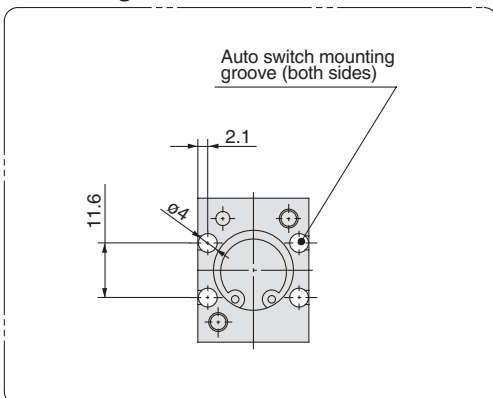


MHZJ2-20□
Double acting/Single acting
Basic type


Scale: 60%

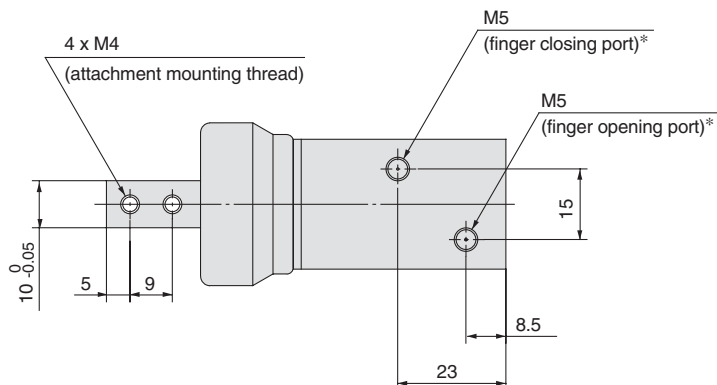

* For single action, the port on one side is a breathing hole.

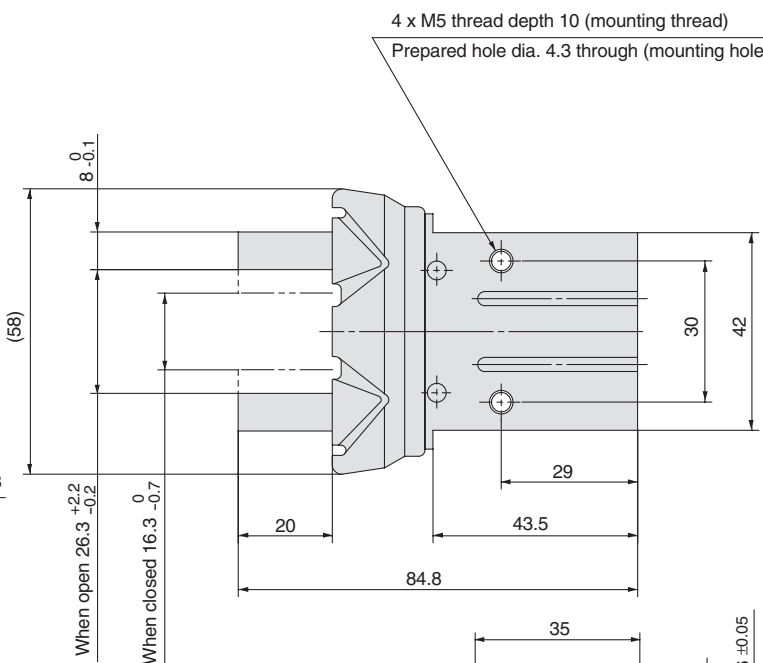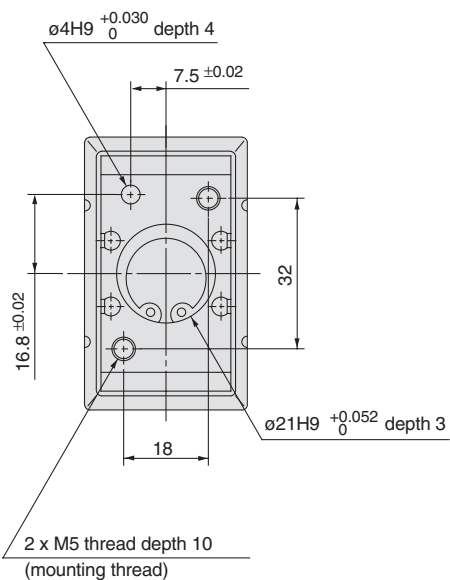

Auto switch mounting groove dimensions

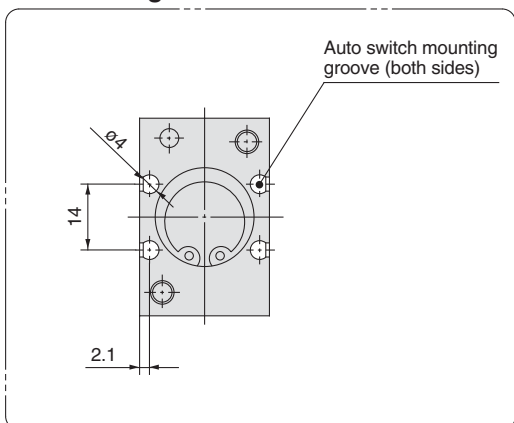


Series MHZJ2

Dimensions



MHZJ2-25□

Double acting/Single acting Basic type


Scale: 50%

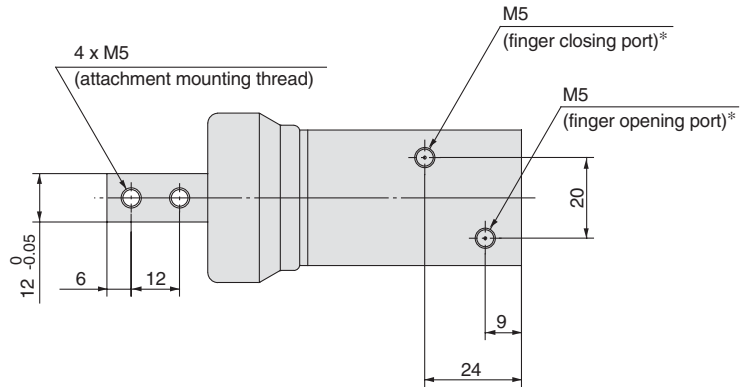

* For single action, the port on one side is a breathing hole.

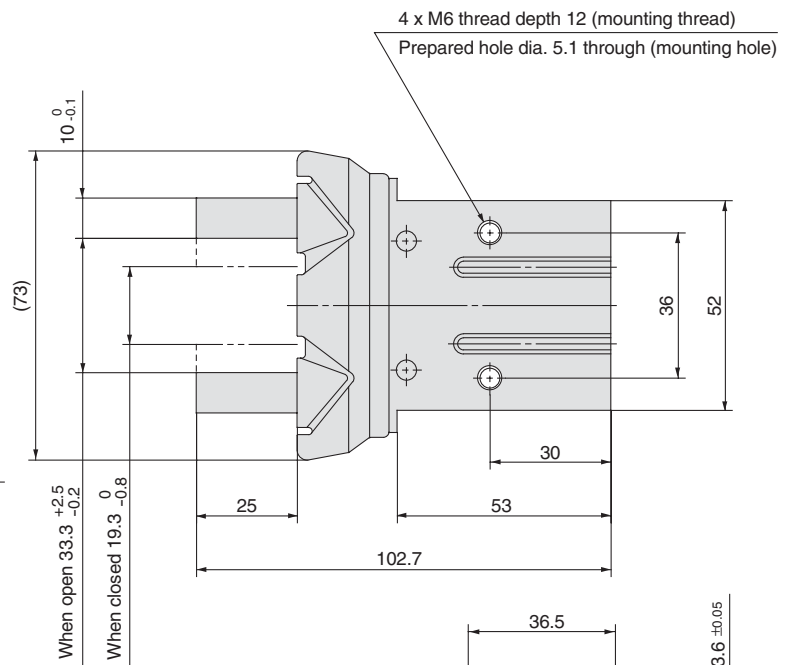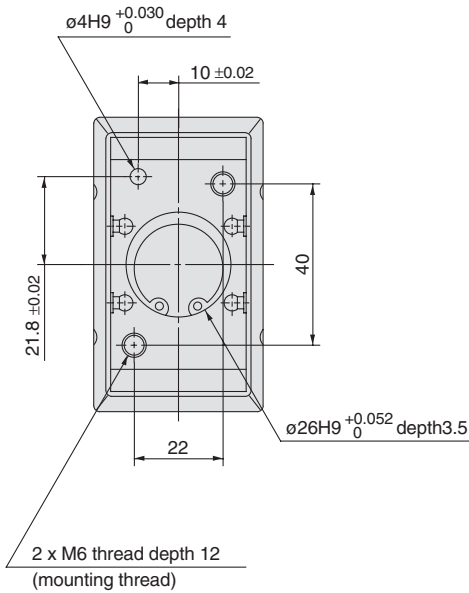

Auto switch mounting groove dimensions

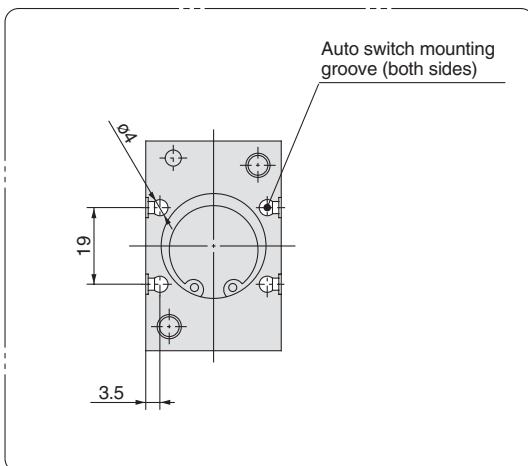


With Dust Cover/Series MHZJ2

Body Options: End Boss Type

Applicable Models

Symbol	Piping port position	Type of piping port				Applicable model		
		MHZJ2-10	MHZJ2-16	MHZJ2-20	MHZJ2-25	Double acting	Single acting	
							Normally open	Normally closed
E	Side ported	M3	M5		●	●	●	
W	Axial port	With $\phi 4$ One-touch fitting for coaxial tube				●	—	—
K		With $\phi 4$ One-touch fitting				—	●	●
M		M5 x 0.8				—	●	●

Side Ported [E]

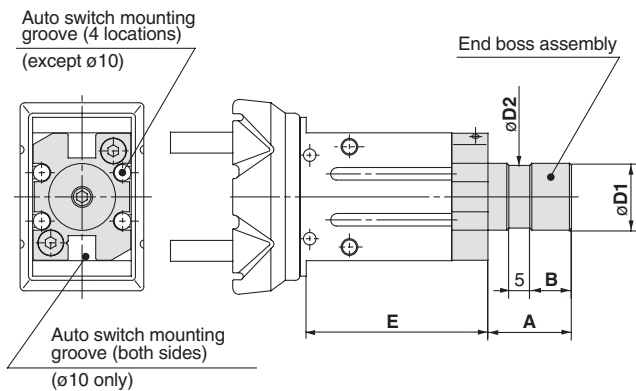


- * Refer to the dimension table.
- * When auto switches are used on $\phi 10$, side mounting with through holes is not possible.

Unit: mm

Model	A	B	D1	D2	E
MHZJ2-10□□	15	7	12f8 ^{-0.016} _{-0.043}	11	40
MHZJ2-16□□	20	10	16f8 ^{-0.016} _{-0.043}	15	43.5
MHZJ2-20□□	22	12	20f8 ^{-0.020} _{-0.053}	19	51.7
MHZJ2-25□□	25	15	25f8 ^{-0.020} _{-0.053}	24	61.3

Other dimensions and specifications correspond to the standard type.

Axial Port (One-touch Fitting for Coaxial Tubing) [W]

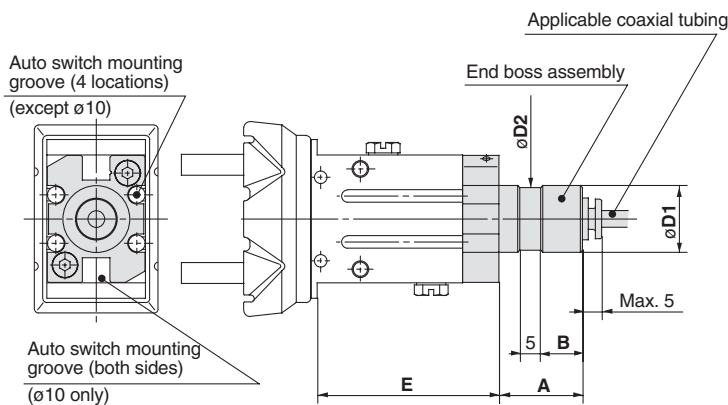

- * Refer to the dimension table.
- * When auto switches are used on $\phi 10$, side mounting with through holes is not possible.


Unit: mm

Model	A	B	D1	D2	E
MHZJ2-10□□	15	7	12f8 ^{-0.016} _{-0.043}	11	40
MHZJ2-16□□	20	10	16f8 ^{-0.016} _{-0.043}	15	43.5
MHZJ2-20□□	22	12	20f8 ^{-0.020} _{-0.053}	19	51.7
MHZJ2-25□□	25	15	25f8 ^{-0.020} _{-0.053}	24	61.3

Other dimensions and specifications correspond to the standard type.


Applicable coaxial tubing

Specification	Model	TW04B-20
Outside diameter		4mm
Max. operating pressure		0.6MPa
Min. bending radius		10mm
Operating temperature		-20 to 60°C
Material		Nylon 12




Changing from Coaxial to Single Tubing

Changing to single tubing is possible by using a branch "Y" or branch tee fitting. In this case particularly, single tube fittings and tubing for $\phi 3.2$ will be necessary.

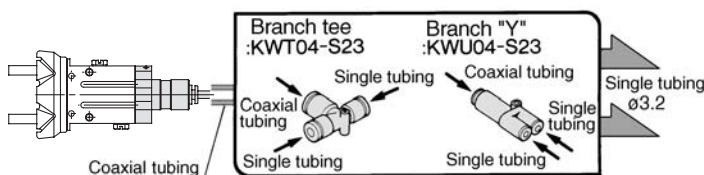

Branch tee, Different diameter tee, Branch "Y", Male run tee

Refer to catalogue CAT.E004-A "Coaxial Air Tubing System" regarding coaxial tubing.

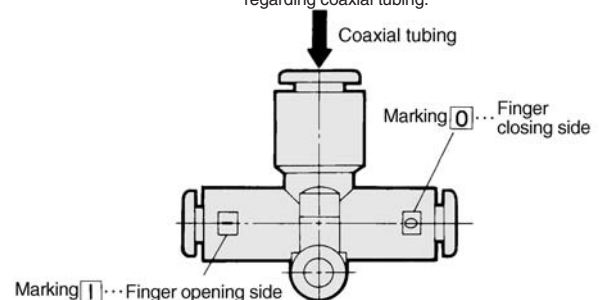


With Dust Cover/Series MHZJ2

Body Options: End Boss Type

Axial Port (with One-touch Fitting) [K]

Unit: mm

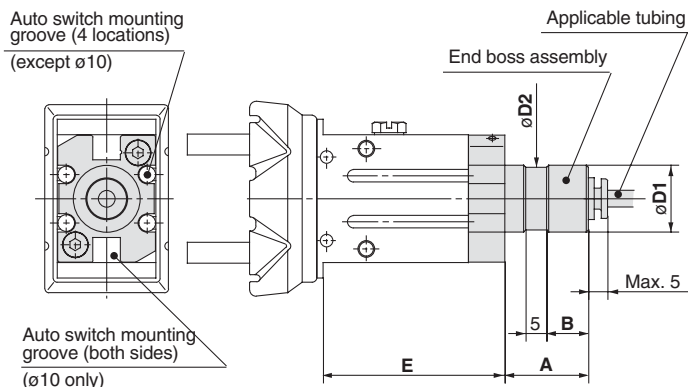

- * Refer to the dimension table.
- * When auto switches are used on ø10, side mounting with through holes is not possible.

Model	A	B	D1	D2	E
MHZJ2-10□□	15	7	12f8 ^{-0.016} _{-0.043}	11	40
MHZJ2-16□□	20	10	16f8 ^{-0.016} _{-0.043}	15	43.5
MHZJ2-20□□	22	12	20f8 ^{-0.020} _{-0.053}	19	51.7
MHZJ2-25□□	25	15	25f8 ^{-0.020} _{-0.053}	24	61.3

Other dimensions and specifications correspond to the standard type.


Applicable tubing

Description/ Model	Nylon tubing	Soft nylon tubing	Polyurethane tubing	Polyurethane coiled tubing
	T0425	TS0425	TU0425	TCU0425B-1
Outside diameter mm	4	4	4	4
Max. operating pressure MPa	1.0	0.8	0.5	0.5
Min. bending radius mm	13	12	10	—
Operating temperature °C	-20 to 60	-20 to 60	-20 to 60	-20 to 60
Material	Nylon 12	Nylon 12	Polyurethane	Polyurethane

Refer to catalog CAT. E501-B "Air Fittings and Tubing" regarding One-touch fittings and tubing.

Axial Port (M5 Port) [M]

Unit: mm

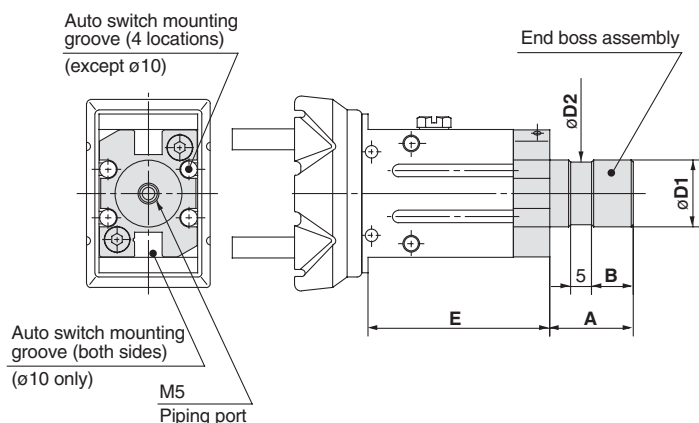

- * Refer to the dimension table.
- * When auto switches are used on ø10, side mounting with through holes is not possible.

Model	A	B	D1	D2	E
MHZJ2-10□□	15	7	12f8 ^{-0.016} _{-0.043}	11	40
MHZJ2-16□□	20	10	16f8 ^{-0.016} _{-0.043}	15	43.5
MHZJ2-20□□	22	12	20f8 ^{-0.020} _{-0.053}	19	51.7
MHZJ2-25□□	25	15	25f8 ^{-0.020} _{-0.053}	24	61.3

Other dimensions and specifications correspond to the standard type.


Weights

Unit: g

Model	End boss type (symbol)			
	E	W	K	M
MHZJ2-10□□	70	70	70	70
MHZJ2-16□□	165	165	165	165
MHZJ2-20□□	290	290	290	290
MHZJ2-25□□	525	525	525	525

Auto Switch Hysteresis

Auto switches have hysteresis similar to micro switches. The adjustment of switch positions should be performed using the table below as a guide.

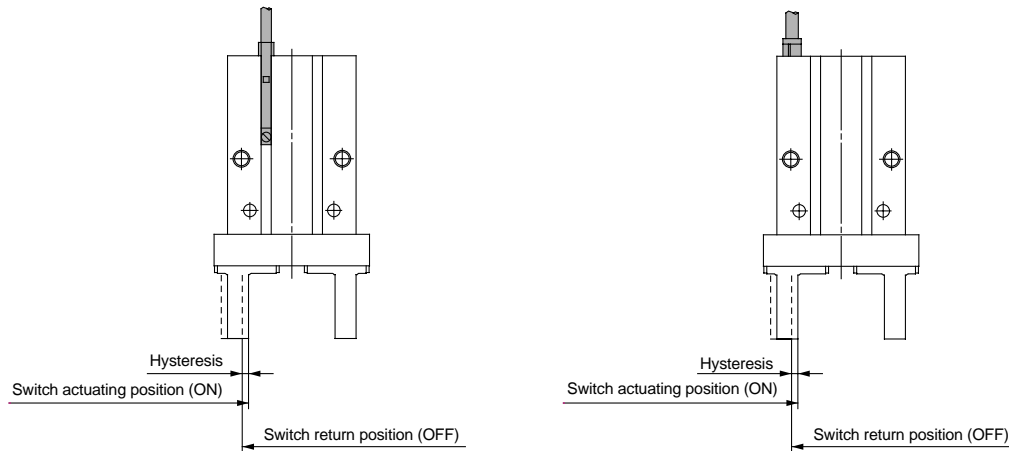


Hysteresis

	D-Y59A, B D-Y69A, B D-Y7P(V)	D-M9□(V) D-F8□	D-Y7□W(V)		D-M9□W(V)		D-M9BAL	
			Red light ON	Green light ON	Red light ON	Green light ON	Red light ON	Green light ON
MHZ2-6□	No setting	0.5	No setting		No setting		No setting	
MHZ2-10□, MHZL2-10□	0.4	No setting						
MHZ2-16□, MHZL2-16□	0.4	0.5						
MHZ2-20□, MHZL2-20□	0.4	0.5	0.5	1	0.5	1		
MHZ2-25□, MHZL2-25□	0.4	0.5	0.5	1	0.5	1		
MHZ2-32□	0.4	0.5	0.5	1	0.5	1		
MHZ2-40□	0.4	0.5	0.5	1	0.5	1		
MHZJ2-6□	No setting	0.5	No setting		No setting		0.4	0.8
MHZJ2-10□		0.5					0.4	0.8
MHZJ2-16□		0.5					0.4	0.8
MHZJ2-20□		0.5			0.5	1	0.4	0.8
MHZJ2-25□		0.5			0.5	1	0.4	0.8

Auto Switch Mounting

When mounting auto switches, insert them into one of the air gripper's switch mounting grooves from the direction shown in the figure below. After setting in the desired mounting position, tighten the switch mounting screw (included) using a flat head watchmakers screw driver.

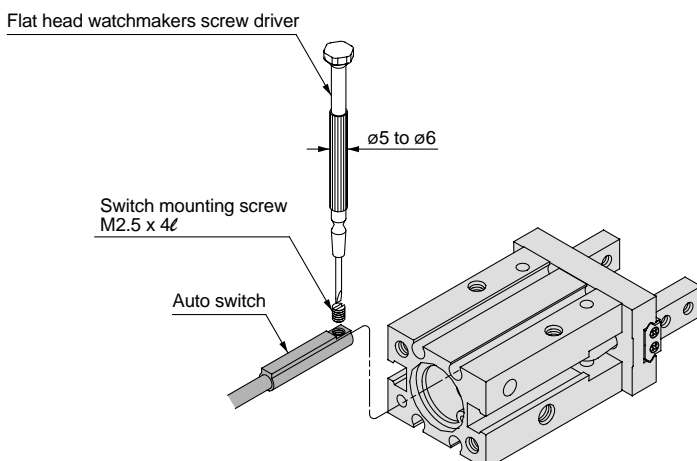

Note) When tightening the auto switch mounting screw, use a watchmakers screw driver with a handle diameter of about 5 to 6mm. The tightening torque should be about 0.05 to 0.1N·m. As a rule, it should be turned about 90° beyond the point at which tightening can be felt.

Auto Switch Protrusion from the Body End Surface

- The amount of auto switch protrusion from the body's end surface is as shown in the table below.
- Use this as a guide when mounting, etc.
- With D-F8□, there is no auto switch protrusion from the body's end surface.

Standard body

Lead wire type	In-line					Perpendicular				
	Illustration					Illustration				
Model	D-Y59□ D-Y7P	D-Y7□W	D-M9□	D-M9□W	D-M9BAL	D-Y69□ D-Y7PV	D-Y7□WV	D-M9□V	D-M9□WV	
Standard	MHZ2-6□	Open	No setting	No setting	No setting	No setting	No setting	No setting	No setting	
		Closed								11
	MHZ2-10□	Open	1	No setting	No setting	No setting	No setting	No setting	No setting	No setting
		Closed	7.5							
	MHZ2-16□	Open	—	No setting	No setting	No setting	No setting	No setting	No setting	No setting
		Closed	6							
	MHZ2-20□	Open	—	4	4	2	2	No setting	3	3
Closed		4	4							
MHZ2-25□	Open	—	1	1	—	—	—	—	—	—
	Closed	1								
MHZ2-32□	Open	—	3	3	—	—	—	—	—	—
	Closed	3								
MHZ2-40□	Open	—	2	2	—	—	—	—	—	—
	Closed	2								
With dust cover	MHZJ2-6□	Open	No setting	No setting	No setting	No setting	No setting	No setting	No setting	No setting
		Closed								
	MHZJ2-10□	Open	No setting	No setting	No setting	No setting	No setting	No setting	No setting	No setting
		Closed								
	MHZJ2-16□	Open	No setting	No setting	No setting	No setting	No setting	No setting	No setting	No setting
		Closed								
	MHZJ2-20□	Open	No setting	No setting	No setting	No setting	No setting	No setting	No setting	No setting
Closed		7								
MHZJ2-25□	Open	No setting	No setting	No setting	No setting	No setting	No setting	No setting	No setting	
	Closed									2
MHZJ2-25□	Open	No setting	No setting	No setting	No setting	No setting	No setting	No setting	No setting	
	Closed									3
Long stroke	Double acting	MHZL2-10D	Open	No setting	No setting	No setting	No setting	No setting	No setting	No setting
			Closed							
		MHZL2-16D	Open	No setting	No setting	No setting	No setting	No setting	No setting	No setting
			Closed							
	MHZL2-20D	Open	No setting	No setting	No setting	No setting	No setting	No setting	No setting	
		Closed								8
	MHZL2-25D	Open	No setting	No setting	No setting	No setting	No setting	No setting	No setting	
		Closed								7
	Single acting (normally open)	MHZL2-10S	Open	No setting	No setting	No setting	No setting	No setting	No setting	No setting
			Closed							
		MHZL2-16S	Open	No setting	No setting	No setting	No setting	No setting	No setting	No setting
			Closed							
		MHZL2-20S	Open	No setting	No setting	No setting	No setting	No setting	No setting	No setting
			Closed							
MHZL2-25S	Open	No setting	No setting	No setting	No setting	No setting	No setting	No setting		
	Closed								—	—
Single acting (normally closed)	MHZL2-10C	Open	No setting	No setting	No setting	No setting	No setting	No setting	No setting	
		Closed								—
	MHZL2-16C	Open	No setting	No setting	No setting	No setting	No setting	No setting	No setting	
		Closed								5.5
	MHZL2-20C	Open	No setting	No setting	No setting	No setting	No setting	No setting	No setting	
		Closed								5.5
MHZL2-25C	Open	No setting	No setting	No setting	No setting	No setting	No setting	No setting		
	Closed								3.5	3.5
MHZL2-25C	Open	No setting	No setting	No setting	No setting	No setting	No setting	No setting		
	Closed								1.5	1.5

Note) There is no protrusion for sections of the table with no values entered.

End boss type

Lead wire type		In-line					Perpendicular											
		Illustration																
Model	Auto switch Finger position	D-Y59□ D-Y7P		D-Y7□W	D-M9□	D-M9□W	D-M9BAL	D-Y69□ D-Y7PV	D-Y7□WV	D-M9□V	D-M9□WV							
		With dust cover	MHZJ2-10□□□	Open	No setting			No setting		No setting								
Closed	—			—										4	—	—	No setting	
MHZJ2-16□□□	Open		—	8										No setting	1	6.5		—
	Closed		—	—													—	
MHZJ2-20□□□	Open		—	—										—	3	—	—	—
	Closed		—	—										—				
MHZJ2-25□□□	Open		—	—										—	1.5	—	—	—
	Closed		—	—										—				

Note) There is no protrusion for sections of the table with no values entered.

Series MHZ Order Made Specifications

Contact SMC for detailed dimensions, specifications and lead times.




Symbol

X7
- X12

1 Spring Assisted Type

Compact Type/MHZA2-6, MHZAJ2-6

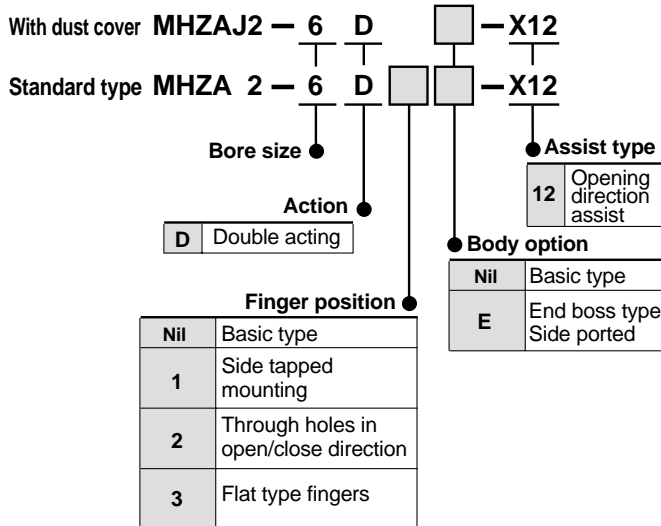


Specifications

Type	Spring assisted type
Bore size	6
Action	Double acting
Fluid	Air

Note) Dimensions are the same as the standard type.

With Dust Cover/MHZJ2

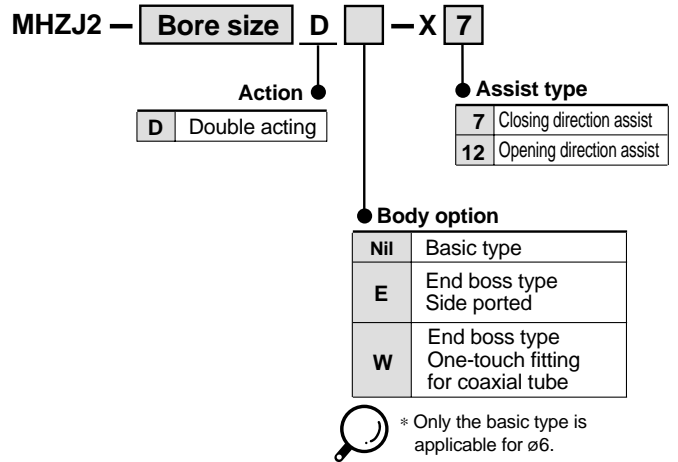


Specifications

Type	Spring assisted type
Bore size	6, 10, 16, 20, 25
Action	Double acting
Fluid	Air

Note) Dimensions are the same as the standard type.

Standard Type/MHZ2

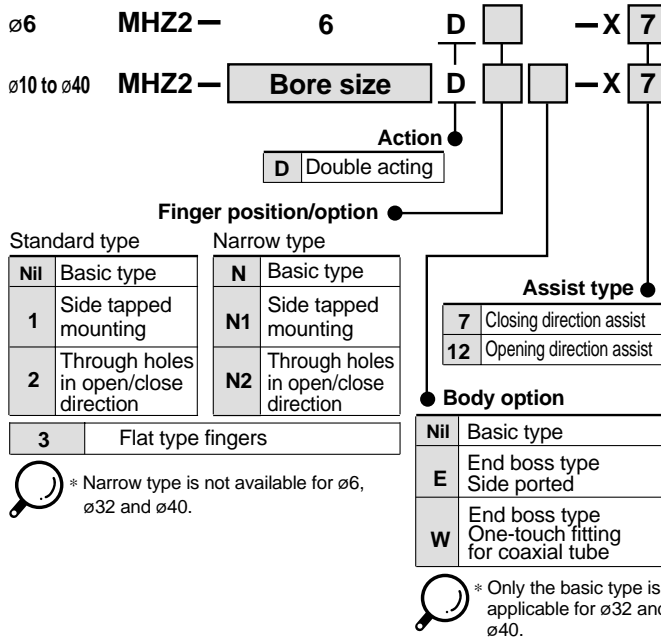


Specifications

Type	Spring assisted type
Bore size	6, 10, 16, 20, 25, 32, 40
Action	Double acting
Fluid	Air

Note) Dimensions of ø6 to ø25 are the same as the standard type.
Dimensions of ø32 and ø40 are the same as the standard single acting type.

Long Stroke/MHZL2

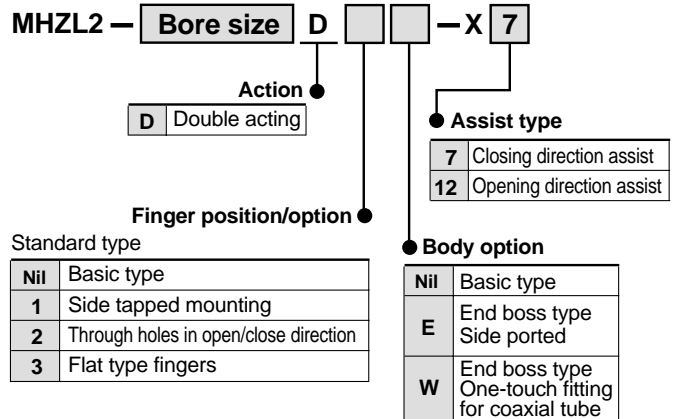

Specifications


Type	Spring assisted type
Bore size	10, 16, 20, 25
Action	Double acting
Fluid	Air

Dimensions are the same as the single acting type.

2 With Needle (with Variable Throttle)

-X46


Installation of a variable throttle allows adjustment of the finger opening/closing speed.

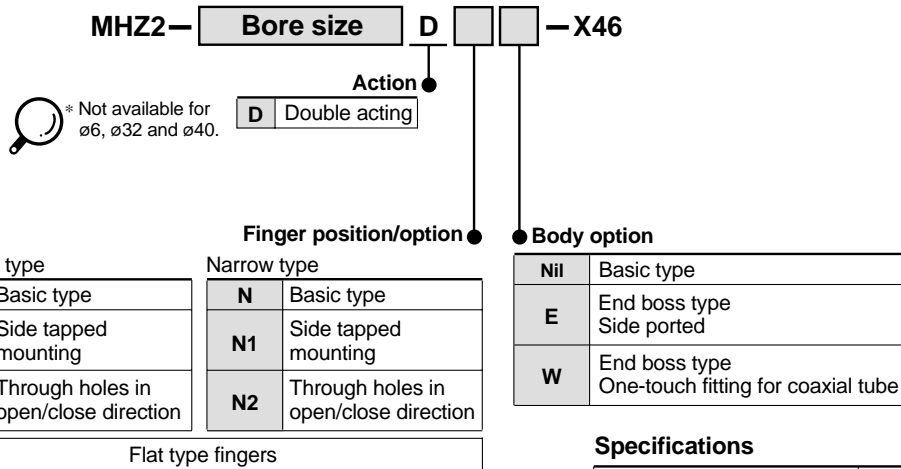

Specifications

Type	With needle
Bore size	10, 16, 20, 25
Action	Double acting
Fluid	Air

Dimensions

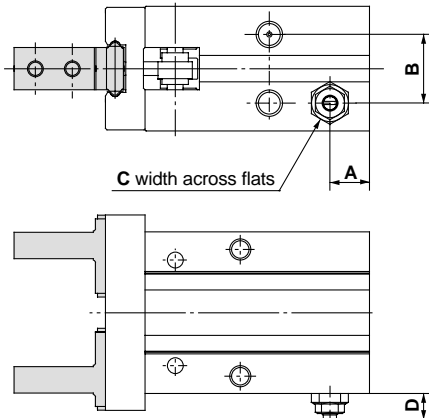

Model	A	B	C	D*
MHZ2-10D□□-X46	9	11	4.5	5.2
MHZ2-16D□□-X46	7.5	13	7	5.8
MHZ2-20D□□-X46	10	15	7	6
MHZ2-25D□□-X46	10.7	20	7	6.2

Dimensions other than the above are identical to the standard type; refer to pages 5-24 through 5-28.

* Reference values to establish criteria for needle adjustment.

Adjust so that the finger opening/closing speed will be no greater than necessary. If the finger opening/closing speed is greater than necessary, impact forces acting on the fingers and other parts will increase. This can cause a loss of repeatability when gripping work pieces and have an adverse effect on the life of the unit.


Guide for internal needle adjustment

Model	Number of rotations from fully closed needle condition ^{Note 1)}
MHZ2-10D□□-X46	1/4 to 1/2
MHZ2-16D□□-X46	1/2 to 1
MHZ2-20D□□-X46	1 to 1 1/2
MHZ2-25D□□-X46	1 1/2 to 2

Note 1) The condition in which the needle is tightened gently until it stops.

3 MHQ2/MHQG2 Compatible Flat Finger Type


The flat finger type can be selected depending on the intended application.

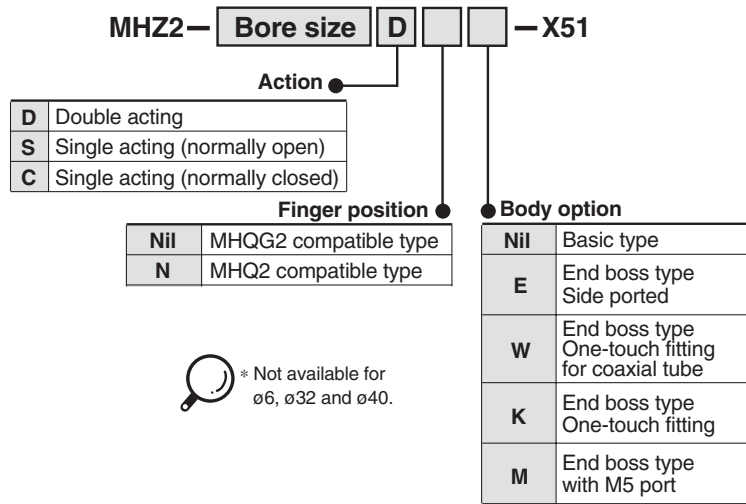

Specifications

Type	Flat finger type
Bore size	10, 16, 20, 25
Action	Double acting, Single acting (normally open, normally closed)
Fluid	Air

Dimensions

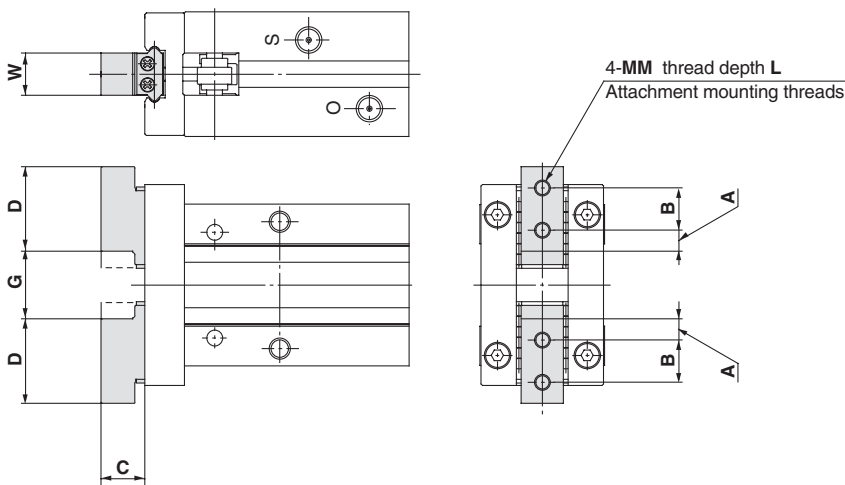

Unit: mm


Model		A	B	C	D	G		MM	L	W
						Open	Closed			
MHZ2-10□□□-X51	MHQG2 compatible	3	6	5.2	12	9.7 ^{+2.2} ₀	5.7 ⁰ _{-0.4}	M2	3.6	5 ⁰ _{-0.05}
	MHQ2 compatible	2	5	5.2	9	9.7 ^{+2.2} ₀	5.7 ⁰ _{-0.4}	M2	3.6	5 ⁰ _{-0.05}
MHZ2-16□□□-X51	MHQG2 compatible	4	8	8.3	16	12.6 ^{+2.2} ₀	6.6 ⁰ _{-0.4}	M3	6	8 ⁰ _{-0.05}
	MHQ2 compatible	2.5	7	8.3	12	12.6 ^{+2.2} ₀	6.6 ⁰ _{-0.4}	M3	6	8 ⁰ _{-0.05}
MHZ2-20□□□-X51	MHQG2 compatible	5	10	10.5	20.8	17.2 ^{+2.2} ₀	7.2 ⁰ _{-0.4}	M4	8	10 ⁰ _{-0.05}
	MHQ2 compatible	3.3	9	10.5	15.5	17.2 ^{+2.2} ₀	7.2 ⁰ _{-0.4}	M4	8	10 ⁰ _{-0.05}
MHZ2-25□□□-X51	MHQG2 compatible	6.5	12	13.1	25	22.8 ^{+2.5} ₀	8.8 ⁰ _{-0.4}	M5	10	12 ⁰ _{-0.05}
	MHQ2 compatible	3.5	12	13.1	19	22.8 ^{+2.5} ₀	8.8 ⁰ _{-0.4}	M5	10	12 ⁰ _{-0.05}

Dimensions other than the above are identical to the standard type; refer to pages 5-24 through 5-28

Series MHZ Model Selection

Model Selection

Selection procedure



Step 1 Confirmation of gripping force



Example Work piece weight: 0.1kg

Gripping method: External gripping

Model selection criteria with respect to work piece weight

- Although differences will exist depending upon factors such as shape and the coefficient of friction between the attachments and the work pieces, select a model which will provide a gripping force at least 10 to 20 times ^{Note} greater than the work piece weight.
- Note) For further details, refer to the model selection illustration.
- Furthermore, in cases with high acceleration or impact, etc., it is necessary to allow an even greater margin of safety.

Example: When it is desired to set the gripping force at 20 times or more above the work piece weight.
 Required gripping force = 0.1kg x 20 x 9.8m/s² (approx.) 19.6N or more

Gripping point distance: L = 30mm


Operating pressure: 0.4MPa

MHZ□2-16 External gripping

• Selecting MHZ□2-16D. A gripping force of 24N is obtained from the intersection point of gripping point distance L = 30mm and pressure of 0.4MPa.

• The gripping force is 24.5 times greater than the work piece weight, and therefore satisfies a gripping force setting value of 20 times or more.

Model selection illustration

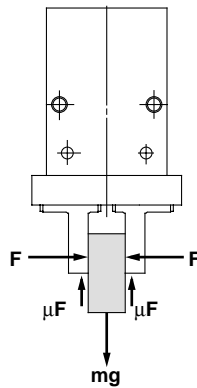

When gripping a work piece as in the figure to the left, and with the following definitions,

F: Gripping force (N)

μ: Coefficient of friction between the attachments and the work piece

m: Work piece mass (kg)

g: Gravitational acceleration (= 9.8m/s²)

mg: Work piece weight (N)

the conditions under which the work piece will not drop are

$$2 \times \mu F > mg$$

↑ Number of fingers

and therefore,

$$F > \frac{mg}{2 \times \mu}$$

With "a" representing the safety margin, F is determined by the following formula:

$$F = \frac{mg}{2 \times \mu} \times a$$

"Gripping force at least 10 to 20 times the work piece weight"

The "10 to 20 times or more of the work piece weight" recommended by SMC is calculated with a safety margin of a=4, which allows for impacts that occur during normal transportation, etc.

When $\mu = 0.2$	When $\mu = 0.1$
$F = \frac{mg}{2 \times 0.2} \times 4$ $= 10 \times mg$	$F = \frac{mg}{2 \times 0.1} \times 4$ $= 20 \times mg$


10 x work piece weight

20 x work piece weight


Note) Even in cases where the coefficient of friction is greater than $\mu=0.2$, for reasons of safety, select a gripping force which is at least 10 to 20 times greater than the work piece weight, as recommended by SMC. It is necessary to allow a greater safety margin for high accelerations and strong impacts, etc.

Step 1 Effective gripping force: Series MHZ□2/Double acting/External gripping force

- Expressing the effective gripping force
The effective gripping force shown in the graphs to the right is expressed as F, which is the impellent force of one finger, when both fingers and attachments are in full contact with the work piece as shown in the figure below.




External gripping

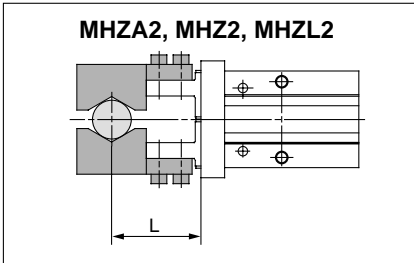


External gripping force


MHZ2-6D/MHZA2-6D

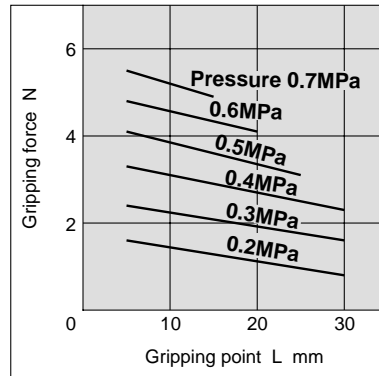


MHZ2-10D/MHZA2-10D

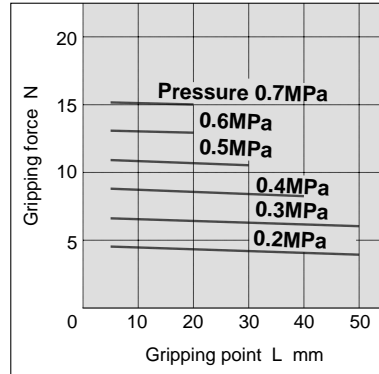

MHZ2-16D/MHZA2-16D

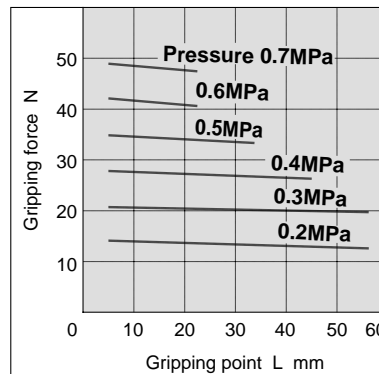


MHZ2-20D/MHZA2-20D

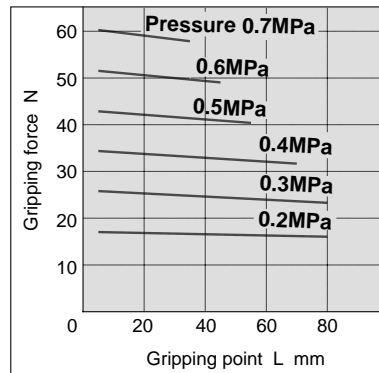


External gripping force


MHZ2-25D/MHZA2-25D

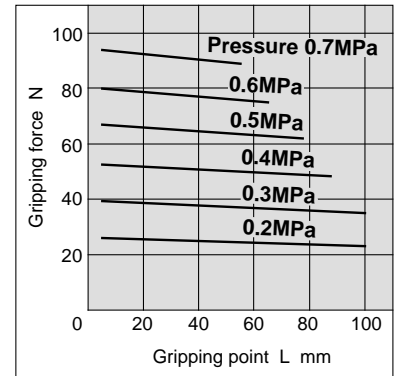

MHZ2-32D

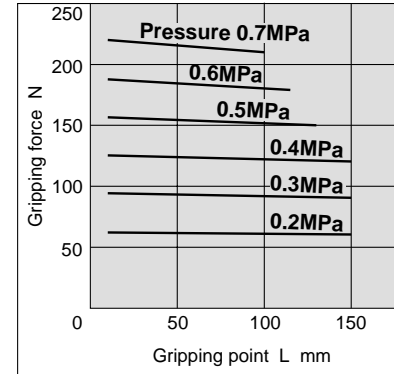


MHZ2-40D

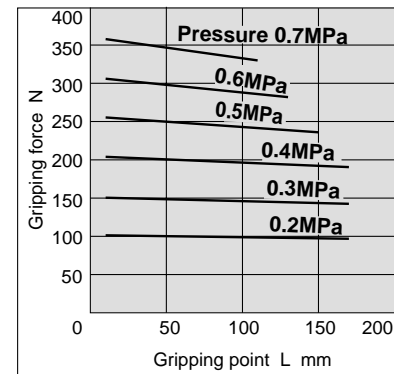


Model Selection

Step 1 Effective gripping force: Series MHZ/2/Double acting/Internal gripping force

- Expressing the effective gripping force
The effective gripping force shown in the graphs to the right is expressed as F, which is the impellent force of one finger, when both fingers and attachments are in full contact with the work piece as shown in the figure below.




Internal gripping

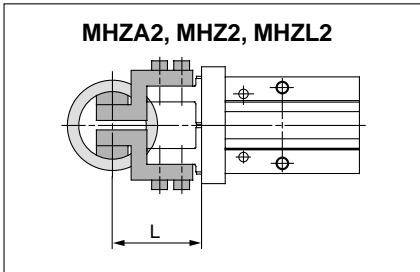


Internal gripping force


MHZ2-6D/MHZA2-6D

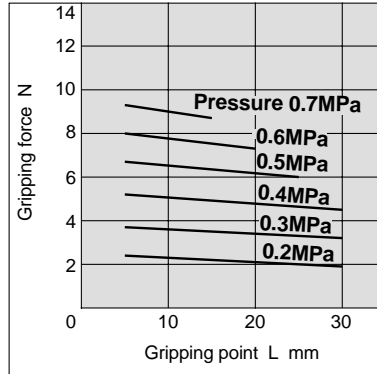


MHZ2-10D/MHZA2-10D

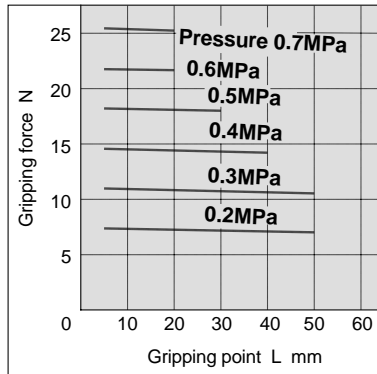

MHZ2-16D/MHZA2-16D

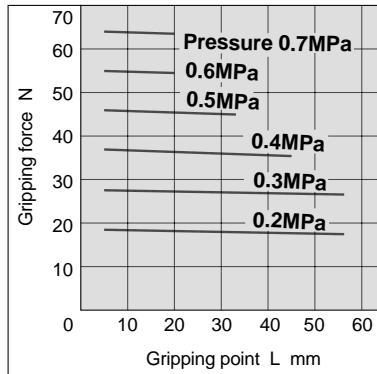


MHZ2-20D/MHZA2-20D

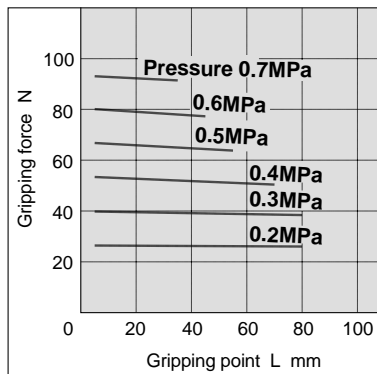


Internal gripping force


MHZ2-25D/MHZA2-25D

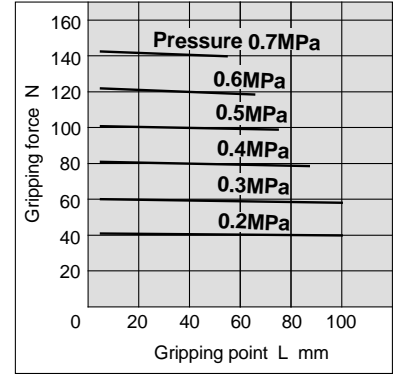

MHZ2-32D

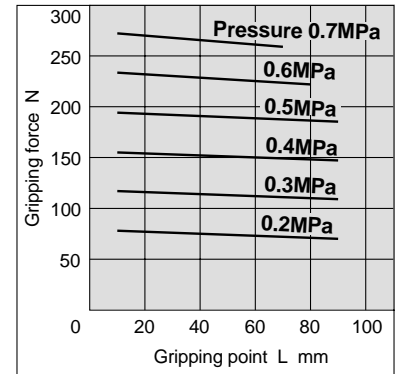


MHZ2-40D

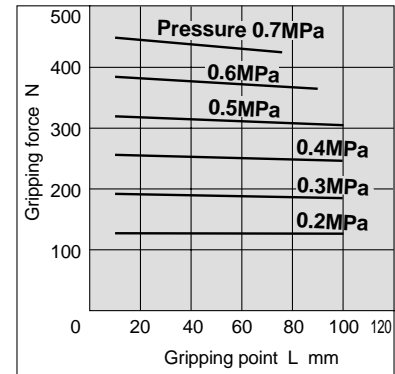


Step 1 Effective gripping force: Series MHZ□2/Single acting/External gripping force

- Expressing the effective gripping force
The effective gripping force shown in the graphs to the right is expressed as F, which is the impellent force of one finger, when both fingers and attachments are in full contact with the work piece as shown in the figure below.




External gripping

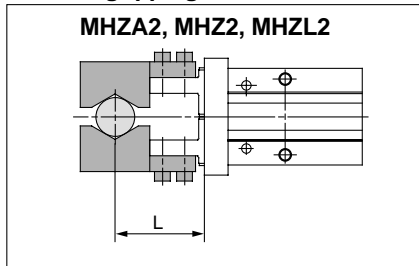


External gripping force

MHZ2-6S/MHZA2-6S

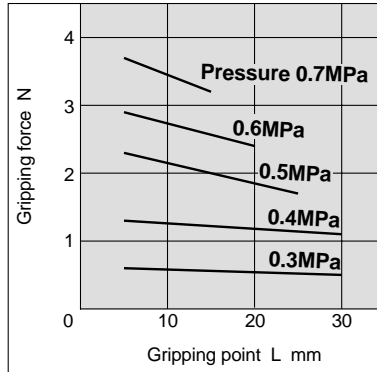


External gripping force


MHZ2-25S/MHZL2-25S

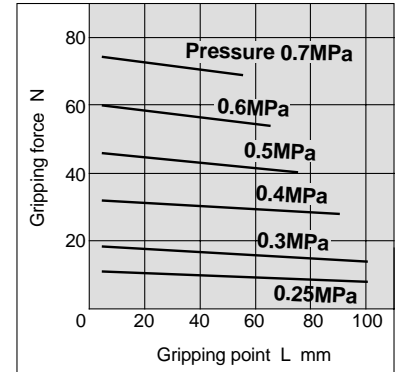


MHZ2-10S/MHZL2-10S

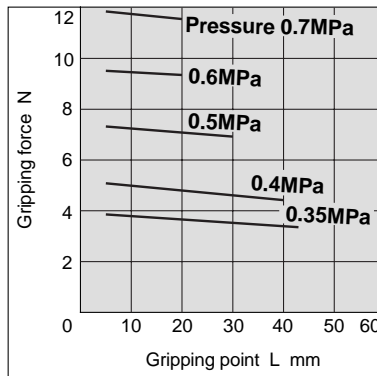


MHZ2-32S

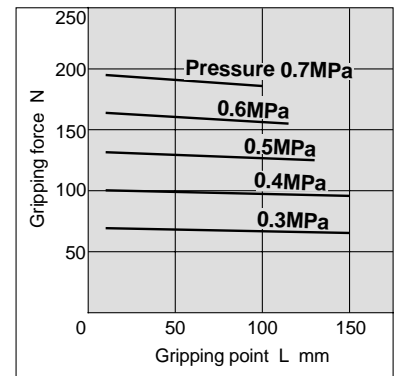


MHZ2-16S/MHZL2-16S

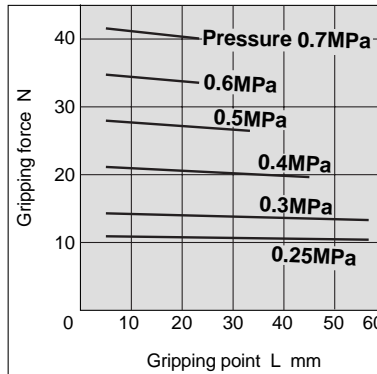

MHZ2-40S

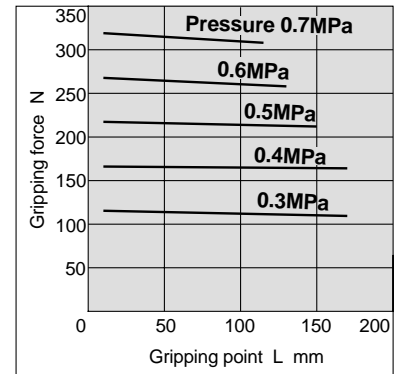


MHZ2-20S/MHZL-20S

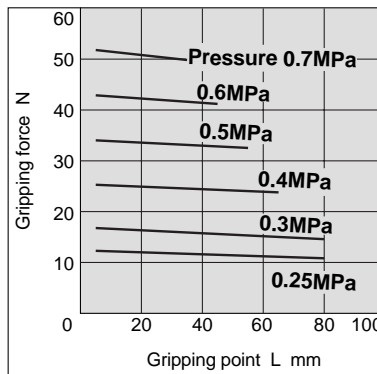


Model Selection

Step 1 Effective gripping force: Series MHZ/2/Single acting/Internal gripping force

- Expressing the effective gripping force
The effective gripping force shown in the graphs to the right is expressed as F, which is the impellent force of one finger, when both fingers and attachments are in full contact with the work piece as shown in the figure below.




Internal gripping

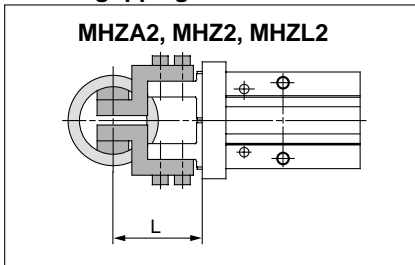


Internal gripping force

MHZ2-6C/MHZA2-6C

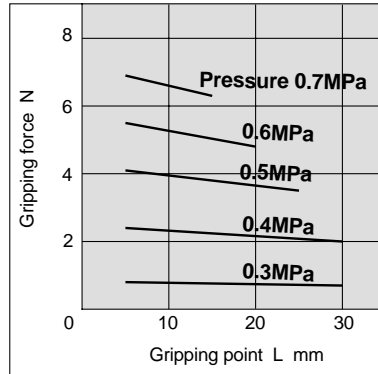


Internal gripping force


MHZ2-25C/MHZA2-25C

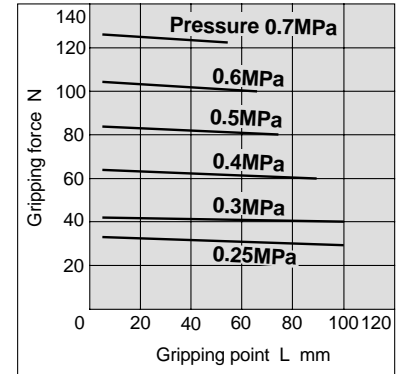


MHZ2-10C/MHZA2-10C

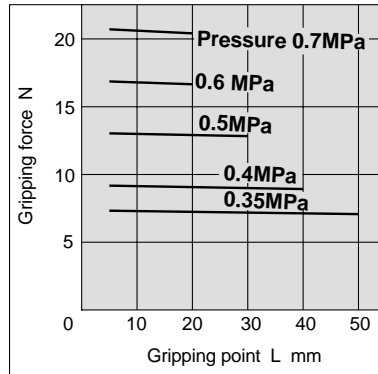


MHZ2-32C

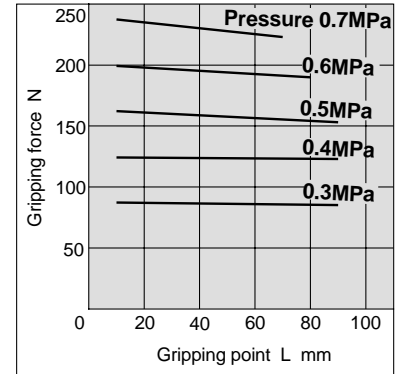


MHZ2-16C/MHZA2-16C

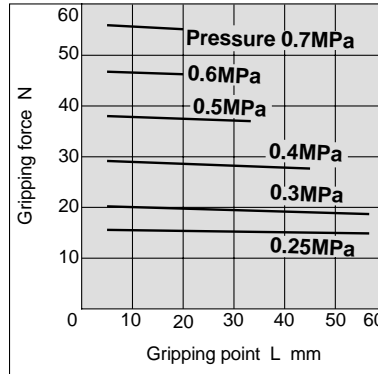

MHZ2-40C

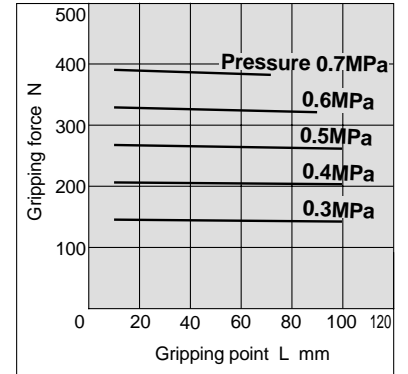


MHZ2-20C/MHZA2-20C

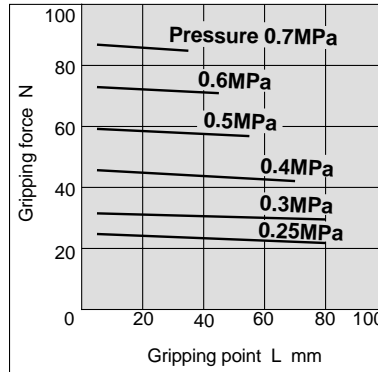


Step 1 Effective gripping force: Series MHZ□2/Double acting/External gripping force

- Expressing the effective gripping force
The effective gripping force shown in the graphs to the right is expressed as F, which is the impellent force of one finger, when both fingers and attachments are in full contact with the work piece as shown in the figure below.




External gripping

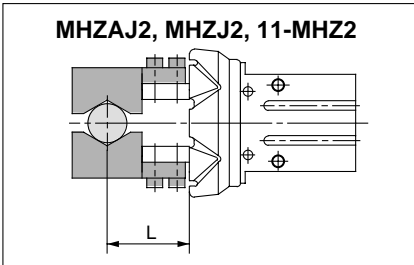


External gripping force

MHZJ2-6D/MHZAJ2-6D

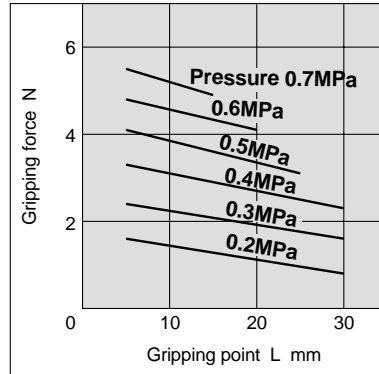


External gripping force


MHZJ2-25D/11-MHZ2-25D

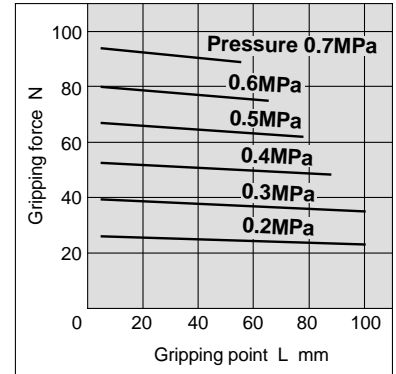


MHZJ2-10D/11-MHZ2-10D

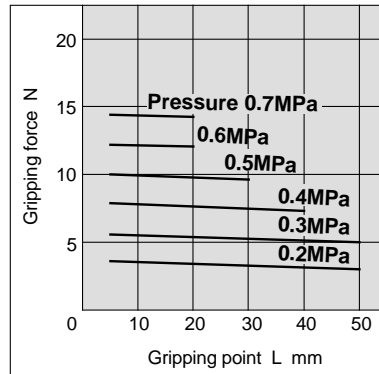

MHZJ2-16D/11-MHZ2-16D

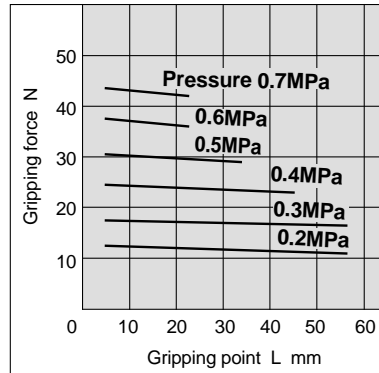


MHZJ2-20D/11-MHZ2-20D

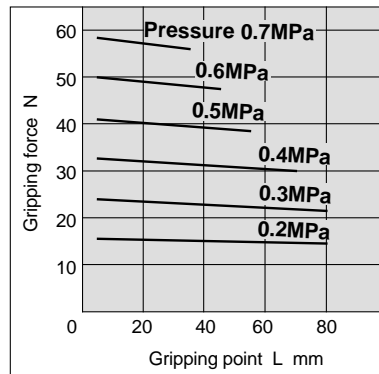


Model Selection

Step 1 Effective gripping force: Series MHZ□2/Double acting/Internal gripping force

- Expressing the effective gripping force
The effective gripping force shown in the graphs to the right is expressed as F, which is the impellent force of one finger, when both fingers and attachments are in full contact with the work piece as shown in the figure below.




Internal gripping

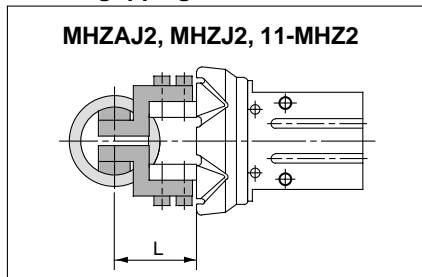


Internal gripping force

MHZJ2-6D/MHZAJ2-6D

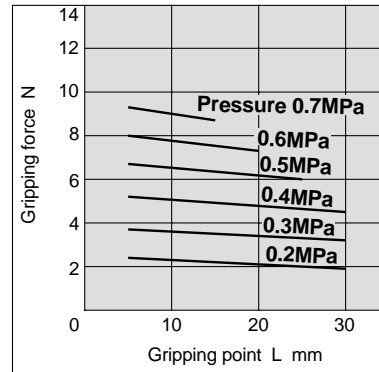


Internal gripping force


MHZJ2-25D/11-MHZ2-25D

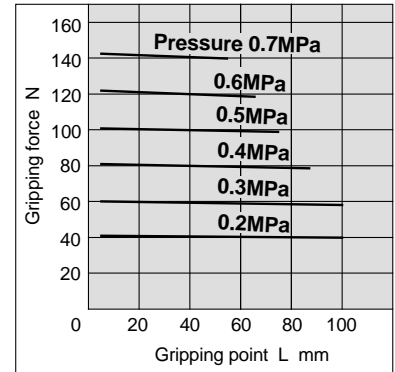


MHZJ2-10D/11-MHZ2-10D

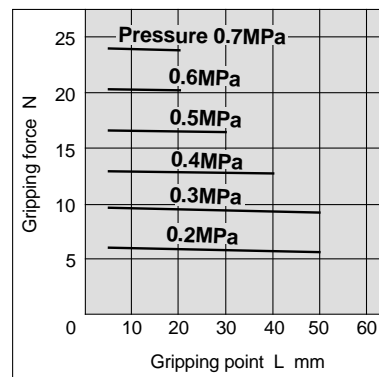

MHZJ2-16D/11-MHZ2-16D

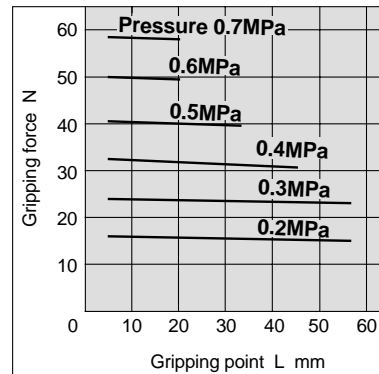


MHZJ2-20D/11-MHZ2-20D

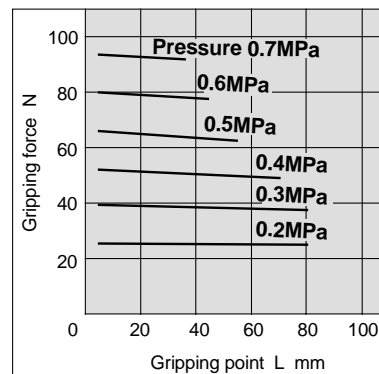


Step 1 Effective gripping force: Series MHZ□2/Single acting/External gripping force _____


• Expressing the effective gripping force
 The effective gripping force shown in the graphs to the right is expressed as F, which is the impellent force of one finger, when both fingers and attachments are in full contact with the work piece as shown in the figure below.




External gripping

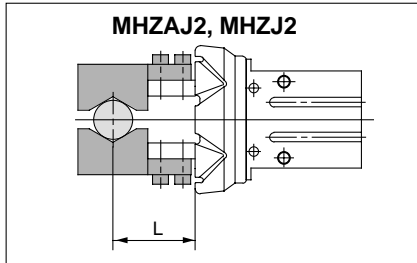


External gripping force

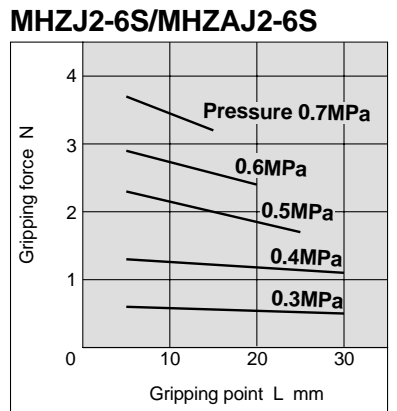


External gripping force

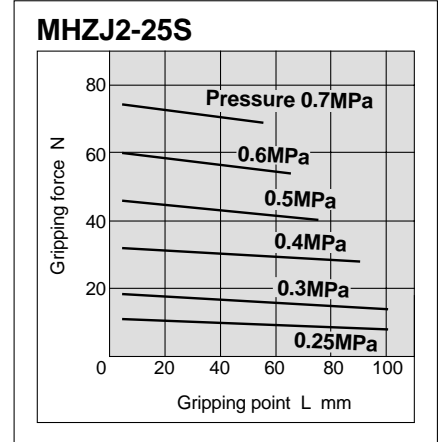


MHZJ2-10S

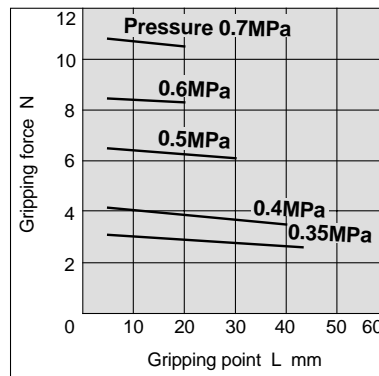

MHZJ2-16S

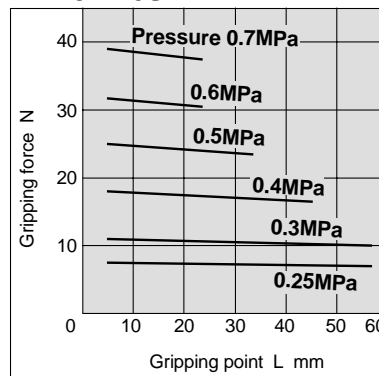


MHZJ2-20S

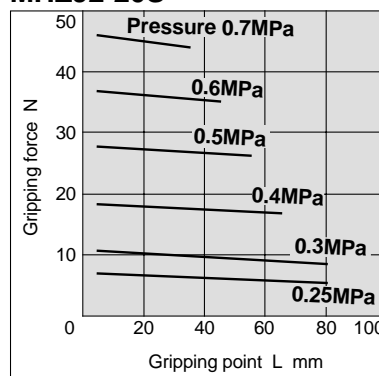


Model Selection

Step 1 Effective gripping force: Series MHZ/2/Single acting/Internal gripping force

- Expressing the effective gripping force
The effective gripping force shown in the graphs to the right is expressed as F, which is the impellent force of one finger, when both fingers and attachments are in full contact with the work piece as shown in the figure below.




Internal gripping

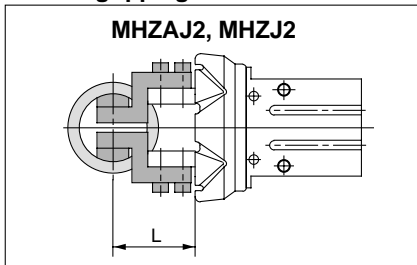


Internal gripping force

MHZJ2-6C/MHZAJ2-6C

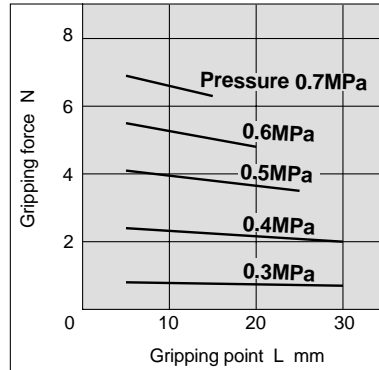


Internal gripping force


MHZJ2-25C

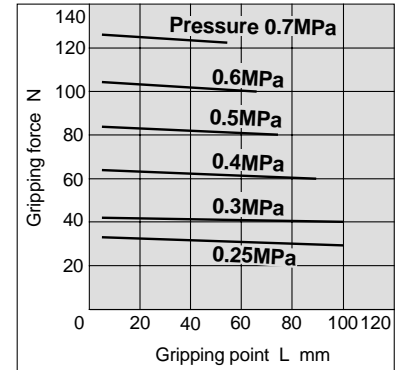


MHZJ2-10C

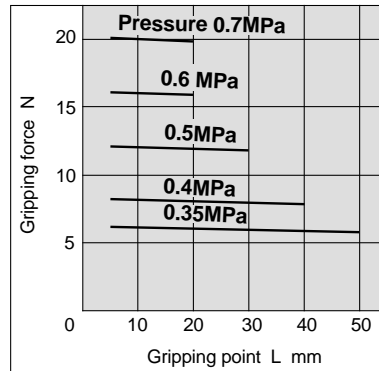

MHZJ2-16C

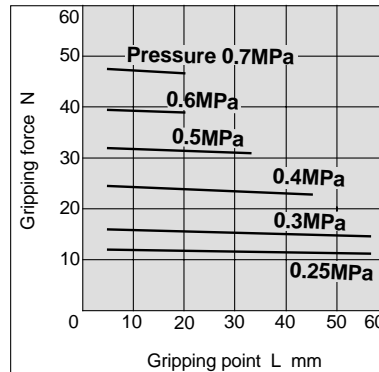


MHZJ2-20C

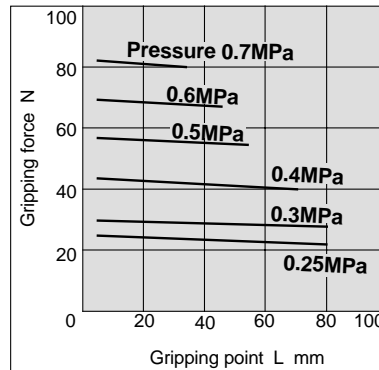

Step 2 Confirmation of gripping point: Series MHZ/External gripping


External gripping

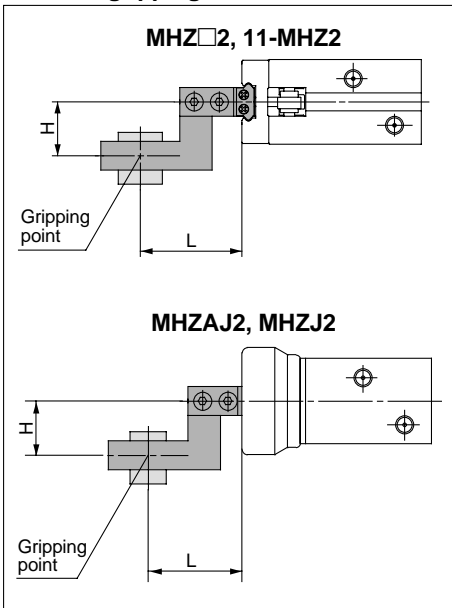


- The air gripper should be operated so that the work piece gripping point "L" and the amount of overhang "H" stay within the range shown for each operating pressure given in the graphs to the right.
- If the work piece gripping point goes beyond the range limits, this will have an adverse effect on the life of the air gripper.

External gripping


MHZ□2-6□

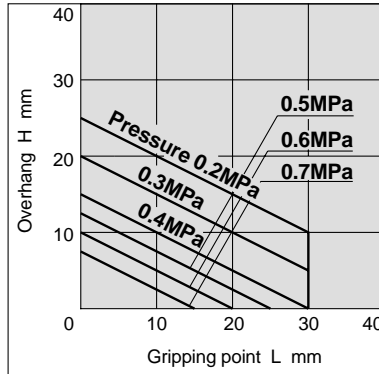


MHZ□2-10□/11-MHZ2-10□

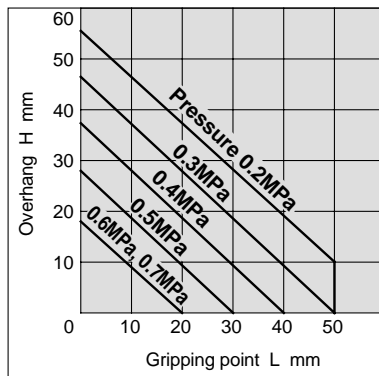

MHZ□2-16□/11-MHZ2-16□

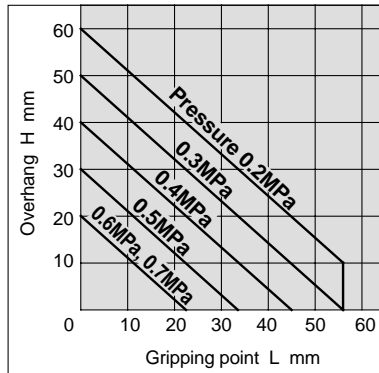


MHZ□2-20□/11-MHZ2-20□

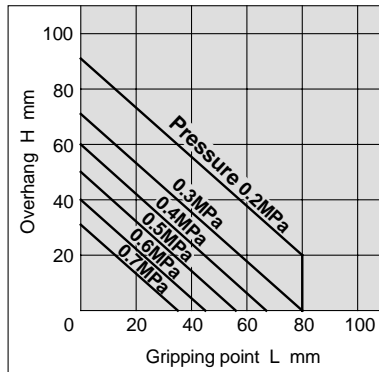


External gripping


MHZ□2-25□/11-MHZ2-25□

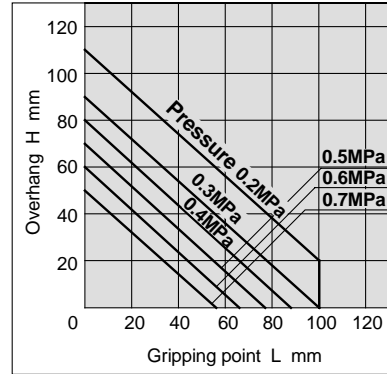

MHZ2-32□

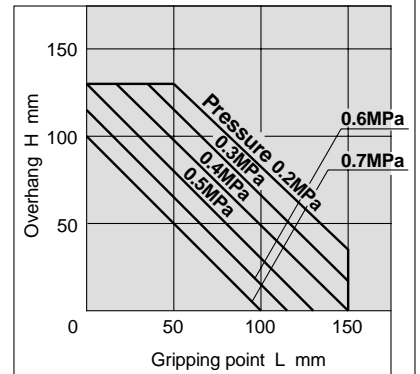


MHZ2-40□

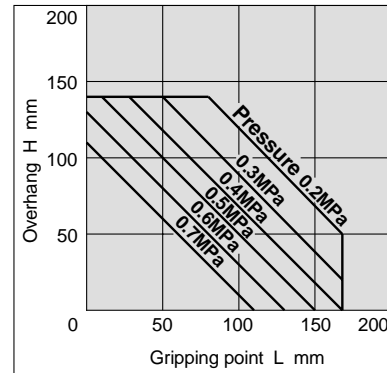

Model Selection

Step 2 Confirmation of gripping point: Series MHZ/Internal gripping


Internal gripping

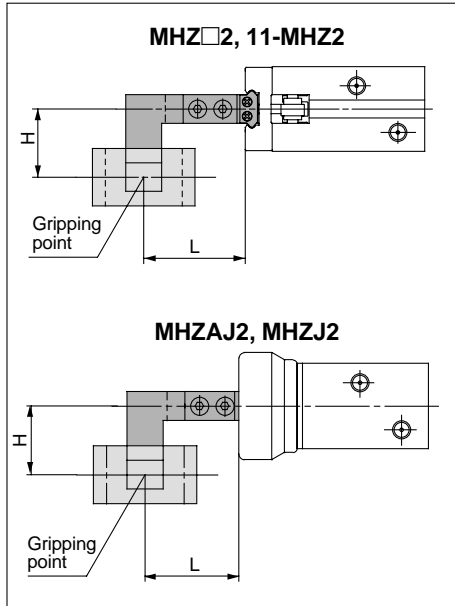


- The air gripper should be operated so that the work piece gripping point "L" and the amount of overhang "H" stay within the range shown for each operating pressure given in the graphs to the right.
- If the work piece gripping point goes beyond the range limits, this will have an adverse effect on the life of the air gripper.

Internal gripping


MHZ□2-6□

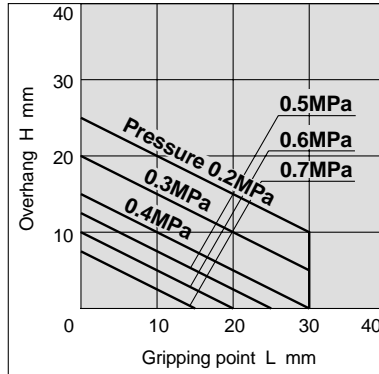


MHZ□2-10□/11-MHZ2-10□

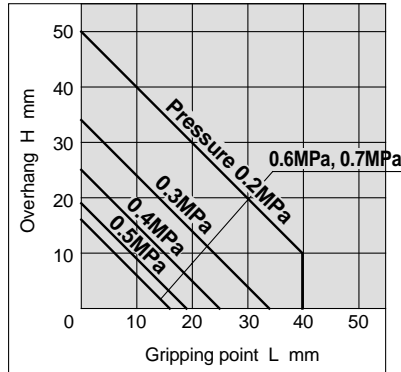

MHZ□2-16□/11-MHZ2-16□

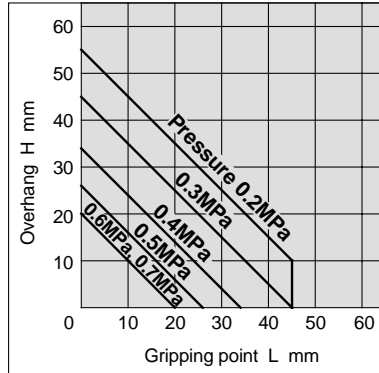


MHZ□2-20□/11-MHZ2-20□

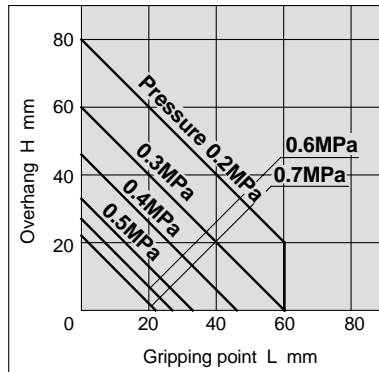


Internal gripping


MHZ□2-25□/11-MHZ2-25□

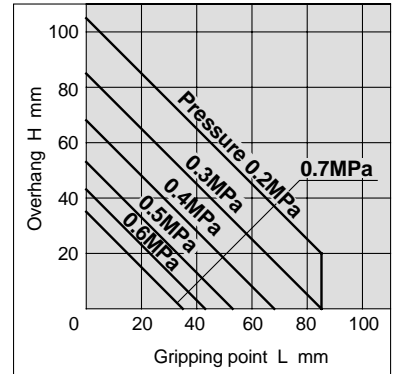


MHZ2-32□

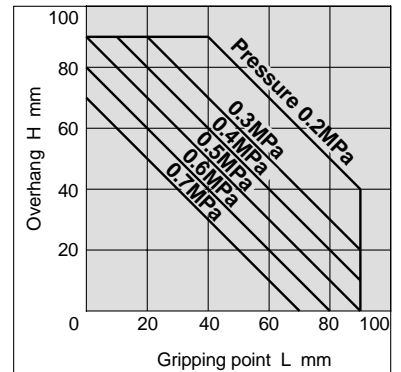

MHZ2-40□

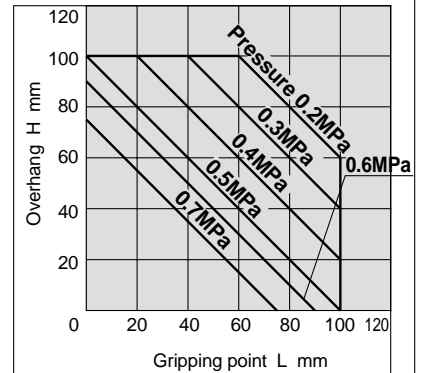

Step 3 Confirmation of external force on fingers: Series MHZ 2

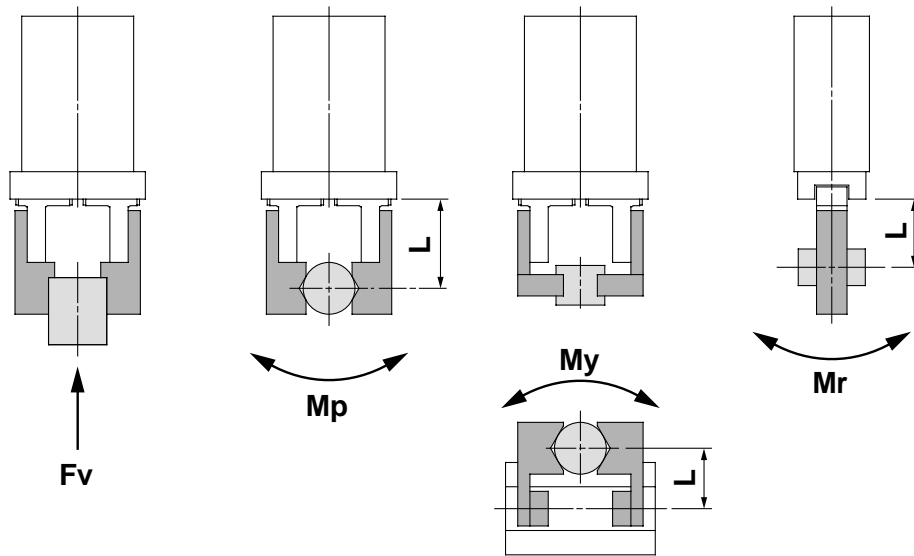

L: Distance to the point at which the load is applied (mm)

Model	Allowable vertical load Fv (N)	Maximum allowable moment		
		Pitch moment: Mp (N·m)	Yaw moment: My (N·m)	Roll moment: Mr (N·m)
MHZ 2-6	10	0.04	0.04	0.08
MHZ 2-10	58	0.26	0.26	0.53
MHZ 2-16	98	0.68	0.68	1.36
MHZ 2-20	147	1.32	1.32	2.65
MHZ 2-25	255	1.94	1.94	3.88
MHZ 2-32	343	3	3	6
MHZ 2-40	490	4.5	4.5	9

Note) Values for load and moment in the table indicate static values.

Calculation of allowable external force (when moment load is applied)	Calculation example
$\text{Allowable load } F \text{ (N)} = \frac{M \text{ (maximum allowable moment) (N·m)}}{L \times 10^{-3} \text{ (*)}}$ <p>(* Unit conversion constant)</p>	<p>When a static load of $f = 10\text{N}$ is operating, which applies pitch moment to point $L = 30\text{mm}$ from the MHZ 2-16D guide.</p> $\text{Allowable load } F = \frac{0.68}{30 \times 10^{-3}}$ $= 22.7 \text{ (N)}$ <p>Load $f = 10 \text{ (N)} < 22.7 \text{ (N)}$ Therefore, it can be used.</p>

Parallel Style Air Gripper Series **MHQ2-6**

ø6 (Please refer to new series MHZ)

Ideal for high precision automatic assembly of small work pieces. Ultra compact with a body width of only 10mm.

Solid state switches with indicator light can be mounted.

High level of repeatability and long operating life of over 10 million cycles.




The overall length of MHQ2-6□□□-X17 is 9mm shorter than that of the standard model, enabling the end boss option.




Specifications

Fluid		Air	
Operating pressure	Double acting		0.15 to 0.6MPa
	Single acting	Normally open	0.3 to 0.6MPa
		Normally closed	
Ambient and fluid temperature			-10 to 60°C
Repeatability			±0.01mm
Max. operating frequency			180c.p.m
Lubrication			Not required
Action			Double acting, Single acting
Auto switch (Option) ⁽¹⁾			Solid state switch: D-M9N(V), D-M9P(V), D-M9B(V)

 ¹⁾ Refer to p.6-15 for auto switch specifications.

Model

Action	Model	Bore size (mm)	Holding force ⁽¹⁾ (Effective value) (N)	Opening/closing stroke (Both sides) (mm)	Weight ⁽²⁾ (g)
Double acting	MHQ2-6D	6	External hold: 3.3 Internal hold: 6.1	4	29
Single acting	Normally open MHQ2-6S	6	External hold: 1.9 Internal hold: 1.1	4	29
	Normally closed MHQ2-6C	6	External hold: 2.1 Internal hold: 3.7	4	29

 ¹⁾ Values at 0.5MPa. Represent both external and internal holding force for double acting, external holding force for single acting normally open and internal holding force for single acting normally closed. However, the internal holding force of MHQ2-6S and external holding force of MHQ2-6C are generated by the spring return force.
²⁾ Except weight of auto switches.
³⁾ Refer to the separate catalogue CAT. E230 for details.

Made to Order Specifications: -X17

Action		Double acting	Single acting	
			Normally open	Normally closed
Model		MHQ2-6D□□-X17	MHQ2-6S□□-X17	MHQ2-6C□□-X17
Bore size(mm)		6		
Holding force (Effective value) (N) at 0.5MPa, L=20mm	External hold	3.3	1.9	2.1
	Internal hold	6.1	1.1	3.7
Opening/closing stroke (Both sides) (mm)		4		
Weight (g)		27		

High Rigidity Style Series **MHQG2** ø32, ø40 (Please refer to new series MHZ)

Provided with a guide holder.

Solid state switches with indicator light can be mounted.



Specifications

Fluid		Air
Operating pressure	Double acting	0.1 to 0.6MPa
	Single acting	Normally open Normally closed
Ambient and fluid temperature		-10 to 60°C
Repeatability		ø32/40: ±0.02mm
Max. operating frequency		ø32/40: 60c.p.m
Lubrication		Not required
Action		Double acting, Single acting
Auto switch (Option) ⁽¹⁾		Solid state switch: D-Y59 [Ⓐ] , D-Y69 [Ⓐ]



¹⁾ Refer to p.6-15 for auto switch specifications.

Model

Action	Model	Bore size (mm)	Holding force ⁽¹⁾ (Effective value) (N)	Opening/closing stroke (Both sides) (mm)	Weight ⁽²⁾ (g)	
Double acting	MHQG2-32D	32	External hold: 88 Internal hold: 139	20	1100	
	MHQG2-40D	40	External hold: 158 Internal hold: 247	28	1940	
Single acting	Normally open	MHQG2-32S	32	69	20	1110
		MHQG2-40S	40	130	28	1960
	Normally closed	MHQG2-32C	32	127	20	1110
		MHQG2-40C	40	227	28	1960



¹⁾ Values at 0.5MPa. Represent both external and internal holding force for double acting, external holding force for single acting normally open and internal holding force for single acting normally closed.

²⁾ Except weight of auto switches

³⁾ Refer to CAT. E230 for details.

With Dust Cover

Series MHQJ2

ø10, ø16, ø20, ø25 (Please refer to new series MHZ)

Air gripper with dust proof and drip proof construction.

Enclosed to prevent accumulation of dust.

Sealed construction with a dust cover.

Three dust cover materials are available to suit your applications.

Solid state switches with indicator light can be mounted.



Specifications

Fluid		Air
Operating pressure	Double acting	0.1 to 0.6MPa
	Single acting	Normally open Normally closed
Ambient and fluid temperature		-10 to 60°C
Repeatability		±0.01mm
Max. operating frequency		180c.p.m
Lubrication		Not required
Action		Double acting, Single acting
Auto switch (Option) ⁽¹⁾		Solid state switch: D-M9N(V), D-M9P(V), D-M9B(V)



¹⁾ Refer to p.6-15 for auto switch specifications.

Model

Action	Model	Bore size (mm)	Holding force ⁽¹⁾ (Effective value) (N)	Opening/closing stroke (Both sides) (mm)	Weight ⁽²⁾ (g)	
Double acting	MHQJ2-10D	10	11	4	90	
	MHQJ2-16D	16	34	6	180	
	MHQJ2-20D	20	42	10	340	
	MHQJ2-25D	25	63	14	640	
Single acting	Normally open	MHQJ2-10S	10	7.8	4	90
		MHQJ2-16S	16	26	6	181
		MHQJ2-20S	20	33	10	342
		MHQJ2-25S	25	49	14	643
	Normally closed	MHQJ2-10C	10	7.8	4	90
		MHQJ2-16C	16	26	6	181
		MHQJ2-20C	20	33	10	342
		MHQJ2-25C	25	49	14	643



¹⁾ Values at 0.5MPa. Represent both external and internal holding force for double acting, external holding force for single acting normally open and internal holding force for single acting normally closed.

²⁾ Except weight of auto switches.

³⁾ Refer to CAT. E230 for details.