


### Features

- STM32 microcontroller in LQFP144 package
- 3 user LEDs
- 2 push-buttons: USER and RESET
- LSE crystal:
  - 32.768 kHz crystal oscillator
- 2 types of extension resources:
  - ST Zio connector including: support for Arduino™ Uno V3 connectivity (A0 to A5, D0 to D15) and additional signals exposing a wide range of peripherals
  - ST morpho extension pin header footprints for full access to all STM32 I/Os
- USB OTG or full-speed device with Micro-AB connector (depending on STM32 support)
- IEEE-802.3-2002 compliant Ethernet connector (depending on STM32 support)
- Flexible board power supply:
  - 5 V from ST-LINK/V2-1 USB VBUS
  - External power sources: 3.3 V and 7 - 12 V on ST Zio or ST morpho connectors, 5 V on ST morpho connector
- On-board ST-LINK/V2-1 debugger/programmer with SWD connector:
  - ST-LINK/V2-1 standalone kit capability
  - USB re-enumeration capability: virtual COM port, mass storage, debug port
- Comprehensive free software HAL library including a variety of software examples
- Support of a wide choice of Integrated Development Environments (IDEs) including IAR™, Keil®, GCC-based IDEs, ARM® mbed™
- ARM® mbed Enabled™ (see <http://mbed.org>)

### Description

The STM32 Nucleo-144 board provides an affordable and flexible way for users to try out new concepts and build prototypes with the STM32 microcontroller, choosing from the various combinations of performance, power consumption, and features.

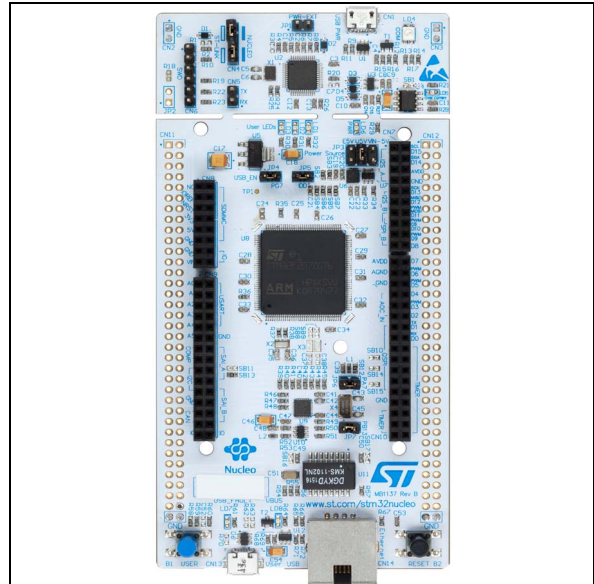

1. Picture is not contractual.

The ST Zio connector, which is an extension of Arduino™ Uno V3, provides access to more peripherals while ST morpho headers provide an easy means of expanding the functionality of the Nucleo open development platform with a wide choice of specialized shields.

The STM32 Nucleo-144 board does not require any separate probe. This board integrates the ST-LINK/V2-1 debugger / programmer and comes with the STM32 comprehensive software HAL library, together with various packaged software examples, as well as a direct access to the ARM® mbed™ online resources at <http://mbed.org>.

**Table 1. Device summary**

Reference	Part numbers
NUCLEO-XXXXZX	NUCLEO-F207ZG, NUCLEO-F303ZE, NUCLEO-F412ZG, NUCLEO-F413ZH, NUCLEO-F429ZI, NUCLEO-F446ZE, NUCLEO-F722ZE, NUCLEO-F746ZG, NUCLEO-F767ZI, NUCLEO-H743ZI



## System requirements

- Windows® OS (XP, 7, 8, 10), Linux® or macOS™
- USB Type-A to Micro-B cable

## Development toolchains

- Keil® MDK-ARM<sup>(a)</sup>
- IAR™ EWARM<sup>(a)</sup>
- GCC-based IDEs including free SW4STM32 from AC6
- ARM® mbed™ online

## Demonstration software

Demonstration software is preloaded in the STM32 Flash memory for easy demonstration of the device peripherals in standalone mode. For more information and to download the latest version, refer to the demonstration software for the STM32 Nucleo board at the [www.st.com/stm32nucleo](http://www.st.com/stm32nucleo) website.

## Ordering information

[Table 2](#) lists the order codes and the respective targeted STM32.

**Table 2. Ordering information**

Order code	Target STM32
NUCLEO-F207ZG	STM32F207ZGT6
NUCLEO-F303ZE	STM32F303ZET6
NUCLEO-F412ZG	STM32F412ZGT6
NUCLEO-F413ZH	STM32F413ZHT6
NUCLEO-F429ZI	STM32F429ZIT6
NUCLEO-F446ZE	STM32F446ZET6
NUCLEO-F722ZE	STM32F722ZET6

a. On Windows® only.

**Table 2. Ordering information (continued)**

Order code	Target STM32
NUCLEO-F746ZG	STM32F746ZGT6
NUCLEO-F767ZI	STM32F767ZIT6
NUCLEO-H743ZI	STM32H743ZIT6

The meaning of the NUCLEO-TXXXZY codification is explained in [Table 3](#) with an example.

**Table 3. Codification explanation**

NUCLEO-TXXXZY	Description	Example: NUCLEO-F446ZE
TXXX	STM32 product line (F, H or L)	STM32F446
Z	STM32 package pin count	144 pins
Y	STM32 Flash memory size (8 for 64 Kbytes, B for 128 Kbytes, C for 256 Kbytes, E for 512 Kbytes, G for 1 Mbytes, Z for 192 Kbytes, H for 1.5 Mbytes, I for 2 Mbytes.)	512 Kbytes

This order code is mentioned on a sticker placed on the top side of the board.

## Revision history

**Table 4. Document revision history**

Date	Revision	Changes
21-Dec-2015	1	Initial version.
27-Apr-2016	2	Updated: <i>Features</i> , <i>Table 1: Device summary</i> , <i>System requirements</i> to add NUCLEO-F767ZI.
29-Jun-2016	3	Updated <i>Table 1: Device summary</i> , <i>System requirements</i> to add NUCLEO-F412ZG.
25-Nov-2016	4	Extended the applicability to NUCLEO-F413ZH. Updated <i>Table 1: Device summary</i> and <i>Table 2: Ordering information</i> . Added <i>Table 3: Codification explanation</i> .
04-Jan-2017	5	Updated <i>Table 1: Device summary</i> and <i>Table 2: Ordering information</i> to add NUCLEO-F722ZE.
27-Mar-2017	6	Updated <i>Table 1: Device summary</i> and <i>Table 2: Ordering information</i> to add NUCLEO-H743ZI. Updated <i>Section : System requirements</i> and <i>Section : Development toolchains</i> . Reordered <i>Section : Features</i> .

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2017 STMicroelectronics – All rights reserved

