

DC Pass

Power Splitter/Combiner ZN8PD1-63W-S+

8 Way-0° 50Ω 500 to 6000 MHz

The Big Deal

- Wideband, 500 to 6000 MHz
- Low insertion loss, 1.5 dB
- Good isolation, 24 dB
- High power handling, up to 10W as splitter



CASE STYLE: JN1359

Product Overview

Mini-Circuits' ZN8PD1-63W-S+ is an 8-way 0° splitter/combiner providing 10W power handling as a splitter and low insertion loss across the 500 to 6000 MHz range, covering many wireless communications bands as well as SatCom IF and more. Its combination of high power and low loss minimize power dissipation due to intrinsic losses and provide excellent signal fidelity from input to output. This model also provides high port-to-port isolation and low amplitude and phase unbalance. It comes housed in a rugged aluminum alloy case (8.25 x 5.00 x 0.63") with SMA connectors.

Key Features

Feature	Advantages
Wideband, 500 to 6000 MHz	ZN8PD1-63W-S+ covers many popular wireless communications bands, making it suitable for a wide variety of applications.
High power handling: <ul style="list-style-type: none">• 10W as a splitter• 1.5W as a combiner	Suitable for a variety of system power requirements.
Low insertion loss, 1.5 dB	Very low insertion loss minimizes intrinsic losses, making this model a suitable candidate for signal distribution applications where low loss is a requirement.
Excellent input/output VSWR <ul style="list-style-type: none">• Input VSWR, 1.3:1• Output VSWR, 1.2:1	Provides excellent thru-path transmission with low signal reflection.
Low unbalance: <ul style="list-style-type: none">• 0.2 dB amplitude unbalance• 4.5° phase unbalance	ZN8PD-362HP+ produces nearly equal output signals, ideal for parallel path / multi-channel systems.
DC Passing, 1.6A (200mA each port)	Supports applications where DC power is needed at later stages in the system.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Power Splitter/Combiner

ZN8PD1-63W-S+

8 Way-0° 50Ω 500 to 6000 MHz

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	10W max.
Internal Dissipation	1.5W max.
DC Current	1.6A(200mA for each port)

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

SUM PORT	5
PORT 1	1
PORT 2	2
PORT 3	3
PORT 4	4
PORT 5	6
PORT 6	7
PORT 7	8
PORT 8	9


Outline Drawing

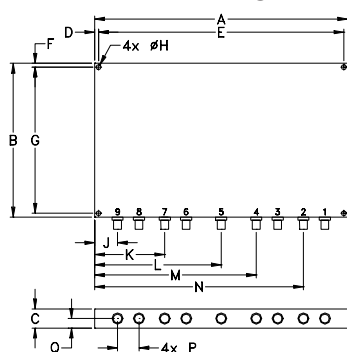

Outline Dimensions (inch/mm)

	A	B	C	D	E	F	G	H
	8.25	5.00	.63	.13	8.000	.13	4.750	.156
	209.55	127.00	16.00	3.30	203.20	3.30	120.65	3.96
	J	K	L	M	N	P	Q	wt
	.74	2.28	4.13	5.27	6.81	.70	.31	grams
	18.80	57.91	104.90	133.86	172.97	17.78	7.87	720

Electrical Schematic



Features

- wideband, 500 to 6000 MHz
- high isolation, 24 dB typ.
- good input matching VSWR, 1.3:1 typ.
- good output matching VSWR, 1.2:1 typ.
- up to 10W power input as splitter

Applications

- UHF TV
- cellular/ISM/GSM
- satellite distribution
- GPS/L-BAND (MARSAT)
- PCS/DCS/UMTS
- ISM
- MMDS
- SATCOM
- WiMax



Generic photo used for illustration purposes only

CASE STYLE: JN1359

Connectors	Model
SMA	ZN8PD1-63W-S+

+RoHS Compliant

The +suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications




Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		500		6000	MHz
Insertion Loss (above theoretical 9.0 dB)	700-3600	—	0.9	1.4	dB
	3600-5500	—	1.5	2.1	
	500-6000	—	1.7	2.3	
Isolation	700-3600	19	25	—	dB
	3600-5500	18	24	—	
	500-6000	15	21	—	
Phase Unbalance	700-3600	—	3	8	Degree
	3600-5500	—	4.5	10	
	500-6000	—	5.0	12	
Amplitude Unbalance	700-3600	—	0.2	0.5	dB
	3600-5500	—	0.2	0.7	
	500-6000	—	0.4	0.9	
VSWR (Port S)	700-3600	—	1.3	1.6	:1
	500-6000	—	1.4	1.8	
VSWR (Port 1-8)	700-3600	—	1.15	1.4	:1
	3600-5500	—	1.10	1.35	
	500-6000	—	1.2	1.4	

Typical Performance Data

Freq. (MHz)	Total Loss ¹ (dB)						Amplitude Unbalance (dB)	Isolation (dB)				Phase Unbalance (deg.)	VSWR		
	S-1	S-2	S-3	S-4	S-6	S-8		1-2	2-3	3-4	6-7		S	1	8
500	9.30	9.30	9.29	9.31	9.34	9.33	0.06	21.09	18.61	20.89	18.55	0.73	1.15	1.06	1.07
700	9.44	9.44	9.45	9.47	9.46	9.45	0.03	25.69	23.10	25.94	23.09	0.95	1.34	1.05	1.05
900	9.46	9.46	9.49	9.50	9.51	9.48	0.07	24.71	28.49	24.45	28.15	0.83	1.20	1.13	1.13
1200	9.46	9.48	9.50	9.51	9.53	9.50	0.09	29.77	27.73	27.61	27.33	1.53	1.16	1.15	1.15
1500	9.60	9.61	9.57	9.56	9.57	9.62	0.07	31.87	24.80	35.73	24.65	1.70	1.21	1.09	1.10
1800	9.61	9.63	9.67	9.67	9.70	9.64	0.12	29.47	30.36	26.44	29.69	2.06	1.12	1.16	1.15
2100	9.74	9.78	9.82	9.83	9.82	9.74	0.12	30.72	40.74	26.59	40.82	2.34	1.12	1.11	1.12
2500	9.83	9.88	9.96	9.92	10.03	9.90	0.20	24.81	32.39	21.96	32.48	2.79	1.28	1.13	1.15
3000	9.92	9.99	10.04	9.99	10.03	9.96	0.13	34.39	29.64	27.95	29.56	3.07	1.36	1.18	1.18
3600	9.90	9.94	9.95	9.92	9.94	9.88	0.07	36.52	37.92	42.47	36.85	4.03	1.07	1.11	1.11
4000	9.99	10.08	10.14	10.07	10.11	10.02	0.15	40.89	30.87	46.17	30.56	4.33	1.11	1.10	1.08
4500	10.06	10.19	10.33	10.25	10.30	10.13	0.27	25.78	33.81	26.53	33.92	5.12	1.18	1.09	1.09
5000	10.41	10.46	10.57	10.56	10.54	10.42	0.21	22.81	33.46	20.87	33.26	4.81	1.53	1.17	1.17
5500	10.44	10.53	10.65	10.57	10.64	10.56	0.30	22.05	27.22	21.62	26.43	5.78	1.47	1.18	1.19
6000	10.49	10.58	10.78	10.62	10.79	10.63	0.31	17.72	29.09	18.07	28.22	5.72	1.14	1.12	1.14

1. Total Loss = Insertion Loss + 9dB splitter loss.

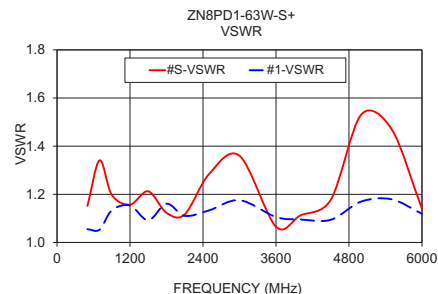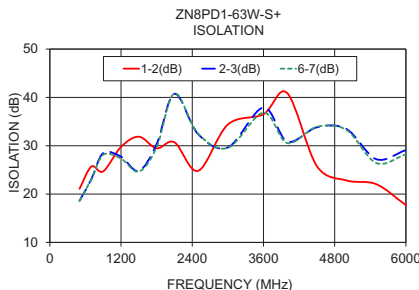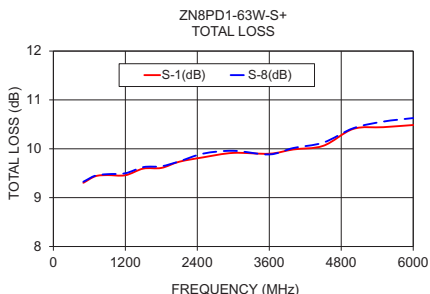

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/WCLStore/terms.jsp



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[ZN8PD1-63W-S+](#)