

## NLCV32T-221K-EF



Applications	Commercial Grade	_
Feature	No Directivity Wire Wound Ferrite Core Ferrite Core	
Series   Type	NLCV32-EF	
Status	Production	
Brand	TDK	



Size	
Length(L)	3.20mm ±0.20mm
Width(W)	2.50mm ±0.20mm
Thickness   Height	2.20mm ±0.20mm
Recommended Land Pattern (A)	1.20mm Nom.
Recommended Land Pattern (B)	2.00mm Nom.
Recommended Land Pattern (C)	2.00mm Nom.

Electrical Characteristics			
Inductance	220µH ±10% at 796kHz		
Rated Current	80mA		
DC Resistance [Typ.]	8.4Ω		
DC Resistance [Max.]	10.92Ω		
Self Resonant Frequency [Min.]	7MHz		
Self Resonant Frequency [Typ.]			
Q [Min.]			
Q [Typ.]	20		


Other		
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 105°C	
	Wave (Flow)	
Soldering Method	Reflow	
	Iron Soldering	
AEC-Q200	No	
Packing	Blister (Plastic)Taping [180mm Reel]	
Package Quantity	2000pcs	
Weight	0.05g	

! Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.



### NLCV32T-221K-EF



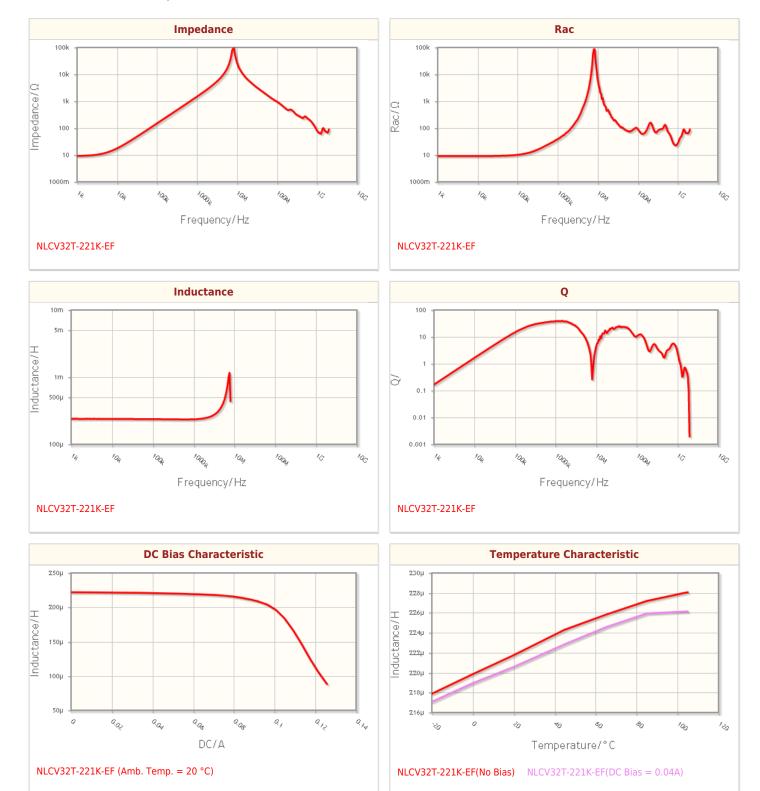

## Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)


! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.



#### NLCV32T-221K-EF



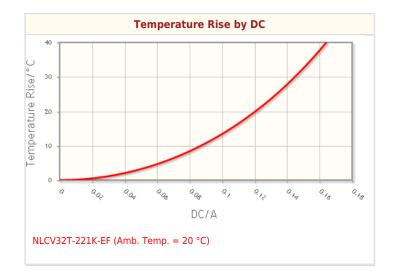

# Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)


! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.





# Associated Images

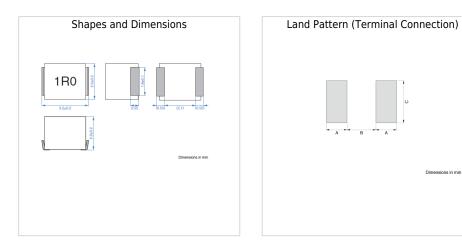

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.